MHI Series

Horizontal multi-stage stainless steel pump

Features

- Stainless steel materials
- High pressure by multi-stage impeller



Application scope

- Water supply and pressure boosting
- Hot water circulation and heating system
- Air-conditioning systems
- Industrial circulation systems
- Washing and spinkling systems
- For various machinery

MHI-BP Series

Frequency conversion multi-stage pump







Application

Approved fluids	Clean water
Fluid temp(℃)	0~90
Max. suction lift(m)	8

Material

Casing	AISI304 stainless steel
Impeller	AISI304 stainless steel
Shaft	AISI304 stainless steel
Mechanical seal	Silicon Carbide & US Morgan Graphite resistant to temperature of 120°C, antifreeze corrosion
Bearing	Customized high-temperature grease resistant (-50~200°C), high-speed silent bearings
Motor	National standard silicon steel sheet stator rotor, F-class high-temperature resistant insulated copper wire


AQUARIS
MADE IN ITALY

Technical Data


Model	MHI-202	MHI-203	MHI-204	MHI-205	MHI-206	MHI-402	MHI-403	MHI-404	MHI-405	MHI-406	MHI-802	MHI-803	MHI-804	MHI-805	MHI-1602	MHI-1603	MHI-1604
Electrical connection																	
Power source	220V/50Hz,380V/50Hz MHI-EH MHI-QH																
Power(kW)	0.37	0.55	0.55	0.75	1.1	0.37	0.55	0.75	1.1	1.5	0.75	1.1	1.5	2.2	1.5	1.85	2.2
Application situation																	
Approved Fliuds	Clean water																
Fluid temp (℃)	0 ~90																
Max. suction lift(m)	8																
Performance parameter																	
Max Head(m)	27	37	45	54	69	23	28	37	45	55	23	28	38	47	24	30	36
Rated head(m)	21	28	38	47	60	18	21	29	38	45	17	23	30	31	16	22	27
Max flow(m^3/h)	4	4	4	4	4	7	7	7.5	7.2	7.2	10	10	10	12	26	26	26
Rated flow(m^3/h)	2	2	2	2	2	4	4	4	4	4	6	6	6	8	16	16	16
Inlet size(DN)	25	25	25	25	25	32	32	32	32	32	40	40	40	40	50	50	50
Outlet size(DN)	25	25	25	25	25	25	25	25	25	25	32	32	32	32	40	40	40
Max pressure(bar)	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
Protection class	IP54	IP54	IP54	IP54	IP54	IP54	IP54	IP54	IP54	IP54	IP54	IP54	IP54	IP54	IP54	IP54	IP54

* m^3/h*16.667=L/min


Performance curve

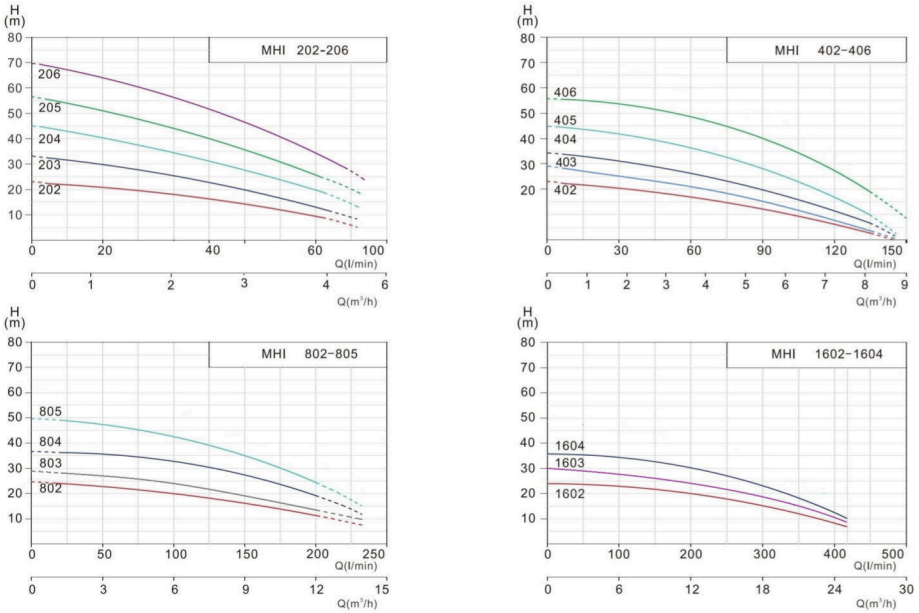

Dimensional drawing

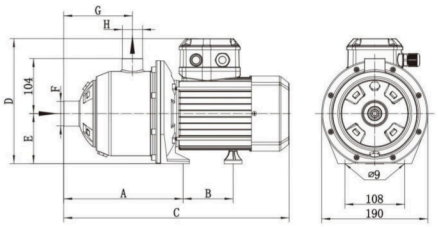

Model	A	B		C		D		E		F	G	H
		1~220V	3~380V	1~220V	3~380V	1~220V	3~380V	1~220V	3~380V			
	mm											
202	147	70	70	327	327	206	225	90	90	Rp1	110	Rp1
203	205	88	70	418	377	206	225	90	90	Rp1	110	Rp1
204	229	88	88	418	418	206	225	90	90	Rp1	134	Rp1
205	253	88	88	442	442	206	225	90	90	Rp1	158	Rp1
206	277	88	88	474	466	206	225	90	90	Rp1	182	Rp1
402	205	70	70	377	377	206	225	90	90	Rp11/4	110	Rp1
403	147	88	88	327	327	206	225	90	90	Rp11/4	110	Rp1
404	165	88	88	345	345	206	225	90	90	Rp11/4	134	Rp1
405	253	88	88	474	474	206	225	90	90	Rp11/4	158	Rp1
406	277	106	88	498	498	232	225	90	90	Rp11/4	182	Rp1
802	217	88	88	406	406	206	225	90	90	Rp11/2	122	Rp11/4
803	174	88	88	401	401	206	225	90	90	Rp11/2	122	Rp11/4
804	206	106	88	428	428	232	225	90	90	Rp11/2	152	Rp11/4
805	227	-	106	-	455	-	237	-	90	Rp11/2	182	Rp11/4
1602	237	-	106	-	440	-	237	-	90	Rp2	138	Rp11/2
1603	237	-	106	-	440	-	237	-	90	Rp2	138	Rp11/2
1604	237	-	106	-	440	-	237	-	90	Rp2	138	Rp11/2

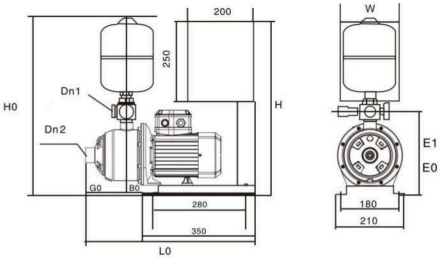

Model	Dn1	Dn2	E0	E1	G0	B0	L0	H0	H	W	压力设定 Pressure setting(bar)
BF-MHI202	25	25	120	138	110	80	505	541	540	180	1.6
BF-MHI203	25	25	120	138	110	80	505	541	540	180	2.4
BF-MHI402	25	32	120	138	110	80	505	541	540	180	1.6
BF-MHI403	25	32	120	138	110	80	505	541	540	180	2.4
BF-MHI404	25	32	120	138	158	80	553	541	540	180	3.0
BF-MHI405	25	32	120	138	158	80	553	541	540	180	4.0
BF-MHI406	25	32	130	138	182	80	577	551	540	180	5.0
BF-MHI802	32	40	120	144	122	80	517	552	540	180	1.6
BF-MHI803	32	40	120	144	122	80	517	552	540	180	2.4
BF-MHI804	32	40	130	144	182	80	517	562	540	180	3.0
BF-MHI805	32	40	130	144	182	80	517	562	540	180	4.0
BF-MHI1602	40	50	120	154	138	84	537	562	540	180	1.6
BF-MHI1603	40	50	120	154	138	84	537	562	540	180	2.4
BF-MHI1604	40	50	130	154	183	84	582	572	590	210	3.0