Open-impeller centrifugal pumps with hydraulic parts made of AISI 304 stainless steel, suitable for handling suspended solids in food processing, e.g. washing vegetables, meat and fish.
Industrial washing machines for bottles, jars, glasses and crates, where the liquid may contain solids.
Process applications such as paint plants and general handling of dirty liquids.




RANGE CHARACTERISTICS


Power	1.5–2.2 kW (2–3 HP)
Max. flow rate	60 m³/h
Max. head	23 m
Speed	n ≈ 2900 /min
Frequency	50 Hz
Power supply	1~ 220–240 V / 3~ 380–415 V

Model code: DWO + size + T or M (T: three-phase 3~; M: single-phase 1~)
Example: DWO200T, DWO200M

Q–H CURVES

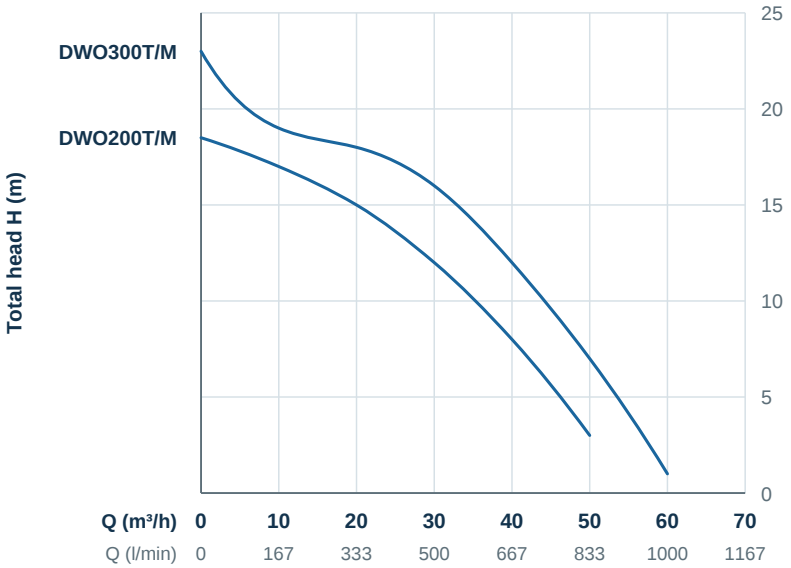

EXPLODED VIEW AND MATERIALS

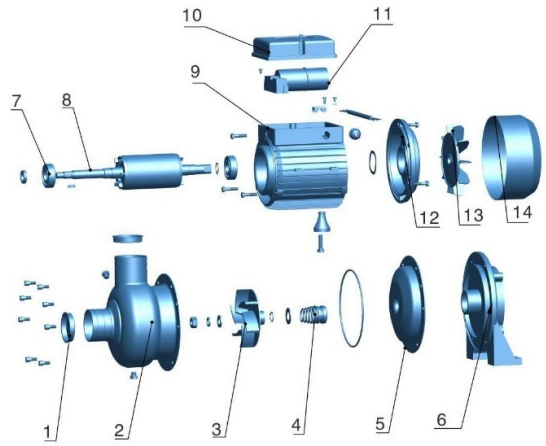

NO.	PART	MATERIAL
1	Inlet cover	Plastic
2	Pump body	AISI 304
3	Impeller	AISI 304
4	Mechanical seal	Carbon/Ceramic/NBR
5	Flap	AISI 304
6	Support	Cast iron
7	Bearing	High quality
8	Shaft	AISI 304
9	Motor housing	Cast iron
10	Top cover	Plastic
11	Capacitor	High quality
12	Motor cover	Cast iron
13	Fan	Nylon
14	Fan cover	Steel

OPERATING CONDITIONS

Max. working pressure: 8 bar
Max. liquid temperature: 90 °C
Passage of solids: max. Ø 19 mm

MOTOR AND PORTS

2-pole asynchronous motor, insulation class F, protection IP55
Single-phase: permanent split capacitor and automatic thermal overload protection
Three-phase: thermal protection to be provided by the user
Suction DNA: 2" for DWO200, 2"1/2 for DWO300
Delivery DNM: 2"

PERFORMANCE DATA

50 Hz | n ≈ 2900 /min

MODEL		P_2		I (A)		Q	m³/h	0	10	20	30	40	50	60
3~ 380–415 V	1~ 220–240 V	kW	HP	3~ 400 V	1~ 230 V		l/min	0	167	333	500	667	833	1000
DWO200T	**DWO200M**	1.5	2	3.5	9.0	**H (m)**		18.5	17	15	12	8	3	–
DWO300T	**DWO300M**	2.2	3	4.8	12.9			23	19	18	16	12	7	1

T = three-phase 3~ M = single-phase 1~ – not applicable