
Perotac
MADE IN TAIWAN

SUBMERSIBLE PUMP

QXN40-60

PERFORMANCE DATA | 50 Hz | n ≈ 2850 /min

Hydraulic part under the motor; the motor is cooled by the pumped water for safe operation, even with the pump only partially immersed. Double shaft seal with interposed oil chamber.

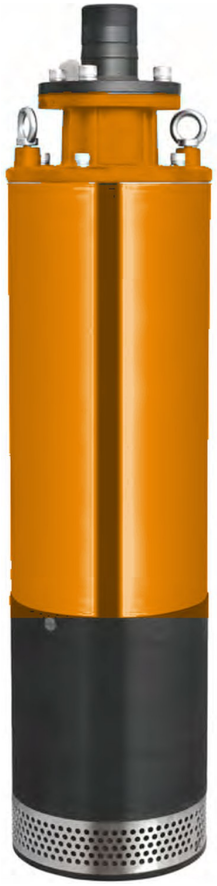

PEROTAC QXN40-60

APPLICATION

- For mining, building, factory and industrial applications.
- For water supply from wells, tanks or reservoirs.
- For garden use and agricultural irrigation.

SPECIFICATION

- Water temperature: up to 40 °C
- pH: 6.5 – 8.5
- Power supply: 3~ 380–415 V, 50 Hz
- Motor power: 15 kW (20 HP)
- Insulation class: B
- Protection class: IP68
- Maximum immersion depth: 20 m
- Cable length: 15 m


SPECIAL FEATURES ON REQUEST

- Other voltages
- The length of cable is optional

PERFORMANCE TABLE

Model	Motor kW	Motor HP	Current 380 V (A)	Outlet (mm)	Rated Q (m³/h)	Rated Q (l/min)	Rated H (m)	Max Q (m³/h)	Max H (m)	Passage (mm)
QXN40-60	15	20	31	80	40	667	80	90	90	8

PERFORMANCE CURVE

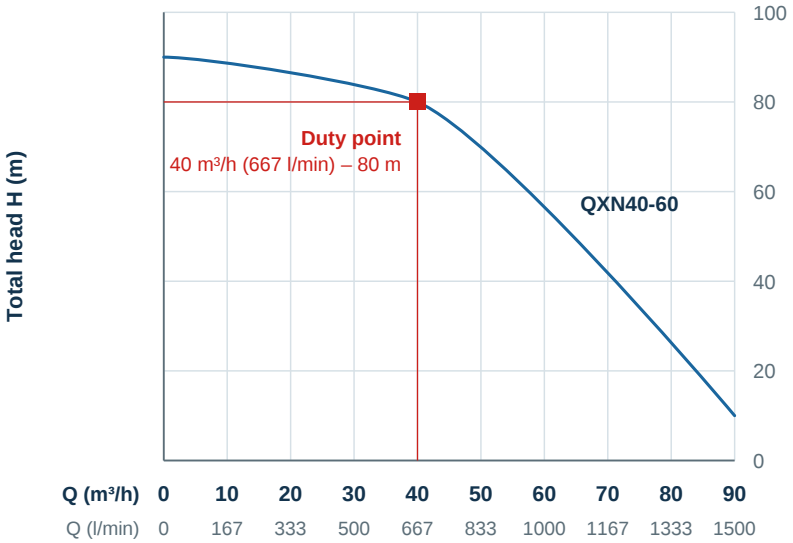


Q (m³/h)	Q (l/min)	H (m)
0	0	90
10	167	89
20	333	87
30	500	84
40	667	80
50	833	70
60	1000	57
70	1167	42
80	1333	26
90	1500	10

QXN40-60

CONSTRUCTION AND MATERIALS

SECTIONAL DRAWING

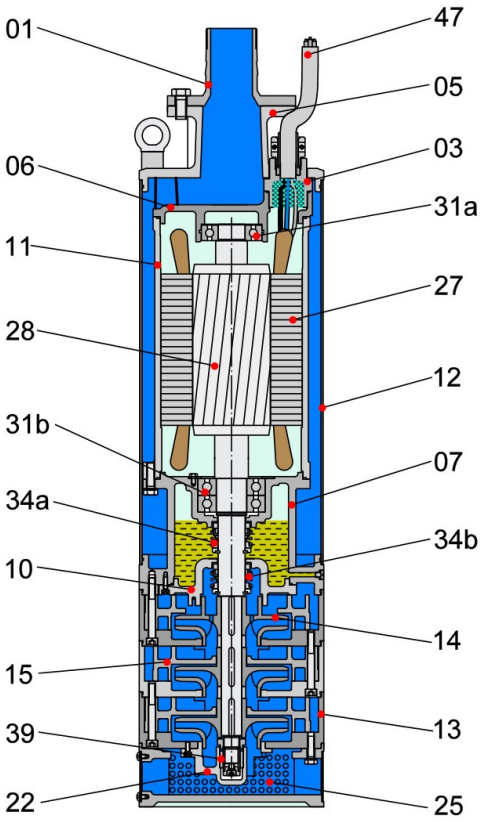

MATERIALS

No.	Part name	Material
01	Hose coupling	Cast iron
03	Terminal box	Cast iron
05	Upper cover	Cast iron
06	Upper bearing house	Cast iron
07	Bearing house	Cast iron
10	Seal bracket	Cast iron
11	Motor body	Cast iron
12	Outer casing	AISI 304 SS
13	Pump casing	Cast iron
14	Impeller	Cast iron
15	Diffuser	Cast iron
22	Seat assembly	Cast iron
25	Strainer	Steel
27	Stator	–
28	Rotor	Shaft: stainless steel
31a	Bearing	Ball bearing
31b	Bearing	Ball bearing
34a	Mechanical seal	SiC-SiC
34b	Mechanical seal	SiC-SiC
38	Shaft sleeve	NBR & steel
47	Cable	–

OUTLET CONNECTION

Outlet D (mm)	Style	Hose I.D. (mm)	Steel pipe thread G	Transition joint · nominal pipe (mm)
80	A	80	G2½"	G2½" → G3" · 80