SF SERIES

STAINLESS STEEL SUBMERSIBLE PUMPS · HIGH HEAD

AQUARIS
MADE IN ITALY



0.37–9.2 kW POWER P2	**54 m³/h** MAX. FLOW RATE
60.6 m MAX. HEAD	**50 Hz** FREQUENCY
1~ / 3~ 220–240 V / 380–415 V	**2850 /min** SPEED · 2 POLES

APPLICATIONS

- For water supply from wells or reservoirs.
- For domestic use, for civil and industrial applications.
- For garden use and irrigation.

OPERATING CONDITIONS

- Maximum fluid temperature up to +40 °C
- Maximum sand content: 0.1 %

MOTOR AND PUMP

- Rewindable motor
- Single-phase: 1~ 220–240 V 50 Hz
- Three-phase: 3~ 380–415 V 50 Hz
- Can be equipped with a floating switch (single-phase models, suffix F)

OPTIONS ON REQUEST

- Special mechanical seal
- Other voltages

MODEL CODE

SF	m	6	22	0.75	F
Model	Single-phase	Capacity (m³/h)	Head (m)	Power (kW)	Floating switch

Example: SFm6-22-0.75F · three-phase models without "m"

MATERIALS

Impeller	Cast aluminium
Strainer	AISI 304 stainless steel
Motor external casing	AISI 304 stainless steel
Top cover	AISI 304 stainless steel
Mechanical seal	Graphite / ceramic
Seal lubricant oil	Oil for food machinery and pharmaceutical use

RANGE OVERVIEW


MODEL 1~	MODEL 3~	P2 kW	P2 HP	Q max m³/h	H max m
SFm6-15-0.37F	**SF6-15-0.37**	0.37	0.5	9	17.4
SFm6-18-0.55F	**SF6-18-0.55**	0.55	0.75	9	20.2
SFm6-22-0.75F	**SF6-22-0.75**	0.75	1	12	24.4
SFm6-25-1.1F	**SF6-25-1.1**	1.1	1.5	15	27.5
SFm10-28-1.5F	**SF10-28-1.5**	1.5	2	15	31.9
SFm10-32-1.9F	**SF10-32-1.9**	1.9	2.5	18	36.7
SFm15-32-2.2F	**SF15-32-2.2**	2.2	3	30	37.4
SFm15-40-3F	**SF15-40-3**	3	4	30	41
–	**SF20-40-4**	4	5.5	36	46.4
–	**SF27-50-5.5**	5.5	7.5	48	57.9
–	**SF27-55-7.5**	7.5	10	54	58.5
–	**SF35-55-9.2**	9.2	12.5	54	60.6

SF 0.37 – 1.9 kW

PERFORMANCE & TECHNICAL DATA · 50 Hz · n ≈ 2850 /min

AQUARIS
MADE IN ITALY

PERFORMANCE CURVES

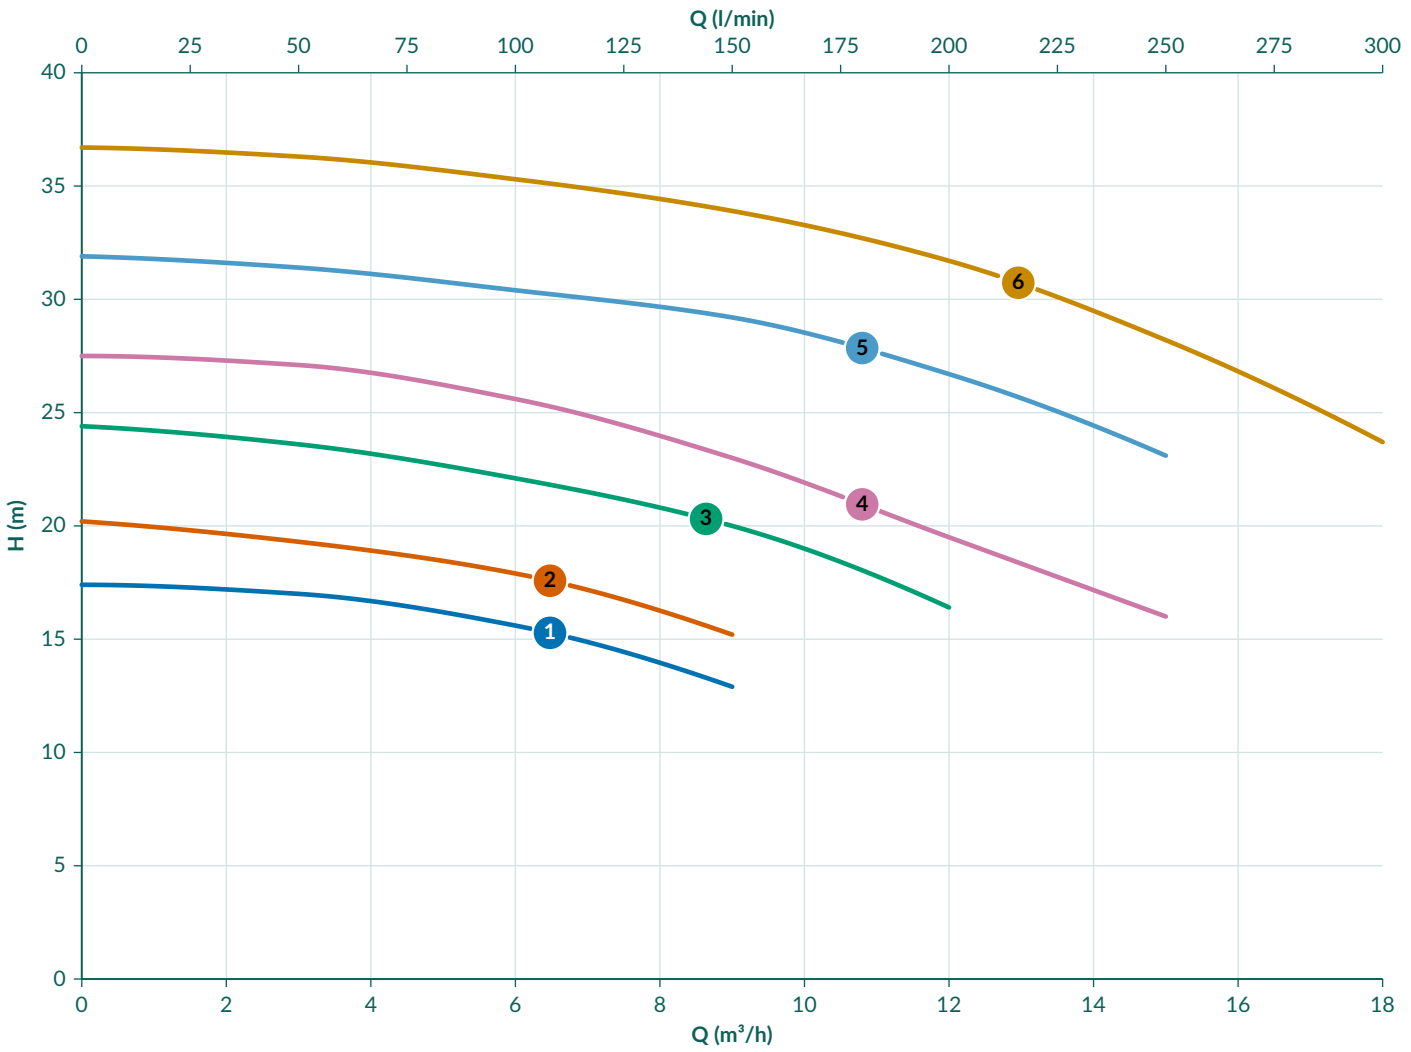

1 SF6-15-0.37 2 SF6-18-0.55 3 SF6-22-0.75 4 SF6-25-1.1 5 SF10-28-1.5 6 SF10-32-1.9

Curves at 50 Hz, 2 poles (≈ 2850 min^{-1}), clean water at 20 °C, kinematic viscosity 1 mm^2/s. Typical values, not guaranteed.

PERFORMANCE DATA


		1	2	3	4	5	6
Model	1~	SFm6-15-0.37F	SFm6-18-0.55F	SFm6-22-0.75F	SFm6-25-1.1F	SFm10-28-1.5F	SFm10-32-1.9F
Model	3~	**SF6-15-0.37**	**SF6-18-0.55**	**SF6-22-0.75**	**SF6-25-1.1**	**SF10-28-1.5**	**SF10-32-1.9**
P2	kW	0.37	0.55	0.75	1.1	1.5	1.9
P2	HP	0.5	0.75	1	1.5	2	2.5
Q (m^3/h)	**Q (l/min)**			**H (m)**			
0	0	17.4	20.2	24.4	27.5	31.9	36.7
3	50	17	19.3	23.6	27.1	31.4	36.3
6	100	15.6	17.9	22.1	25.6	30.4	35.3
9	150	12.9	15.2	20	23	29.2	33.9
12	200			16.4	19.5	26.7	31.7
15	250				16	23.1	28.2
18	300						23.7

SF 2.2 – 9.2 kW

PERFORMANCE & TECHNICAL DATA · 50 Hz · n ≈ 2850 /min

AQUARIS MADE IN ITALY

PERFORMANCE CURVES

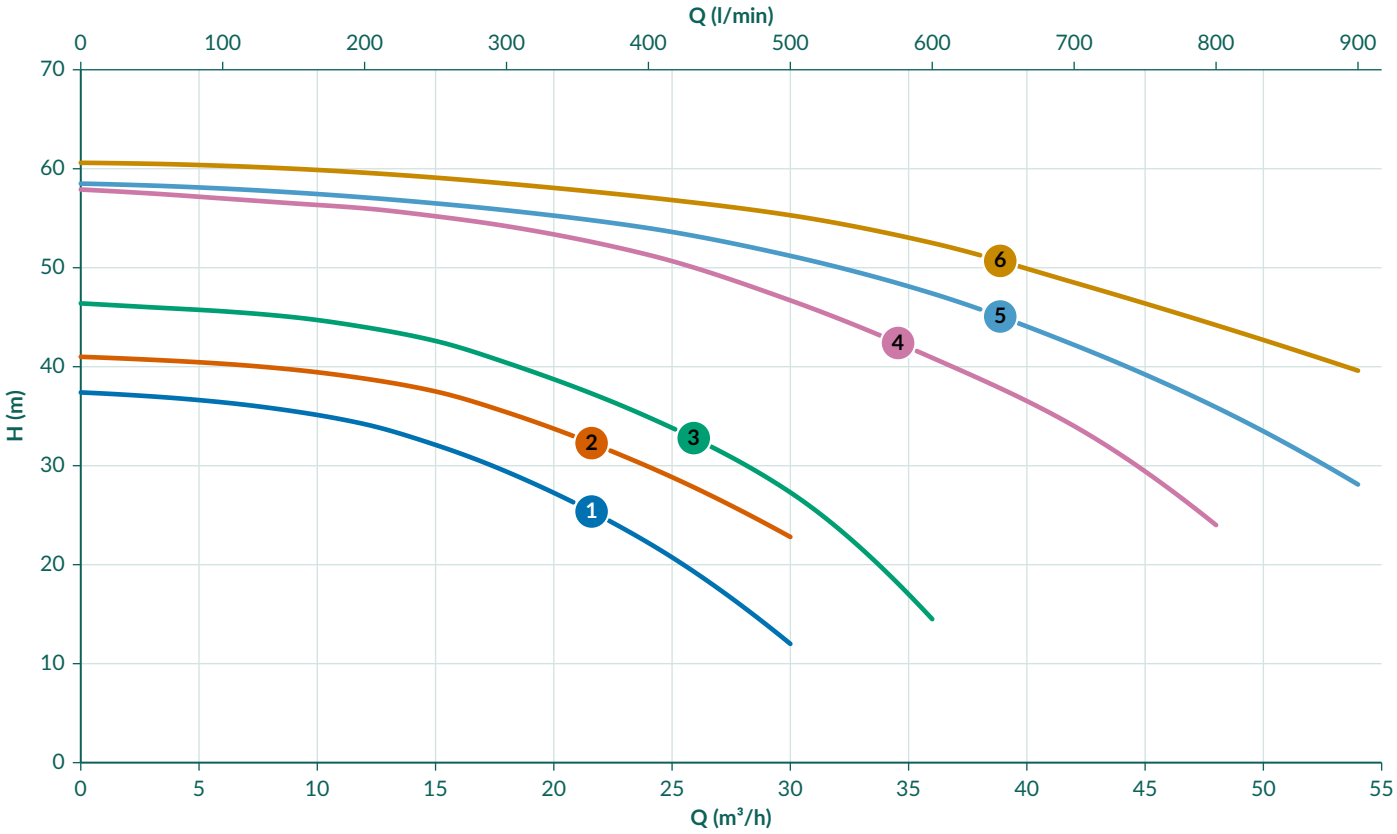

1 SF15-32-2.2 2 SF15-40-3 3 SF20-40-4 4 SF27-50-5.5 5 SF27-55-7.5 6 SF35-55-9.2

Curves at 50 Hz, 2 poles (≈ 2850 min^{-1}), clean water at 20 °C, kinematic viscosity 1 mm^2/s. Typical values, not guaranteed.

PERFORMANCE DATA

		1	2	3	4	5	6
Model	1~	SFm15-32-2.2F	SFm15-40-3F	–	–	–	–
Model	3~	**SF15-32-2.2**	**SF15-40-3**	**SF20-40-4**	**SF27-50-5.5**	**SF27-55-7.5**	**SF35-55-9.2**
P2	kW	2.2	3	4	5.5	7.5	9.2
P2	HP	3	4	5.5	7.5	10	12.5
Q (m³/h)	**Q (l/min)**			**H (m)**			
0	0	37.4	41	46.4	57.9	58.5	60.6
3	50	37	40.7	46	57.5	58.3	60.5
6	100	36.4	40.3	45.6	57	58	60.3
9	150	35.5	39.7	45	56.5	57.6	60
12	200	34.2	38.8	44	56	57.1	59.6
15	250	32.1	37.5	42.6	55.2	56.5	59.1
18	300	29.4	35.4	40.4	54.2	55.8	58.5
24	400	22.2	29.9	34.9	51.3	54	57.1
30	500	12	22.8	27.3	46.7	51.2	55.3
36	600			14.5	40.9	47.4	52.5
42	700				34	42.2	48.5
48	800				24	35.9	44.2
54	900					28.1	39.6