SF SERIES

SF

Stainless steel submersible pumps
High head

RANGE CHARACTERISTICS

Power P2	**0.37 – 9.2 kW**
Max. flow rate	**54 m³/h (900 l/min)**
Max. head	**60.6 m**
Speed	**n ≈ 2850 /min (2 poles)**
Frequency	**50 Hz**
Single-phase	**1~ 220–240 V 50 Hz**
Three-phase	**3~ 380–415 V 50 Hz**
Models	**12 (three-phase), 8 (single-phase)**

MODEL CODE

SFm6-22-0.75F

SF	Model
m	Single-phase
6	Capacity (m³/h)
22	Head (m)
0.75	Power (kW)
F	Floating switch

Three-phase models without "m".

STAINLESS STEEL SUBMERSIBLE PUMP

High head | 1~ 220–240 V | 3~ 380–415 V | 50 Hz | n ≈ 2850 /min

Redpump
Italy Standard

APPLICATIONS

- For water supply from wells or reservoirs.
- For domestic use, for civil and industrial applications.
- For garden use and irrigation.

OPERATING CONDITIONS

- Maximum fluid temperature up to +40 °C
- Maximum sand content: 0.1 %

MOTOR AND PUMP

- Rewindable motor
- Single-phase: 1~ 220–240 V 50 Hz
- Three-phase: 3~ 380–415 V 50 Hz
- Can be equipped with a floating switch (single-phase models, suffix F)

OPTIONS ON REQUEST

- Special mechanical seal
- Other voltages



TECHNICAL SHEET – MATERIALS

Impeller	Cast aluminium
Strainer	AISI 304 stainless steel
Motor external casing	AISI 304 stainless steel
Top cover	AISI 304 stainless steel
Mechanical seal	Graphite / ceramic
Seal lubricant oil	Oil for food machinery and pharmaceutical use

RANGE OVERVIEW

MODEL 1~	MODEL 3~	P2 kW	P2 HP	Q max m³/h	H max m
SFm6-15-0.37F	**SF6-15-0.37**	0.37	0.5	9	17.4
SFm6-18-0.55F	**SF6-18-0.55**	0.55	0.75	9	20.2
SFm6-22-0.75F	**SF6-22-0.75**	0.75	1	12	24.4
SFm6-25-1.1F	**SF6-25-1.1**	1.1	1.5	15	27.5
SFm10-28-1.5F	**SF10-28-1.5**	1.5	2	15	31.9
SFm10-32-1.9F	**SF10-32-1.9**	1.9	2.5	18	36.7
SFm15-32-2.2F	**SF15-32-2.2**	2.2	3	30	37.4
SFm15-40-3F	**SF15-40-3**	3	4	30	41
–	**SF20-40-4**	4	5.5	36	46.4
–	**SF27-50-5.5**	5.5	7.5	48	57.9
–	**SF27-55-7.5**	7.5	10	54	58.5
–	**SF35-55-9.2**	9.2	12.5	54	60.6

SF SERIES

SF

Stainless steel submersible pumps
High head


PERFORMANCE DATA

Models	**0.37 – 1.1 kW**
Single-phase	**1~ 220–240 V 50 Hz**
Three-phase	**3~ 380–415 V 50 Hz**
Speed	**n ≈ 2850 /min**
Poles	**2**



PERFORMANCE & TECHNICAL DATA

SF SERIES · 0.37 – 1.1 kW

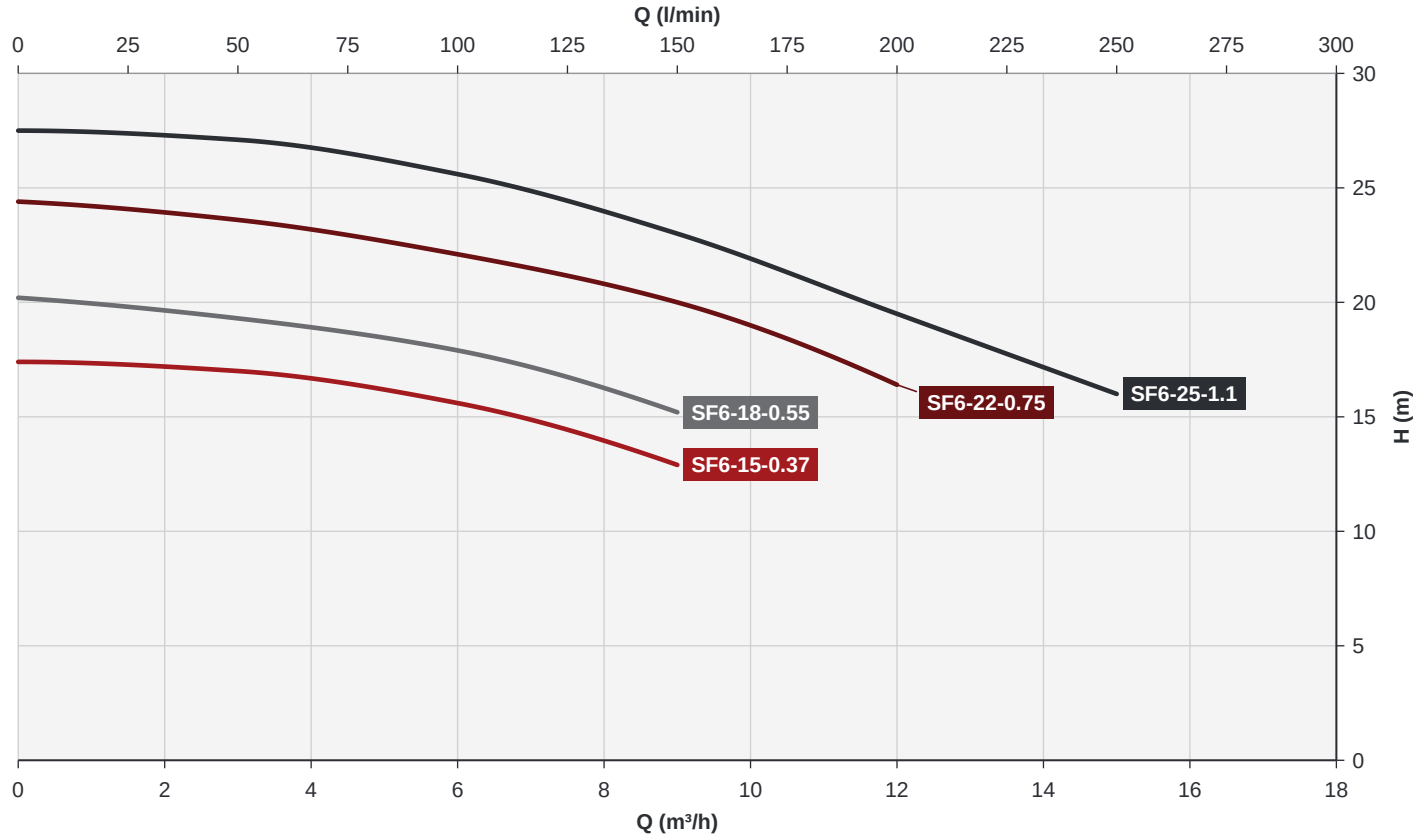

Curves at 50 Hz, 2 poles (≈ 2850 min^{-1}), clean water at 20 °C, kinematic viscosity 1 mm^2/s. Typical values, not guaranteed.

PERFORMANCE TABLE

Model 1~	Model 3~	P2	P2	Q (m³/h)	0	3	6	9	12	15
		kW	HP	Q (l/min)	0	50	100	150	200	250
SFm6-15-0.37F	**SF6-15-0.37**	0.37	0.5	H (m)	17.4	17	15.6	12.9		
SFm6-18-0.55F	**SF6-18-0.55**	0.55	0.75		20.2	19.3	17.9	15.2		
SFm6-22-0.75F	**SF6-22-0.75**	0.75	1		24.4	23.6	22.1	20	16.4	
SFm6-25-1.1F	**SF6-25-1.1**	1.1	1.5		27.5	27.1	25.6	23	19.5	16

SF SERIES

SF

Stainless steel submersible pumps
High head


PERFORMANCE DATA

Models	**1.5 – 3 kW**
Single-phase	**1~ 220–240 V 50 Hz**
Three-phase	**3~ 380–415 V 50 Hz**
Speed	**n ≈ 2850 /min**
Poles	**2**



PERFORMANCE & TECHNICAL DATA

SF SERIES · 1.5 – 3 kW

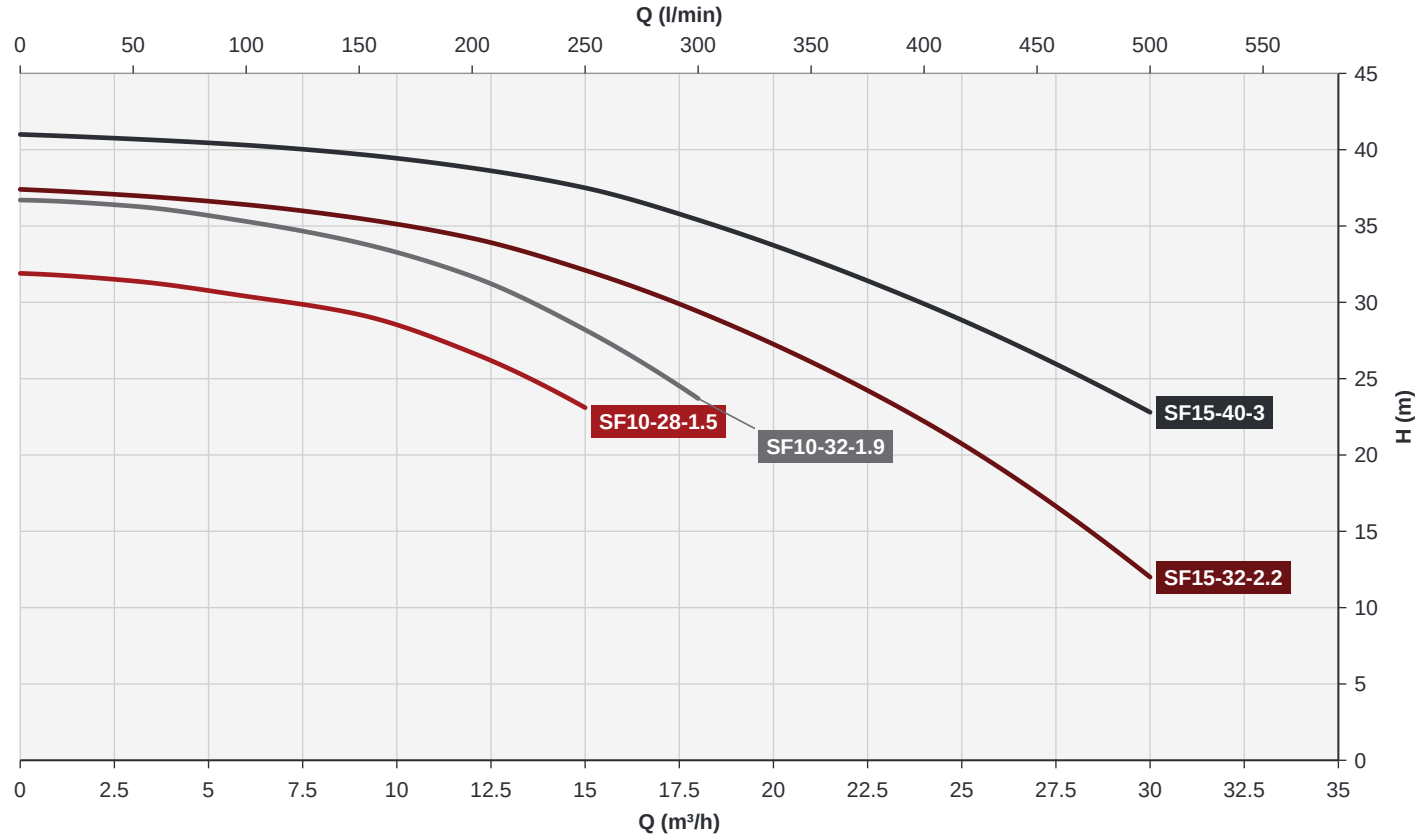

Curves at 50 Hz, 2 poles (≈ 2850 min^{-1}), clean water at 20 °C, kinematic viscosity 1 mm²/s. Typical values, not guaranteed.

PERFORMANCE TABLE

Model 1~	Model 3~	P2	P2	Q (m³/h)	0	3	6	9	12	15	18	24	30
		kW	HP	Q (l/min)	0	50	100	150	200	250	300	400	500
SFm10-28-1.5F	**SF10-28-1.5**	1.5	2	H (m)	31.9	31.4	30.4	29.2	26.7	23.1			
SFm10-32-1.9F	**SF10-32-1.9**	1.9	2.5		36.7	36.3	35.3	33.9	31.7	28.2	23.7		
SFm15-32-2.2F	**SF15-32-2.2**	2.2	3		37.4	37	36.4	35.5	34.2	32.1	29.4	22.2	12
SFm15-40-3F	**SF15-40-3**	3	4		41	40.7	40.3	39.7	38.8	37.5	35.4	29.9	22.8

SF SERIES

SF

Stainless steel submersible pumps
High head


PERFORMANCE DATA

Models	**4 – 9.2 kW**
Three-phase	**3~ 380–415 V 50 Hz**
Speed	**n ≈ 2850 /min**
Poles	**2**



PERFORMANCE & TECHNICAL DATA

SF SERIES · 4 – 9.2 kW

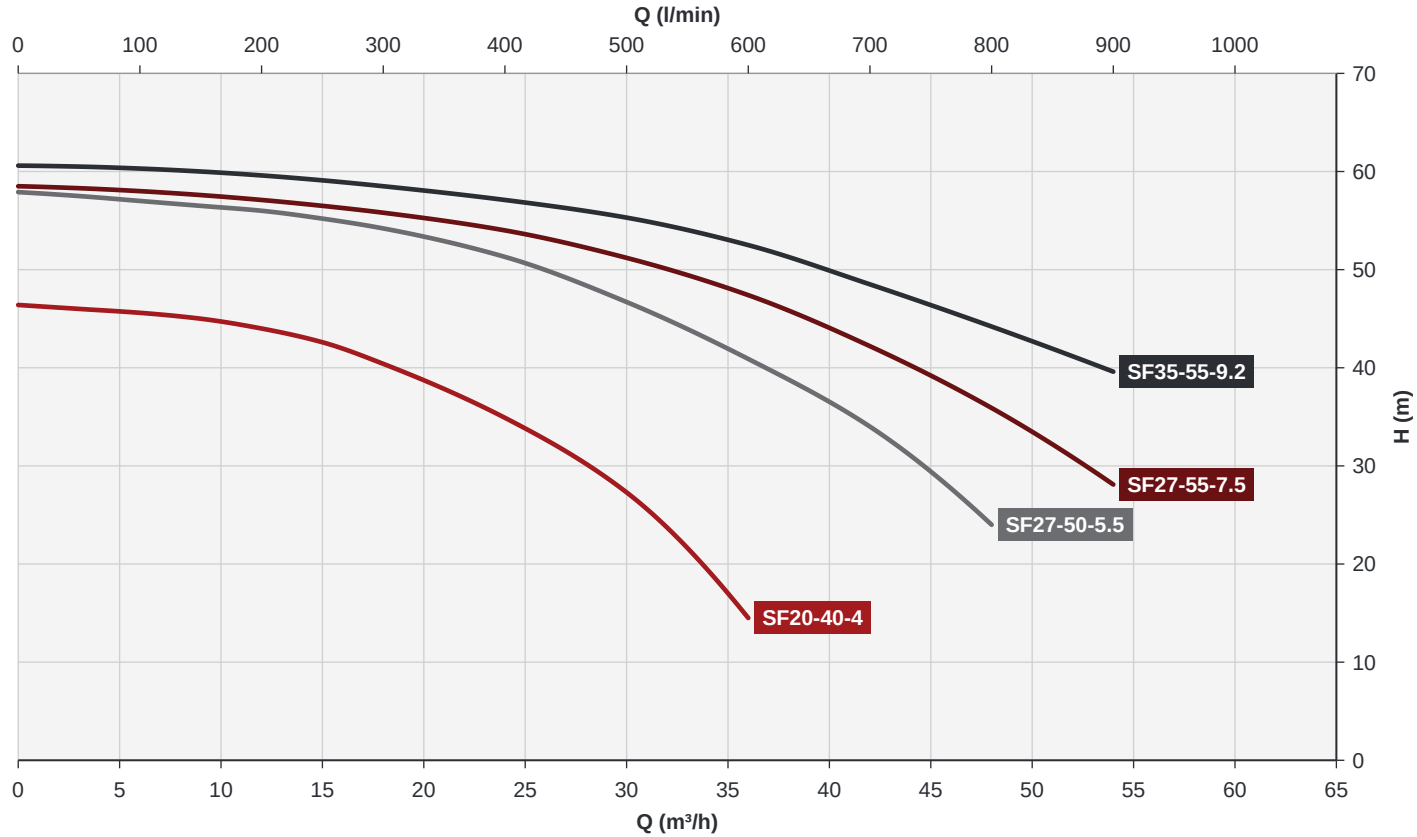

Curves at 50 Hz, 2 poles (≈ 2850 min^{-1}), clean water at 20 °C, kinematic viscosity 1 mm²/s. Typical values, not guaranteed.

PERFORMANCE TABLE

Model 3~	P2	P2	Q (m³/h)	0	3	6	9	12	15	18	24	30	36	42	48	54
	kW	HP	Q (l/min)	0	50	100	150	200	250	300	400	500	600	700	800	900
SF20-40-4	4	5.5	H (m)	46.4	46	45.6	45	44	42.6	40.4	34.9	27.3	14.5			
SF27-50-5.5	5.5	7.5		57.9	57.5	57	56.5	56	55.2	54.2	51.3	46.7	40.9	34	24	
SF27-55-7.5	7.5	10		58.5	58.3	58	57.6	57.1	56.5	55.8	54	51.2	47.4	42.2	35.9	28.1
SF35-55-9.2	9.2	12.5		60.6	60.5	60.3	60	59.6	59.1	58.5	57.1	55.3	52.5	48.5	44.2	39.6