SWQ SERIES

250SWQ

Submersible sewage pump
Without cutter · Large flow



MAIN DATA

Model	**250SWQ500-5**
Power P2	**15 kW / 20 HP**
Power supply	**3~ 380–415 V 50 Hz**
Speed	**n ≈ 1450 /min (4 poles)**
Discharge	**DN250**
Rated point	**500 m³/h – 5 m**
Max. flow rate	**600 m³/h**
Max. head	**25 m**

PRODUCT NOMENCLATURE


250	SWQ	500	5
Outlet size (mm)	Model	Rated flow (m³/h)	Rated head (m)

SUBMERSIBLE SEWAGE PUMP

250SWQ500-5 | 15 kW | 3~ 380–415 V | 50 Hz | n ≈ 1450 /min

Redpump
Italy Standard

PERFORMANCE CURVE

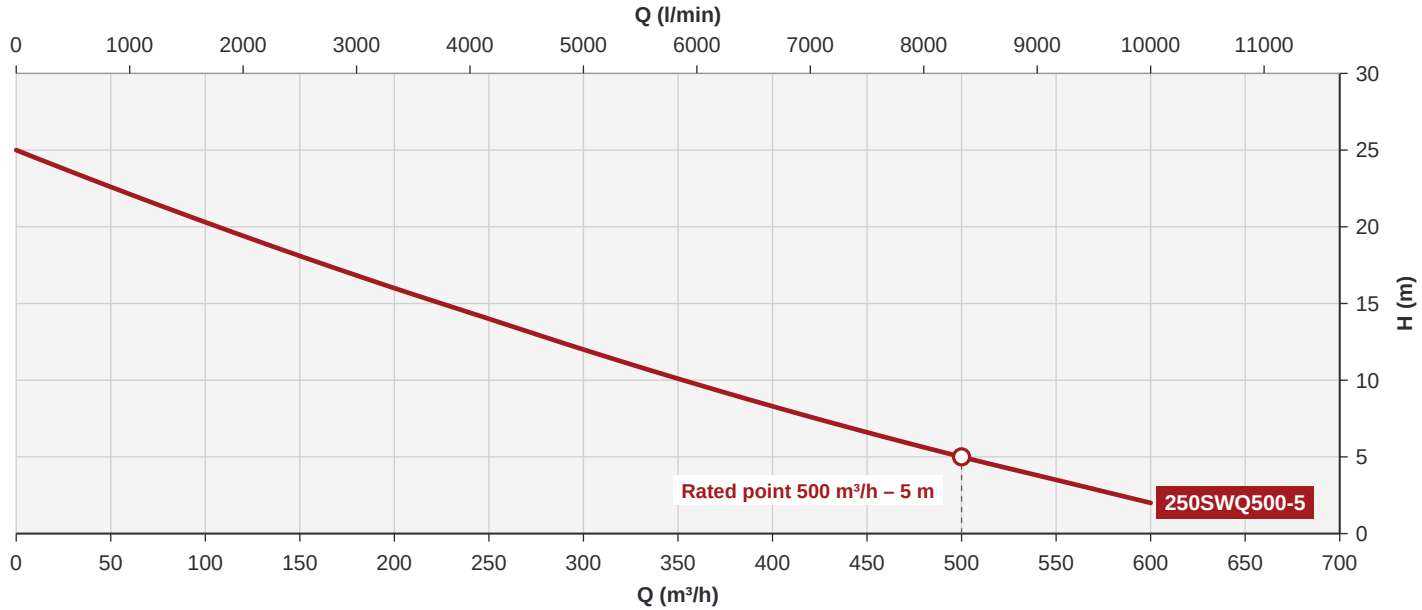

Curves at 50 Hz, 4 poles (≈ 1450 min^{-1}), clean water at 20 °C, kinematic viscosity 1 mm²/s. Typical values, not guaranteed.

PERFORMANCE TABLE

Model 3~	P2	P2	Q (m³/h)	0	50	100	150	200	250	300	350	400	450	500	550	600
	kW	HP	Q (l/min)	0	833	1667	2500	3333	4167	5000	5833	6667	7500	8333	9167	10000
250SWQ500-5	15	20	**H (m)**	25	22.6	20.3	18.1	16	14	12	10.1	8.3	6.6	5	3.5	2

FEATURES

Non-clogging impeller
Open channel for solids, without cutter.

Double mechanical seal
Silicon carbide faces, oil chamber between seals.

Epoxy-sealed cable entry
Keeps moisture out of the motor through the cable cores.

Dry motor, 100% copper winding
Protection IP68, heavy-duty ball bearings.

APPLICATIONS

- Sewage treatment plants
- Industrial draining
- Large-flow drainage, flood control
- Agriculture irrigation

OPERATING CONDITIONS

- Max. fluid temperature +40 °C
- Rewindable motor
- Three-phase: 380–415 V / 50 Hz

MATERIALS

Pump casing	Cast-iron ASTM NO.30
Impeller	Cast-iron ASTM NO.30
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Silicon carbide (SiC)
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use