

CONSTRUCTION · 2-POLE MODELS

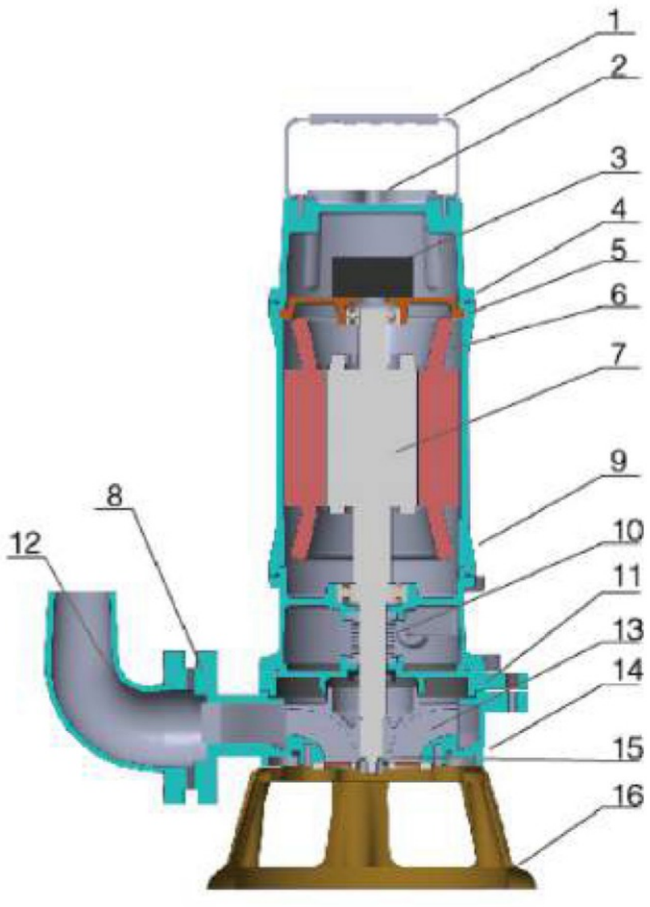

1	Handle	9	Motor body
2	Cable	10	Mechanical seal
3	Capacitor	11	Screw
4	Cap	12	Elbow
5	Thermal protector	13	Impeller
6	Stator	14	Pump body
7	Rotor	15	Cutter ring
8	Outlet	16	Base

Items 3 and 5: single-phase models.

CONSTRUCTION · 4-POLE MODELS

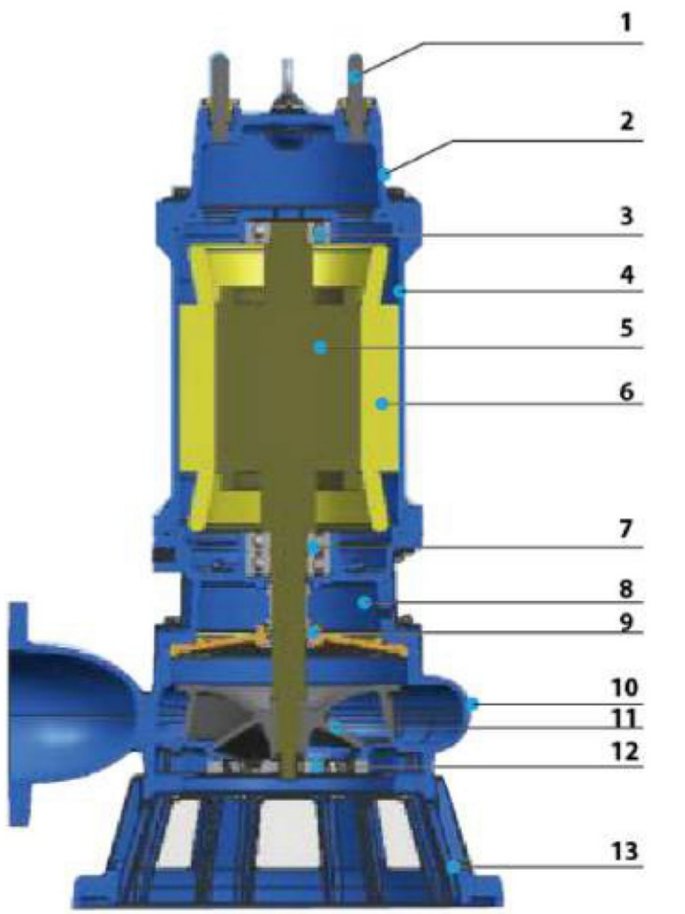

1	Cable	8	Lubricant
2	Motor upper cover	9	Mechanical seal
3	Bearing	10	Pump casing
4	Motor frame	11	Impeller
5	Motor rotor	12	Cutter ring
6	Motor stator	13	Base
7	Bearing		

FEATURES

Cutter impeller with cutter ring
Vortex semi-open, non-clogging impeller. Solids in the wastewater are cut by the impeller and the cutter ring before being pumped out. Impeller and cutter ring are made of high-chromium stainless steel 420, hardness HRC 49–52, for good wear resistance.

Double mechanical seal
Two mechanical seals arranged in series. Seal faces in silicon carbide for superior abrasion resistance and the best sealing effect.

Epoxy-sealed cable entry
An epoxy resin seal at the cable base prevents moisture from entering the motor through the cable cores.

Auto-cut motor protector
Single-phase models have a built-in auto-cut thermal protector that switches the motor off automatically under abnormal electrical conditions or overheating.

Heavy-duty bearings
Heavy-duty ball bearings.

Dry motor, 100% copper winding
Protection IP68, for continuous submerged operation in wastewater and sewage.

SPECIFICATIONS

ITEM	2-POLE MODELS	4-POLE MODELS
Liquid temperature	0 – 40 °C	
Liquid	Wastewater, sewage	
Frequency	50 Hz	
Motor	Dry motor, 2-pole, n ≈ 2900 /min	Dry motor, 4-pole, n ≈ 1450 /min
Protection	IP68	
Motor protector	Auto-cut thermal protector on single-phase models	
Bearing	Ball type	
Mechanical seal	Double mechanical seal, silicon carbide	
Impeller	Vortex, non-clogging, with cutter ring	

APPLICATIONS

- Drainage of wastewater in rivers and wastewater treatment plants
- Commercial buildings, industrial areas and amusement places
- Schools, hospitals, government buildings and parks
- Chicken, cow, pig and fish farms, slaughterhouses

150WC

PRODUCT NOMENCLATURE

150	WC	300	30	37
Outlet size (mm)	Model	Rated flow (m³/h)	Rated head (m)	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

RANGE CHARACTERISTICS

Power	37 kW
Poles	2
Discharge	DN150
Max. flow rate	540 m³/h
Max. head	53 m
Speed	n ≈ 2900 /min

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS


Maximum fluid temperature up to +40 °C

MOTOR AND PUMP

Rewindable motor
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906



COMPONENT	MATERIAL
Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Silicon carbide (SiC)
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

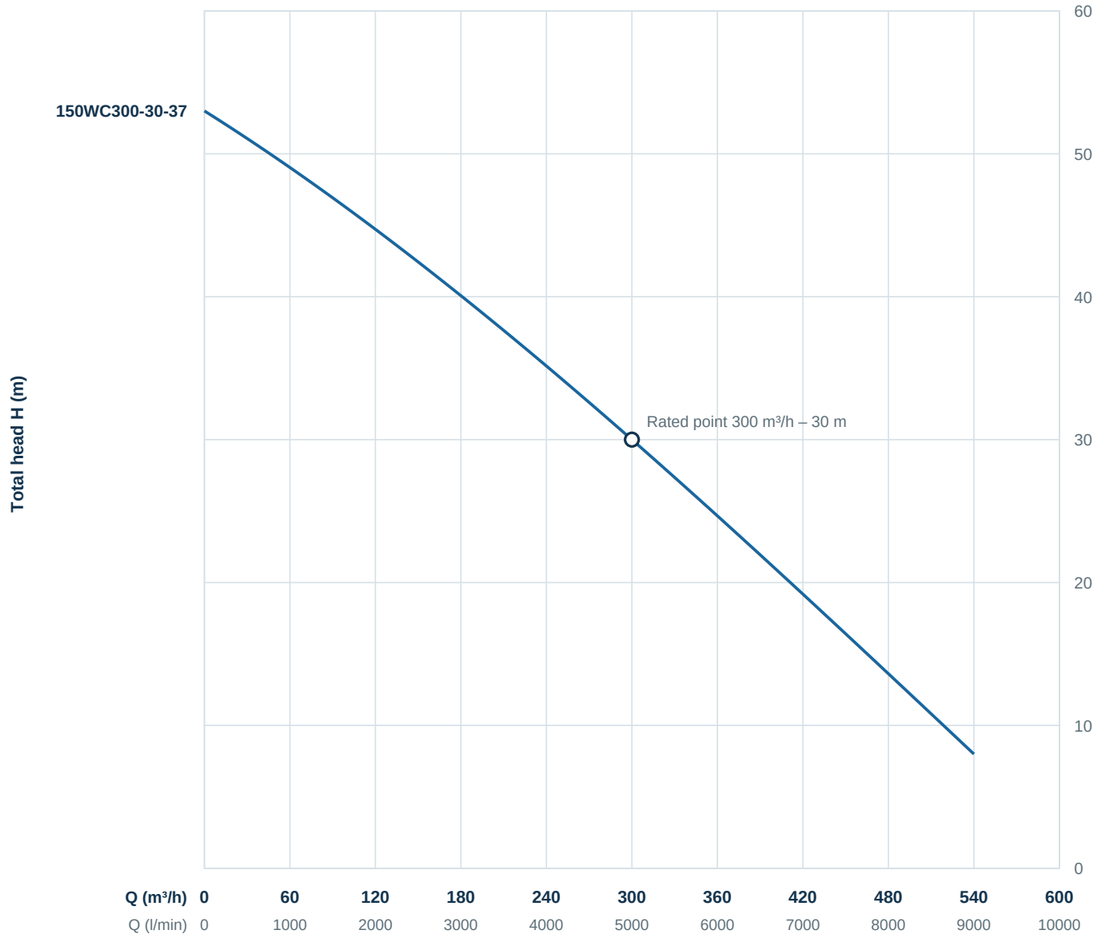

PERFORMANCE DATA

MODEL		P_2		Q	m³/h	0	60	120	180	240	300	360	420	480	540
3~ 380–415 V	1~ 220–240 V	kW	HP		l/min	0	1000	2000	3000	4000	5000	6000	7000	8000	9000
150WC300-30-37	–	37	50	**H (m)**		53	49	45	40	35	30	25	19	14	8