150WC300-30-37

PRODUCT NOMENCLATURE

150	WC	300	30	37
Outlet size (mm)	Model	Rated flow (m³/h)	Rated head (m)	Power (kW)

WC: three-phase 3~

MAIN DATA

Power	37 kW / 50 HP
Power supply	3~ 380–415 V 50 Hz
Poles	2
Speed	n ≈ 2900 /min
Discharge	DN150
Rated point	300 m³/h – 30 m
Max. flow rate	540 m³/h
Max. head	53 m

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS


Maximum fluid temperature up to +40 °C

MOTOR AND PUMP

Rewindable motor
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber



COMPONENT	MATERIAL
Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Silicon carbide (SiC)
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

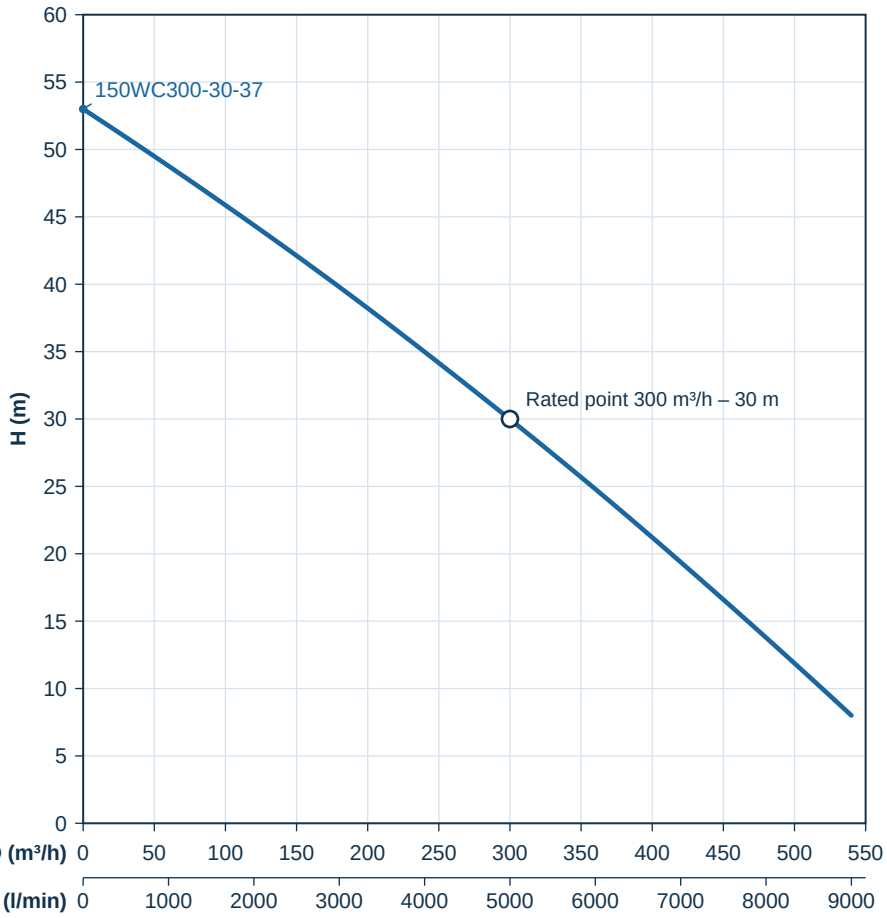


Curves at 50 Hz, 2 poles (≈ 2900 min^{-1}), clean water at 20 °C, kinematic viscosity 1 mm²/s. Typical values, not guaranteed.

PERFORMANCE DATA

Model 3~	P2	P2	Q (m³/h)	0	90	180	270	360	450	540
	kW	HP	Q (l/min)	0	1500	3000	4500	6000	7500	9000
150WC300-30-37	37	50	**H (m)**	53	46.6	39.8	32.5	24.8	16.6	8

CONSTRUCTION · 150WC300-30-37 (2-POLE)

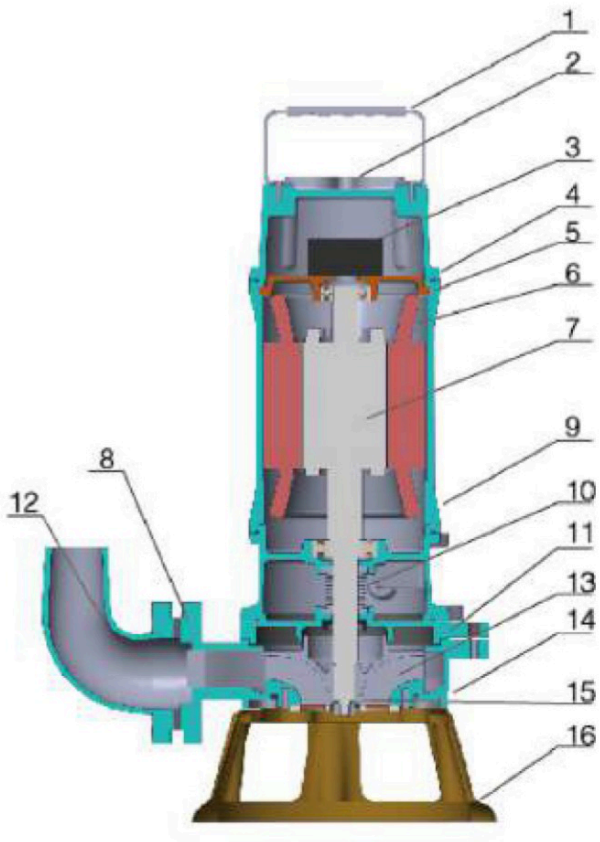

1	Handle	9	Motor body
2	Cable	10	Mechanical seal
3	Capacitor	11	Screw
4	Cap	12	Elbow
5	Thermal protector	13	Impeller
6	Stator	14	Pump body
7	Rotor	15	Cutter ring
8	Outlet	16	Base

Items 3 and 5: single-phase models only.

FEATURES

Cutter impeller with cutter ring
Vortex semi-open, non-clogging impeller. Solids in the wastewater are cut by the impeller and the cutter ring before being pumped out. Impeller and cutter ring are made of high-chromium stainless steel 420, hardness HRC 49–52, for good wear resistance.

Double mechanical seal
Two mechanical seals arranged in series. Seal faces in silicon carbide for superior abrasion resistance and the best sealing effect.

Epoxy-sealed cable entry
An epoxy resin seal at the cable base prevents moisture from entering the motor through the cable cores.

Heavy-duty bearings
Heavy-duty ball bearings.

Dry motor, 100% copper winding
Protection IP68, for continuous submerged operation in wastewater and sewage.

SPECIFICATIONS

ITEM	150WC300-30-37
Liquid temperature	0 – 40 °C
Liquid	Wastewater, sewage
Frequency	50 Hz
Power supply	3~ 380–415 V 50 Hz
Motor	Dry motor, 2-pole, n ≈ 2900 /min
Protection	IP68
Bearing	Ball type
Mechanical seal	Double mechanical seal, silicon carbide
Impeller	Vortex, non-clogging, with cutter ring

APPLICATIONS

- Drainage of wastewater in rivers and wastewater treatment plants
- Commercial buildings, industrial areas and amusement places
- Schools, hospitals, government buildings and parks
- Chicken, cow, pig and fish farms, slaughterhouses