perotac
MADE IN TAIWAN

80WQX

SINGLE MODEL / DATA SHEET

Stainless steel submersible sewage pump



KEY DATA

Model	**80WQX40-15-5.5**
Power	**5.5 kW / 7.5 HP**
Power supply	**3~ 380–415 V / 50 Hz**
Max. flow	**80 m³/h (1333 l/min)**
Max. head	**25 m**
Rated flow	**40 m³/h (667 l/min)**
Rated head	**15 m**
Discharge	**DN80, flanged**
Construction	**Stainless steel**
Origin	**Made in Taiwan**

PRODUCT NOMENCLATURE

80	Discharge diameter DN (mm)
WQX	Stainless steel submersible sewage pump
40	Rated flow (m³/h)
15	Rated head (m)
5.5	Power (kW)


FEATURES

- Stainless steel pump body and motor housing.
- Flanged DN80 discharge.
- Two lifting eyes for handling and installation.
- Support stand for free-standing installation.
- Supplied with power cable.

APPLICATION

- Pumping of sewage and wastewater.

PERFORMANCE CURVE

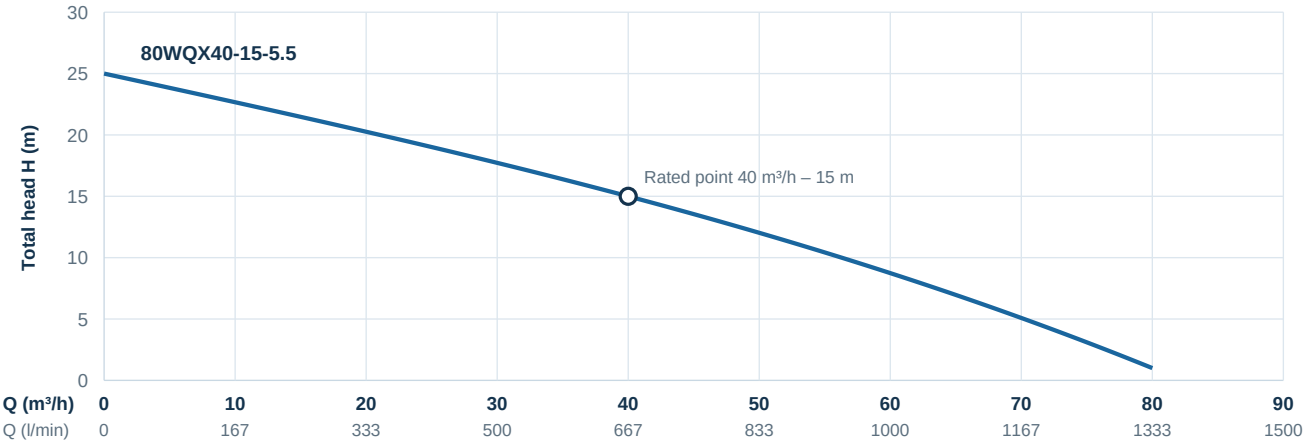

MODEL	POWER		Q m³/h	0	20	40	60	80
	kW	HP	l/min	0	333	667	1000	1333
80WQX40-15-5.5	**5.5**	**7.5**	**H (m)**	**25**	**20**	**15**	**9**	**1**

Supply 3~ 380–415 V, 50 Hz. Rated flow and rated head according to the model designation.