CM 32-160/3

MAIN DATA

Model	**CM 32-160/3**
Power P2	3 kW / 4 HP
Power supply	3~ 380–415 V
Frequency	50 Hz
Speed	n ≈ 2900 /min
Suction × Disch.	DN 50 × 32
Flow range	9–36 m³/h
Head range	29.2–20.5 m

MOTOR

3~ 380–415 V · 50 Hz
IP 55 · Insulation class F
Duty S1 continuous

FIELDS OF USE

Clean water · Civil · Industrial · Firefighting

OPERATING LIMITS

Liquid temperature between -10 °C and +120 °C
Ambient temperature between -10 °C and +50 °C
Max. working pressure 16 bar
Continuous duty S1

DESCRIPTION

New centrifugal pump to EN733 standard
Available with square or round motor
YE3 high-efficiency motor, IP55 protection, insulation class F
Pump casing with anti-corrosion coating
Galvanized counter flange with bolts, nuts and gaskets
Quality bearings, wear-resistant mechanical seal




MATERIALS

Casing	Grey cast iron
Impeller	Cast iron / AISI 304 / Brass
Shaft	45# steel / AISI 316
Shaft seal	Mechanical seal
Bearing	Grease-lubricated rolling bearings

MODEL CODE

CM	Pump with square motor
32	Discharge size (mm)
160	Nominal impeller size (mm)
3	Rated power (kW)

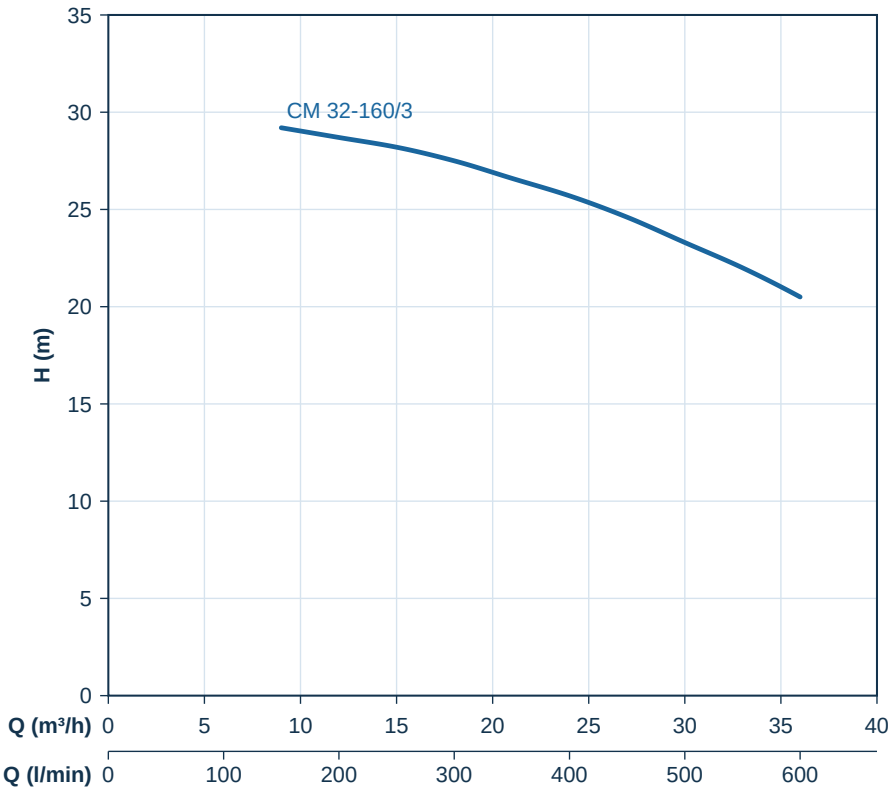

Curves at 50 Hz, 2 poles (≈ 2900 min^{-1}), clean water at 20 °C, kinematic viscosity 1 mm²/s. Typical values, not guaranteed.

PERFORMANCE DATA

Model 3~	P2	P2	Q (m³/h)	9	12	15	18	21	24	27	30	33	36
	kW	HP	Q (l/min)	150	200	250	300	350	400	450	500	550	600
CM 32-160/3	3	4	**H (m)**	29.2	28.7	28.2	27.5	26.6	25.7	24.6	23.3	22	20.5