SS-150

SS SERIES / PERFORMANCE & TECHNICAL DATA

Submersible sewage pump | 50 Hz | n ≈ 2850 /min

MODEL CODE

SS-150	three-phase 3~
SSM-150F	single-phase 1~, with float switch

MAIN DATA

Power P2	0.15 kW / 0.2 HP
Power supply 1~	1~ 220–240 V 50 Hz
Power supply 3~	3~ 380–415 V 50 Hz
Speed	n ≈ 2850 /min
Max. flow rate	7 m³/h (H = 0)
Max. head	6 m (Q = 0)
Impeller type	open

APPLICATIONS

Sewage treatment plants
Industrial drainage
Agricultural irrigation

OPERATING CONDITIONS

Maximum fluid temperature: +50 °C

MOTOR AND PUMP


Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
Available with float switch
Suitable for water containing fibers
Curve tolerance according to ISO 9906



COMPONENT	MATERIAL
Outer motor casing	Cast iron G20
Mechanical seal	Graphite-Ceramic
Shaft	AISI 304 SS-ASTM 5140
Seal lubricating oil	Oil for food machinery

NOTES

- Special mechanical seal available on request.

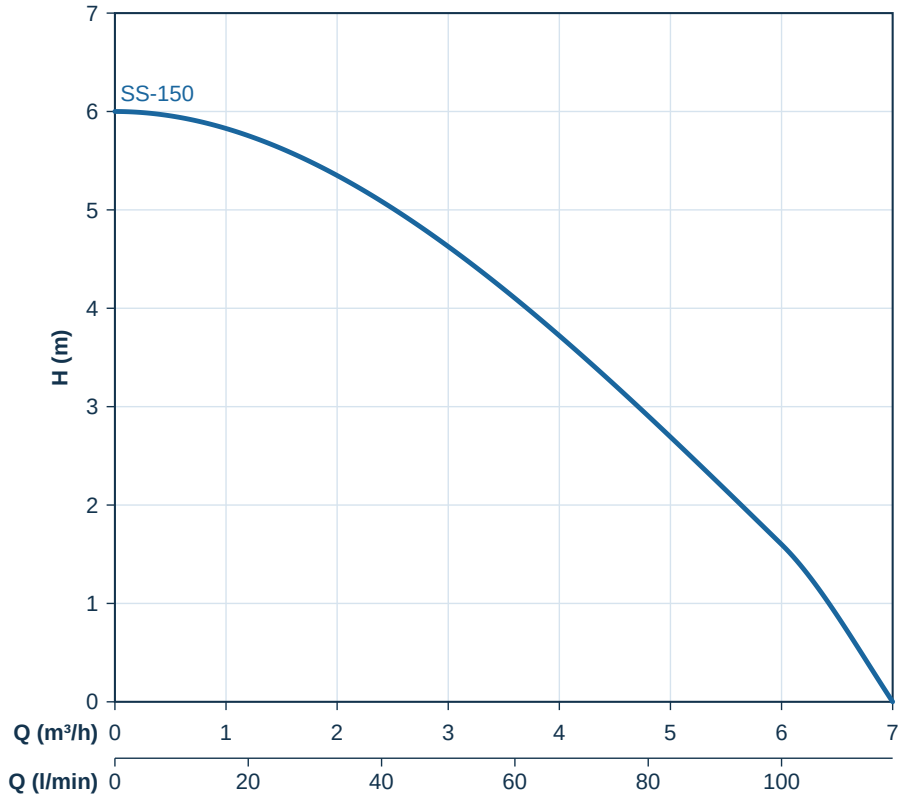

Curves at 50 Hz, 2 poles (≈ 2850 min^{-1}), clean water at 20 °C, kinematic viscosity 1 mm^2/s. Typical values, not guaranteed.

PERFORMANCE DATA

Model 1~	Model 3~	P2 kW	P2 HP	Q (m³/h)	0	6	7
				Q (l/min)	0	100	117
SSM-150F	**SS-150**	0.15	0.2	**H (m)**	6	1.6	0

H = total head (m)
Q max = flow rate at H = 0