CDLF8-12T · CDLF16-8T

MAIN DATA

Model	CDLF8-12T	CDLF16-8T
Power P2	4 kW / 5.5 HP	7.5 kW / 10 HP
Power supply	3~ 380–415 V	3~ 380–415 V
Frequency	50 Hz	50 Hz
Speed	n ≈ 2900 /min	n ≈ 2900 /min
Inlet / Outlet	1.5" / 1.5"	2" / 2"
Flow range	5–12 m³/h	6–24 m³/h
Head range	124–78 m	106.6–38.3 m

OPERATING CONDITIONS

Thin, clean, non-flammable and non-explosive liquids without solid particles or fibers
Liquid temperature, normal type: -15 °C ~ +70 °C
Liquid temperature, hot water type: -15 °C ~ +120 °C
Ambient temperature: up to +40 °C
Altitude: up to 1000 m

PUMP

CDLF is a vertical, non-self-priming multistage centrifugal pump driven by a standard electric motor. The motor shaft is connected directly to the pump shaft through a coupling. The pressure-resistant cylinder and the flow passage components are held between the pump head and the inlet and outlet section by stay bolts. The inlet and outlet are at the bottom of the pump, on the same level. The pump can be fitted with an intelligent protector against dry running, phase failure and overload.




MATERIALS

Pump head	Cast iron ASTM25B
Impeller	Stainless steel AISI304
Diffuser	Stainless steel AISI304
Cylinder	Stainless steel AISI304
Shaft	Stainless steel AISI304 / AISI316L
Base plate	Cast iron ASTM25B
Bearing	Tungsten carbide

MOTOR

Totally enclosed, fan-cooled two-pole standard motor
Protection class: IP55 | Insulation class: F
Three-phase 3~ 380–415 V, 50 Hz

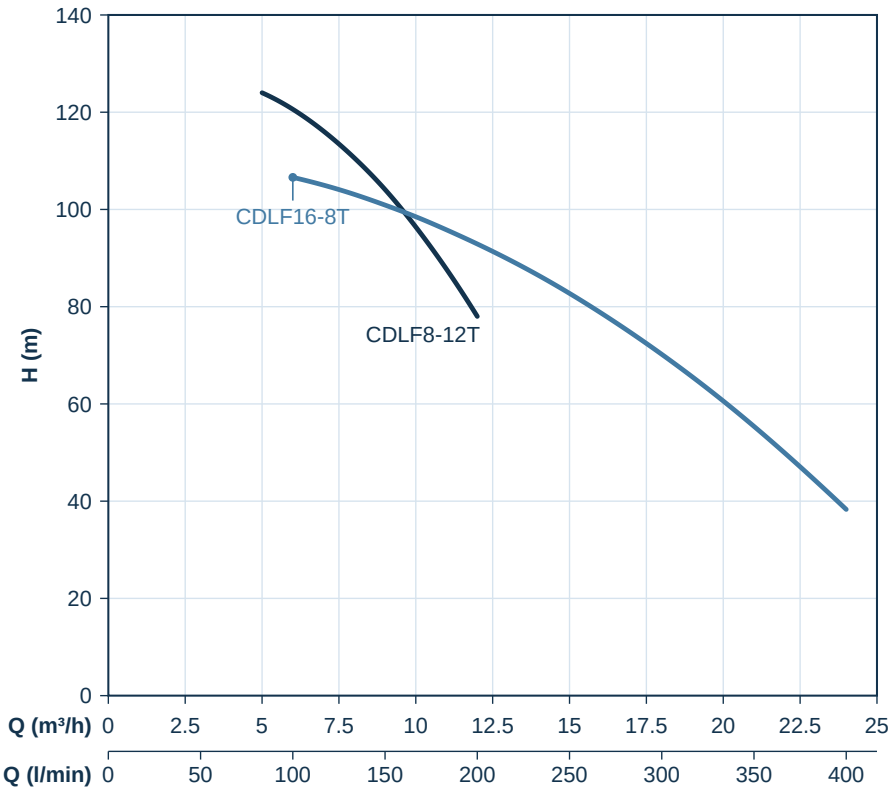

Curves at 50 Hz, 2 poles (≈ 2900 min^{-1}), clean water at 20 °C, kinematic viscosity 1 mm²/s. Typical values, not guaranteed.

PERFORMANCE DATA

Model 3~	P2 kW	P2 HP	Q (m³/h)	5	6	7	8	9	10	11	12	14	16	18	20	22	24
			Q (l/min)	83	100	117	133	150	167	183	200	233	267	300	333	367	400
CDLF8-12T	4	5.5	H (m)	124	120.6	116.1	110.6	104.1	96.4	87.7	78	–	–	–	–	–	–
CDLF16-8T	7.5	10		–	106.6	105	103.1	100.9	98.5	95.8	92.9	86.4	78.8	70.2	60.6	49.9	38.3