CM 32-250/7.5 · 40-160/4

CM SERIES · CLOSE-COUPLED PUMPS · ELETTROPOMPE MONOBLOCCO

AQUARIS MADE IN ITALY



50 × 32 / 65 × 40	4–7.5 kW	3~ 380–415 V	50 Hz
DN (MM)	POWER P2	VOLTAGE	FREQUENCY

MATERIALS

Pump body	**G20 cast iron**	Drive shaft + rotor	**AISI 316**
Impeller	**Cast iron**	Mech. seal (stationary - rotating)	**Ceram./graph.**
Motor bracket	**G20 cast iron**	O-ring	**Nitrile rubber**

SCOPE OF APPLICATION

Radial impeller pumps with axial intake and upward-facing radial delivery. The main feature of these pumps is that they are capable of generating medium-high flow rates and high discharge heads. These single-impeller pumps are particularly suited for industrial, agricultural and domestic applications. It is recommended that these pumps be used only to carry chemically pure liquids free of foreign matter, at temperatures not higher than 120 °C.

PUMP

Horizontal-shaft pump with cast iron impeller, pump body and base support made of G20 cast iron, AISI 316 stainless steel shaft and ceramic/graphite mechanical seal.


MOTOR

Totally enclosed electric motor with external cooling fan, IP55 protection. Class F insulation.
Three-phase 3~ 380–415 V / 50 Hz

STANDARD

Elettropompe normalizzate costruite
secondo norme DIN 24255

PERFORMANCE CURVES

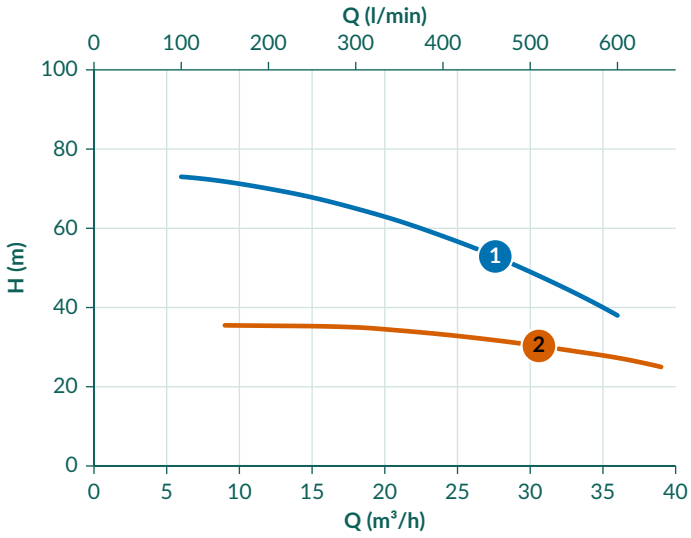

1 CM 32-250/7.5 2 CM 40-160/4

Curves at 50 Hz, 2 poles (≈ 2850 min^{-1}), clean water at 20 °C, kinematic viscosity 1 mm²/s. Typical values, not guaranteed.

PERFORMANCE DATA

Three-phase 3~ 380–415 V · 50 Hz

		1	2
Model	3~	**CM 32-250/7.5**	**CM 40-160/4**
P2	kW	7.5	4
P2	HP	10	5.5
I	A	16	10
Q (m³/h)	**Q (l/min)**	**H (m)**	
6	100	73	–
9	150	71.8	35.5
12	200	70	35.4
15	250	67.8	35.3
18	300	65	35
21	350	61.8	34.2
24	400	58	33.2
27	450	53.8	32
30	500	49	30.6
33	550	43.8	29
36	600	38	27.3
39	650	–	25

Max. suction lift: 7 metres.
The figures in the tables are averages for production models. The Company reserves the right to make changes of any kind without prior notice.