CM SERIES

AQUARIS MADE IN ITALY

CLOSE-COUPLED PUMPS · ELETTROPOMPE MONOBLOCCO · CM 32 – CM 125



32–125 mm
DISCHARGE SIZE

1.1–160 kW
POWER P2

3~ 380–415 V
VOLTAGE

50 Hz
FREQUENCY

STANDARD

Elettropompe normalizzate costruite
secondo norme DIN 24255

SCOPE OF APPLICATION

Radial impeller pumps with axial intake and upward-facing radial delivery. The main feature of these pumps is that they are capable of generating medium-high flow rates and high discharge heads. These single-impeller pumps are particularly suited for industrial, agricultural and domestic applications. It is recommended that these pumps be used only to carry chemically pure liquids free of foreign matter, at temperatures not higher than 120 °C.

PUMP

Horizontal-shaft pump with cast iron, AISI 304 or brass impeller, pump body and base support made of G20 cast iron, AISI 316 stainless steel shaft and ceramic/graphite mechanical seal.


MOTOR

Totally enclosed electric motor with external cooling fan, IP55 protection. Class F insulation. Three-phase 3~ 380–415 V / 50 Hz

RANGE OVERVIEW

SIZE	IMPELLER SIZES (mm)	DN (mm)	MODELS	P2 (kW)	Q max (m³/h)	H max (m)	PAGE
CM 32	160 / 200 / 250	50 × 32	8	1.5–9.2	27	75	02
CM 40	125 / 160 / 200 / 250	65 × 40	11	1.1–18.5	48	90	03
CM 50	125 / 160 / 200 / 250	65 × 50	9	3–22	78	93	04
CM 65	125 / 160 / 200 / 250	80 × 65	9	5.5–37	156	89.5	05
CM 65	315	80 × 65	4	45–90	210	151	06
CM 80	160 / 200	100 × 80	8	7.5–37	240	59.6	07
CM 80	250	100 × 80	2	37–45	210	88	08
CM 100	160 / 200	125 × 100	6	15–37	300	55	09
CM 100	250 / 315	125 × 100	9	45–160	360	148	10
CM 125	200 / 250	150 × 125	6	45–90	400	87	11

CONSTRUCTION – MATERIALS

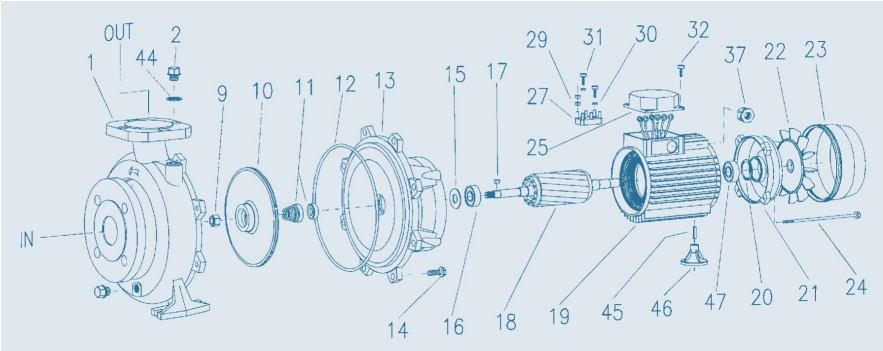

No.	DESCRIPTION	MATERIAL	No.	DESCRIPTION	MATERIAL	No.	DESCRIPTION	MATERIAL
1	Pump body	**G20 Cast iron**	17	Key	**AISI 316**	29	Terminal nut	**Brass**
2	Screw plug 1/4" GAS	**Brass**	18	Drive shaft + rotor	**AISI 316**	30	Washer	**Brass**
9	Self-locking nut	**Brass**	19	Motor casing + stator	**Aluminium**	31	Self-tapping screw	**FE 8.8**
10	Impeller	**Cast iron / AISI 304 / Brass**	20	Ring	**Steel**	32	Self-tapping screw	**FE 8.8**
11	Mech. seal (stationary - rotating)	**Ceram./graph.**	21	Shield	**Aluminium**	37	Cable gland	**Plastic**
12	O-ring	**Nitrile rubber**	22	Cooling fan	**Plastic**	44	Screw plug washer	**FE 8.8**
13	Motor bracket	**G20 Cast iron**	23	Fan cover	**Light alloy**	45	Pin	**AISI 316**
14	Screw	**FE 8.8**	24	Tie rod	**FE 8.8**	46	Foot (CM 40-160/3 - /4; CM 50-125/3 - /4)	**Plastic**
15	Splash ring	**Rubber**	25	Box	**Aluminium**	46	Foot	**FE**
16	Bearing	**AISI 316**	27	Terminal box	**Special alloy**	47	Bearing	**AISI 316**


CM 32

CM SERIES · CLOSE-COUPLED PUMPS · ELETTROPOMPE MONOBLOCCO

AQUARIS MADE IN ITALY



50 × 32	1.5–9.2 kW	3~ 380–415 V	50 Hz
DN (MM)	POWER P2	VOLTAGE	FREQUENCY

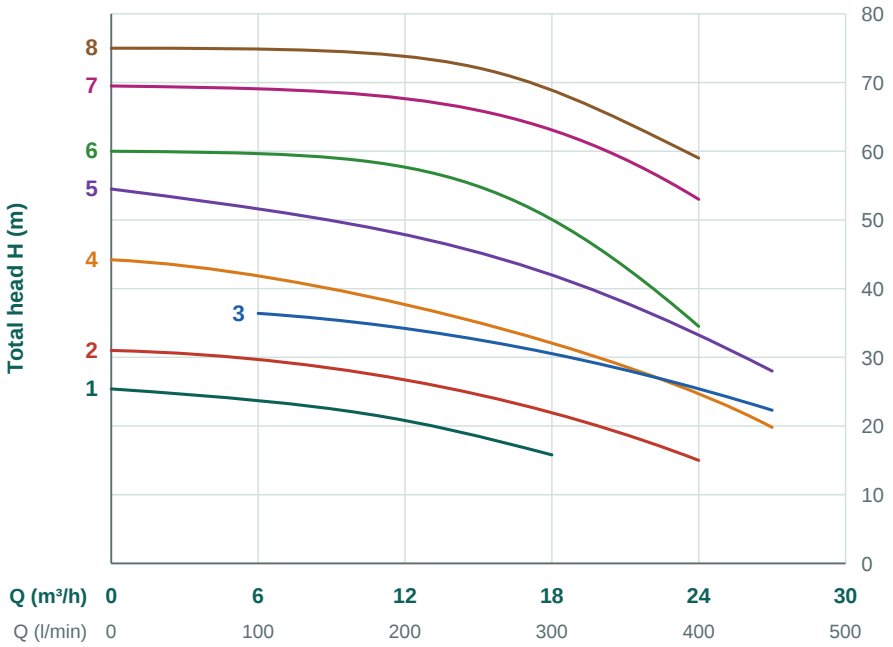

SCOPE OF APPLICATION

Radial impeller pumps with axial intake and upward-facing radial delivery. The main feature of these pumps is that they are capable of generating medium-high flow rates and high discharge heads. These single-impeller pumps are particularly suited for industrial, agricultural and domestic applications. It is recommended that these pumps be used only to carry chemically pure liquids free of foreign matter, at temperatures not higher than 120 °C.

PUMP

Horizontal-shaft pump with cast iron, AISI 304 or brass impeller, pump body and base support made of G20 cast iron, AISI 316 stainless steel shaft and ceramic/graphite mechanical seal.

MOTOR

Totally enclosed electric motor with external cooling fan, IP55 protection. Class F insulation. Three-phase 3~ 380–415 V / 50 Hz

STANDARD

Elettropompe normalizzate costruite secondo norme DIN 24255

CURVES

1 CM 32-160/1.5 · n ≈ 2900 /min
2 CM 32-160/2.2 · n ≈ 2900 /min
3 CM 32-160/3 · n ≈ 2900 /min
4 CM 32-200/3 · n ≈ 2850 /min
5 CM 32-200/4 · n ≈ 2850 /min
6 CM 32-250/5.5 · n ≈ 2850 /min
7 CM 32-250/7.5 · n ≈ 2850 /min
8 CM 32-250/9.2 · n ≈ 2900 /min

MATERIALS

Pump body	**G20 cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Motor bracket	**G20 cast iron**
Drive shaft + rotor	**AISI 316**
Mech. seal (stationary - rotating)	**Ceram./graph.**
O-ring	**Nitrile rubber**

PERFORMANCE DATA

Three-phase 3~ 380–415 V · 50 Hz

No. MODEL	P_2 kW	P_2 HP	I (A) 400 V	Q m³/h / l/min	0 / 0	6 / 100	9 / 150	12 / 200	15 / 250	18 / 300	21 / 350	24 / 400	27 / 450
1 CM 32-160/1.5	1.5	2	4	H (m)	25.4	23.7	22.5	20.8	18.5	15.8	–	–	–
2 CM 32-160/2.2	2.2	3	5.4		31	29.6	28.5	26.7	24.5	22	18.8	15	–
3 CM 32-160/3	3	4	7		–	36.4	35.5	34.2	32.6	30.5	28.2	25.4	22.3
4 CM 32-200/3	3	4	6.8		44.2	42	39.8	37.7	35.2	32.2	28.7	24.6	19.8
5 CM 32-200/4	4	5.5	9.4		54.5	52	50	47.5	45.5	42.3	37.9	33	28
6 CM 32-250/5.5	5.5	7.5	13		60	59.5	59	57.7	55	50.2	43	34.5	–
7 CM 32-250/7.5	7.5	10	16		69.5	69	68.5	67.6	66	63	58.9	53	–
8 CM 32-250/9.2	9.2	12.5	19.4		75	75	74.5	73.8	72	69	64	59	–

Max. suction lift: 7 metres.
The figures in the tables are averages for production models. The Company reserves the right to make changes of any kind without prior notice.


CM 40

CM SERIES · CLOSE-COUPLED PUMPS · ELETTROPOMPE MONOBLOCCO

AQUARIS MADE IN ITALY



65 × 40	1.1–18.5 kW	3~ 380–415 V	50 Hz
DN (MM)	POWER P2	VOLTAGE	FREQUENCY

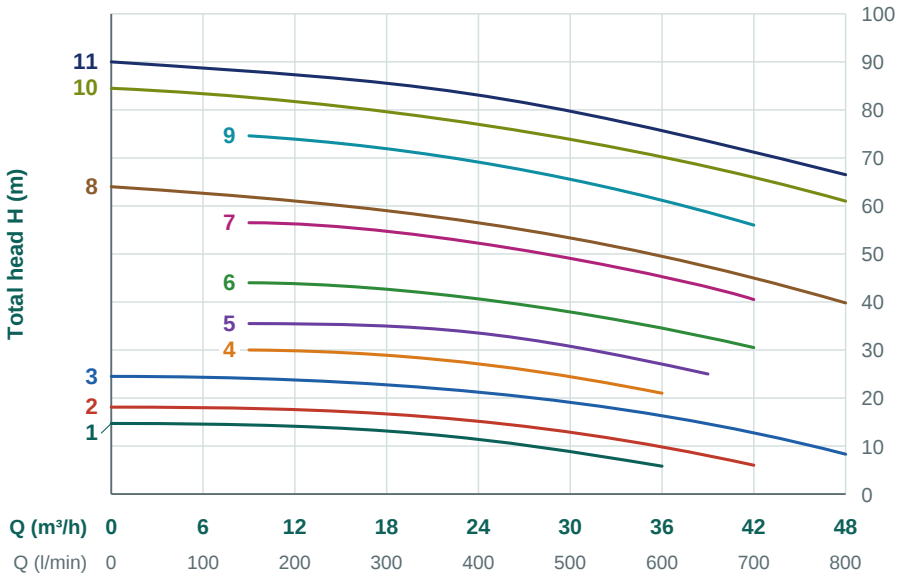

SCOPE OF APPLICATION

Radial impeller pumps with axial intake and upward-facing radial delivery. The main feature of these pumps is that they are capable of generating medium-high flow rates and high discharge heads. These single-impeller pumps are particularly suited for industrial, agricultural and domestic applications. It is recommended that these pumps be used only to carry chemically pure liquids free of foreign matter, at temperatures not higher than 120 °C.

PUMP

Horizontal-shaft pump with cast iron, AISI 304 or brass impeller, pump body and base support made of G20 cast iron, AISI 316 stainless steel shaft and ceramic/graphite mechanical seal.

MOTOR

Totally enclosed electric motor with external cooling fan, IP55 protection. Class F insulation. Three-phase 3~ 380–415 V / 50 Hz

STANDARD

Elettropompe normalizzate costruite secondo norme DIN 24255

CURVES

1 CM 40-125/1.1 · n ≈ 2900 /min
2 CM 40-125/1.5 · n ≈ 2900 /min
3 CM 40-125/2.2 · n ≈ 2900 /min
4 CM 40-160/3 · n ≈ 2850 /min
5 CM 40-160/4 · n ≈ 2850 /min
6 CM 40-200/5.5 · n ≈ 2850 /min
7 CM 40-200/7.5 · n ≈ 2850 /min
8 CM 40-250/9.2 · n ≈ 2900 /min
9 CM 40-250/11 · n ≈ 2900 /min
10 CM 40-250/15 · n ≈ 2900 /min
11 CM 40-250/18.5 · n ≈ 2900 /min

MATERIALS

Pump body	**G20 cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Motor bracket	**G20 cast iron**
Drive shaft + rotor	**AISI 316**
Mech. seal (stationary - rotating)	**Ceram./graph.**
O-ring	**Nitrile rubber**

PERFORMANCE DATA

Three-phase 3~ 380–415 V · 50 Hz

No.	MODEL	P_2 kW	P_2 HP	I (A) 400 V	Q m³/h / l/min	0 / 0	9 / 150	12 / 200	15 / 250	18 / 300	21 / 350	24 / 400	27 / 450	30 / 500	33 / 550	36 / 600	39 / 650	42 / 700	48 / 800
1	CM 40-125/1.1	1.1	1.5	3.2	H (m)	14.7	14.4	14.1	13.7	13	12.4	11.5	10.1	8.8	7.4	5.8	–	–	–
2	CM 40-125/1.5	1.5	2	4		18.1	17.8	17.6	17.2	17	16	15	13.9	12.9	11.4	10	8	6	–
3	CM 40-125/2.2	2.2	3	5.4		24.5	24.1	23.8	23.3	23.2	22.1	21.5	20.2	19.1	17.8	16	15	13	8.3
4	CM 40-160/3	3	4	8		–	30	29.8	29.6	29	28	27	26	24.5	22.7	21	–	–	–
5	CM 40-160/4	4	5.5	10		–	35.5	35.4	35.3	35	34.2	33.2	32	30.6	29	27.3	25	–	–
6	CM 40-200/5.5	5.5	7.5	12.5		–	44	43.7	43.5	42.7	41.7	40.5	39.5	38	36.3	34.5	32.5	30.5	–
7	CM 40-200/7.5	7.5	10	16.4		–	56.5	56	55.5	54.8	53.5	52.5	50.5	49	47.2	45.5	43	40.5	–
8	CM 40-250/9.2	9.2	12.5	19.4		64	62	61	60	59	57.8	56.5	55	53.3	51.5	49.5	47.3	45	39.8
9	CM 40-250/11	11	15	25		–	74.6	73.9	73	71.9	70.6	69.1	67.4	65.5	63.5	61.2	58.7	56	–
10	CM 40-250/15	15	20	32		84.5	82.6	81.7	80.7	79.3	78.4	77.3	75.2	73.9	72.1	70	68	66	61
11	CM 40-250/18.5	18.5	25	38		90	88.1	87.3	86.5	85.5	84.4	82.8	80.7	79.7	77.8	75.8	73.5	70.5	66.5

Max. suction lift: 7 metres.
The figures in the tables are averages for production models. The Company reserves the right to make changes of any kind without prior notice.


CM 50

CM SERIES · CLOSE-COUPLED PUMPS · ELETTROPOMPE MONOBLOCCO

AQUARIS MADE IN ITALY



65 × 50	3–22 kW	3~ 380–415 V	50 Hz
DN (MM)	POWER P2	VOLTAGE	FREQUENCY

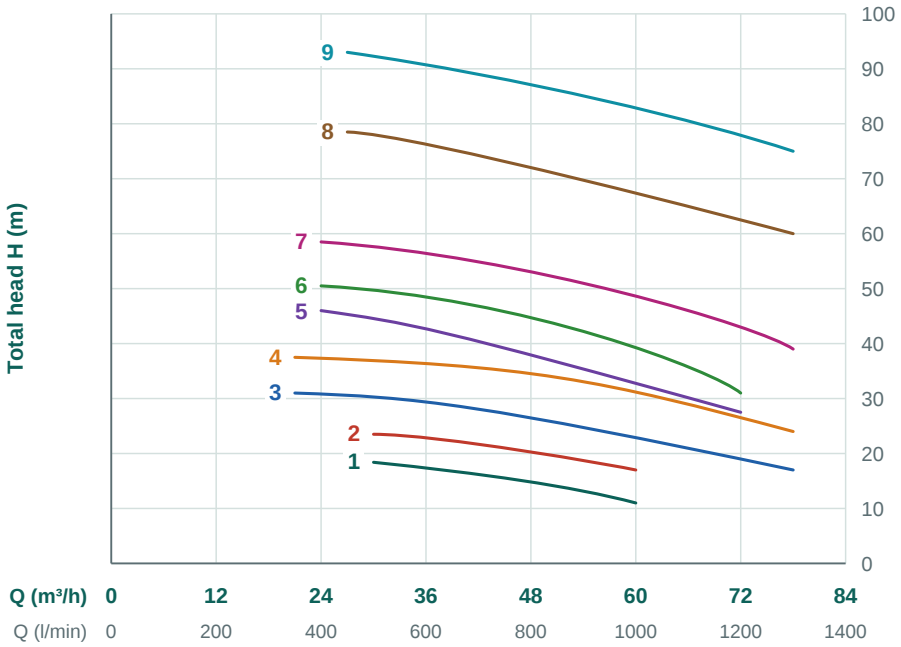

SCOPE OF APPLICATION

Radial impeller pumps with axial intake and upward-facing radial delivery. The main feature of these pumps is that they are capable of generating medium-high flow rates and high discharge heads. These single-impeller pumps are particularly suited for industrial, agricultural and domestic applications. It is recommended that these pumps be used only to carry chemically pure liquids free of foreign matter, at temperatures not higher than 120 °C.

PUMP

Horizontal-shaft pump with cast iron, AISI 304 or brass impeller, pump body and base support made of G20 cast iron, AISI 316 stainless steel shaft and ceramic/graphite mechanical seal.

MOTOR

Totally enclosed electric motor with external cooling fan, IP55 protection. Class F insulation. Three-phase 3~ 380–415 V / 50 Hz

STANDARD

Elettropompe normalizzate costruite secondo norme DIN 24255

CURVES

n ≈ 2850 /min

1 CM 50-125/3
2 CM 50-125/4
3 CM 50-160/5.5
4 CM 50-160/7.5
5 CM 50-200/9.2
6 CM 50-200/11
7 CM 50-200/15
8 CM 50-250/18.5
9 CM 50-250/22

MATERIALS

Pump body	**G20 cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Motor bracket	**G20 cast iron**
Drive shaft + rotor	**AISI 316**
Mech. seal (stationary - rotating)	**Ceram./graph.**
O-ring	**Nitrile rubber**

PERFORMANCE DATA

Three-phase 3~ 380–415 V · 50 Hz · n ≈ 2850 /min

No.	MODEL	P_2 kW	P_2 HP	I (A) 400 V	Q	m³/h	21	24	27	30	33	36	39	42	48	54	60	66	72	78
						l/min	350	400	450	500	550	600	650	700	800	900	1000	1100	1200	1300
1	CM 50-125/3	3	4	8			–	–	–	18.4	18	17.5	17	16	15	13	11	–	–	–
2	CM 50-125/4	4	5.5	10			–	–	–	23.5	23	22.8	22.5	22	20	19	17	–	–	–
3	CM 50-160/5.5	5.5	7.5	14			31	30.5	30	29.7	29.3	28.8	28.2	28	26.5	25	23	21	19	17
4	CM 50-160/7.5	7.5	10	16			37.5	37	36.5	36.4	36.3	36	35.5	35	34	32.5	30.8	29	27	24
5	CM 50-200/9.2	9.2	12.5	18	H (m)		–	46	45	44	43.5	43	42	40	38	36	33.5	29.5	27.5	–
6	CM 50-200/11	11	15	22			–	50.5	50	49.7	49	48.2	47.5	46.5	44.5	42.5	39	36	31	–
7	CM 50-200/15	15	20	28			–	58.5	58.3	58	57.5	56	55.5	55	53	51	49	46	43	39
8	CM 50-250/18.5	18.5	25	41.5			–	–	78.5	78	77	76.5	75.5	74.5	72.5	70	67	65.5	62	60
9	CM 50-250/22	22	30	49			–	–	93	92	90.5	90	89	88	86.5	85	83	80.5	78	75

Max. suction lift: 7 metres.
The figures in the tables are averages for production models. The Company reserves the right to make changes of any kind without prior notice.


CM 65

AQUARIS MADE IN ITALY

CM SERIES · CLOSE-COUPLED PUMPS · CM 65-125 / CM 65-160 / CM 65-200 / CM 65-250



80 × 65	5.5–37 kW	3~ 380–415 V	50 Hz
DN (MM)	POWER P2	VOLTAGE	FREQUENCY

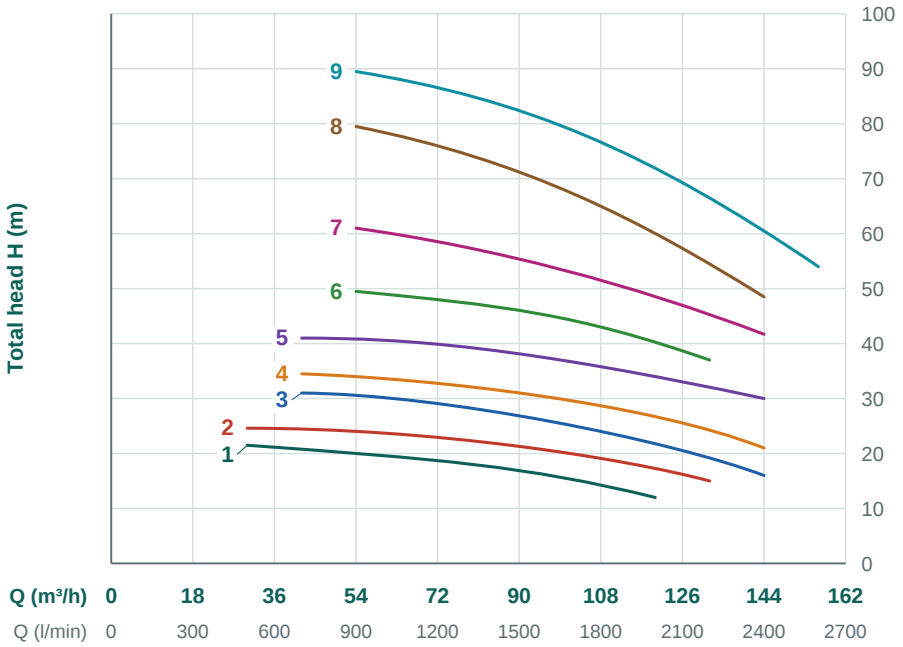

SCOPE OF APPLICATION

Radial impeller pumps with axial intake and upward-facing radial delivery. The main feature of these pumps is that they are capable of generating medium-high flow rates and high discharge heads. These single-impeller pumps are particularly suited for industrial, agricultural and domestic applications. It is recommended that these pumps be used only to carry chemically pure liquids free of foreign matter, at temperatures not higher than 120 °C.

PUMP

Horizontal-shaft pump with cast iron, AISI 304 or brass impeller, pump body and base support made of G20 cast iron, AISI 316 stainless steel shaft and ceramic/graphite mechanical seal.

MOTOR

Totally enclosed electric motor with external cooling fan, IP55 protection. Class F insulation. Three-phase 3~ 380–415 V / 50 Hz

STANDARD

Elettropompe normalizzate costruite secondo norme DIN 24255

CURVES

n ≈ 2850 /min

1 CM 65-125/5.5
2 CM 65-125/7.5
3 CM 65-160/9.2
4 CM 65-160/11
5 CM 65-160/15
6 CM 65-200/18.5
7 CM 65-200/22
8 CM 65-250/30
9 CM 65-250/37

MATERIALS

Pump body	**G20 cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Motor bracket	**G20 cast iron**
Drive shaft + rotor	**AISI 316**
Mech. seal (stationary - rotating)	**Ceram./graph.**
O-ring	**Nitrile rubber**

PERFORMANCE DATA

Three-phase 3~ 380–415 V · 50 Hz · n ≈ 2850 /min

No.	MODEL	P_2 kW	P_2 HP	I (A) 400 V	Q	m³/h	30	33	36	39	42	48	54	60	66	72	78	84	96	108	120	132	144	156
						l/min	500	550	600	650	700	800	900	1000	1100	1200	1300	1400	1600	1800	2000	2200	2400	2600
1	CM 65-125/5.5	5.5	7.5	11			21.5	21.3	21	20.7	20.4	20.3	20	19.5	19.2	18.5	18	17.5	16	14	12	–	–	–
2	CM 65-125/7.5	7.5	10	16			24.6	24.5	24.4	24.3	24.2	24.1	24	23.8	23.6	23.4	22	21.8	21	19.5	17	15	–	–
3	CM 65-160/9.2	9.2	12.5	19.5			–	–	–	–	31	30.7	30.5	30	29.8	29.2	28.7	27.4	26.2	24	22	19	16	–
4	CM 65-160/11	11	15	23			–	–	–	–	34.5	34.3	34.1	33.9	33.5	33	32.5	32	30	28.5	27	24	21	–
5	CM 65-160/15	15	20	27		H (m)	–	–	–	–	41	40.8	40.5	40.3	39.9	39.5	39	38.5	37.5	36	34	32	30	–
6	CM 65-200/18.5	18.5	25	39			–	–	–	–	–	–	49.5	49	48.5	48	47.5	46	45.5	43	41.5	37	–	–
7	CM 65-200/22	22	30	45			–	–	–	–	–	–	61	60.3	59.4	58.5	57.6	56.5	54.2	51.5	48.6	45.3	41.7	–
8	CM 65-250/30	30	40	63.5			–	–	–	–	–	–	79.5	78.5	77.3	76	74.5	73	69.3	65	60	54.5	48.5	–
9	CM 65-250/37	37	50	74.5			–	–	–	–	–	–	89.5	88.5	87.5	86.5	85.5	84	80.5	76.5	72	66.5	60.5	54

Max. suction lift: 7 metres.
The figures in the tables are averages for production models. The Company reserves the right to make changes of any kind without prior notice.


CM 65

CM SERIES · CLOSE-COUPLED PUMPS · CM 65-315

AQUARIS MADE IN ITALY



80 × 65	45–90 kW	3~ 380–415 V	50 Hz
DN (MM)	POWER P2	VOLTAGE	FREQUENCY

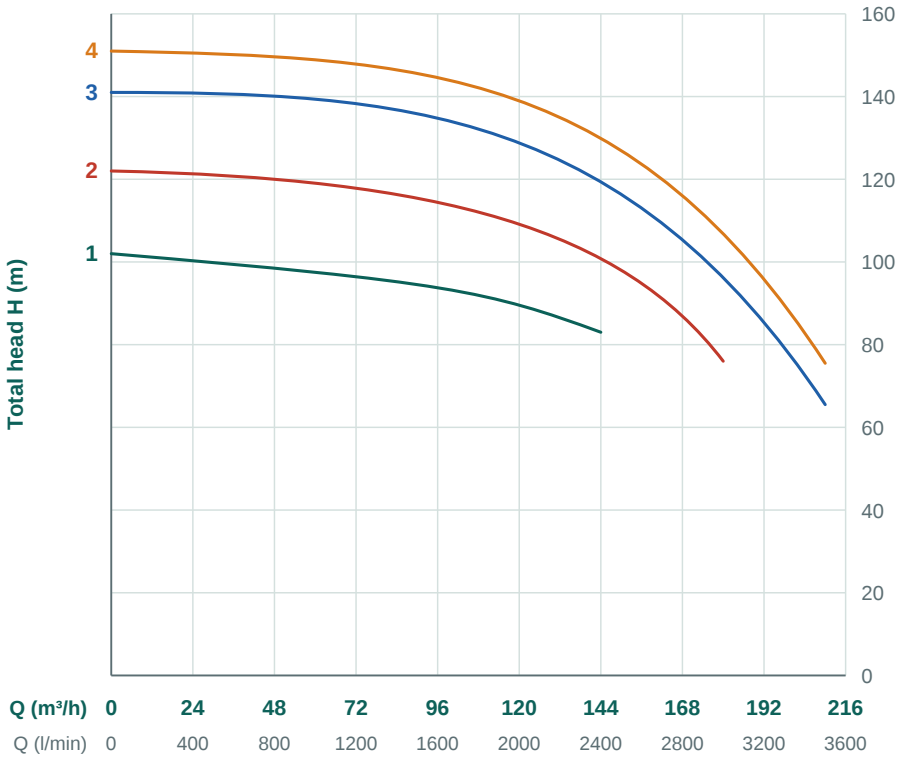

SCOPE OF APPLICATION

Radial impeller pumps with axial intake and upward-facing radial delivery. The main feature of these pumps is that they are capable of generating medium-high flow rates and high discharge heads. These single-impeller pumps are particularly suited for industrial, agricultural and domestic applications. It is recommended that these pumps be used only to carry chemically pure liquids free of foreign matter, at temperatures not higher than 120 °C.

PUMP

Horizontal-shaft pump with cast iron, AISI 304 or brass impeller, pump body and base support made of G20 cast iron, AISI 316 stainless steel shaft and ceramic/graphite mechanical seal.

MOTOR

Totally enclosed electric motor with external cooling fan, IP55 protection. Class F insulation. Three-phase 3~ 380–415 V / 50 Hz

STANDARD

Elettropompe normalizzate costruite secondo norme DIN 24255

CURVES

n ≈ 2900 /min

1 CM 65-315/45
2 CM 65-315/55
3 CM 65-315/75
4 CM 65-315/90

MATERIALS

Pump body	**G20 cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Motor bracket	**G20 cast iron**
Drive shaft + rotor	**AISI 316**
Mech. seal (stationary - rotating)	**Ceram./graph.**
O-ring	**Nitrile rubber**

PERFORMANCE DATA

Three-phase 3~ 380–415 V · 50 Hz · n ≈ 2900 /min

No.	MODEL	P_2 kW	P_2 HP	I (A) 400 V	Q m³/h / l/min	0 / 0	60 / 1000	90 / 1500	120 / 2000	144 / 2400	180 / 3000	200 / 3333	210 / 3500
					H (m)								
1	CM 65-315/45	45	60	90.9		102	98	94.5	90	83	–	–	–
2	CM 65-315/55	55	75	110.9		122	120	114.5	110	100	76	–	–
3	CM 65-315/75	75	100	150.9		141	141	134.5	130	120	96	78	65.5
4	CM 65-315/90	90	125	180.8		151	150	144.5	140	130	106	88	75.5

Max. suction lift: 7 metres.
The figures in the tables are averages for production models. The Company reserves the right to make changes of any kind without prior notice.


CM 80

CM SERIES · CLOSE-COUPLED PUMPS · ELETTROPOMPE MONOBLOCCO

AQUARIS MADE IN ITALY



100 × 80	7.5–37 kW	3~ 380–415 V	50 Hz
DN (MM)	POWER P2	VOLTAGE	FREQUENCY

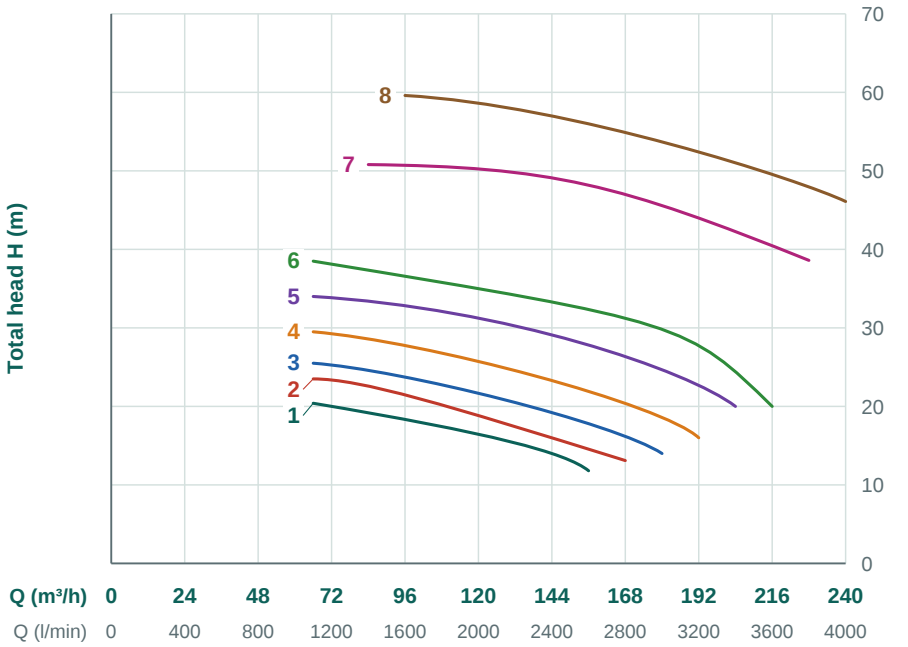

SCOPE OF APPLICATION

Radial impeller pumps with axial intake and upward-facing radial delivery. The main feature of these pumps is that they are capable of generating medium-high flow rates and high discharge heads. These single-impeller pumps are particularly suited for industrial, agricultural and domestic applications. It is recommended that these pumps be used only to carry chemically pure liquids free of foreign matter, at temperatures not higher than 120 °C.

PUMP

Horizontal-shaft pump with cast iron, AISI 304 or brass impeller, pump body and base support made of G20 cast iron, AISI 316 stainless steel shaft and ceramic/graphite mechanical seal.

MOTOR

Totally enclosed electric motor with external cooling fan, IP55 protection. Class F insulation. Three-phase 3~ 380–415 V / 50 Hz

STANDARD

Elettropompe normalizzate costruite secondo norme DIN 24255

CURVES

n ≈ 2850 /min

1 CM 80-160/7.5
2 CM 80-160/9.2
3 CM 80-160/11
4 CM 80-160/15
5 CM 80-160/18.5
6 CM 80-160/22
7 CM 80-200/30
8 CM 80-200/37

MATERIALS

Pump body	**G20 cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Motor bracket	**G20 cast iron**
Drive shaft + rotor	**AISI 316**
Mech. seal (stationary - rotating)	**Ceram./graph.**
O-ring	**Nitrile rubber**

PERFORMANCE DATA

Three-phase 3~ 380–415 V · 50 Hz · n ≈ 2850 /min

No.	MODEL	P_2 kW	P_2 HP	I (A) 400 V	Q m³/h / l/min	66 1100	72 1200	78 1300	84 1400	96 1600	108 1800	120 2000	132 2200	144 2400	156 2600	168 2800	180 3000	192 3200	204 3400	216 3600	228 3800	240 4000
1	CM 80-160/7.5	7.5	10	16	H (m)	20.4	20	19.6	19	18.4	17.5	16.6	15.3	14	11.8	–	–	–	–	–	–	–
2	CM 80-160/9.2	9.2	12.5	19		23.5	23	22.5	22	21.6	21	19.5	18	15.4	14.2	13.1	–	–	–	–	–	–
3	CM 80-160/11	11	15	21		25.5	25	24.8	24.5	24	22.5	21.7	20.3	19	18	16	14	–	–	–	–	–
4	CM 80-160/15	15	20	26		29.5	29.2	29	28.5	28	27	25.5	24.5	23.5	22	20.2	18.5	16	–	–	–	–
5	CM 80-160/18.5	18.5	25	35		34	33.8	33.5	33	32.5	32	31	30	29.5	27.5	26	25	22.5	20	–	–	–
6	CM 80-160/22	22	30	41		38.5	38	37.5	37	36.5	36	35	34.5	33.5	32.5	31.5	30	28	24.2	20	–	–
7	CM 80-200/30	30	40	63.5		–	–	–	50.8	50.6	50.3	49.8	49.3	48.6	47.7	46.7	45.5	44.5	42	40	38.6	–
8	CM 80-200/37	37	50	74.5		–	–	–	–	59.6	59.2	58.6	58	57.3	56.4	55.5	54.3	52.5	51	49	48.5	46.1

Max. suction lift: 7 metres.
The figures in the tables are averages for production models. The Company reserves the right to make changes of any kind without prior notice.


CM 80

CM SERIES · CLOSE-COUPLED PUMPS · CM 80-250

AQUARIS MADE IN ITALY



100 × 80	37–45 kW	3~ 380–415 V	50 Hz
DN (MM)	POWER P2	VOLTAGE	FREQUENCY

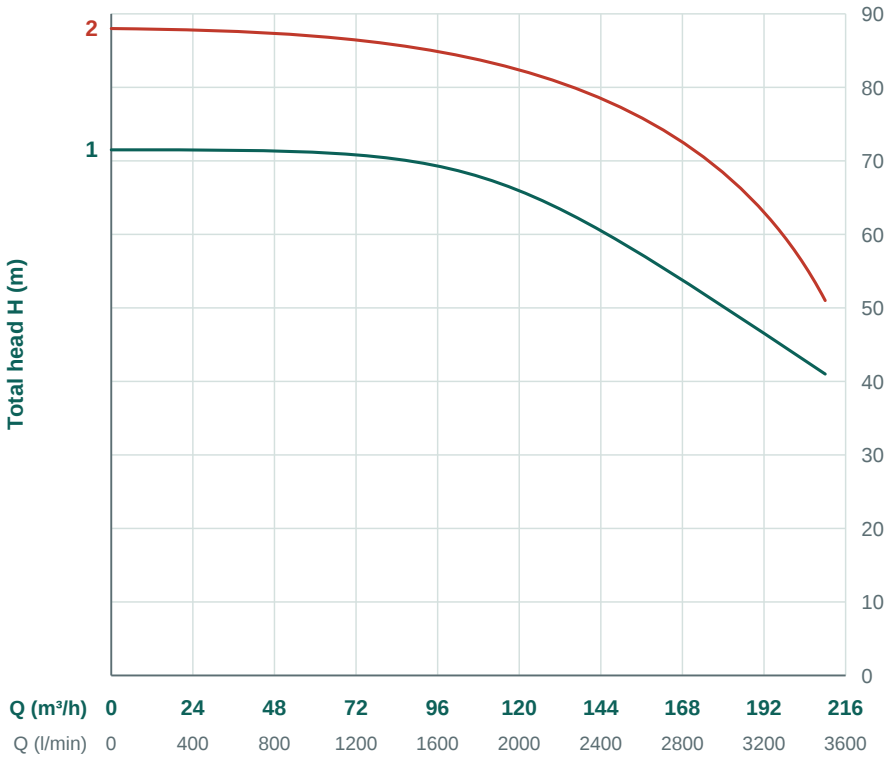

SCOPE OF APPLICATION

Radial impeller pumps with axial intake and upward-facing radial delivery. The main feature of these pumps is that they are capable of generating medium-high flow rates and high discharge heads. These single-impeller pumps are particularly suited for industrial, agricultural and domestic applications. It is recommended that these pumps be used only to carry chemically pure liquids free of foreign matter, at temperatures not higher than 120 °C.

PUMP

Horizontal-shaft pump with cast iron, AISI 304 or brass impeller, pump body and base support made of G20 cast iron, AISI 316 stainless steel shaft and ceramic/graphite mechanical seal.

MOTOR

Totally enclosed electric motor with external cooling fan, IP55 protection. Class F insulation. Three-phase 3~ 380–415 V / 50 Hz

STANDARD

Elettropompe normalizzate costruite secondo norme DIN 24255

CURVES

n ≈ 2900 /min

1 CM 80-250/37

2 CM 80-250/45

MATERIALS

Pump body	**G20 cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Motor bracket	**G20 cast iron**
Drive shaft + rotor	**AISI 316**
Mech. seal (stationary - rotating)	**Ceram./graph.**
O-ring	**Nitrile rubber**

PERFORMANCE DATA

Three-phase 3~ 380–415 V · 50 Hz · n ≈ 2900 /min

No.	MODEL	P_2 kW	P_2 HP	I (A) 400 V	Q	m³/h	0	60	90	120	144	180	200	210
						l/min	0	1000	1500	2000	2400	3000	3333	3500
1	**CM 80-250/37**	37	50	74.9	H (m)		71.5	70.9	70.5	65.5	59.3	51	43.2	41
2	**CM 80-250/45**	45	60	90.9			88	86.7	86	83.6	78.5	70.5	60	51

Max. suction lift: 7 metres.

The figures in the tables are averages for production models. The Company reserves the right to make changes of any kind without prior notice.


CM 100

CM SERIES · CLOSE-COUPLED PUMPS · CM 100-160 / CM 100-200

AQUARIS MADE IN ITALY



125 × 100	15–37 kW	3~ 380–415 V	50 Hz
DN (MM)	POWER P2	VOLTAGE	FREQUENCY

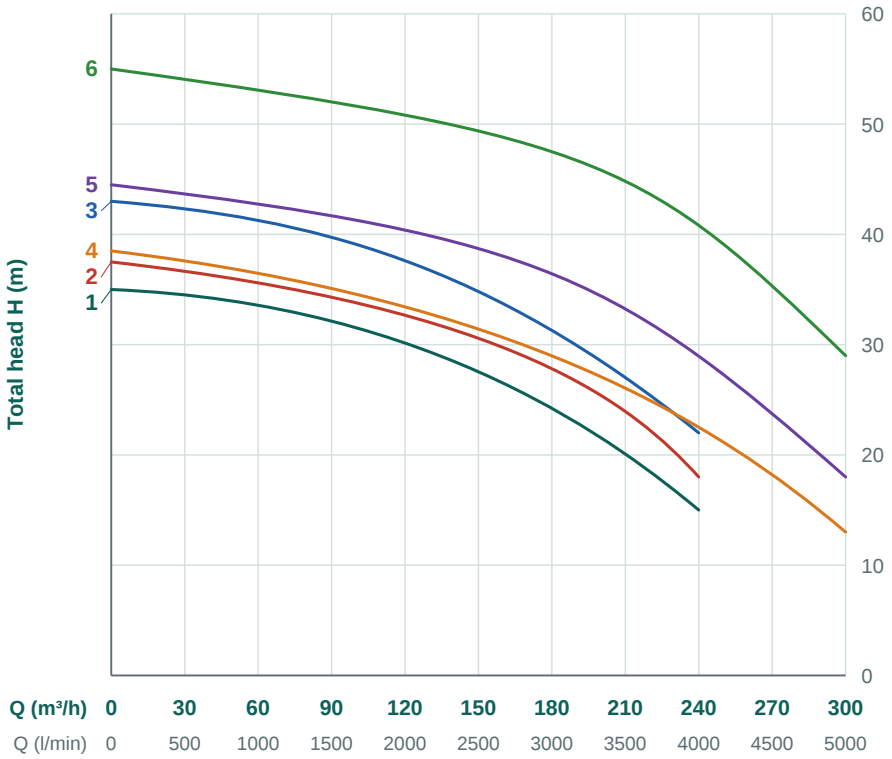

SCOPE OF APPLICATION

Radial impeller pumps with axial intake and upward-facing radial delivery. The main feature of these pumps is that they are capable of generating medium-high flow rates and high discharge heads. These single-impeller pumps are particularly suited for industrial, agricultural and domestic applications. It is recommended that these pumps be used only to carry chemically pure liquids free of foreign matter, at temperatures not higher than 120 °C.

PUMP

Horizontal-shaft pump with cast iron, AISI 304 or brass impeller, pump body and base support made of G20 cast iron, AISI 316 stainless steel shaft and ceramic/graphite mechanical seal.

MOTOR

Totally enclosed electric motor with external cooling fan, IP55 protection. Class F insulation. Three-phase 3~ 380–415 V / 50 Hz

STANDARD

Elettropompe normalizzate costruite secondo norme DIN 24255

CURVES

n ≈ 2900 /min

1 CM 100-160/15
2 CM 100-160/18.5
3 CM 100-160/22
4 CM 100-200/22
5 CM 100-200/30
6 CM 100-200/37

MATERIALS

Pump body	**G20 cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Motor bracket	**G20 cast iron**
Drive shaft + rotor	**AISI 316**
Mech. seal (stationary - rotating)	**Ceram./graph.**
O-ring	**Nitrile rubber**

PERFORMANCE DATA

Three-phase 3~ 380–415 V · 50 Hz · n ≈ 2900 /min

No.	MODEL	P_2 kW	P_2 HP	I (A) 400 V	Q m³/h	0	60	90	120	144	180	200	210	220	240	280	300
					Q l/min	0	1000	1500	2000	2400	3000	3333	3500	3667	4000	4667	5000
1	CM 100-160/15	15	20	31	H (m)	35	33.5	32.5	30	27.8	24.5	21.5	20	18.3	15	–	–
2	CM 100-160/18.5	18.5	25	38		37.5	35.7	34.7	32.8	30.7	27.5	25.7	24	22	18	–	–
3	CM 100-160/22	22	30	45		43	41	40	37.6	35.2	31.5	28.5	27	25.3	22	–	–
4	CM 100-200/22	22	30	45		38.5	36.7	35.7	33.8	31.7	28.5	26.8	26	25	22.9	16.3	13
5	CM 100-200/30	30	40	60.9		44.5	42.5	42	40.2	38.8	36.7	34.2	33	31.7	29	21.7	18
6	CM 100-200/37	37	50	74.9		55	53	51	50.6	49.2	47	45	44	42.8	40.5	32.8	29

Max. suction lift: 7 metres.
The figures in the tables are averages for production models. The Company reserves the right to make changes of any kind without prior notice.


CM 100

CM SERIES · CLOSE-COUPLED PUMPS · CM 100-250 / CM 100-315

AQUARIS MADE IN ITALY



125 × 100	45–160 kW	3~ 380–415 V	50 Hz
DN (MM)	POWER P2	VOLTAGE	FREQUENCY

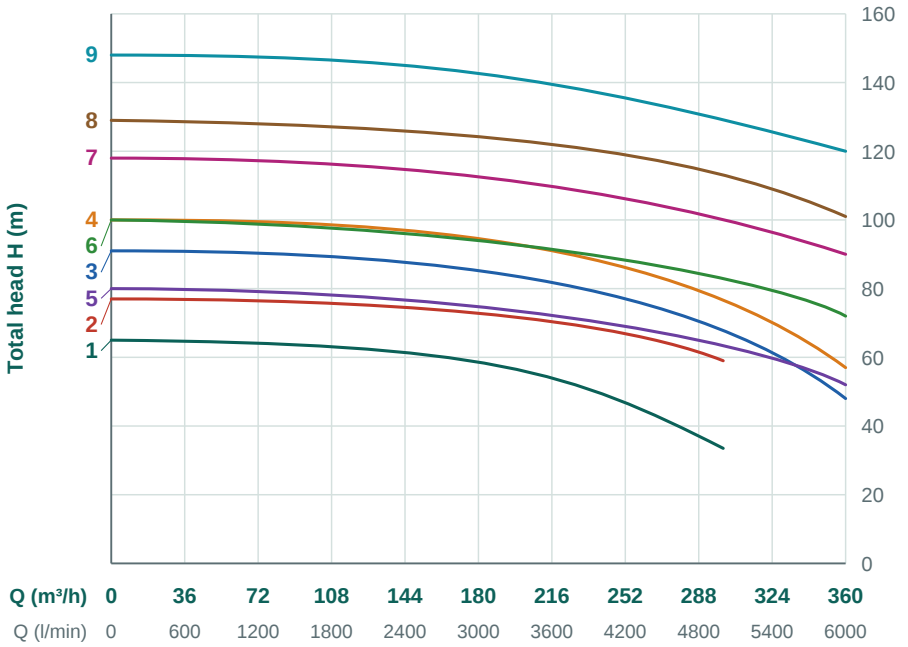

SCOPE OF APPLICATION

Radial impeller pumps with axial intake and upward-facing radial delivery. The main feature of these pumps is that they are capable of generating medium-high flow rates and high discharge heads. These single-impeller pumps are particularly suited for industrial, agricultural and domestic applications. It is recommended that these pumps be used only to carry chemically pure liquids free of foreign matter, at temperatures not higher than 120 °C.

PUMP

Horizontal-shaft pump with cast iron, AISI 304 or brass impeller, pump body and base support made of G20 cast iron, AISI 316 stainless steel shaft and ceramic/graphite mechanical seal.

MOTOR

Totally enclosed electric motor with external cooling fan, IP55 protection. Class F insulation. Three-phase 3~ 380–415 V / 50 Hz

STANDARD

Elettropompe normalizzate costruite secondo norme DIN 24255

CURVES

n ≈ 2900 /min

1 CM 100-250/45
2 CM 100-250/55
3 CM 100-250/75
4 CM 100-250/90
5 CM 100-315/75
6 CM 100-315/90
7 CM 100-315/110
8 CM 100-315/132
9 CM 100-315/160

MATERIALS

Pump body	**G20 cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Motor bracket	**G20 cast iron**
Drive shaft + rotor	**AISI 316**
Mech. seal (stationary - rotating)	**Ceram./graph.**
O-ring	**Nitrile rubber**

PERFORMANCE DATA

Three-phase 3~ 380–415 V · 50 Hz · n ≈ 2900 /min

No.	MODEL	P_2 kW	P_2 HP	I (A) 400 V	Q	m³/h	0	60	90	120	144	180	200	210	220	240	280	300	360
						l/min	0	1000	1500	2000	2400	3000	3333	3500	3667	4000	4667	5000	6000
1	CM 100-250/45	45	60	90.9			65	65	64	63	61	58	56	55	53.3	50	39	33.5	–
2	CM 100-250/55	55	75	110.9			77	76	75.5	75	73.8	72	71.7	71.5	70.7	69	62.3	59	–
3	CM 100-250/75	75	100	150.9			91	91	90.5	89.7	88	85.5	84	83.3	81.5	78	71.7	68.5	48
4	CM 100-250/90	90	125	180.8			100	100	99.5	98.7	97	94.5	93	92.3	90.5	87	80.7	77.5	57
5	CM 100-315/75	75	100	150.9	H (m)		80	79.4	78.7	78.5	76.7	74	73	72.8	72.5	70.7	68	64	52
6	CM 100-315/90	90	125	180.8			100	99.1	98.5	98.5	96.7	94	93	92.8	92.5	90.7	88	84	72
7	CM 100-315/110	110	150	220.8			118	117.5	116.8	116.5	114.7	112	111	110.8	110.5	108.7	106	102	90
8	CM 100-315/132	132	180	264.8			129	128.2	127.6	127.5	125.7	123	122	121.8	121.5	119.7	117	112	101
9	CM 100-315/160	160	220	320.7			148	147.6	147.1	146.5	144.7	142	141	140.8	140.5	138.7	136	132	120

Max. suction lift: 7 metres.
The figures in the tables are averages for production models. The Company reserves the right to make changes of any kind without prior notice.


CM 125

CM SERIES · CLOSE-COUPLED PUMPS · ELETTROPOMPE MONOBLOCCO

AQUARIS MADE IN ITALY



150 × 125	45–90 kW	3~ 380–415 V	50 Hz
DN (MM)	POWER P2	VOLTAGE	FREQUENCY

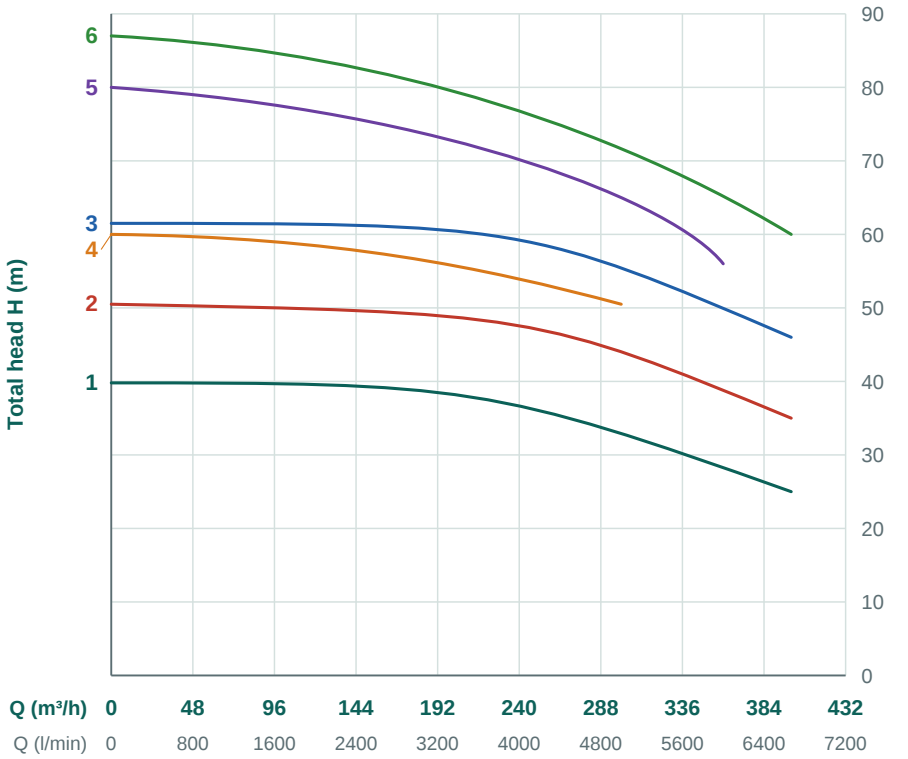

SCOPE OF APPLICATION

Radial impeller pumps with axial intake and upward-facing radial delivery. The main feature of these pumps is that they are capable of generating medium-high flow rates and high discharge heads. These single-impeller pumps are particularly suited for industrial, agricultural and domestic applications. It is recommended that these pumps be used only to carry chemically pure liquids free of foreign matter, at temperatures not higher than 120 °C.

PUMP

Horizontal-shaft pump with cast iron, AISI 304 or brass impeller, pump body and base support made of G20 cast iron, AISI 316 stainless steel shaft and ceramic/graphite mechanical seal.

MOTOR

Totally enclosed electric motor with external cooling fan, IP55 protection. Class F insulation. Three-phase 3~ 380–415 V / 50 Hz

STANDARD

Elettropompe normalizzate costruite secondo norme DIN 24255

CURVES

n ≈ 2900 /min

1 CM 125-200/45
2 CM 125-200/55
3 CM 125-200/75
4 CM 125-250/55
5 CM 125-250/75
6 CM 125-250/90

MATERIALS

Pump body	**G20 cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Motor bracket	**G20 cast iron**
Drive shaft + rotor	**AISI 316**
Mech. seal (stationary - rotating)	**Ceram./graph.**
O-ring	**Nitrile rubber**

PERFORMANCE DATA

Three-phase 3~ 380–415 V · 50 Hz · n ≈ 2900 /min

No.	MODEL	P_2 kW	P_2 HP	I (A) 400 V	Q m³/h	0	120	144	180	200	210	220	240	280	300	360	400
					Q l/min	0	2000	2400	3000	3333	3500	3667	4000	4667	5000	6000	6667
1	**CM 125-200/45**	45	60	90.9	H (m)	39.8	39.3	39.2	39	38.9	38.9	38.8	37.5	35	34	28.6	25
2	**CM 125-200/55**	55	75	110.9		50.5	49.3	49.2	49	48.9	48.9	48.8	47.5	45	44	38.6	35
3	**CM 125-200/75**	75	100	150.9		61.5	60.3	60.2	60	59.9	59.9	59.8	58.5	56	55	49.6	46
4	**CM 125-250/55**	55	75	110.9		60	58.5	57.8	56.6	55.8	55.4	54.9	53.9	51.7	50.5	–	–
5	**CM 125-250/75**	75	100	150.9		80	76.5	75.5	74	73	72	71.5	70	67	65	56	–
6	**CM 125-250/90**	90	125	180.8		87	84	82.5	81	79.5	79	78	77	73.5	71.5	65	60


Max. suction lift: 7 metres.
The figures in the tables are averages for production models. The Company reserves the right to make changes of any kind without prior notice.

CM SERIES

DIMENSIONS · PACKING · FLANGES

AQUARIS MADE IN ITALY

DIMENSIONS IN MM

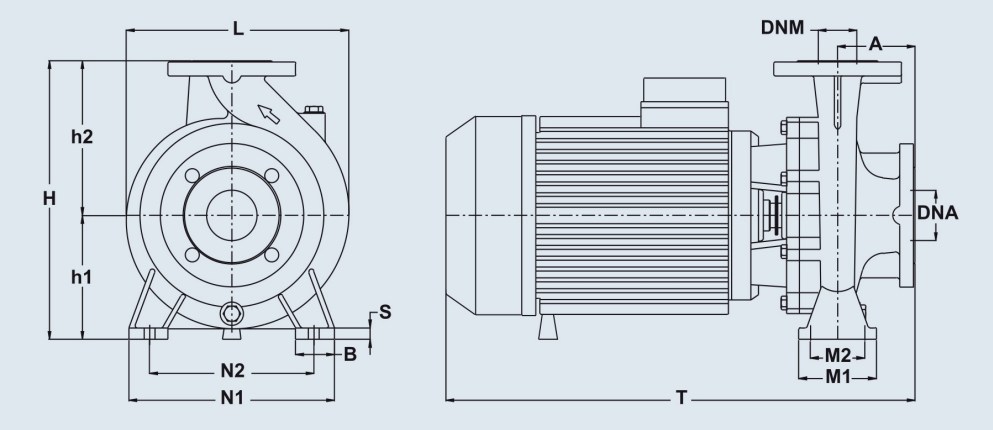

FLANGES (MM)

DN	K	D	C	HOLES	
				No.	Ø
32	100	140	78	4	18
40	110	150	88	4	18
50	125	165	102	4	18
65	145	185	122	4	18
80	160	200	138	4	18
100	180	220	158	8	18

DIMENSIONS · PACKING

mm

MODEL	DIMENSIONS (mm)														PACKING (mm)		
	A	H	h1	h2	L	M1	M2	N1	N2	B	S	T	DNA	DNM	L	H	P
CM 32-200/3	80	340	160	180	260.5	100	70	240	190	50	14	450	50	32	540	360	290
CM 32-200/4	80	340	160	180	260.5	100	70	240	190	50	14	450	50	32	540	360	290
CM 32-250/5.5	80	340	160	180	268	100	70	240	190	50	15	541	50	32	660	520	350
CM 32-250/7.5	80	340	160	180	268	100	70	240	190	50	15	541	50	32	660	520	350
CM 40-160/3	80	292	132	160	245.5	100	70	240	190	50	15	460	65	40	540	360	290
CM 40-160/4	80	292	132	160	245.5	100	70	240	190	50	15	460	65	40	540	360	290
CM 40-200/5.5	100	340	160	180	275	100	70	265	212	50	15	560	65	40	660	520	350
CM 40-200/7.5	100	340	160	180	275	100	70	265	212	50	15	560	65	40	660	520	350
CM 40-250/11	100	405	180	225	310	125	95	320	250	65	15	600	65	40	660	520	350
CM 40-250/15	100	405	180	225	310	125	95	320	250	65	15	600	65	40	660	520	350
CM 50-125/3	100	292	132	160	228	100	70	240	190	50	14	482	65	50	540	360	290
CM 50-125/4	100	292	132	160	228	100	70	240	190	50	14	482	65	50	540	360	290
CM 50-160/5.5	100	340	160	180	256	100	70	265	212	50	14	560	65	50	660	520	350
CM 50-160/7.5	100	340	160	180	256	100	70	265	212	50	14	560	65	50	660	520	350
CM 50-200/9.2	100	360	160	200	287	100	70	265	212	50	15	565	65	50	660	520	350
CM 50-200/11	100	360	160	200	287	100	70	265	212	50	15	605	65	50	660	520	350
CM 50-200/15	100	360	160	200	287	100	70	265	212	50	15	605	65	50	660	520	350
CM 50-250/18.5	100	405	180	225	332	125	95	320	250	65	15	724.5	65	50	810	570	360
CM 50-250/22	100	405	180	225	332	125	95	320	250	65	15	724.5	65	50	810	570	360
CM 65-125/5.5	100	340	160	180	252	125	95	280	212	65	15	565	80	65	660	520	350
CM 65-125/7.5	100	340	160	180	252	125	95	280	212	65	15	565	80	65	660	520	350
CM 65-160/9.2	100	360	160	200	269	125	95	280	212	65	15	565	80	65	660	520	350
CM 65-160/11	100	360	160	200	269	125	95	280	212	65	15	605	80	65	660	520	350
CM 65-160/15	100	360	160	200	269	125	95	280	212	65	15	605	80	65	660	520	350
CM 65-200/18.5	100	405	180	225	330	125	95	320	250	65	15	725	80	65	810	570	360
CM 65-200/22	100	405	180	225	330	125	95	320	250	65	15	725	80	65	810	570	360
CM 65-250/30	100	450	200	250	370	160	120	360	280	80	16	850	80	65	850	490	380
CM 65-250/37	100	450	200	250	370	160	120	360	280	80	16	850	80	65	850	490	380
CM 80-160/7.5	125	405	180	225	328	125	95	320	250	65	15	595	100	80	660	530	350
CM 80-160/9.2	125	405	180	225	328	125	95	320	250	65	15	595	100	80	660	520	350
CM 80-160/11	125	405	180	225	328	125	95	320	250	65	15	635	100	80	660	520	350
CM 80-160/15	125	405	180	225	328	125	95	320	250	65	15	635	100	80	660	520	350
CM 80-160/18.5	125	405	180	225	330	125	95	320	250	65	15	755	100	80	810	530	360
CM 80-160/22	125	405	180	225	330	125	95	320	250	65	15	755	100	80	810	570	360
CM 80-200/30	125	405	180	250	355	125	95	345	280	65	16	840	100	80	850	490	380
CM 80-200/37	125	405	180	250	355	125	95	345	280	65	16	840	100	80	850	490	380

The figures in the tables are averages for production models. The Company reserves the right to make changes of any kind without prior notice.