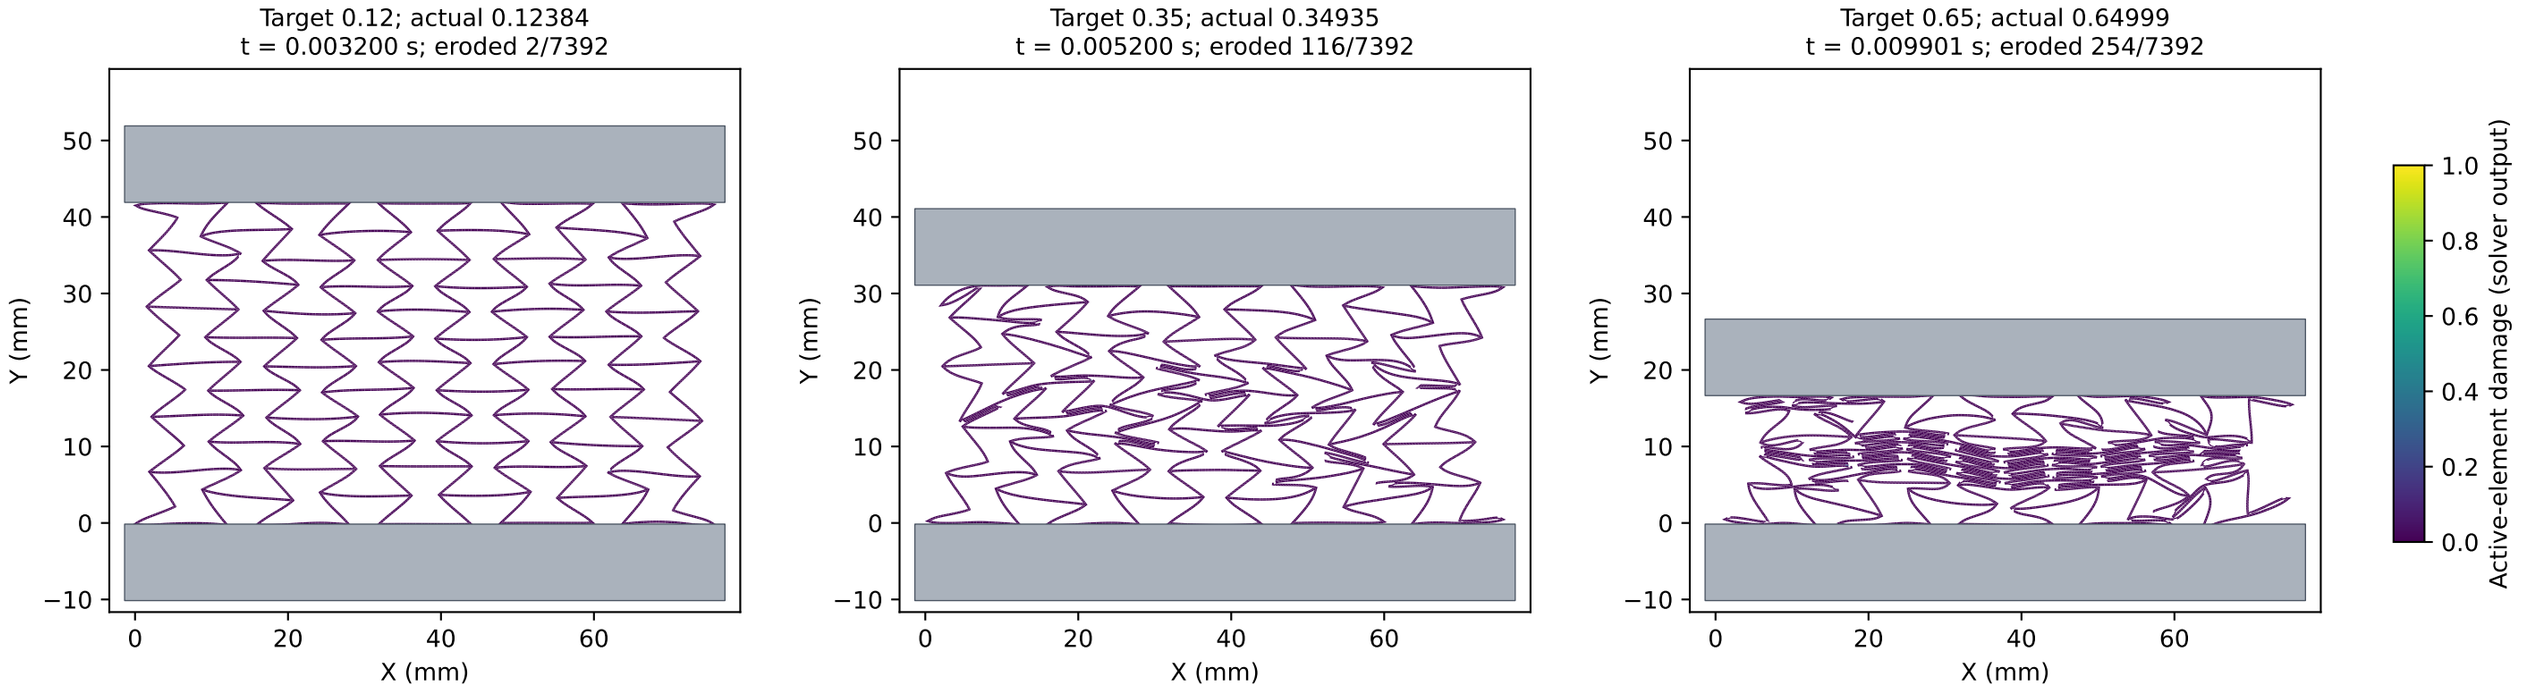

Thin-wall t=0.3 mm — OpenCourant actual deformed frames
Free-X baseline; uncalibrated; AMS and quasi-static unqualified
Target 0.12; actual 0.12384
t = 0.003200 s; eroded 2/7392
Target 0.35; actual 0.34935
t = 0.005200 s; eroded 116/7392
Target 0.65; actual 0.64999
t = 0.009901 s; eroded 254/7392
Y (mm)
X (mm)
Active-element damage (solver output)
Front projection; true displacement scale; eroded elements excluded. Morphology and experimental agreement remain unvalidated.