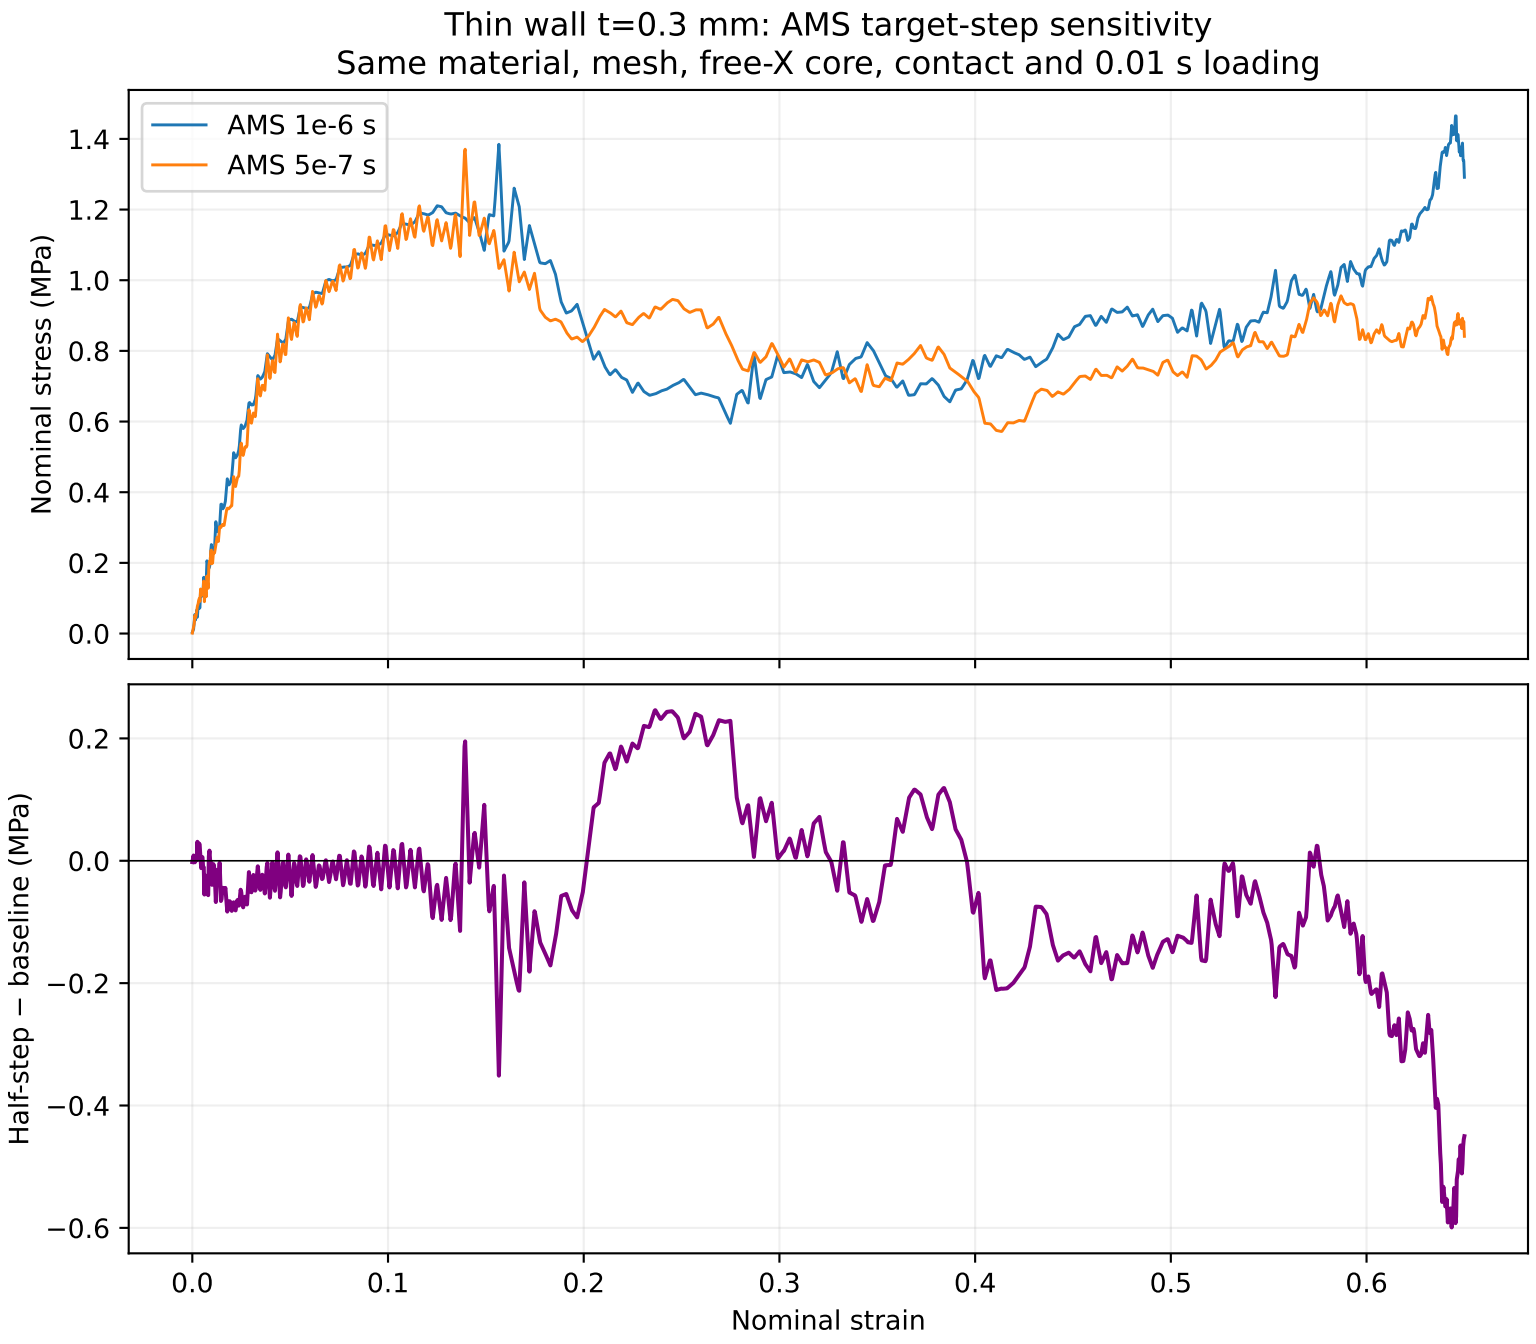
Thin wall t=0.3 mm: AMS target-step sensitivity
Same material, mesh, free-X core, contact and 0.01 s loading
AMS 1e-6 s
AMS 5e-7 s
Nominal stress (MPa)
Half-step − baseline (MPa)
Nominal strain