

cover what you want.
2 factors → multiply
product + factor → product + factor

IMPEDANCE

$$S|Z_T = Z_1 + Z_2 + \dots \uparrow$$

$$P|Z_T = Z_1 / N \downarrow$$

$$\text{mix} | 1 / (1/Z_1 + 1/Z_2 \dots)$$

AREA & VOLUME

$$A = L \times W$$

$$V = L \times W \times H$$

16:9 FROM DIAGONAL

$$W = D \times .872$$

$$H = D \times .490$$


$$\text{far viewer} = 4 / 6 / 8 \times H$$

OVER DISTANCE

$$\Delta dB = 20 \log(D_1/D_2)$$

$$E_2 = E_1 (D_1/D_2)^2$$

CONVERT × m3.281f f.3048m in25.4mm m³35.32ft³

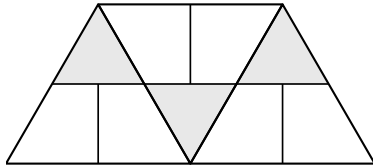

shaded cell = the product

IMPEDANCE

16:9 FROM DIAGONAL


.....

AREA & VOLUME

OVER DISTANCE

.....

CONVERT ×

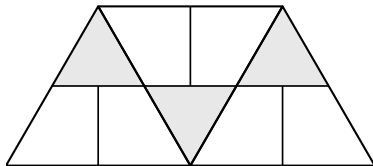

shaded cell = the product

IMPEDANCE

16:9 FROM DIAGONAL


.....

AREA & VOLUME

OVER DISTANCE

.....

CONVERT ×

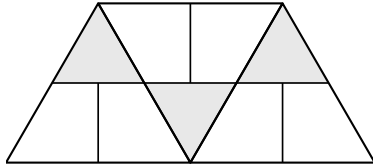

shaded cell = the product


IMPEDANCE

16:9 FROM DIAGONAL

AREA & VOLUME

OVER DISTANCE

CONVERT ×

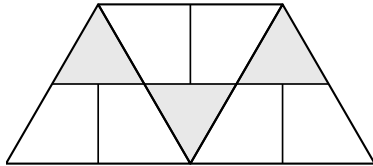

shaded cell = the product


IMPEDANCE

16:9 FROM DIAGONAL

AREA & VOLUME

OVER DISTANCE

CONVERT ×

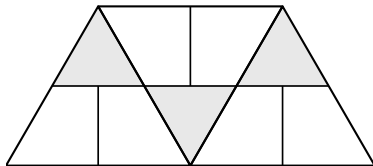

shaded cell = the product


IMPEDANCE

16:9 FROM DIAGONAL

AREA & VOLUME

OVER DISTANCE

CONVERT ×

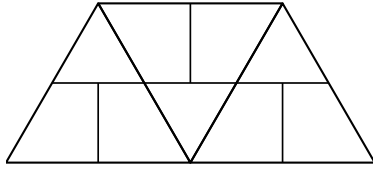

.....

.....

.....


.....

.....

.....

.....

.....

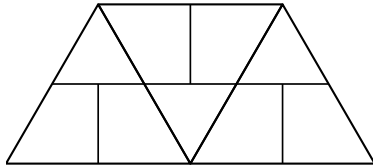

.....

.....

.....


.....

.....

.....

.....

.....

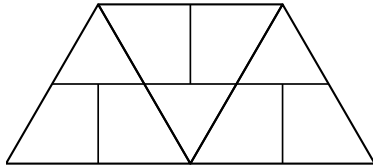

.....

.....

.....

.....

.....

.....

.....

.....