
# NATIONAL COMMUNICATIONS INC.


*"A FULL SERVICE CABLING SYSTEMS SUPPLIER"*

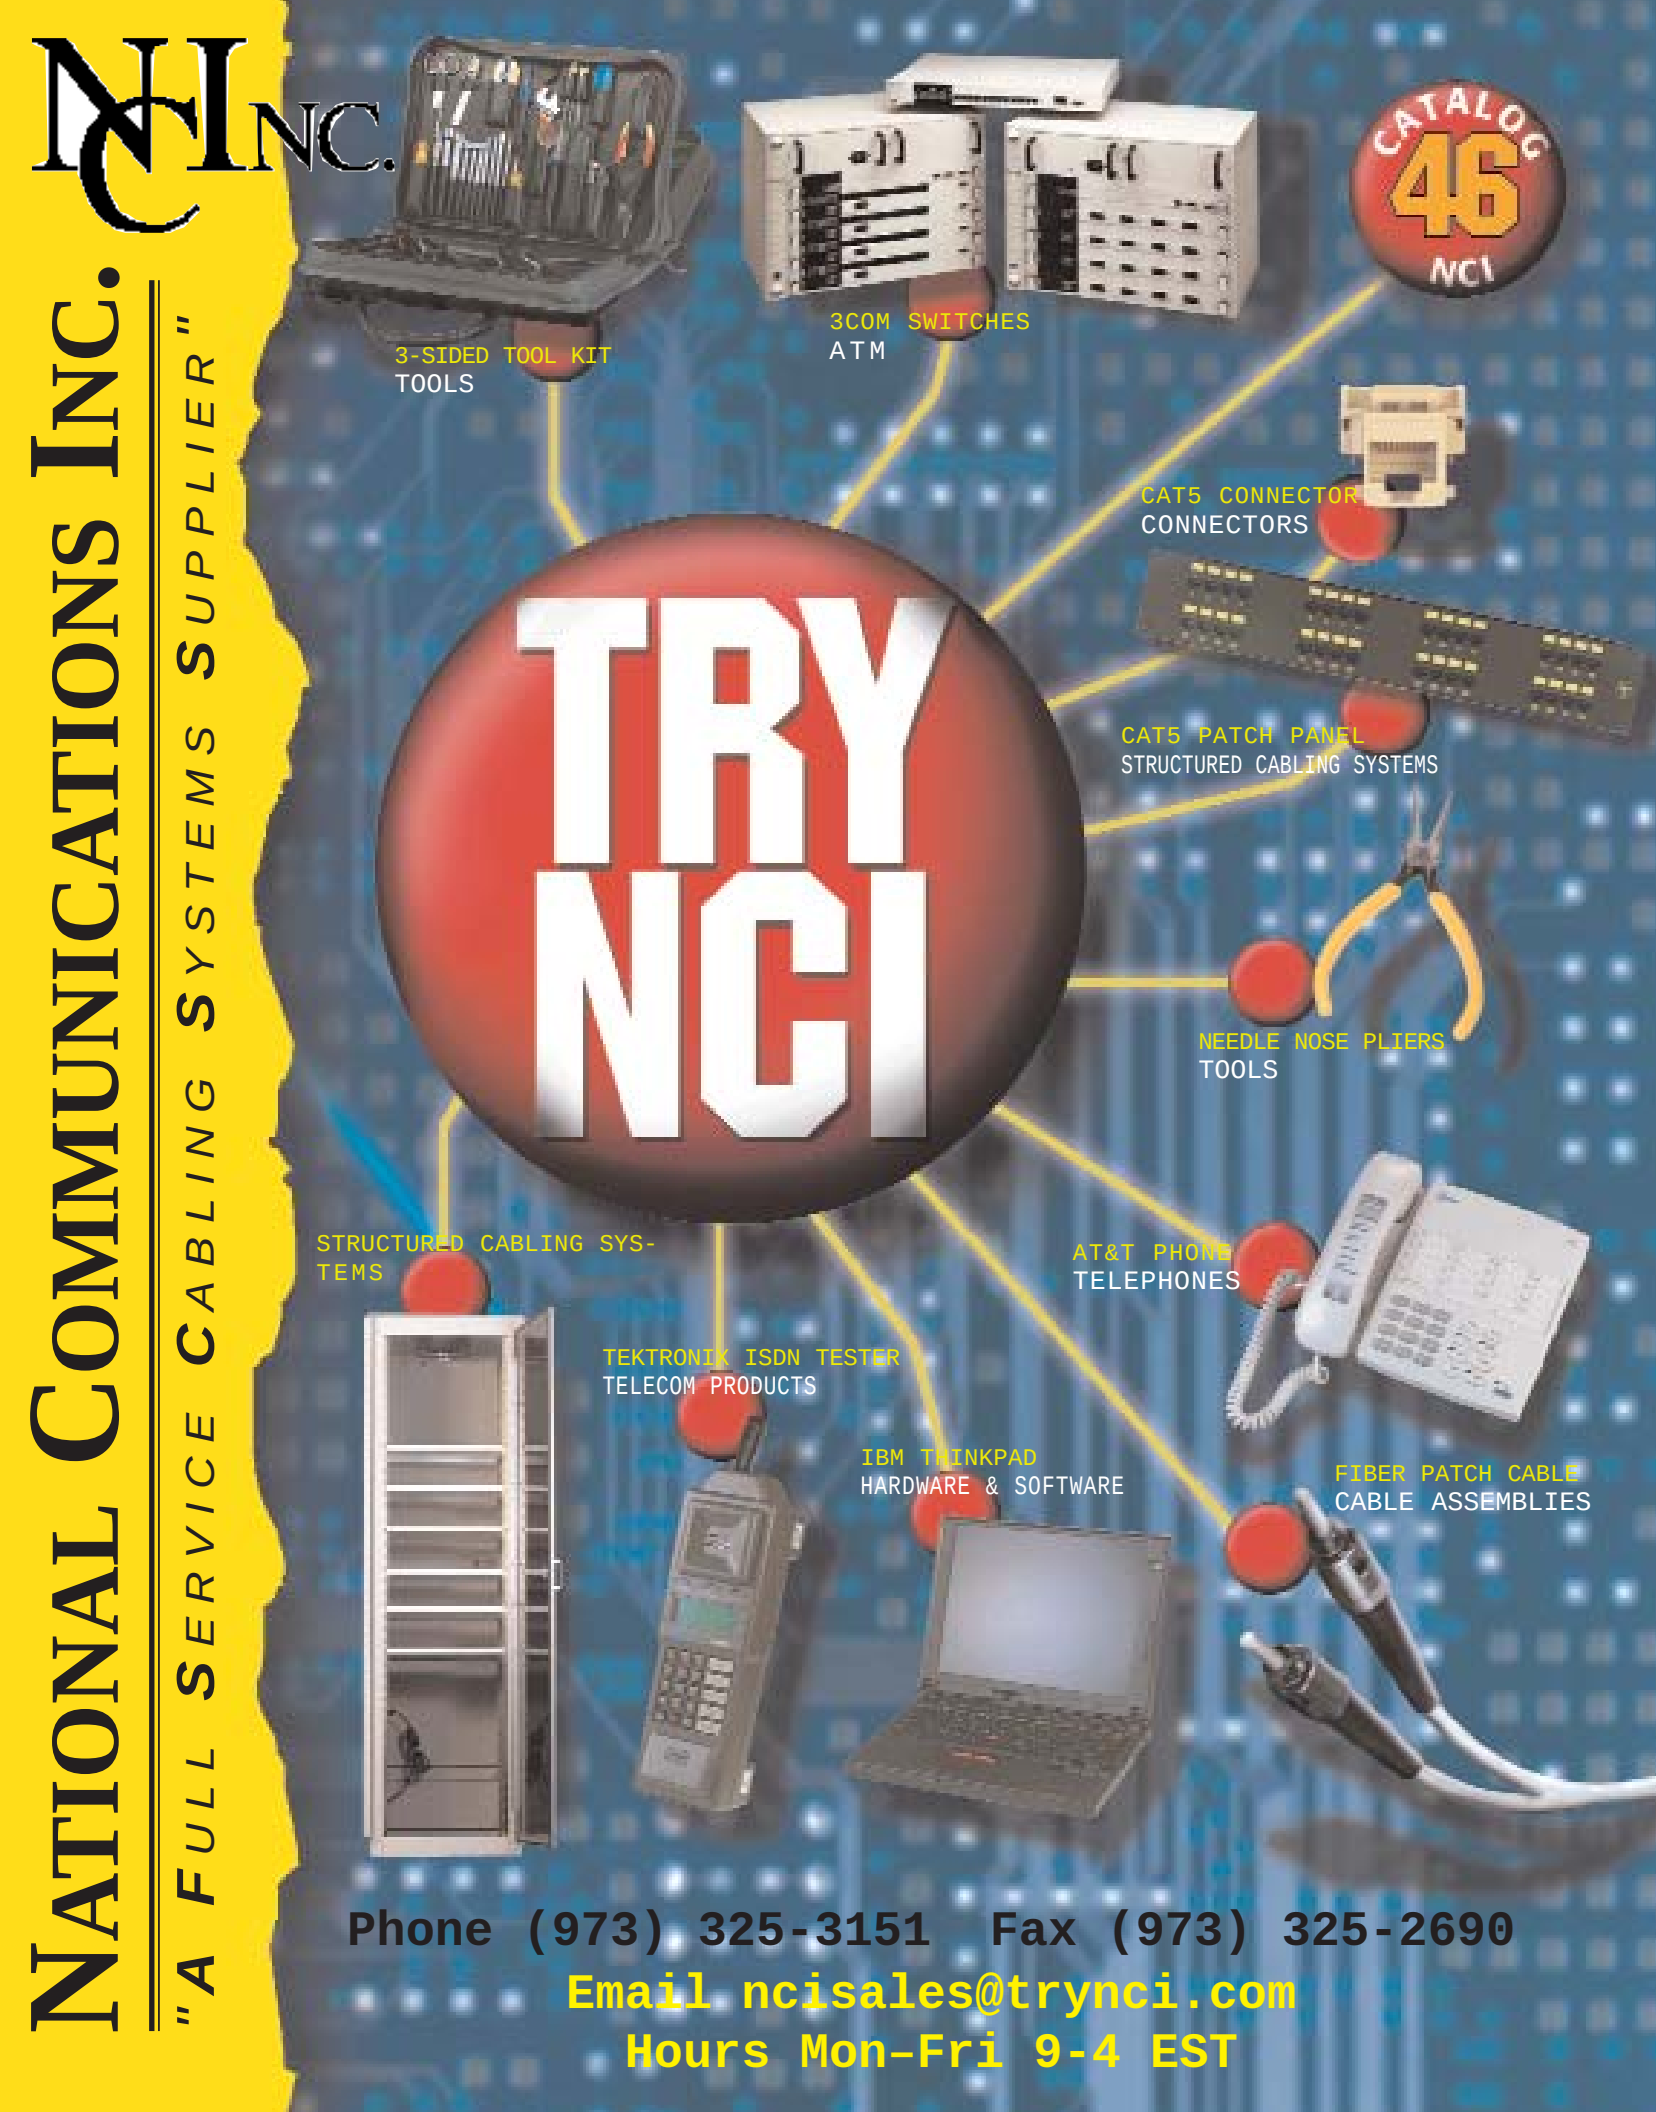


**Phone (973) 325-3151  Fax (973) 325-2690**

**Email ncisales@trynci.com**

**Hours Mon-Fri 9-4 EST**

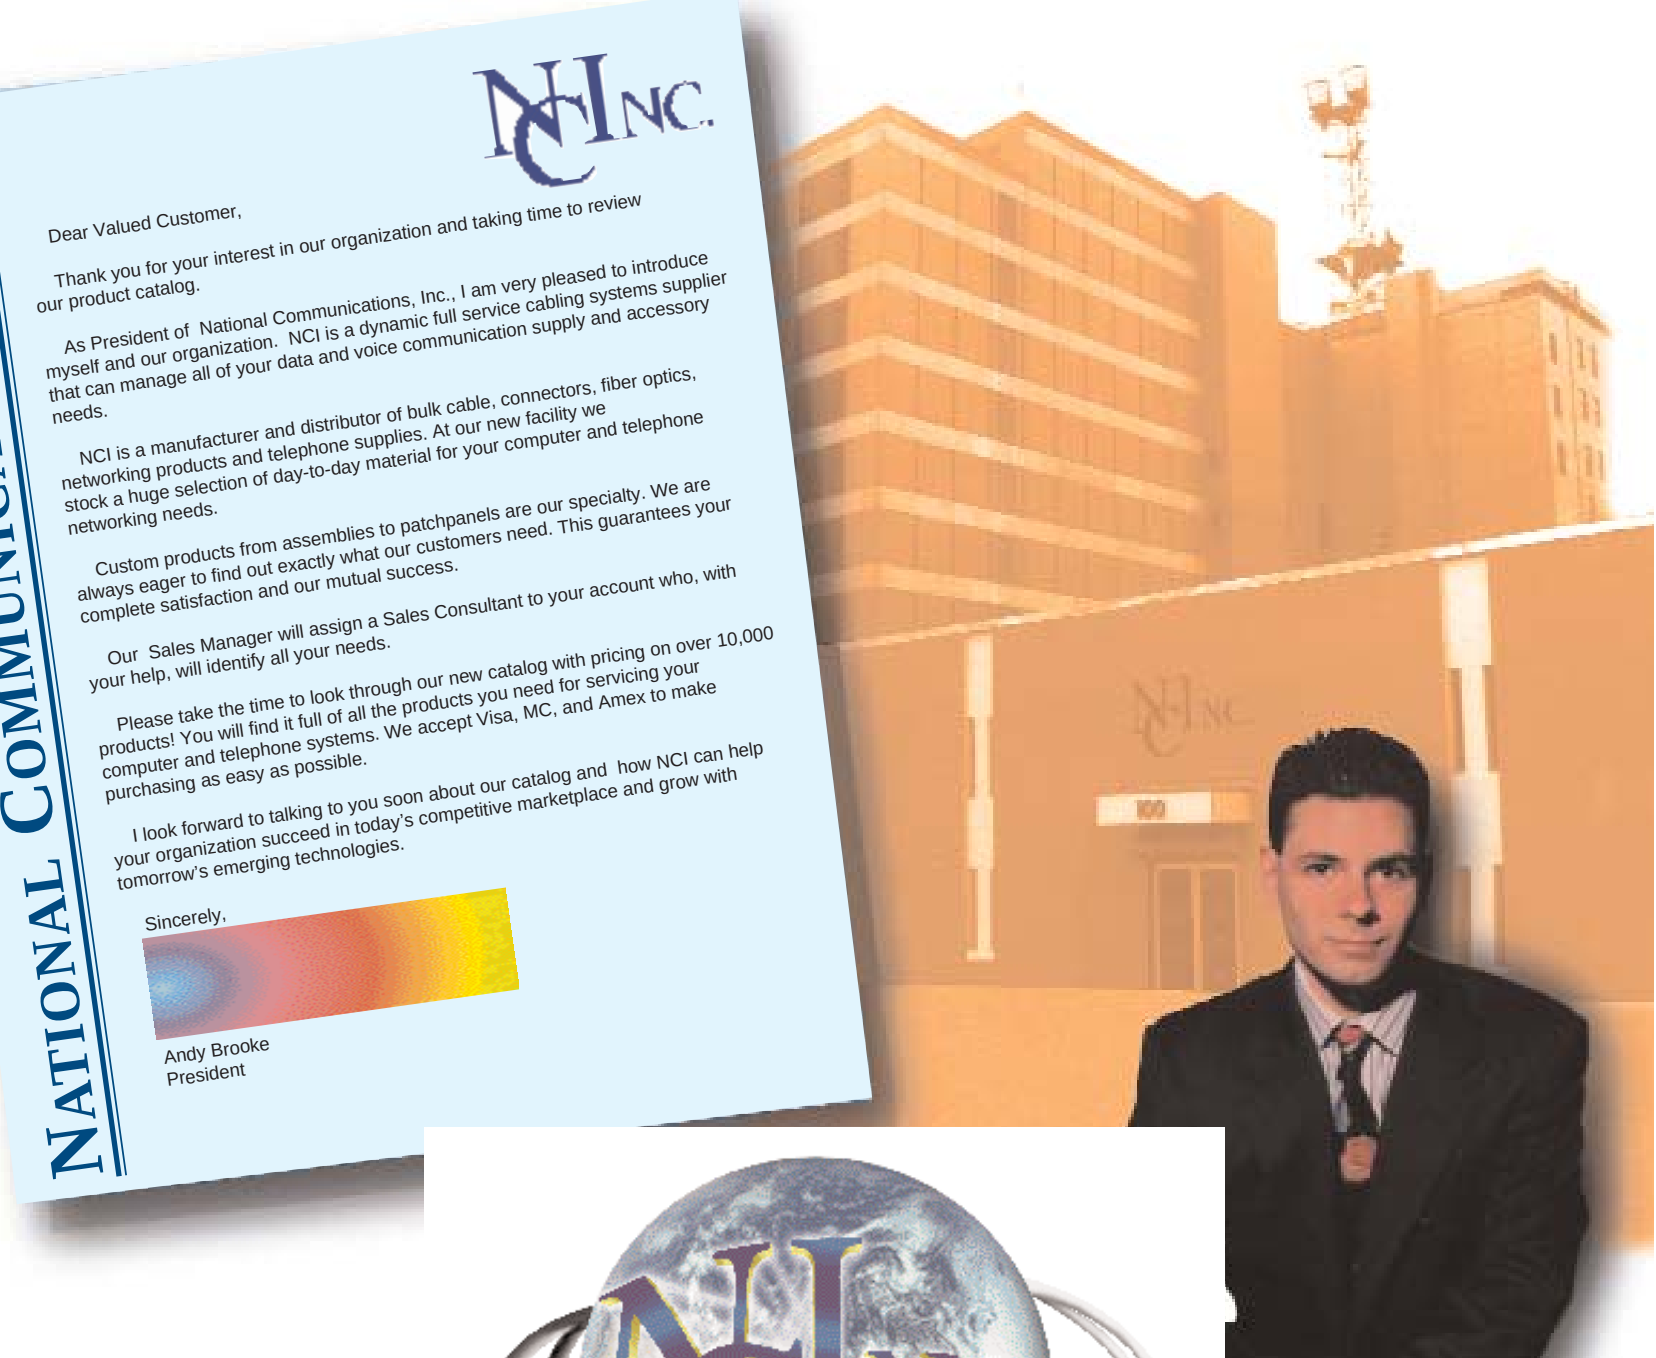


- **Custom Products**
- **Same Day Shipping**
- **Fast Turnaround on Quotes**
- **Credit Available**
- **Federal Buyers Welcome**

- Save with Quantity Discounts
- **Credit Cards Welcome**
- EMAIL ORDERS
- **Internet Catalog Online**

Email ncisales@trynci.com Hours Mon-Fri 9-4 EST
Phone (973) 325-3151 Fax (973) 325-2690
Internet:http://www.trynci.com

# CALL US

**Phone (973) 325-3151 Fax (973) 325-2690**
**Email ncisales@trynci.com**
**Hours Mon-Fri 9-4 EST**

National Communications is at the forefront of bringing you the latest technology as soon as it is available. Call us today to get the most current pricing on all your communications needs. We are your

# HOT NCI PRODUCTS

## SCSI3



As Low As

## Cat5 4 Pair



As Low As K

## RCI Master Console



As Low As Page 91

## 100Base-T



As Low As Page 43

## Microtest



## SLT3






PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# NCI Inc. Table of Contents


| | |
|---|---|
| Special / Hot Products | Page 2 |
| Apple | Page 3 |
| Arcnet | Page 4 |
| AS400 / RISC 6000 / IBM Systems | Page 5 |
| ATM | Page 6 |
| Baluns / Media Filters | Page 8 |
| Bulk Cable | Page 9 |
| Cable Assemblies | Page 16 |
| Connectors / Kits / Components | Page 23 |
| Ethernet | Page 33 |
| Fiber Optic | Page 55 |
| Hardware and Software | Page 85 |
| Structure Cabling Systems | Page 87 |
| Switches | Page 91 |
| Telecom Products | Page 95 |
| Telephones | Page 105 |
| Token Ring | Page 109 |
| Tools - Test Equipment / Cable Mgmt. / Reference | Page 111 |
| Index / Order Form & Info | Page 128 |



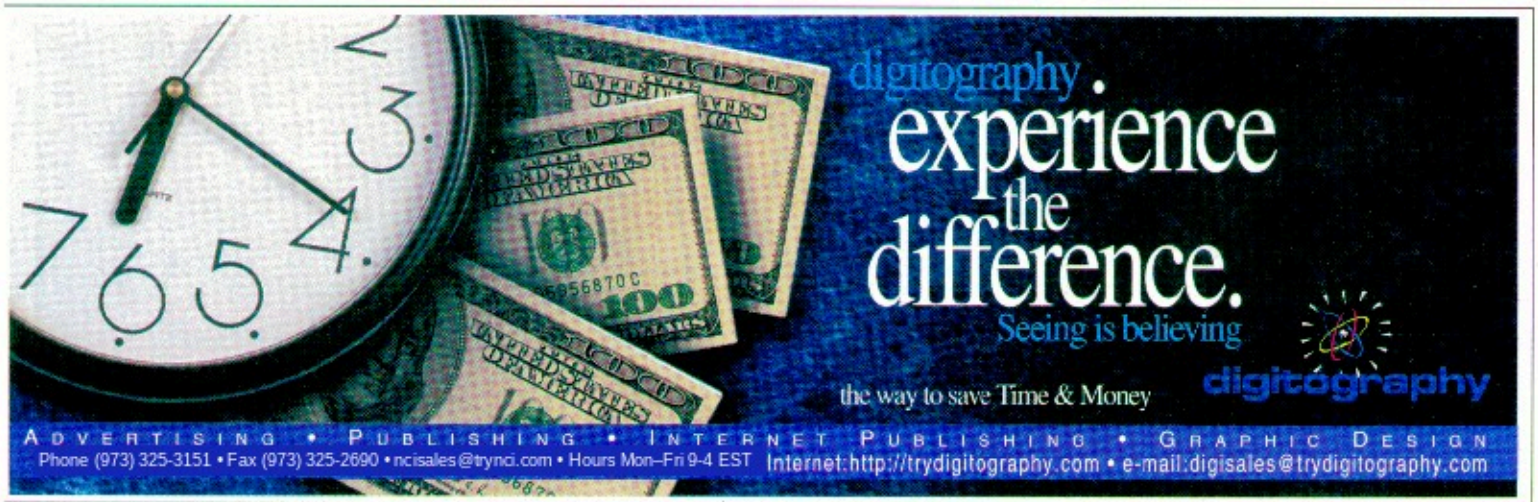





NCI Communications Catalog #46 1997. Published by Digitography Inc. Phone (973) 325-3151, ncisales@trynci.com.


National Communications Incorporated ©. All rights reserved. No portion of this publication may be reproduced or transmitted, in any form or by any means, without the express written permission of the publisher and the copyright holder. Printed in the U.S.A. - Production Manager & Art Director: Danx Grodzian Art & Layout Designer: Pablo Lauria • Layout & Photo Production: Amanda Denny • Digital Image Production: Portia Della Torre • Research & Development: Tilden Davies • Special Thanks: Tracy Taylor & Don Vellekamp

# APPLE


| DESCRIPTION | PART # |
|---|---|
| 78 OHM 20AWG SHIELDED PVC | 271070 |
| 78 OHM 20AWG SHIELDED *PLENUM* | 291070 |
| 2PR. LEVEL 3 SOLID UTP PVC | 213002AL3 |
| 2PR. LEVEL 3 SOLID UTP *PLENUM* | 233002AL3 |

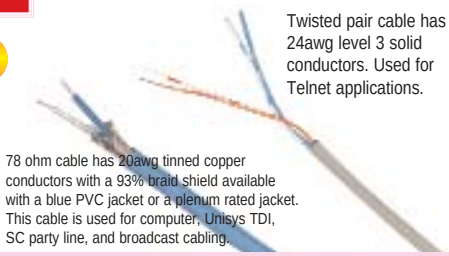

78 ohm cable has 20awg tinned copper conductors with a 93% braid shield available with a blue PVC jacket or a plenum rated jacket. This cable is used for computer, Unisys TDI, SC party line, and broadcast cabling.

Twisted pair cable has 24awg level 3 solid conductors. Used for Telnet applications.

| DESCRIPTION | PART # |
|---|---|
| MINI DIN 3 PLUG FOR APPLETALK (A) | 311215 |
| MINI DIN 4 PLUG FOR APPLETALK (B) | 311232 |
| MINI DIN 8 PLUG FOR APPLETALK (C) | 311238 |
| MINI DIN 3 SPLICE FEMALE (D) | 311217 |
| RJ11 4 POS TERMINATOR (E) | 311201 |
| RJ11 4 POS MODULAR PLUG (F) | 414005RSO |
| RJ11 F- F COUPLER (G) | 414060 |

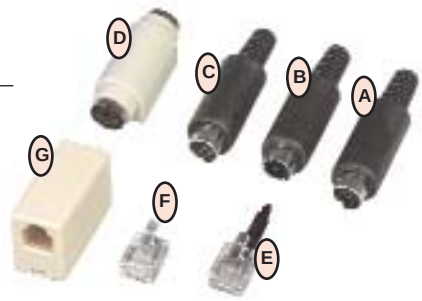


Serial cables used to connect Imagewriter I, II, and Hayes modems to your computer.




| DESCRIPTION | PART # |
|---|---|
| IMAGEWRITER II, MD8PM-MD8PM, 10FT (A) | Q30011-010 |
| IMAGEWRITER I, HIGH SPEED MODEM, 6FT (B) | Q30211-006 |

Connects various peripherals to the DB9 port. DB9 Male Series.



| DESCRIPTION | PART # |
|---|---|
| IMAGEWRITER II, DB9M-MD8M- 6 FT. | Q30311-006 |
| DB9M - MD8F- ADAPTER* | Q30621-A |
| DB9M - MD8M- 6 FT. | Q30711-006 |

| DESCRIPTION | PART # |
|---|---|
| HAYES MODEM, 5 PIN DIN M-DB25M,6FT. | Q31411-006 |



| DESCRIPTION | PART # |
|---|---|
| MD8M-MD8M- STRAIGHT - 6FT | Q32211-006 |
| MD8M-MD8M- STRAIGHT - 12FT | Q32211-012 |
| MD8M-MD8F EXTENDER - 6FT* | Q32321-006 |
| MD8M-MD8F EXTENDER - 12FT | Q32321-012 |



| DESCRIPTION | PART # |
|---|---|
| MD4M-MD4M STRAIGHT - 6FT | Q32411-006 |
| MD4M-MD4M STRAIGHT - 12FT | Q32411-012 |
| MD4M-MD4F STRAIGHT - 6FT* | Q32511-006 |



These connectors allow Apple Talk over phone cable. They use Modular telephone wiring and jacks for a reliable and low cost network for your MAC's.

**TELNET- RJ11 TO MD8M**

PART # 410159 .....

OTHER TYPES AVAILABLE. ALSO SOLD IN 10 AND 50 PACKS. PLEASE CALL FOR CURRENT PRICING.



## ETHER THIN TRANSCEIVERS

Connect your device directly to an Ethernet network. Features LED for transmit, receive, link, detect collision, power, and SQE switch. Available in AUI/UTP and Thin or AAUI/UTP and Thin.

| DESCRIPTION | 1-4 | 5-25 |
|---|---|---|
| ETHER 10- T- AUI/UTP | | |
| PART # 410194 ..... | | |



# ARCNET



93 ohm star or bus topology with passive or active hubs.

| Description | Part # |
|---|---|
| RG62A/U PVC | 271060 |
| RG62A/U *Plenum* | 291060 |




We carry the finest most cost effective BNC connectors for your Arcnet system.

| Description | PVC # | 10 | 50 | 100 |
|---|---|---|---|---|
| 1pc BNC Male Rt. Angle Twist- On (A) | 321036 | | | |
| 1pc BNC Female Twist- On (D) | 321206 | | | |
| 1pc BNC Male Twist- On (E) | 321200 | | | |
| 2pc BNC Male Crimp (B) | 321057 | | | |
| 3pc BNC Male Crimp (C) | 321055 | | | |
| 3pc BNC Female Crimp | 321050 | | | |

| Description | Plenum # | 100 |
|---|---|---|
| 3pc BNC Male Crimp | 321032 | |
| 3pc BNC Female Crimp | 321051 | |
| 2pc BNC Male Crimp | 321058 | |
| 1pc BNC Male Twist- On | 321111 | |
| 1pc BNC Female Twist- On | 321113 | |




| Adapters & Kits | Part # |
|---|---|
| BNC F-F (Splice) Inline Coupler (A) | 323105 |
| BNC Terminator- 93ohm (B) | 326907 |
| BNC Full Boot Strain Relief (C) | 323114 |
| BNC 1/2 Boot Strain Relief | 323116 |



Used as the center of a Star Configuration in an Arcnet Network.


10 50 100

Part # 341010



Designed to convert a 93 OHM coaxial signal to an unshielded twisted pair cable. Transparent at 2.5 Mbps for up to 100 meters.

**Arcnet RJ11 Balun - No Pigtail**
Part# 360029 .....

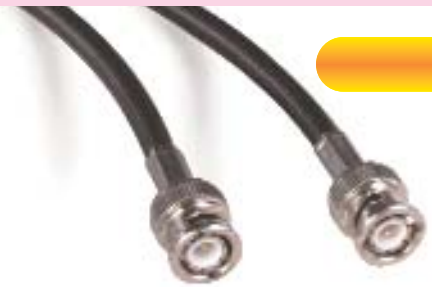

All the Arcnet cables you will ever need are made at NCI. These cables feature the highest quality cable, connectors, strain reliefs, and workmanship. Custom Lengths and configuratons with same day shipping is our specialty. All cables 300% guaranteed:

***100% on quality, 100% on delivery and 100% on your satisfaction.***

| Arcnet Cable Assemblies | Part # |
|---|---|
| Arcnet Cable Assembly PVC 6 ft. | Q32711-006 |
| Arcnet Cable Assembly PVC 10 ft. | Q32711-010 |
| Arcnet Cable Assembly PVC 15 ft. | Q32711-015 |
| Arcnet Cable Assembly PVC 25 ft. | Q32711-025 |
| Custom Lengths - PVC | Q32711-✶✶✶ |
| *Plenum* | Q32710-✶✶✶ |

**✶✶✶=Length in Feet**

**Optional- Add Suffix -FB = Fullboot Assembly (Add per Cable)**
**Add Suffix -HB = Halfboot Assembly (Add per Cable)**



PHONE / FAX
*Phone (973) 325-3151 Fax (973) 325-2690*
*Email ncisales@trynci.com Hours Mon–Fri 9-4 EST*

*Prices Change Frequently.*
*Please Call for Most Current Pricing.*

20awg stranded conductors (1 tinned and 1 bare copper) with a foil and an 86% braid shield. Used for computer, broadcast, IBM system 34, 36, 38, and AS/400 LAN cabling.



| DESCRIPTION | PART # |
|---|---|
| 20AWG SHIELDED PVC* | 271100 |
| 20AWG SHIELDED *PLENUM* | 291100 |

These connectors are used when installing Twinax cable for 3X and AS/400 systems. These precision connectors provide a quality termination.




| DESCRIPTION | PART# | REF# |
|---|---|---|
| MALE PVC-CRIMP (D) | 325103 | |
| MALE *PLENUM*-CRIMP | 325104 | |
| MALE PVC- SOLDER | 325105 | 7362229 |
| MALE *PLENUM* - SOLDER | 325107 | 7362064 |
| FEMALE PVC- SOLDER | 325109 | 6838959 |
| F-F COUPLER (B) | 325110 | 7362230 |
| FEEDTHRU PANEL JACK | 325112 | 7369083 |
| PANEL JACK SOLDER TYPE | 325114 | 7362179 |
| TERMINATOR MALE (A) | 325130 | 6091068 |
| TERMINATOR FEMALE | 325131 | |
| "T" CONNECTOR F-F-F | 325125 | 6851167 |
| "T" CONNECTOR F-M-F (C) | 325120 | |

These cables are used for connecting 3X and AS/400 systems. They use 100 ohm Twinax cable and quality Twinaxial solder type connectors.



| LENGTH | PVC# |
|---|---|
| 6FT | M31006 |
| 10 FT | M31010 |
| 15 FT | M31015 |
| 25 FT | M31025 |
| 50 FT | M31050 |
| CUSTOM LENGTH - PVC | M31*** + |
| CUSTOM LENGTH - *PLENUM* | M33*** + |

***=LENGTH IN FEET
OPTIONAL FEMALE CONNECTORS ADD PER END

The T Adapters with 9 and 15 pin connectors are used with PC's equipment with 3X emulation boards. The Twinax T adapters are used with standard Twinax monitors and peripherals.




| DESCRIPTION | PART # | REF # |
|---|---|---|
| "T" TWINAX (A) | 325140 | 6457102 |
| "T" DB9-TWINAX (B) | 325142 | |
| "T" DB15-TWINAX (C) | 325144 | |

An inexpensive twisted pair solution for your 3X or AS/400 system. It is very high quality with 50 um Modular Jacks.



| DESCRIPTION | PART # | REF # |
|---|---|---|
| RJ11-TWINAX NO PIGTAIL PINS 3 & 4* | 360002 | 1143 |
| RJ45-TWINAX NO PIGTAIL PINS 4 & 5 | 360004 | 4554 |


LIC 3 HIGH SPEED


LIC 1

Lineset cables for 3704-3705 Front End Processor.

| DESCRIPTION | PART# | REF# | |
|---|---|---|---|
| LIC 1 | Q21821-*** | 6089075 | CALL FOR PRICING |

Lineset cables for 3725 Front End Processor. ASSEMBLY CHARGE+

| DESCRIPTION | PART# | REF# | PVC |
|---|---|---|---|
| 3725 LIC 3 - HIGH SPEED | Q21721-*** | 1733820 | |

Lineset cables for 3745 Front End Processor.

| DESCRIPTION | PART# | REF# | |
|---|---|---|---|
| 3745 LIC 3 | Q21921-*** | 58X9485 | CALL FOR LATEST PRICING |

## IBM® DATA CENTER

For IBM 360,370,and 380 series. Utilizes high speed mini Coax cable. Call NCI for all your IBM Data Center needs. Our knowledgeable and courteous sales staff will be happy to assist you.



| DESCRIPTION | PART# | REF# | ASSEMBLY+PER | PVC |
|---|---|---|---|---|
| IBM 360 20 COND. BLUE | Q22021-*** | 5460185 | | |
| IBM 370 24 COND. BLUE* | Q22121-*** | | | |

***=LENGTH IN FEET

# ATM

Sharing mission-critical data with speed and efficiency among employees, customers, vendors and distributors located around the globe is the goal of any successful company. Today, more than ever, a business must be able to implement high-bandwidth applications, such as multimedia, CAD/CAM and large database management systems, that increase its capacity to process information.

Incorporating the latest technological innovations, such as video, collaborative computing and medical imaging, is a must that improves your ability to serve customers.

With ATM, a powerful networking technology, these goals are being achieved. Seamless LAN/WAN connectivity for improved communication, bandwidth-on-demand for all applications, and simultaneously integrated voice, video and data to support today's innovative multimedia applications are all a part of what ATM can do for you.

## ATM Technology

ATM is a switched, connection-oriented networking technology that provides dedicated, high-speed connections to virtually an unlimited number of users. It operates on a cell-based fast-packet communication method that supports transfer rates from Mbps to 10 Gbps.


Dedicated media connections running in parallel allow an ATM switch to simultaneously support multiple conversations, eliminating the bandwidth contention and data bottlenecks found on shared-media networks such as Ethernet, Token Ring and FDDI.

When Data is transferred in an ATM network, a switched virtual circuit (SVC) is established between the sender and receiver. The information is converted into fixed-length cells, which are transmitted through the network and reassembled into data packets at the destination.

ATM relies on the reliability of digital lines to ensure data integrity and does not use error-correction protocols. Numerous transmissions can take place at once, enabling ATM to accommodate multiple dialogues quickly, easily and reliably.

ATM's dedicated bandwidth is capable of easily supporting data-intensive applications such as high-resolution computer graphics, large data-base management systems and high-end engineering packages. The technology's high throughput and real-time information delivery also make it a perfect solution for emerging multimedia applications combining data, voice and animation.

ATM can be installed into an existing network as needed without upgrading the entire LAN!

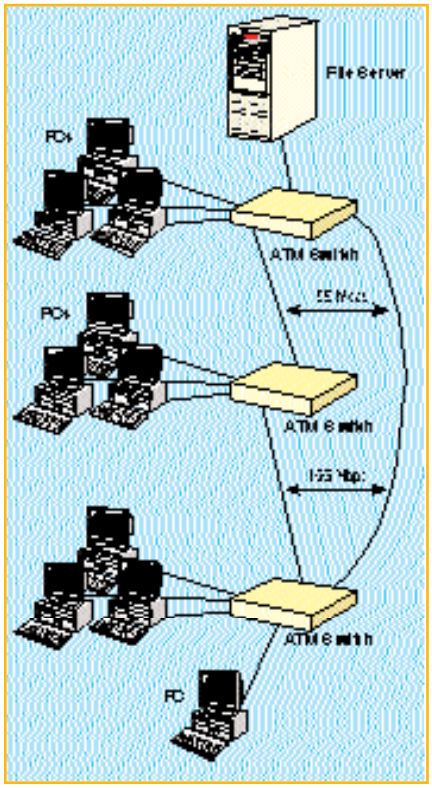






## Bay Networks

The LattisCell™ family of Asynchronous Transfer Mode (ATM) switches delivers a total ATM solution for high-speed networking environments. Working with SynOptics' ATM Network Management Application, the Connection Management System software, ATM SBus adapter cards and EtherCell™ Ethernet-to-ATM switches, the LattisCell products allow users to implement a complete, high-performance ATM network.

| Description | Ref# | Part # | |
|---|---|---|---|
| ATM Router Model 5780 | AD1304006 | 315551 | |
| ATM Router Model 5780 | AD1304007 | 315553 | |
| ATM Router Software VNR | AD1308001 | 315555 | |
| LattisCell ATM Switch | 10115R | 315556 | Call 4 |
| LattisCell ATM Switch 16SC MMF Sonnet | 10114R | 315557 | 29,797 |
| LattisCell ATM Switch 14SC MMF 2BNC E3 w/RPS | 10114R-E3 | 315559 | 37,447 |
| LattisCell ATM Switch 14SC MMF 2ST SMF w/RPS | 10114R-SM | 315561 | 37,447 |
| Ethernet/ATM Router Mux 13 12-10BT 1-155Mbps Sonet OC-3C Fiber | 10328-F | 315563 | |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

The Intelligent Hub is a low-profile, stackable 8-port hub designed to connect multiple workstations and additional hubs to an ARCNET network. In combination with SMC's Network Management Software, this hub provides a level of network fault tolerance previously unavailable in any ARCNET local area network environment. There are two versions: one for coax networks, and the other for twisted pair networks.

# SMC Arcnet Intelligent Hub



| DESCRIPTION | PART# |
|---|---|
| SMC ARCNET INTELLIGENT HUB, COAX VERSION, 8 PORT | 534244 |



The 365A Adapter is a twinaxial-to-twisted-pair balun that eliminates the need for twinaxial cable to connect equipment in IBM® System 36/38 and Application System/400™ environments. The adapter allows the 1 Mbps signals of the IBM equipment to be transmitted over the unshielded twisted-pair wiring of the AT&T SYSTIMAX® Premises Distribution System (PDS).

The 365A Adapter consists of a flame-retardant plastic housing with a short section of twinaxial cable terminated with a male twinaxial connector. The other end of the housing contains an 8-pin modular jack. The 366A Terminating Adapter is included in this package.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| AT&T 365A ADAPTER | 400074 | 105282610 |


digital™

Digital's networking products have been recognized for excellence in performance, innovation, and investment protection for nearly two decades. Digital has always led the way in networks helping to keep you competitive. Today we're leading the way in client/server networking and high-performance switched networks.



| Description | Ref# | Part # |
|---|---|---|
| 1 Port 155 Mbps SMF ATM | DESSL-AC | 536101 |
| 2 Port 155 Mbps SMF ATM | DESSL-AD | 544001 |
| ATM MODPHY DS3/T2 Coax | DAGGT-AA | 544003 |
| ATM MODPHY Multimode Fiber | DAGGM-AA | 544005 |
| ATM MODPHY Single Mode Fiber | DAGGS-AA | 536109 |
| GIGA/ATM 1 Port 622 MMF LC | DAGGL-CA | 536111 |
| GIGA/ATM 1 Port 622 Modular LC | DAGGL-BA | 536113 |
| GIGA/ATM 1 Port 622 SMF LC | DAGGL-CB | 536115 |
| GIGA/ATM 1 Port E1 UTP Modphy | DAGE1-AA | 536117 |
| GIGA/ATM 1 Port E3 Coax Modphy | DAGGE-AA | 536119 |
| GIGA/ATM 1 Port TI UTP Modphy | DAGT1-AA | 536121 |
| GIGA/ATM w/52 MMF Ports | DAGGL-AB | 536123 |
| GIGA/ATM 1C, 2MMF 25 MF Ports | DAGGA-DA | 536125 |
| GIGA/ATM 5 SLT Chass, PWR, CLK | DAGND-AA | 536127 |
| GIGA/ATM ATMLINE Card 2 Ports for DS Sonet | DEFGT-BA | 536129 |
| GIGA/ATM 1 Port 155 UTP Modphy | DAGGU-AA | 536131 |
| GIGA/ATM 48V Power Module | DAGPL-AB | 536133 |
| GIGA/ATM 5V Power Module | DAGPL-AA | 536135 |
| GIGA/ATM Cell Buffer Exp Card | DAGCB-AA | 536137 |
| GIGA/ATM Chasis (No Power No Line Cards) | DAGGA-CA | 536139 |
| GIGA/ATM 4 Port Line Card 155Mb/s MMF | DAGGL-AA | 536141 |

3Com®

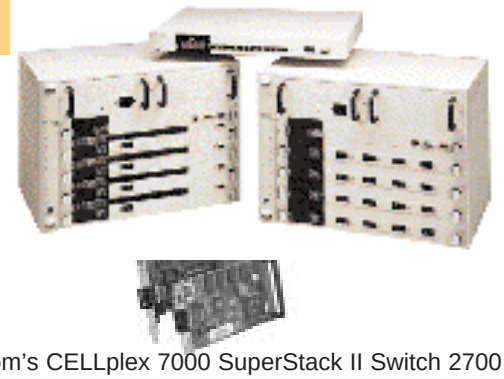

| Description | Ref# | Part # | |
|---|---|---|---|
| Cellplex 7000 Switch Kit | 3C37000 | 536919 | |
| Cellplex 7000 4 Port Interface Card | 3C37052 | 536921 | |
| Cellplex 7000 OC-3C Mudule | 3C37058 | 536923 | |
| Cellplex 7000 OC-3C MM Module | 3C37100 | 536925 | |
| Cellplex 7000 Redundant Switch Engine | 3C37016 | 536927 | |
| 7201 Enet/ATM Interface Card | 3C37263 | 536929 | |
| 7X00 Interface Card for Cellplex 700 | 3C37300 | 536931 | |
| ATMLink PCI-155 Fiber Adapter | 3C971-F | 536933 | |
| Cellplex 7000 1 DS-3 Physical Module | 3C37061 | 536935 | |
| Cellplex 7000 1 OC-3C Physical Module MM | 3C37060 | 536937 | |
| Cellplex 7000 1 DS-3 Physical Module | 3C37061 | 536939 | |
| Cellplex 7000 Physical Module (one TP0) | 3C37062 | 536941 | |
| Cellplex 7000 Power Supply Module | 3C37061 | 536943 | |
| Netbuilder II MP ATM Link | 3C6075 | 543999 | |
| Superstack II Switch 2700 OC3 Multimode | 3C32700A | 543997 | |
| Superstack II Switch 2700 DS3 ATM | 3C32710A | 543995 | 6,106 |
| Superstack II Switch 2700 OC3 Singlemode | 3C32711A | 543993 | 8,114 |
| 7200 Enet/ATM Nic 12 Enet 30C-3C MM ATM Ports | 3C37262 | 543991 | 8,345 |
| ATMLINK PCI-55 Fiber Adapter | 3C971-F | 543989 | |
| 7200 Fiber Enet/ATM Interface Card | 3C37264 | 543987 | 13,353 |
| 7201 Fiber Enet/ATM Interface Card (12-10 Base Fl Port) | 3C37266 | 543985 | 11,684 |
| 7201F Fiber Ethernet/ATM Interface Card | 3C37265 | 337739 | 10,632 |

3Com's CELLplex 7000 SuperStack II Switch 2700 switches open up traffic bottlenecks, boost performance, and extend manageability, while maintaining the installed network infrastructure.


In combination, they let you scale performance easily throughout the network.

CELLplex™ 7000 is an ATM switch that provides ATM connections as well as Ethernet interface linked in a non-blocking switching architecture.

SuperStack II Switch 2700 is a stackable Ethernet/ATM workgroup switch that employs 3Com's leading-edge "ZipChip" processor for full-wire-speed Ethernet connections to Ethernet LANs, and ATM connectivity to the backbone.

SMC®

SMC, a leading worldwide supplier of industry-standard LAN products, provides a comprehensive portfolio of networking solutions for scaling, managing and connecting LANs. Under its Unity framework, SMC has outlined a strategy for building and expanding networks to meet current bandwidth and management requirements, while providing a migration path to ATM.

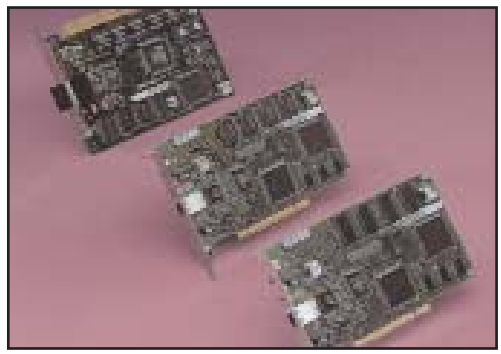

| Description | Ref# | Part # |
|---|---|---|
| ATM Power 155 EISA Adapter 2MB Uses UTP-5 Cable | SMC9747D | 534203 |
| ATM Power 155 EISA Adapter 2MB Uses MMF Cable | SMC9747F | 534205 |
| ATM Power 155 EISA Adapter 256KB Uses UTP-5 Cable | SMC9742D | 534207 |
| ATM Power 155 EISA Adapter 256KB Uses MMF Cable | SMC9742F | 534209 |
| ATM Power 155 PCI Adapter 2MB Uses UTP-5 Cable | SMC9746D | 534211 |
| ATM Power 155 PCI Adapter 2MB Uses MMF Cable | SMC9746F | 534213 |
| ATM Power 155 PCI Adapter 512KB Uses UTP-5 Cable | SMC974IF | 534215 |
| ATM Power 155 PCI Adapter 512KB Uses MMF Cable | SMC974ID | 534217 |
| ATM Power 155 Sbus Adapter 2MB Uses UTP-5 Cable | SMC9749D | 534219 |
| ATM Power 155 Sbus Adapter 2MB Uses MMF Cable | SMC9749F | 534221 |
| ATM Power 155 Sbus Adapter 512KB Uses UTP-5 Cable | SMC9744D | 534223 |
| ATM Power 155 Sbus Adapter 512KB Uses MMF Cable | SMC9744F | 534225 |

# Baluns & Media Filters

Balun stands for BALanced/UNbalanced and is measured in ohms. A balun is an impedance matching transformer. It is a passive device that converts the impedance of coaxial cable so that its signal can run on twisted pair wiring, however, the signal can



ıigned to connect a
0 catagory-A device to
hielded twisted pair.
‹. distance is 3000 ft.

| Description | Part # | Ref # |
|---|---|---|
| 3270 Type A RJ45 No Tail | 340065 | B4554 |
| 3270 Type A Slim- Line RJ45- 25ft pins 1&2 | 360100 | ATT353A |
| 3270 Type A Slim- Line RJ11- 8ft pins 3&4* | 340068 | SL-114318 |



Passively converts Ethernet 1E EE802.3 10 Base-2 (50 ohm) Coaxial cable to (105 OHM) twisted pair cable. It is transparent at 10 Mbps up to 330 ft. Used in 10 Base-2 (Thinnet) LANS, point to point.

| Description | Part # | Ref # |
|---|---|---|
| Ethernet RJ11 | 360104 | 2534 |
| Ethernet RJ45* | 360106 | 3645 |

NOTE: This is not a transceiver. Must be used in PAIRS.

This Video Adaptor is a twisted pair media balun that allows the transmiss
and audio signals over
4 pair UTP

**Connections:**
Video: BNC (female)
Audio: Standard Phono Jack (2)
Output: 8-position modular jack

**Distances:**
Color Transmission - 15
Bl. & Wh. - 2500' (762m)




| Description | Part # |
|---|---|
| Video Adapter Balun | 400044 |

**Must be Use in Pairs**

**Connections:**
Input: 3 BNC (female)
Output: 8-position/ 8-conductor modular jack

**Distances:**
Cat5 Cable - 500' (152m)
Cat3 Cable - 330'(100m)

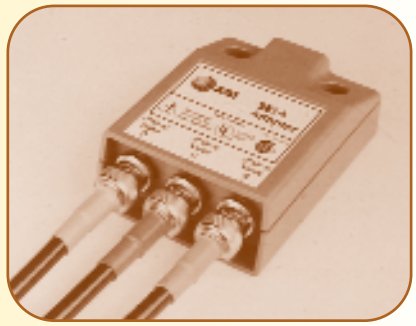

This video adapter provides the intrabuilding connectivity of RGB component video equipment to Cat 3 or Cat unshielded twisted pair (UTP) wiring. This device is a twisted pair media adapter used to support red-green-blue (RGB) video monitors with resolutions of up to 640 by 480 pixels and refresh rates up to 72 Hz.

| Description | Part # |
|---|---|
| Composite Video Adapter Balun | 400043 |

**Must be Use in Pairs**



**Now you can convert your DB9 Token Ring connector to an RJ11 or RJ45 connector for use with UTP cabling.** Type 3A Token Ring cable can be used in place of the more expensive Type 1A cable, when using the Type 3 Media Filter. You can connect up to 72 workstations, achieve speeds up to 16Mbps and have workstations up to 200 feet away from their MAU's. Available in 4/16 Mbps version, so you can run at 4Mbps.

| Description | Part # | Ref # |
|---|---|---|
| 4/16Mbps RJ11 - No Line Cord | 360116 | MF1611 |
| 4/16Mbps RJ45 - No Line Cord | 360118 | MF1645 |
| 4/16Mbps RJ11 - w/8ft Line Cord | 360120 | MF16118 |
| 4/16 Mbps RJ45 - w/8ft line Cord | 360122 | MF16458 |
| 4/16 Mbps RJ11 - w/6" DB9 & 8ft Line Cord | 360124 | MF16168 |
| 4/16 Mbps RJ45 - w/6" DB9 & 8ft Line Cord | 360126 | MF16568 |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.


# UNSHIELDED TWISTED PAIR

## Unshielded Twisted Pair (UTP) SuperCat 5 - PVC & Plenum

24 GUAGE

Belden has a commitment to providing the most thorough lineup of wire and cable solutions.The **Datatwist-350** series is tested to support high speed applications upto **350Mhz**.

| DESCRIPTION | PVC # | 1K-5K | 1'-999' | *PLENUM #* | 1K-5K | 1'-999' |
|---|---|---|---|---|---|---|
| 4PR DATA TWIST-350 ENHANCED | 318043 | | | 318419 | | |




Data T
350 Enhanced

Berk-Tek is a world leader in the development and manufacturing of high performance cables. The **LANMark** series is designed to support high speed applications up to **350Mhz**. Berk-Tek guarantees enhanced ACR,NexT, SRL and PS-NexT.

| DESCRIPTION | PVC # | 1K-5K | 1'-999' | *PLENUM #* | 1K-5K | 1'-999' |
|---|---|---|---|---|---|---|
| 4PR LANMARK 350 ENHANCED | 540801 | | / FT | 540803 | | |



## Unshielded Twisted Pair (UTP) - Level 5 - PVC & Plenum

24 GUAGE

Level 5 UTP has a performance rate of 100 mbps. We offer these cables in a siamese type construction to offer you time and money savings on your installations. The best cost for performance cable available today.

| DESCRIPTION | PVC # | 1K-5K | 500'-999' | 1'-499' | *PLENUM #* | 1K-5K | 500'-999' | 1'-499' |
|---|---|---|---|---|---|---|---|---|
| 2PR LEVEL5 SOLID UTP | 213002AL5 | | | | 233002AL5 | | | |
| 4PR LEVEL5 SOLID UTP | 213004AL5 | | | | 233004AL5 | | | |
| 4PR LEVEL5 SOLID UTP ZIPCORD | 213004AL5ZIP | | | | 233004AL5ZIP | | | |
| 6PR LEVEL5 SOLID UTP | 213006AL5 | | | | 233006AL5 | | | |
| 8PR LEVEL5 SOLID UTP | 213008AL5 | | | | ------- | | | |
| 25PR LEVEL5 SOLID UTP | 213025AL5 | | | | 233025AL5 | | | |



## Unshielded Twisted Pair (UTP) - Level 3 - PVC & Plenum

24 GUAGE

Level 3 cable is ideal for 16 mbps Token Ring and 10 Base "T" applications. We offer a dual 4 pair zipcord type cable that eliminates the need of running 2 separate cables to station location. Speeds up to 16 mbps can be achieved.

| DESCRIPTION | PVC # | 1K-5K | 500'-999' | 1'-499' | *PLENUM #* | 1K-5K | 500'-999' | 1'-499' |
|---|---|---|---|---|---|---|---|---|
| 2PR LEVEL3 SOLID UTP | 213002AL3 | | | | 233002AL3 | | | |
| 3PR LEVEL3 SOLID UTP$^{O}$ | 213003AL3 | | | | 233003AL3 | | | |
| 4PR LEVEL3 SOLID UTP | 213004AL3 | | | | 233004AL3 | | | |
| 6PR LEVEL3 SOLID UTP | 213006AL3 | | | | 233006AL3 | | | |
| 8PR LEVEL3 SOLID UTP | 213008AL3 | | | | 233008AL3 | | | |
| 12PR LEVEL3 SOLID UTP | 213012AL3 | | | | 233012AL3 | | | |
| 25PR LEVEL3 SOLID UTP | 213025AL3 | | | | 233025AL3 | | | |
| 50PR LEVEL3 SOLID UTP | 213050AL3 | | | | 233050AL3 | | | |
| 75PR LEVEL3 SOLID UTP | 213075AL3 | | | | 233075AL3 | | | |
| 100PR LEVEL3 SOLID UTP | 213100AL3 | | | | 233100AL3 | | | |



## Unshielded Twisted Pair (UTP) - Level 2 - Plenum

24 GUAGE

Level 2 cable is equivalent to IBM's Type 3. It's ideal for 4 mbps Token Ring, RS-232, RS422, System/3X, and AS/400 utilizing UTP. Speeds up to 4 Mbps can be achieved.

| DESCRIPTION | *PLENUM #* | 1K-5K | 500'-999' | 1'-499' |
|---|---|---|---|---|
| 2PR LEVEL 2 SOLID UTP | 233002AL2 | | | |
| 3PR LEVEL 2 SOLID UTP | 233003AL2 | | | |
| 4PR LEVEL 2 SOLID UTP | 233004AL2 | | | |
| 6PR LEVEL 2 SOLID UTP | 233006AL2 | | | |
| 8PR LEVEL 2 SOLID UTP | 233008AL2 | | | |
| 12PR LEVEL 2 SOLID UTP | 233012AL2 | | | |
| 25PR LEVEL 2 SOLID UTP$^{O}$ | 233025AL2 | | | / FT |
| 50PR LEVEL 2 SOLID UTP | 233050AL2 | | | |
| 100PR LEVEL 2 SOLID UTP | 233100AL2 | | | |



# BULK CABLE

## LAN CABLE




### CAT 5 Shielded Twisted Pair (STP)

This new high performance cable is suitable for network speeds of up to 100mbps. The addition of an overall foil shield reduces EMI/RFI interference. Available in PVC and *PLENUM* jackets.

24 GUAGE

| DESCRIPTION | PVC # | 1K-5K | 500'-999' | 1'-499' | *PLENUM* # | 1K-5K | 500'-999' | 1'-499' |
|---|---|---|---|---|---|---|---|---|
| 2PR LEV5 SOLID STP | 227002AL5 | | | | 229002AL5 | | | |
| 4PR LEV5 SOLID STP[O] | 227004AL5 | | | | 229004AL5 | | | |
| 25PR LEV5 SOLID STP | 227025AL5 | | | | 229025AL5 | | | |
| 2PR LEV5 STRANDED STP | 224002AL5 | | | | 244002AL5 | | | |
| 4PR LEV5 STRANDED STP | 224004AL5 | | | | 244004AL5 | | | |

OTHER PAIR COUNTS ARE AVAILABLE. PLEASE CONSULT YOUR SALESPERSON FOR MORE INFORMATION.WE CAN MANUFACTURE HYBRIDS AND COMPOSITE CABLES FOR YOUR SPECIAL REQUIREMENTS.

### CAT 5 Stranded Patch Cable - 10 BASE T



This is the perfect cable for high speed patching of your level 5 (100Mhz) networks.
This cable is not recommended for premise cabling. It should only be used for patching and wallplate to PC cords.
**NOTE:** If you are installing Level 5 premise cable, keep that level thru-out your patch panels, wall outlets, connectors and patch cables. This will allow your network to operate at those levels without any bottlenecks.

24 GUAGE

| DESCRIPTION | PVC # | 1K-5K | 500'-999' | 1'-499' | *PLENUM* # | 1K-5K | 500'-999' | 1'-499' |
|---|---|---|---|---|---|---|---|---|
| 2PR LEV 5 STRANDED UTP BONE | 203002AL5[Q] | | | | ---------- | | | |
| 3PR LEV 5 STRANDED UTP BONE | 203003AL5[Q] | | | | ---------- | | | |
| 4PR LEV 5 STRANDED UTP BONE | 203004AL5[Q] | | | | 223004AL5[Q] | | | |

Q **Use Suffix: 1=Bone 2=Red 3=Green 4=Blue 5=Black 6=Yellow**
**Other Cables Available.**

### Thin Ethernet - RG58A/U



50 ohm Coaxial segments (185 meters max. 10Base-2) with a 19x32 stranded 20awg center conductor.
Foil & braid shielding

| DESCRIPTION | PART # |
|---|---|
| THINNET RG58A/U PVC | 271080 |
| THINNET RG58A/U *PLENUM* | 291080 |

### Thick Ethernet



50 ohm Coax cable backbone segment(500 meters max. 802.3, 10Base-5).

| DESCRIPTION | PART # |
|---|---|
| THICK ETHERNET BACKBONE PVC YELLOW | 271120 |
| THICK ETHERNET BACKBONE *PLENUM* ORANGE | 291120 |

### Transceiver AUI Drop Cable



4 pair 20awg where each pair is individually shielded and the cable has an overall foil shield with a 95% braid shield.

| DESCRIPTION | PART # |
|---|---|
| AUI DROP CABLE PVC[O] | 272055 |
| AUI DROP CABLE *PLENUM* | 292055 |

### Office Drop Cable



A thin version of the standard AUI drop cable used for patching. The cable is 4 pair (1pair 24awg / 3pair 28awg) where each pair is individually shielded and the cable has an overall foil shield with a 95% braid shield.

| DESCRIPTION | PART # |
|---|---|
| OFFICE AUI CABLE PVC | 272057 |



*Phone (973) 325-3151 Fax (973) 325-2690*
*Email ncisales@trynci.com Hours Mon–Fri 9-4 EST*

# BULK CABLE

## 78 ohm



20awg tinned copper conductors with a 93% braid shield available with a blue PVC jacket or a Plenum rated jacket. This cable is used for computers, Unisys TDI, SC party line & broadcast cabling.

20 AWG

| Description | Part # |
|---|---|
| Twinax 78 ohm Shielded PVC$^{O}$ | 271070 |
| Twinax 78 ohm Shielded *Plenum* | 291070 |

## 100 ohm



20awg stranded conductors (1 tinned & 1 bare copper) with a foil and an 86% braid shield. Used for computers, IBM system 34, 36, 38 and AS/400 LAN cabling

20 AWG

| Description | Part # |
|---|---|
| Twinaxial 100 ohm Shielded PVC$^{O}$ | 271100 |

# COAXIAL


## ARCNET Coaxial - RG62A/U




93 ohm star or bus topology with passive or active hubs.

| Description | Part # |
|---|---|
| RG62A/U PVC$^{O}$ | 271060 |

# TOKEN RING



*Type 1AP*

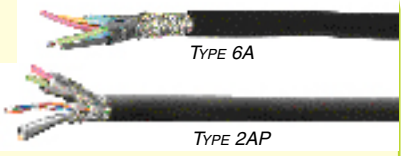

*Type 6A*

*Type 2AP*

**Type 1A / 1AP -** A Level5 2pair cable with 22awg solid conductors, each pair individually foil shielded and overall shielded in a flexible tinned copper braid. These cables are 150 ohms and have super low mutual capcitance (8.5pf/ft)

| Description | Part # | Ref # |
|---|---|---|
| Type 1A PVC | 272030 | 33G2772 |

**Type 2A / 2AP -** Same as Type 1A/1AP cable, plus 4 voice pairs inside the outer jacket

| Description | Part # | Ref # |
|---|---|---|
| Type 2A PVC | 272040 | 33G2773 |

**Siamese Type 2A / 2AP -** Same as above, but the 4 voice pairs are in a seperate jacket bonded parallel to outer jacket of data pairs.

| Description | Part # |
|---|---|
| Siamese Type 2A PVC | 272045 |

**Type 6A -** 2 pair 26awg Overall Shielded cable used mostly for patch cable because of

| Description | Part # | Ref # |
|---|---|---|
| Type 6A PVC | 272050 | 33G277 |

**Type 8A -** 2 pair 26awg cable with a flat constructed jacketto allow under carpet

| Description | Part # | Ref # |
|---|---|---|
| Type 8A PVC | 272070 | 4716750 |

**Type 9A / 9AP -** Same as Type 1A, but is 25% smaller due to 26awg (not 22awg)

| Description | Part # | Ref # |
|---|---|---|
| Type 9AP *Plenum* | 292047 | 33G8223 |

## Coaxial - 50 ohm

RG58/U audio, broadcast, and computer cable. This cable has a 20awg solid center conductor with a 95% braid shield. This cable is not recommended for Ethernet because of the solid center conductor.



20 AWG

| Description | Part # |
|---|---|
| RG58/U Braid Shield PVC$^{O}$ | 271017 |

## Coaxial - 75 ohm

RG59, RG6, and RG11 video, broadcast, and computer cable. These cables have a braid shield.



| Description | PVC # | 1K-5K | 500'-999' | 1'-499' | *PLENUM* # | 1K-5K | 500'-999' | 1'-499' |
|---|---|---|---|---|---|---|---|---|
| Mini RG59 27awg Braid Shield | 271055 | | | | 291055 | | | |
| RG59 20awg Braid Shield$^{O}$ | 271040 | | | | 291040 | | | |
| RG6 18awg Foil & Braid Shield | 271065 | | | | 291065 | | | |
| RG11 11awg Foil & Braid Shield | 271071 | | | | 291071 | | | |
| Dual RG59 | 271050 | | | | 29105 0 | | | |

# BULK CABLE

## SILVER SATIN MODULAR CORD - UNSHIELDED & SHIELDED



| DESCRIPTION | PART # |
|---|---|
| 4 COND. UNSHIELDED | 218100 |
| 6 COND. UNSHIELDED | 218110 |
| 8 COND. UNSHIELDED | 218120 |
| 10 COND. UNSHIELDED | 218130 |
| 3 COND. SHIELDED + 1 DRAIN | 218105 |
| 5 COND. SHIELDED + 1 DRAIN | 218115 |
| 7 COND. SHIELDED + 1 DRAIN | 218125 |

**STANDARD COLOR IS GREY. FOR BLACK ADD SUFFIX -B TO PART# AND 10% TO PRICE.**

## TELEPHONE CABLES

HOT ITEM!!!



24 GUAGE


| DESCRIPTION | PART # | 10K- 49K |
|---|---|---|
| 1 PAIR CROSS CONNECT LEVEL 5 | 217001AL5 | |
| 2 PAIR CROSS CONNECT LEVEL 5 | 217002AL5 | |
| 3 PAIR CROSS CONNECT LEVEL 5 | 217003AL5 | |
| 4 PAIR CROSS CONNECT LEVEL 5 | 217004AL5 | |
| 2 PAIR CROSS CONNECT LEVEL 5 | 217002AL5-BELD | |



Used for short runs between blocks and equipment.

| DESCRIPTION | 24AWG | 1K- 9K | 10K-49K | 22AWG | 1K-49K |
|---|---|---|---|---|---|
| 1 PAIR WHITE/BLUE | 217001A | | | 217001B | |
| 1 PAIR WHITE/RED | 217011A | | | | |
| 1 PAIR WHITE/ORANGE | 217021A | | | 217021B | |
| 1 PAIR WHITE/GREEN | 217031A | | | | |
| 1 PAIR WHITE/BLACK | 217041A | | | | |
| 1 PAIR BLUE/YELLOW | 217051A | | | | |
| 1 PAIR BLUE/RED | 217061A | | | | |
| 1 PAIR RED/GREEN | 217071A | | | 217071B | |
| 2 PAIR WHITE BLUE/WHITE ORANGE | 217002A | | | 217002B | |
| 2 PAIR RED BLUE/RED ORANGE | 217012A | | | | |
| 3 PAIR WHITE BLUE/WHITE ORANGE/WHITE GREEN | 217003A | | | | |
| 4 PAIR WHITE BLUE/WHITE ORANGE/WHITE GREEN/WHITE BLUE | 217004A | | | | |

## ddd dd

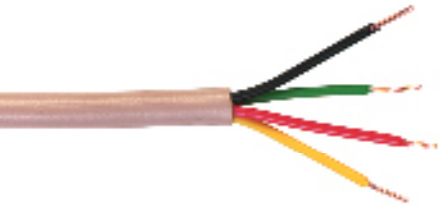

| DESCRIPTION | PART # |
|---|---|
| 4COND 24AWG SOLID GRAY | 210004AG |
| 4COND 24AWG SOLID BEIGE | 210004AB |
| 4COND 24AWG SOLID WHITE | 210004AW |
| 4COND 22AWG SOLID GRAY | 210004BG |
| 4COND 22AWG SOLID BEIGE | 210004BB |
| 4COND 22AWG SOLID WHITE | 210004BW |



24 GUAGE

Used for voice and low speed data transmission, instrumentation and computer hook-up applications. We stock 24awg solid annealed copper cable with tinned copper drain.Type CMR SPEC.8009.

| DESCRIPTION | PART # |
|---|---|
| 2PR SHIELDED PVC | 214002AL1 |
| 4PR SHIELDED PVC | 214004AL1 |
| 25PR SHIELDED PVC | 214025AL1 |

**WE CAN OFFER YOU DIFFERENT PAIR COUNTS and AWG's.CONSULT YOUR SALESPERSON.**



24 GUAGE

Used for central office and PBX equipment cabling and interconnections. We stock 24awg tinned solid annealed copper cable. SPEC 4753 CMR.

| DESCRIPTION | PART # |
|---|---|
| 25PR GRAY | 223025A |



*Phone (973) 325-3151 Fax (973) 325-2690*
*Email ncisales@trynci.com Hours Mon–Fri 9-4 EST*

## Aerial & Duct Air Core Cables REA SPEC PE 22



For aerial and duct use. Cable has an aluminum shield with a plastic core wrap and a black polyethylene jacket.

24 GUAGE

| Description | Part # |
|---|---|
| 6PR PE 22 | 215006A |
| 12PR PE 22O | 215012A |
| 25PR PE 22 | 215025A |
| 50PR PE 22 | 215050A |

## Self Supporting (Figure 8) Air Core Cables REA SPEC PE 38

Cable is designed for aerial installations where self-support is necessary. One black polyethylene jacket in parallel construction to a 7 strand class A messenger supports the cable and provides element protection.



24 GUAGE

| Description | Part # |
|---|---|
| 6PR PE 38 | 220006A |
| 12PR PE 38 | 220012A |
| 25PR PE 38 | 220025A |
| 50PR PE 38 | 220050A |

## Direct Burial or Aerial Filled Cable REA PE 89



Filled foam-skin insulation, designed for duct or direct burial trunk service. A longitudinally applied aluminum tape with a black polyethylene.

24 GUAGE

| Description | Part # |
|---|---|
| 6PR PE 89 | 221006A |
| 12PR PE 89O | 221012A |
| 25PR PE 89 | 221025A |
| 50PR PE 89 | 221050A |

## Direct Burial or Aerial Filled Cable REA SPEC PE

Filled/Solid insulation. A petroleum "jelly" compound flooding the inside of the cable eliminates any moisture passage in the event of outer jacket damage.



24 GUAGE

| Description | Part # |
|---|---|
| 6PR 24AWG PE 39 | 222006A |
| 12PR 24AWG PE 39O | 222012A |
| 25PR 24AWG PE 39 | 222025A |
| 50PR 24AWG PE 39 | 222050A |

# DATA COMMUNICATION CABLES



24awg stranded conductor cable for use in electronic applications such as RS232, serial data, audio, and control cabling. 30 pf/ft.

22 GUAGE

| | 1-5K | 500'-999' | 1'-499' |
|---|---|---|---|
| 4 COND. STRANDED ..... 201004B | | | |
| 5 COND. STRANDED ..... 201005B | | | |
| 8 COND. STRANDED ..... 201008B | | | |
| 12 COND. STRANDED ..... 201012B | | | |
| 15 COND. STRANDED ..... 201015B | | | |
| 25 COND. STRANDED ..... 201025B | | | |

**OTHER GUAGE SIZES AND *PLENUM* JACKETED CABLE AVAILABLE. PLEASE CONSULT YOUR SALESPERSON FOR FURTHER DETAILS.**

## Multiconductor Shielded




Foil shielded cable with 24awg stranded conductor. For sound, broadcast, audio, computer, RS232, and instrumentation cabling. 33 pf/ft.

24 GUAGE

| Description | PVC # | 1-5K | 500'-999' | 1'-499' |
|---|---|---|---|---|
| 4 COND. STRANDED SHIELDEDO ..... | 202004A | | | |
| 5 COND. STRANDED SHIELDED ..... | 202005A | | | |
| 6 COND. STRANDED SHIELDED ..... | 202006A | | | |
| 8 COND. STRANDED SHIELDED ..... | 202008A | | | |
| 10 COND.STRANDED SHIELDED ..... | 202010A | | | |
| 12 COND.STRANDED SHIELDED ..... | 202012A | | | |
| 15 COND.STRANDED SHIELDED ..... | 202015A | | | |
| 25 COND.STRANDED SHIELDED ..... | 202025A | | | |

## Multipair Shielded

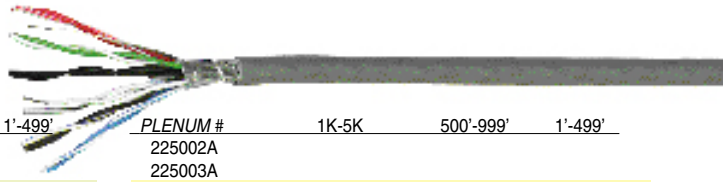

Low cap cable used in extended distance RS232, RS423, RS449, V.35, serial data, audio, and control cabling. 12.5 pf/ft.

| Description | PVC # | 1K-5K | 500'-999' | 1'-499' | *PLENUM* # | 1K-5K | 500'-999' | 1'-499' |
|---|---|---|---|---|---|---|---|---|
| 2PAIR 24AWG STRANDED SHIELDED ..... | 205002A | | | | 225002A | | | |
| 3PAIR 24AWG STRANDED SHIELDED ..... | 205003A | | | | 225003A | | | |
| 4PAIR 24AWG STRANDED SHIELDED ..... | 205004A | | | | 225004A | | | |
| 6PAIR 24AWG STRANDED SHIELDEDO ..... | 205006A | | | | 225006A | | | |
| 9PAIR 24AWG STRANDED SHIELDED ..... | 205009A | | | | 225009A | | | |
| 12.5 PAIR 24AWG STRANDED SHIELDED ..... | 205012HA | | | | 225012HA | | | |
| 18.5 PAIR 24AWG STRANDED SHIELDED ..... | 205018HA | | | | 19PAIR- 225019A | | | |

**OTHER PAIR COUNTS AVAILABLE. CONSULT YOUR SALESPERSON.**

## Multipair-Individually Shielded



22awg cable with individually foil shielded pairs under one jacket. For computer, point of sale, and loop cable. 30 pf/ft.

| Description | PVC # | 1K-5K | 500'-999' | 1'-499 | |
|---|---|---|---|---|---|
| 2PAIR 22AWG STRANDED IND. SHIELDED ..... | 208002B | | | | |
| 3PAIR 22AWG STRANDED IND. SHIELDED ..... | 208003B | | | | 228003B |

**OTHER PAIR COUNTS AVAILABLE. CONSULT YOUR SALESPERSON.**

## Multipair Extended Distance - Foil & Braid Shielded



Used for extended distance EIA/TIA RS232 & EIA/TIA 422 applications. 12.5 pf/ft.

| Description | PVC # | 1K-5K | 500'-999' | 1'-499 | |
|---|---|---|---|---|---|
| 2PAIR 24AWG STRANDED FOIL & BRAID ..... | 206002A | | | | |
| 3PAIR 24AWG STRANDED FOIL & BRAID ..... | 206003A | | | | 226003A |
| 4PAIR 24AWG STRANDED FOIL & BRAID ..... | 206004A | | | | 226004AO |
| 6PAIR 24AWG STRANDED FOIL & BRAID ..... | 206006A | | | | 226006A |
| 12.5 PAIR 24AWG STRANDED FOIL & BRAID ..... | 206012HA | | | | |

**OTHER PAIR COUNTS AVAILABLE. CONSULT YOUR SALESPERSON.**

# Bulk Cable

## Ribbon Cable

Our flexible multiconductor flat ribbon cable is made with 28awg stranded conductors on .050" centers. Covered with a PVC jacket. UL listed






### Gray

| Description | Part # | 100ft.+ |
|---|---|---|
| 9 Cond. | 272109 | |
| 10 Cond. | 272110 | |
| 14 Cond. | 272114 | |
| 15 Cond. | 272115 | |
| 16 Cond. | 272116 | |
| 20 Cond.O | 272120 | |
| 25 Cond. | 272125 | |

### Colored

| Description | Part # | 100ft.+ |
|---|---|---|
| 9 Cond. | 273109 | |
| 10 Cond. | 273110 | |
| 14 Cond. | 273114 | |
| 15 Cond. | 273115 | |
| 16 Cond. | 273116 | |
| 20 Cond. | 273120 | |
| 25 Cond. | 273125 | |
| 26 Cond. | 273126 | |
| 34 Cond. | 273134 | |
| 37 Cond. | 273137 | |
| 40 Cond. | 273140 | |
| 50 Cond.O | 273150 | |
| 60 Cond. | 273160 | |
| 64 Cond. | 273164 | |

### Color Twisted

| Description | Part # | 100ft.+ |
|---|---|---|
| 9 Cond. | 274109 | |
| 10 Cond. | 274110 | |
| 14 Cond. | 274114 | |
| 15 Cond. | 274115 | |
| 16 Cond. | 274116 | |
| 20 Cond. | 274120 | |
| 25 Cond. | 274125 | |
| 26 Cond. | 274126 | |

### Shielded Flat

| Description | Part # | 100ft.+ |
|---|---|---|
| 9 Cond. | 275109 | |
| 10 Cond. | 275110 | |
| 14 Cond. | 275114 | |
| 15 Cond. | 275115 | |
| 16 Cond. | 275116 | |
| 20 Cond.O | 275120 | |
| 25 Cond. | 275125 | |
| 26 Cond. | 275126 | |
| 34 Cond. | 275134 | |
| 37 Cond. | 275137 | |
| 40 Cond. | 275140 | |
| 50 Cond. | 275150 | |
| 60 Cond. | 275160 | |
| 64 Cond. | 275164 | |

# Specialty Cable

AT&T

| Description | Part # | Ref # |
|---|---|---|
| ABAM 22awg 16pr PVC | 400041 | 106989346 |
| ABAM 22awg 30pr PVC | 400027 | 106556632 |
| 4pr Cat5 Yellow Patch Cable | 400023 | 106999071 |
| 4pr Plenum Cat 5 | 292077 | 2061 |

Belden

| Description | Part # | Ref # |
|---|---|---|
| Data Twist -5 4pr Plenum | 318423 | |
| Data Twist 350 4 pr PVC | 318403 | SM1700A |
| Mini 75 ohm Coax PVC | 318413 | 8218 |
| RG59 PVC Black | 318401 | 8241 |
| 2pr, 22 awg Type 1 Plenum | 318405 | 82688 |
| 3pr, 22 awg Ind/Shld PVC | 318415 | 8777 |
| RG6 Coax PVC | 318411 | 9114 |
| 7 Cond 24awg Foil/Braid PVC | 318409 | 9932 |

## T-1 High Speed



A 2 pair 22awg solid tinned conductor individually shielded and jacketed. This cable comes in multiple pair counts and features flexibility, low attenuation, good crosstalk isolation, and high speed. Used for terminating high frequency lines to carrier equipment in central offices.

| Description | Part # |
|---|---|
| T-1 High Speed 1Pair PVC | 271025 |
| T-1 High Speed 2Pair PVC | 271026 |
| T-1 Hgh Spd. 2Pair *Plenum*O | 291026 |
| T-1 High Speed 4 Pair PVC | 271027 |
| T-1 High Speed 5 Pair PVC | 271028 |
| T-1 High Speed 8 Pair PVC | 271030 |
| T-1 Hgh Spd. 10 Pair PVC | 271031 |
| T-1 Hgh Spd. 12 Pair PVC | 271032 |

## T-1 Low Speed

A 2 pair 22awg solid cable with overall foil shield.



| Description | Part # |
|---|---|
| T-1 Low Speed PVC | 271024 |
| T-1 Low Speed *Plenum*O | 291024 |



**Phone (973) 325-3151 Fax (973) 325-2690**
**Email ncisales@trynci.com Hours Mon–Fri 9-4 EST**

## [illegible]



A MiniCoax bundle with stranded conductors that are foil & braid shielded. Used in TV cameras, HDTV monitors, & computer VDT VGA/ CGA monitors

| DESCRIPTION | PART # | REF# |
|---|---|---|
| RGB 3 COAX PVC | 271019 | 1164A |
| RGB 4 COAX PVC | 271020 | 1167A |
| RGB 5 COAX PVC | 271016 | |
| RGB 3 COAX *PLENUM*O | 291019 | |

## *Quotron Type Cable*



An RG59 cable with a bonded 4 conductor 22awg solid copper cable. Used to connect Quotron terminals to control units.

| DESCRIPTION | PART # |
|---|---|
| QUOTRON PVC | 272012 |
| QUOTRON *PLENUM*O | 292012 |

## [illegible]



We offer many different conductor counts and gauge sizes. Listed below are some of the more popular types

| DESCRIPTION | PART # |
|---|---|
| 2 COND 18AWG | 272002D |
| 2 COND 16AWGO | 272002E |
| 2 COND 14AWG | 272002F |
| 2 COND 12AWG "SUPER SPEAKER" | 272002GS |

## [illegible]



These cables are designed for motor and transformer leads, external wiring of machinery, building wiring, and ground wiring. They feature premium grade PVC jackets in a range of colors and are resistant to corrosion, heat & moisture.

| DESCRIPTION | PART # |
|---|---|
| 2 COND 12AWG UNSHIELDED 300V | 201002G |
| 2 COND 14AWG UNSHIELDED 300V | 201002F |
| 2 COND 16AWG UNSHIELDED 300VO | 201002ER |
| 2 COND 16AWG UNSHIELDED 300V | 201002EW |
| 2 COND 20AWG UNSHIELDED 300V | 201002C |
| 2 COND 12AWG SHIELDED 300V | 200002G |
| 2 COND 14AWG SHIELDED 300V | 200002F |
| 2 COND 16AWG SHIELDED 300V | 200002E |
| 2 COND 18AWG SHIELDED 300V | 200002D |
| 2 COND 20AWG SHIELDED 300V | 200002C |

***PLENUM* AND DIFFERENT CONDUCTOR COUNTS AND JACKET COLORS AVAILABLE. CONSULT YOUR SALESPERSON.**

## [illegible]

Three 75 ohm Coaxial cables and one 5 pair 24awg stranded cable with an overall foil shield. Used to connect Bloomberg terminals to control units.

| DESCRIPTION | PART # |
|---|---|
| BLOOMBERG PVC | 271018 |
| BLOOMBERG *PLENUM* | 291018 |

## [illegible]



These cables feature a number of mini RG62A/U 93 ohm coax cables under one jacket. Used primarily in IBM 3274, 3271, and 31 series controllers and IBM 3277, 3270, 3279, and 3278 terminals. We can make custom length assemblies for you in PVC or Plenum or provide you the tools and connectors to make them yourself. Other coax counts available.

| DESCRIPTION | PART # |
|---|---|
| 20 COND. MINI RG62A/U PVCO | 271021 |
| 24 COND. MINI RG62A/U PVC | 271022 |
| 34 COND. MINI RG62A/U PVC | 271023 |
| 24 COND. MINI RG62A/U *PLENUM* | 291022 |
| 34 COND. MINI RG62A/U *PLENUM* | 291023 |

## [illegible]



An RG59 coaxial cable bonded to a single pair 22awg stranded cable with an overall foil shield. Used for Atex computer systems.

| DESCRIPTION | PART # | REF# |
|---|---|---|
| ATEX PVCO | 272010 | 9265 |
| ATEX *PLENUM* | 292010 | |

## [illegible]



Available in an ultra flexible TPE jacketed cable with 2 to 4 conductors. Standard type features gray jacket and 2 bare copper conductors with 95% bare copper braid shield.

| DESCRIPTION | PART # |
|---|---|
| STANDARD 2 COND PVC GRAY. | 272080 |
| ULTRA 2 COND 22AWG TPEO | 272081 |
| ULTRA 4 COND 22AWG TPE | 272082 |

***PLEASE INDICATE JACKET COLOR FOR ULTRA CABLES: BLUE, ORANGE, RED, YELLOW OR BLACK.***

## [illegible]



Available in 8awg thru 20awg stranded bare copper, some with a foil shield.

| DESCRIPTION | PART # |
|---|---|
| 1 COND 8AWG UNSHIELDED 600V | 201110IQQ |
| 1 COND 12AWG UNSHIELDED 600V | 201110GQQ |
| 1 COND 18AWG UNSHIELDED 600V | 201110DQQ |

QQ**COLORS : BK=**BLACK, **BL=**BLUE, **RE=**RED, **GR=**GREEN, **OR=**ORANGE, **WH=**WHITE, **GY=**GRAY, **YE=**YELLOW, **BR=**BROWN.

[illegible]

# CUSTOM CABLE ASSEMBLIES

2 Hour Quote Response!

NCI Inc.

National Communications is Your First and Last Stop for Custom Made Cables. Our Cables are Guaranteed for Life
Follow the 10 Easy Steps to Your Quality Assembly. If You Need Some Help Just Call Our Knowledgeable Sales

## 1 Cable Type

1-Unshielded
2-Foil-Shielded
3-Foil and Braid Shielded
4-Flat
5-None
6-Cat5
7-Silver Satin
8-Other _____

## 2 Length: _____

Put "A" for Adapter




## 3 Cable Jacket Type

1-PVC
2-Plenum
3-None
4-Other _____

## 4 Pinning Specifications:

| A Pin# | Connector | B Pin# |
|---|---|---|
| | Examples | |
| 1/2 | | 1/4,5 |
| 1 | | |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |
| 6 | | |
| 7 | | |
| 8 | | |
| 9 | | |
| 10 | | |
| 11 | | |
| 12 | | |
| 13 | | |
| 14 | | |
| 15 | | |
| 16 | | |
| 17 | | |
| 18 | | |
| 19 | | |
| 20 | | |
| 21 | | |
| 22 | | |
| 23 | | |
| 24 | | |
| 25 | | |
| 26 | | |
| 27 | | |
| 28 | | |
| 29 | | |
| 30 | | |
| 31 | | |
| 32 | | |
| 33 | | |
| 34 | | |
| 35 | | |
| 36 | | |
| 37 | | |
| 38 | | |
| 39 | | |
| 40 | | |
| 41 | | |
| 42 | | |
| 43 | | |
| 44 | | |
| 45 | | |
| 46 | | |
| 47 | | |
| 48 | | |
| 49 | | |
| 50 | | |

## 5A Gender Male ☐ Female ☐

## 6A Connector Type (Circle one:)

1- DB9
2- DB15
3- DB25
4- DB37
5- DB50
6- HD15
7- HD26
8- HD44
9- HD62
10-HD78
11- 36 Pin Centronics
12- 24 Pin Telco
13- 50 Pin Telco Cat5
14- 50 Pin telco
15- RJ11 4 wire
16- RJ11 6 wire
17- RJ22 handset 4 wire
18- RJ45 8 wire
19- DEC™ MMJ
20- RJ69 10 wire
21- M/50
22- M/34 (V.35)
23- Spade Lugs, length
24- BNC
25- Other: _____

## 7A Special Instructions (Circle Options:)

1- One end cut (Blunt)
2- Pins Only
3- Plastic☐ Metalized☐ Metal☐
4- Slide Label
5- Thumbscrews
6- Ports
7- Screwlocks: Male or Female
8- Bail
9- 90 degree hood
Specify cable exit: _____
10- Pairing
11- Flying leads, length: _____
12- Label: _____
13- Other: _____

## 8A Drain Wire (Circle one:)

(Applies only to foil-shielded cables)
1- Cut drain wire
2- Pin drain by itself.....Pin# _____
4- Wrap drain w/conductor.....Pin# _____
5- Attach drain to shell

## 9 Quantity: _____

## 2 Hour Response!

Part#: _____
Price: _____
Delivery: _____
Comments: _____

## 5B Gender Male ☐ Female ☐

## 6B Connector Type (Circle one:)

1- DB9
2- DB15
3- DB25
4- DB37
5- DB50
6- HD15
7- HD26
8- HD44
9- HD62
10-HD78
11- 36 Pin Centronics
12- 24 Pin Telco
13- 50 Pin Telco Cat5
14- 50 Pin telco
15- RJ11 4 wire
16- RJ11 6 wire
17- RJ22 handset 4 wire
18- RJ45 8 wire
19- DEC™ MMJ
20- RJ69 10 wire
21- M/50
22- M/34 (V.35)
23- Spade Lugs, length
24- BNC
25- Other: _____

## 7B Special Instructions (Circle Options:)

1- One end cut (Blunt)
2- Pins Only
3- Plastic☐ Metalized☐ Metal☐
4- Slide Label
5- Thumbscrews
6- Ports
7- Screwlocks: Male or Female
8- Bail
9- 90 degree hood
Specify cable exit: _____
10- Pairing
11- Flying leads, length: _____
12- Label: _____
13- Other: _____

## 8B Drain Wire (Circle one:)

(Applies only to foil-shielded cables)
1- Cut drain wire
2- Pin drain by itself.....Pin# _____
3- Wrap drain w/conductor.....Pin# _____
4- Attach drain to shell

## 10

Name: _____
Title: _____
Company: _____
Address: _____
City: _____ State: _____ Zip: _____



Phone / Fax
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

**NO Cancels or Returns on Custom Cables**

# Cable Assemblies

| Length | Part# |
|---|---|
| 3ft | Q07211-003-? |
| 8ft | Q07211-008-? |
| 10ft | Q07211-010-? |
| 15ft | Q07211-015-? |
| 25ft | Q07211-025-? |
| 30ft | Q07211-030-? |
| 50ft | Q07211-050-? |
| 100ft | Q07211-100-? |
| Custom Lengths | Q07211-✶✶✶-? + |

✶✶✶ = Length in Feet

?=Color: 1=Bone, 2=Red, 3=Green,4=Blue, 5=Black, 6=Yellow
Standard Color is Bone

### Cross Over Patch Cables
for Hub to Hub Connections ONLY!

| Length | Part# |
|---|---|
| 2ft | N00056-002-? |
| 3ft | N00056-003-? |
| 4ft | N00056-004-? |
| 5ft | N00056-005-? |
| 6ft | N00056-006-? |
| 8ft | N00056-008-? |
| 10ft | N00056-010-? |
| 15ft | N00056-015-? |
| 30ft | N00056-030-? |
| Custom Lengths | N07211-✶✶✶-? + |



RJ45-RJ45.

| Description | Part # | 5 ft. | Part # | ft |
|---|---|---|---|---|
| 1 Pair 110-110 | 400014-005 | | 400014-010 | |
| 2 Pair 110-110 | 400016-005 | | 400016-010 | |
| 3 Pair 110-110 | 400018-005 | | 400018-010 | |
| 4 Pair 110-110 | 400020-005 | | 400020-010 | |
| 4 Pair 110-RJ45 | 400022-005 | | 400022-010 | |


*Other Lengths Available*



The 12 leg octopus cable can be used to go from concentrator to patch panel.
The 6 leg can be used to go from patch panel to patch panel.
NCI can custom make this cable to your specifications. Call for more info.

| Description | Part # |
|---|---|
| 2 Pair - 12 Leg 6' Telco w/RJ45 - CAT5 Pins 1,2,3,6 | N00035-006 |
| 4 Pair - 6 Leg 6' Telco w/RJ45 - Pins 1-8, 568B wiring | N00406-006 |



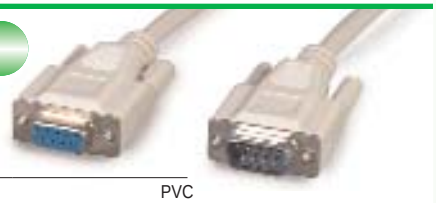

| Length | Part# |
|---|---|
| DB9M-DB9M Molded 6ft | Q00411-006 |
| DB9M-DB9M Molded 10ft | Q00411-010 |
| DB9M-DB9F Molded 6ft* | Q00421-006 |
| DB9M-DB9F Molded 10ft. | Q00421-010 |
| DB9M-DB9F Molded 15ft. | Q00421-015 |
| DB9F-DB9F Molded 6ft. | Q00431-006 |

| Length | Part# | |
|---|---|---|
| Custom Lengths - PVC | Q004?1✶✶✶-Q | PVC |
| *Plenum* | Q004?0✶✶✶-Q | *Plenum* |

✶✶✶ = Amount in Feet - ? = 1=MALE-MALE, 2=MALE-FEMALE, 3=FEMALE-FEMALE.



| Description | Part # |
|---|---|
| DB15M-DB15M Molded 6ft. | Q00611-006 |
| DB15M-DB15F Molded 6ft* | Q00621-006 |
| Custom Lengths - PVC | Q006?1✶✶✶-Q |
| *Plenum* | Q006?0✶✶✶-Q |

✶✶✶ = Amount in Feet - ? = 1=MALE-MALE, 2=MALE-FEMALE, 3=FEMALE-FEMALE.



| Description | Part # | | |
|---|---|---|---|
| HD15M-HD15M Molded 6ft | Q01411-006 | | |
| HD15M-HD15M Molded 10ft | Q01411-010 | | |
| HD15M-HD15M Molded 12ft | Q01411-012 | | |
| HD15M-HD15F Molded 6ft* | Q01421-006 | | |
| HD15M-HD15F Molded 10ft | Q01421-010 | | |
| HD15M-HD15F Molded 12ft | Q01421-012 | | |
| HD15M-HD15F Molded 15ft | Q01421-015 | | |
| Custom Lengths - PVC | Q014?1✶✶✶-Q | + | |
| *Plenum* | Q014?0✶✶✶-Q | + | |
| **SUPER-VGA HD15M-F Using MiniCoax 6ft** | **Q01721-006** | --- | --- |
| **SUPER-VGA HD15M-F Using MiniCoax 25ft** | **Q01721-025** | --- | --- |
| **SUPER-VGA HD15M-F Using MiniCoax 50ft** | **Q01721-050** | --- | --- |
| **SUPER-VGA Custom Lengths - PVC** | **Q017?1✶✶✶-Q** | + | |

✶✶✶ = Amount in Feet - ? = 1=MALE-MALE, 2=MALE-FEMALE, 3=FEMALE-FEMALE.

# CABLE ASSEMBLIES



DB25 MOLDED M-M, M-F, F-F

✶✶✶ = AMOUNT IN FEET

? =1=MALE-MALE, 2=MALE-FEMALE, 3=FEMALE-FEMALE.

| DESCRIPTION | PART # |
|---|---|
| 3FT. | Q0087?1-003 |
| 6FT | Q0087?1-006 |
| 10FT | Q0087?1-010 |
| 15FT | Q0087?1-015 |
| 20FT | Q0087?1-020 |
| 25FT | Q0087?1-025 |
| 35FT | Q0087?1-035 |
| 50FT | Q0087?1-050 |
| 75FT | Q0087?1-075 |
| 100FT | Q0087?1-100 |
| CUSTOM LENGTHS - PVC | Q0087?1✶✶✶-Q |
| PLENUM | Q0087?0✶✶✶-Q |



HD26 M-M, M-F, F-F

| DESCRIPTION | PART # |
|---|---|
| CUSTOM LENGTHS - PVC | Q0097?1✶✶✶-Q |
| PLENUM | Q0097?0✶✶✶-Q |

✶✶✶ = AMOUNT IN FEET

?= 1=MALE-MALE, 2=MALE-FEMALE, 3=FEMALE-FEMALE.



| DESCRIPTION | PART # |
|---|---|
| DB37M-DB37M MOLDED 3FT* | Q01011-003 |
| DB37M-DB37M MOLDED 6FT. | Q01011-006 |
| DB37M-DB37F MOLDED 3FT. | Q01021-003 |
| DB37M-DB37F MOLDED 6FT. | Q01021-006 |
| CUSTOM LENGTHS - PVC | Q0107?1✶✶✶-Q |
| PLENUM | Q0107?0✶✶✶-Q |

✶✶✶ = AMOUNT IN FEET ?= 1=MALE-MALE, 2=MALE-FEMALE, 3=FEMALE-FEMALE.



HD44 M-M, M-F, F-F

| DESCRIPTION | PART # | |
|---|---|---|
| CUSTOM LENGTHS - PVC | Q0117?1✶✶✶-Q | PVC |
| PLENUM | Q0117?0✶✶✶-Q | PLENUM |

✶✶✶ = AMOUNT IN FEET ?= 1=MALE-MALE, 2=MALE-FEMALE, 3=FEMALE-FEMALE.



| DESCRIPTION | PART # | |
|---|---|---|
| DB50M-DB50M MOLDED 6FT* | Q01211-006 | |
| DB50M-DB50F MOLDED 6FT. | Q01221-006 | |
| CUSTOM LENGTHS - PVC | Q0127?1✶✶✶-Q | PVC |
| PLENUM | Q0127?0✶✶✶-Q | PLENUM |


✶✶✶ = AMOUNT IN FEET ? = 1=MALE-MALE, 2=MALE-FEMALE, 3=FEMALE-FEMALE.




HD62 M-M, M-F, F-F

| DESCRIPTION | PART # | |
|---|---|---|
| CUSTOM LENGTHS - PVC | Q0137?1✶✶✶-Q | PVC |
| PLENUM | Q0137?0✶✶✶-Q | PLENUM |

✶✶✶ = AMOUNT IN FEET ? = 1=MALE-MALE, 2=MALE-FEMALE, 3=FEMALE-FEMALE.




| DESCRIPTION | PART # |
|---|---|
| M-M 6FT (A) | Q02211-006 |
| M-M 10FT | Q02211-010 |
| M-M 15FT | Q02211-015 |
| M-F 6FT | Q02221-006 |
| M-F 10FT | Q02221-010 |
| M-F 15FT | Q02221-015 |
| F-F 6FT | Q02231-006 |
| F-F 10FT | Q02231-010 |
| CUSTOM LENGTHS - PVC | Q0222?1✶✶✶-Q PVC |
| PLENUM | Q0222?0✶✶✶-Q PLENUM |




✶✶✶ = LENGTH IN FEET - ? = 1=MALE-MALE, 2=MALE-FEMALE, 3=FEMALE-FEMALE.

| DESCRIPTION | PART # |
|---|---|
| M-M 3FT (B) | Q02411-003 |
| M-M 6FT | Q02411-006 |
| M-M 10FT | Q02411-010 |
| M-F 3FT | Q02421-003 |
| M-F 6FT | Q02421-006 |
| M-F 10FT | Q02421-010 |
| CUSTOM LENGTHS - PVC | Q0242?1✶✶✶-Q PVC |
| PLENUM | Q0242?0✶✶✶-Q PLENUM |

✶✶✶ = LENGTH IN FEET - ? = 1=MALE-MALE, 2=MALE-FEMALE, 3=FEMALE-FEMALE.




PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# CABLE AS

| DESCRIPTION | PART # |
|---|---|
| IEEE 488 BUS CABLE 6FT | Q03641-006 |
| IEEE 488 BUS CABLE 14FT | Q03641-014 |
| IEEE 488 BUS CABLE 28FT | Q03641-028 |

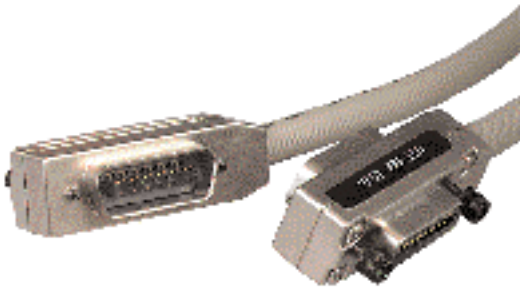

| DESCRIPTION | PART # |
|---|---|
| CUSTOM 12 PAIR TELCO 90° PVC* | P12??*** |
| PLENUM | Q12??*** |

*** = LENGTH IN FEET ?? = GENDER PP=MALE-MALE, PC=MALE-FEMALE, CC=FEMALE-FEMALE.

NOTE: ADD PER CONNECTOR FOR 180° ON ALL TELCO ASSEMBLIES.
HOOD BAIL LOCK & SHIELDED CABLES AVAILABLE. PLEASE CALL.




## 25 PAIR TELCO ASSEMBLY 90 DEGREES

| DESCRIPTION | PART # |
|---|---|
| 25 PAIR TELCO 90° 3FT | P25??003- L3 |
| 25 PAIR TELCO 90° 5FT | P25??005- L3 |
| 25 PAIR TELCO 90° 10FT | P25??010- L3 |
| 25 PAIR TELCO 90° 15FT | P25??015- L3 |
| 25 PAIR TELCO 90° 20FT | P25??020- L3 |
| 25 PAIR TELCO 90° 25FT | P25??025- L3 |
| 25 PAIR TELCO 90° 30FT | P25??030- L3 |
| 25 PAIR TELCO 90° 35FT | P25??035- L3 |
| 25 PAIR TELCO 90° 50FT | P25??050- L3 |


| DESCRIPTION | PART # | |
|---|---|---|
| 25 PAIR TELCO 90° 75FT | P25??075- L3 | |
| 25 PAIR TELCO 90° 100FT | P25??100- L3 | |
| 25 PAIR TELCO 90° 150FT | P25??150- L3 | |
| 25 PAIR TELCO 90° 200FT | P25??200- L3 | |
| CUSTOM 25 PAIR TELCO 90° PVC | P25??***- L3 | + |
| PLENUM | Q25??***- L3 | + |
| CUSTOM *NEW CAT 5* PVC | P25??***- L5 | + |
| *NEW CAT 5* PLENUM | Q25??***- L5 | + |

*** = LENGTH IN FEET ?? = GENDER PP=MALE-MALE, PC=MALE-FEMALE, CC=FEMALE-FEMALE, PX=MALE-BLUNT, CX=FEMALE-BLUNT.



| DESCRIPTION | PART # | |
|---|---|---|
| CUSTOM PVC | P50??***- L3 | + |
| PLENUM | Q50??***- L3 | + |

*** = LENGTH IN FEET
?? = GENDER PP=MALE-MALE, PC=MALE-FEMALE, CC=FEMALE-FEMALE, PX=MALE-BLUNT, CX=FEMALE-BLUNT.

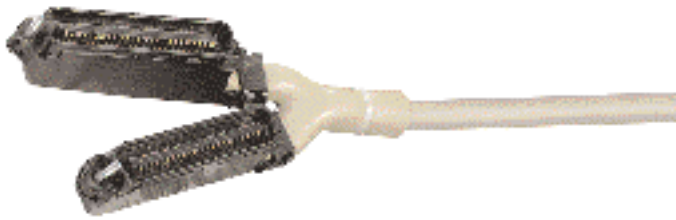

| DESCRIPTION | PART # | |
|---|---|---|
| CUSTOM PVC | P75??***- L3 | + |
| PLENUM | Q75??***- L3 | + |

*** = LENGTH IN FEET
?? = GENDER PP=MALE-MALE, PC=MALE-FEMALE, CC=FEMALE-FEMALE, PX=MALE-BLUNT, CX=FEMALE-BLUNT.



| DESCRIPTION | PART # | |
|---|---|---|
| CUSTOM PVC | P100??***- L3 | + |
| PLENUM | Q100??***- L3 | + |

*** = LENGTH IN FEET
?? = GENDER PP=MALE-MALE, PC=MALE-FEMALE, CC=FEMALE-FEMALE, PX=MALE-BLUNT, CX=FEMALE-BLUNT.



| DESCRIPTION | PART # |
|---|---|
| 2 WIRE 24 LEG 3' TELCO 50 (MALE)-RJ11 | M11003 |
| 4 WIRE 12 LEG 3' TELCO 50 (MALE)-RJ11 | M12003 |
| 6 WIRE 8 LEG 3' TELCO 50 (MALE)-RJ12 | M13003 |
| 8 WIRE 6 LEG 3' TELCO 50 (MALE)-RJ45 | M14003 |
| 2 WIRE 24 LEG 3' TELCO 50 (FEMALE)-RJ11 | M16003 |
| 4 WIRE 12 LEG 3' TELCO 50 (FEMALE)-RJ11 | M17003 |
| 6 WIRE 8 LEG 3' TELCO 50 (FEMALE)-RJ12 | M18003 |
| 8 WIRE 6 LEG 3' TELCO 50 (FEMALE()-RJ45 | M19003 |



# CABLE ASSEMBLIES










## SCSI - 1 CABLE ASSEMBLIES

| Description | Part # |
|---|---|
| DB25M-Centronic50M 3ft | Q04011-003 |
| DB25M-Centronic50M 6ft | Q04011-006 |
| DB25M-Centronic50M 10ft | Q04011-010 |

| Description | Part # |
|---|---|
| Centronic50M-DB50M 6ft | Q04211-006 |

| Description | Part # |
|---|---|
| Centronic50M-Centronic50F 3ft | Q02421-003 |
| Centronic50M-Centronic50F 6ft | Q02421-006 |
| Centronic50M-Centronic50F 10ft | Q02421-010 |

| Description | Part # |
|---|---|
| Centronic50M-Centronic50M 3ft | Q02411-003 |
| Centronic50M-Centronic50M 6ft | Q02411-006 |
| Centronic50M-Centronic50M 10ft | Q02411-010 |

## SCSI - 2 CABLE ASSEMBLIES

| Description | Part # |
|---|---|
| HPD50M-HPD50M 3ft | Q04411-003 |
| HPD50M-HPD50M 6ft | Q04411-006 |
| HPD50M-HPD50M 10ft | Q04411-010 |

| Description | Part # |
|---|---|
| HPD50M-HPD50F 6ft | Q04421-006 |
| HPD50M-HPD50F 10ft | Q04421-010 |

| Description | Part # |
|---|---|
| HPD50M-Centronic50M 3ft | Q04611-003 |
| HPD50M-Centronic50M 6ft | Q04611-006 |

| Description | Part # |
|---|---|
| HPD50M-DB50M 3ft | Q04811-003 |
| HPD50M-DB50M 6ft | Q04811-006 |
| HPD50M-DB50M 10ft | Q04811-010 |
| DB50M-DB50M 6ft | Q01211-006 |

| Description | Part # |
|---|---|
| HD Cent50 Male-Cent50 Male 3ft | Q50811-003 |
| HD Cent50 Male-Cent50 Male 6ft | Q50811-006 |
| HD Cent50 Male-DB50 Male 3ft | Q51011-003 |
| HD Cent50 Male-DB50 Male 6ft | Q51011-006 |
| HD Cent50 Male-HD Cent50 Male 3ft | Q51211-003 |
| HD Cent50 Male-HD Cent50 Male 6ft | Q51211-006 |

## SCSI - 3 CABLE ASSEMBLIES

| Description | Part # |
|---|---|
| HPD68 Male to Male 3' | QO3311-003 |
| HPD68 Male to Male 6' | QO3311-006 |
| HPD68M to Centronics 50M 3' | QO3511-003 |
| HPD68M to Centronics 50M 6' | QO3511-006 |
| HPD68M to SCSI 2 HPD 50M w/Latch 3' | QO3711-003 |
| HPD68M to SCSI 2 HPD 50M w/Latch 6' | QO3711-006 |
| HPD50 Male to SCSI 3 HPD 68M w/Screw 3' | QO3911-003 |
| HPD50 Male to SCSI 3 HPD 68M w/Screw 6' | QO3911-006 |
| HPD68M to 2 SCSI 2 HPD 50M w/Screw 6' | QO4111-006 |

| Description | Part # |
|---|---|
| HPD68M - Centronics 50M 6' | QO5811-006 |
| HPD68F - Centronics 50M 6' | QO5821-006 |
| HPD68 - SCSI 2 HPD 50 6' | QO5911-006 |
| HPD68F - DB50M 3' | QO6021-003 |
| HPD68M - Centronics 50F SCSI Adaptor | QO6121-00A |
| Single Ended Active HPD68 Terminator | QO6511-1 |
| SCSI 3M - SCSI1M Adaptor | QO6711-A |
| SCSI Fast Wide Cable 3' | Q06911-006 |
| SCSI Fast Wide Cable 6' | QO6911-003 |
| SCSI 3 Wide Internal 3 Conn 30" | QO6313-RIB |
| SCSI 3 Wide Internal 5 Conn 56" | QO6315-RIB |
| SCSI 3 Wide Internal 7 Conn 80" | QO6317-RIB |
| SCSI 3 Wide Internal 8 Conn 92" | QO6318-RIB |

## SPECIAL SCSI CABLES

| Description | Part # |
|---|---|
| **DEC SCSI Cable Assemblies** | |
| SCSI HPD68F-Centronic50M 6ft | Q05821-006 |
| SCSI HPD68F-DB50M 3ft. | Q06021-003 |
| **IBM SCSI Cable Assemblies** | |
| RISC HPD60M-Centronic50M 5ft | Q06011-005 |
| RISC HPD60M-Centronic50M/F 5ft. | Q06241-005 |
| **SCSI Flat Ribbon Drive Cable Assemblies** | |
| Single-Internal 18" (50Socket-50S.) | Q06411-002 |
| Dual-External 22"(50Socket-50S.-50S.) | Q06611-002 |
| **Special SCSI Cable Assemblies** | |
| SCSI-2 HPD100M-HPD100M 1ft | Q06811-001 |

☛ Due to Everchanging Technical Definitions, Changes Have Been Made to SCSI Terminology.

**SCSI-1** -Will remain the same
**SCSI-2** -Will also be know as **FAST SCSI**
**SCSI-3** -Will also be know as **ULTRA SCSI** or **ULTRA2 SCSI**

**NCI** will use **SCSI-1,2,3** as our terminology

**ULTRA SCSI**
includes FAST 20 and Double Speed SCSI

**ULTRA SCSI2**
includes FAST 40 devices


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

# CABLE ASSEMBLIES

These high speed cables are 34 conductor with a PVC jacket.


| DESCRIPTION | PART # |
|---|---|
| V.35 M-M 6FT. | Q76011-006 |
| V.35 M-M 10FT. | Q76011-010 |
| V.35 M-M 15FT | Q76011-015 |
| V.35 M-F 6FT (A) | Q76021-006 |
| V.35 M-F 10FT. | Q76021-010 |
| V.35 M-F 15FT | Q76021-015 |
| V.35 F-F 6FT. | Q76031-006 |
| V.35 F-F 10FT. | Q76031-010 |
| V.35 F-F 15FT. | Q76031-015 |
| CUSTOM 34 CDTR - PVC | Q760?1-✶✶✶ |
| PLENUM | Q760?0-✶✶✶ |
| CUSTOM 18 CDTR - PVC | Q761?1-✶✶✶ |
| PLENUM | Q761?0-✶✶✶ |


✶✶✶ = LENGTH IN FEET


? =GENDER: 1=MALE-MALE, 2=MALE-FEMALE, 3=FEMALE-FEMALE.

| DESCRIPTION | PART # |
|---|---|
| CUSTOM 50 CDTR-PVC (B) | Q762?1-✶✶✶ |
| PLENUM | Q762?0-✶✶✶ |

✶✶✶ = LENGTH IN FEET ? =GENDER:
1=MALE-MALE, 2=MALE-FEMALE, 3=FEMALE-FEMALE.

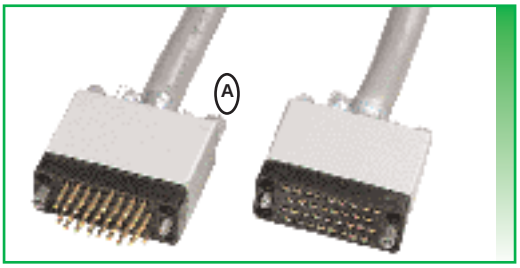

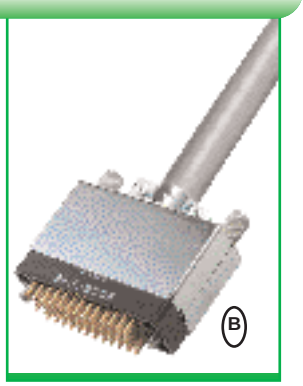
| DESCRIPTION | PART # |
|---|---|
| (A) FULL HANDSHAKE DB25 M-F | 403250 |
| (B) STANDARD 1 DB25 M-F | 403248 |
| (C) STANDARD 2 DB25 M-F | 403254 |
| (D) NO HANDSHAKE DB25 M-F | 403252 |
| (E) PRINTER DB25 M-F | 403246 |
| (F) STANDARD NULL DB9 M-F | 403244 |

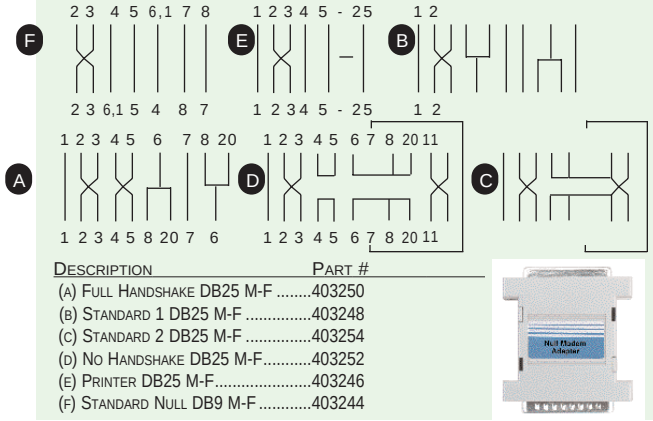


| DESCRIPTION | PART # | |
|---|---|---|
| DB25M - CENTRONIC 36M 3FT | Q00121-003 | |
| DB25M - CENTRONIC 36M 6FT | Q00121-006 | |
| DB25M - CENTRONIC 36M 10FT | Q00121-010 | |
| DB25M - CENTRONIC 36M 15FT | Q00121-015 | |
| DB25M - CENTRONIC 36M 20FT | Q00121-020 | |
| DB25M - CENTRONIC 36M 25FT | Q00121-025 | |
| DB25M - CENTRONIC 36M 35FT | Q00121-035 | |
| DB25M - CENTRONIC 36M 50FT | Q00121-050 | |
| CUSTOM LENGTHS - PVC | Q00121✶✶✶-Q | PVC |
| PLENUM | Q00120✶✶✶-Q | PLENUM |

✶✶✶ = AMOUNT IN FEET









Serial Printer (Null Modem) cable works on most serial printers, except HP Laser.

| DESCRIPTION | PART # | |
|---|---|---|
| DB9F-DB25M 6FT. | Q02821-006 | |
| DB9F-DB25M 10FT. | Q02821-010 | |
| DB9F-DB25M 15FT. | Q02821-015 | |
| CUSTOM LENGTHS - PVC | Q02821-✶✶✶-Q | PVC |
| PLENUM | Q02820-✶✶✶-Q | PLENUM |

✶✶✶ = AMOUNT IN FEET

| DESCRIPTION | PART # |
|---|---|
| DB9F-DB25M ADAPTER | Q03821-00A |
| DB9F-DB25F ADAPTER | Q03831-00A |
| DB9M-DB25M ADAPTER | Q03811-00A |
| DB9F-DB25M 1FT | Q03821-001 |
| DB9F-DB25M 6FT | Q03821-006 |
| DB9F-DB25M 10FT | Q03821-010 |
| DB9F-DB25M 15FT | Q03821-015 |
| CUSTOM LENGTHS - PVC | Q038?1-✶✶✶-Q PVC |
| PLENUM | Q038?0-✶✶✶-Q PLENUM |

✶✶✶ = AMOUNT IN FEET ?=GENDER: 1=MALE-MALE, 2=MALE-FEMALE, 3=FEMALE-FEMALE

| DESCRIPTION | PART # | |
|---|---|---|
| DB9F-DB25M 6FT. | Q03421-006 | |
| DB9F-DB25M 10FT | Q03421-010 | |
| CUSTOM LENGTHS - PVC | Q03421-✶✶✶-Q | PVC |
| PLENUM | Q03420-✶✶✶-Q | PLENUM |

✶✶✶ = AMOUNT IN FEET

| DESCRIPTION | PART # | |
|---|---|---|
| DB9F-DB9F 6FT. | Q03031-006 | |
| CUSTOM LENGTHS - PVC | Q03031-✶✶✶-Q | PVC |
| PLENUM | Q03030-✶✶✶-Q | PLENUM |

✶✶✶ = AMOUNT IN FEET

| DESCRIPTION | PART # | |
|---|---|---|
| DB25M-DB25F 6FT | Q03221-006 | |
| DB25M-DB25F 10FT | Q03221-010 | |
| CUSTOM LENGTHS - PVC | Q03221-✶✶✶-Q | PVC |
| PLENUM | Q03220-✶✶✶-Q | PLENUM |

✶✶✶ = AMOUNT IN FEET

Serial Printer (Null Modem) cable works on most serial printers, except HP Laser.

| DESCRIPTION | PART # | |
|---|---|---|
| DB25M-M, M-F, F-F 6FT. | Q026?1-006 | |
| DB25M-M, M-F, F-F 10FT. | Q026?1-010 | |
| DB25M-M, M-F, F-F 15FT. | Q026?1-015 | |
| DB25M-M, M-F, F-F 20FT. | Q026?1-020 | |
| DB25M-M, M-F, F-F 25T. | Q026?1-025 | |
| CUSTOM LENGTHS - PVC | Q026?1-✶✶✶-Q | PVC |
| PLENUM | Q026?0-✶✶✶-Q | PLENUM |

✶✶✶ = AMOUNT IN FEET ? =GENDER: 1=MALE-MALE, 2=MALE-FEMALE, 3=FEMALE-FEMALE.

# CABLE ASSEMBLIES



| DESCRIPTION | PART # | |
|---|---|---|
| MINI DIN 3M - MINI DIN 3M 6FT | Q76311-006 | |
| MINI DIN 3M - MINI DIN 3F 6FT | Q76321-006 | |
| MINI DIN 4M - MINI DIN 4M 6FT | Q76411-006 | |
| MINI DIN 6M - MINI DIN 6M 6FT | Q01811-006 | |
| MINI DIN 6M - MINI DIN 6M 12FT | Q01811-012 | |
| MINI DIN 6M - MINI DIN 6F 6FT | Q01821-006 | |
| MINI DIN 6M - MINI DIN 6F 12FT | Q01821-012 | |
| MINI DIN6 CUSTOM LENGTHS-PVC | Q018?1✶✶✶-Q | PVC |
| PLENUM | Q018?0✶✶✶-Q | PLENUM |
| MD8M-MD8M- STRAIGHT - 6FT | Q32211-006 | |
| MD8M-MD8M- STRAIGHT - 12FT | Q32211-012 | |
| MD8M-MD8F EXTENDER - 6FT* | Q32321-006 | |
| MD8M-MD8F EXTENDER - 12FT | Q32321-012 | |
| MINI DIN 9M - MINI DIN 9M 6FT | Q76611-006 | |
| MINI DIN 9M - MINI DIN 9M 12FT | Q76611-012 | |
| DIN 4M - DIN 4M 6FT | Q76811-006 | |
| DIN 5M-DIN 5M 6FT | Q01611-006 | |
| DIN 5M-DIN 5M 12FT | Q01611-012 | |
| DIN 5M-DIN 5F 6FT | Q01621-006 | |
| DIN 5M-DIN 5F 10FT | Q01621-010 | |
| DIN 5M-DIN 5F 25FT | Q01621-025 | |
| DIN 5 CUSTOM LENGTHS - PVC | Q016?1✶✶✶-Q | PVC |
| PLENUM | Q016?0✶✶✶-Q | PLENUM |
| DIN 6M - DIN 6M 6FT | Q77011-006 | |
| DIN 6M - DIN 6F 6FT | Q77021-006 | |
| DIN 8M - DIN 8M 6FT | Q77211-006 | |
| DIN 8M - DIN 8F 6FT | Q77221-006 | |

✶✶✶ = AMOUNT IN FEET




| DESCRIPTION | PART # |
|---|---|
| DIN 5 FEMALE TO MINI 6 MALE ADAPTER (A) | Q98121-A |
| DIN 5 FEMALE TO MINI 6 MALE 1 FT (B). | Q98121-001 |
| DIN 5 MALE TO MINI 6 FEMALE ADAPTER | Q98221-A |
| DIN 5 MALE TO MINI 6 FEMALE 1 FT | Q98221-001 |


| DESCRIPTION | PART # | |
|---|---|---|
| RG59 F (MALE) TO F (MALE) PVC | N00385-✶✶✶ | PVC OR PLENUM |
| RG59 F (MALE) TO BNC (MALE) PVC | N00399-✶✶✶ | PVC OR PLENUM |
| RG59 BNC (MALE) TO BNC (MALE) PVC | N00027-✶✶✶ | PVC OR PLENUM |
| 75 OHM TERMINATOR BNC TYPE | 326904 | |
| 75 OHM TERMINATOR F TYPE | 380057 | |



BIG SAVINGS

NCI offers this hard drive cable for far less than the original manufacturer. We carry a full line of DEC compatible products. Call our knowledgeable sales department for more information.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| FLAT HIGH SPEED HARD DRIVE CABLE | Q04711-050 | BC26V |

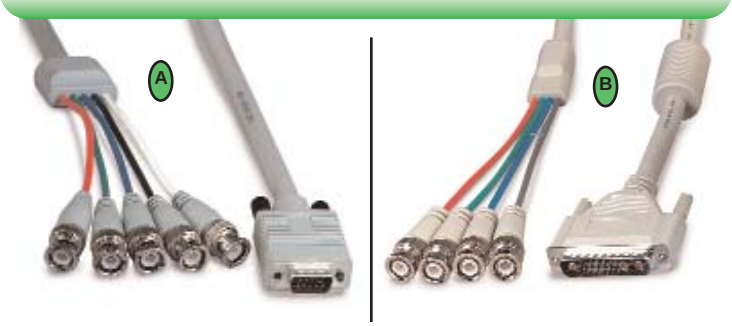


| DESCRIPTION | PART # | |
|---|---|---|
| 3 BNC-DB15 MALE | 6FT | Q12611-006 |
| 4 BNC-4 BNC | 8FT | Q11411-008 |
| 4 BNC-DB13W3 MALE (B) | 6FT | Q10611-006 |
| 4 BNC-DB13W3 MALE W/DIP SWITCH | 6FT | Q10811-006 |
| 4 BNC-DB13W3 FEMALE | 6FT | Q11011-006 |
| 4 BNC-HD15 MALE | 6FT | Q12211-006 |
| 5 BNC-5 BNC | 8FT | Q11611-008 |
| 5 BNC-DB15 MALE | 6FT | Q12411-006 |
| 5 BNC-HD15 MALE (A) | 6FT | Q12011-006 |
| DB13W3 MALE-DB13W3 MALE | 6FT | Q11211-006 |
| DB13W3 MALE-DB13W3 FEMALE | 6FT | Q11811-006 |
| SONY VGA GENDER CHANGER | | Q07211-00A |
| SONY MULTI-SYNC MONITOR CABLE | 6FT | Q07411-006 |
| NEC VGA GENDER CHANGER | | Q07611-00A |
| HITACHI VGA CHANGER | | Q07811-00A |
| SAMSUNG CN 4551 VGA CABLE | 6FT | Q08011-006 |
| MITSUBISI 1381 VGA CABLE | 6FT | Q08211-006 |
| MITSUBISI 1451 VGA CABLE | 6FT | Q08411-006 |
| THOMSON 4375 VGA CABLE | 6FT | Q08611-006 |
| TATUNG VGA GENDER CHANGER | | Q08811-00A |
| TATUNG OR TAXAN 7700 VGA CABLE | 6FT | Q09011-006 |
| SONY VGA MONITOR TO EGA CHANGER | | Q09211-00A |
| NEC VGA MONITOR TO EGA CHANGER | | Q09411-00A |
| TATUNG VGA MONITOR TO EGA CHANGER | | Q09611-00A |
| MAC II TO SONY VGA CABLE | 6FT | Q09811-006 |
| MAC II TO MITSUBISI VGA CABLE | 6FT | Q10011-00A |
| MAC LC TO VGA MONITOR ADAPTER | | Q10211-00A |
| VGA Y CABLE (2HD-15S 1HD-15P) | 6" | Q10411-001 |



| DESCRIPTION | PART # |
|---|---|
| HARD DRIVE - 2 CABLES (34 & 20PIN) | 380450 |
| HARD DRIVE & FLOPPY - 3 CABLES (2-34 & 20PIN) | 380452 |
| IDE H.D. DUAL (40PIN) & AT FLOPPY DUAL (34PIN) | 380454 |
| IDE HARD DRIVE SINGLE (40PIN) | 380456 |
| IDE HARD DRIVE DUAL (40PIN) | 380458 |
| FLOPPY AT DUAL | 380460 |
| FLOPPY XT DUAL-3 CARDEDGE-TWIST 10-16 | 380462 |
| HARD DRIVE CABLE AT DUAL TWIST 25-29 | 380464 |
| HARD DRIVE CABLE AT (DUAL PURPOSE & 3.5) | 380466 |
| FLOPPY CABLE AT (DUAL FLOPPY & TAPE BACK-UP) | 380468 |



| DESCRIPTION | PART # |
|---|---|
| BANTAM-BANTAM 1' | 332411 |
| BANTAM-BANTAM 3' | 332401 |
| BANTAM-BANTAM 5' | 332407 |
| BANTAM-BANTAM 25' | 332415 |
| BANTAM-310 8' | 332409 |
| 310M-BANTAM F ADAPTER | 332413 |
| 2COND LOOP BACK PLUG | 332419 |
| DOUBLE LOOP BACK PLUG | 332403 |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST


Prices Change Frequently.
Please Call for Most Current Pricing.

# CABLE ASSEMBLIES



## Telect Loopback Plug

| DESCRIPTION | PART # |
|---|---|
| TELECT LOOPBACK PLUG | 541701 |



## DB25M-Cent36

The premium quality Belkin IEEE 1284-1994 compliant "A-B" cable assembly is designed to fully support all of the capabilities and advantages of the IEEE 1284 standard, including all high speed and bi-directional/Bi-tronic data transmission. It will also provide superior performance in all other PC to parallel printer applications, including the use of all non-IEEE 1284 computers and printers.

-This cable features a DB25 "A" connector for the PC and a Centronics 36P "B" connector for the printer. It has been fully tested and certified by Belkin to be compliant with the IEEE 1284-1994 and other applicable industry standards.
-This cable will perform flawlessly in all modes, including Centronics compatible, Bi-Directional, Bi-tronic, Nibble, Byte, ECP, EPP, Level 1&2, and Type 1, 2, & 3, and with all PC's and printers

| DESCRIPTION | PART # |
|---|---|
| BELKIN DB25M-CENT36M | 415205 |

## Mini Din 6F-DB9F Adapter



| DESCRIPTION | PART # |
|---|---|
| MINI DIN 6F-DB9F ADAPTER | Q98231-A |



## DB25M-M

The premium quality Belkin IEEE 1284-1994 compliant "A-A" cable assembly is designed to fully support all of the capabilities and advantages of the IEEE 1284 standard, including all high speed and bi-directional/Bi-tronic data transmission. It will also provide superior performance in all other PC to switch box applications.

-This cable features a DB25 "A" connector for the PC and a DB25 "A" connector for the switch box. It has been fully tested and certified by Belkin to be compliant with the IEEE 1284-1994 and other applicable industry standards.
-This cable will perform flawlessly in all modes, including Centronics compatible, Bi-Directional, Bi-tronic, Nibble, Byte, ECP, EPP, Level 1&2, and Type 1, 2, & 3, and with all PC's and printers

| DESCRIPTION | PART # |
|---|---|
| BELKIN DB25M-M | 541905 |



## RJ45-RJ45 Patch Cable

| DESCRIPTION | PART # |
|---|---|
| AMP MODULAR PLUG CABLE ASSEMBLY CAT5, RJ45-RJ45 PATCH CABLE 8' | 315114 |

## V.24 - V.35 Interface Converter

The V.24 - V.35 Interface Converter connects two data communications products: one has a V.24 interface and the other has a V.35 interface. The Converter is used in synchronous applications and operates at data rates up to 64 Kbps. It converts the physical as well as the electrical interfaces. Its circuitry converts the interface within short range -- use the Converter to connect devices located close to each other (less than 6.5 feet [2 m] apart).

The Converter operates without AC power, using ultra-low power from the DTE and DCE equipment data and control signals. It is switch-selectable for one of the following two applications:

- Connecting a V.24 (RS-232) DTE to a V.35 DCE
- Connecting a V.24 (RS-232) DCE to a V.35 DTE

The Converter offers these features:

- Cable and connectors are built into a single unit
- Transparent to protocol
- Operates at speeds up to 64 Kbps
- Quick and easy to install
- Works without AC power

**Specifications**

Speed - Up to 64 Kbps
Maximum Distance - 6.5 ft. (2.0 m)
Operation - Synchronous
Leads Supported - V.35: A, B, C, D, E, F, H, P, R, S, T, U, V, W, X, Y, AA
V.24/RS-232: 1, 2, 3, 4, 5, 6, 7, 8, 15, 17, 20,
Indicators - None
Flow Control - Provided by attached devices (transparent to protocol)
Interface - V.24/RS-232 and V.35; both DTE/DCE shunt-selectable
Connectors - V.24: DB25 (male), V.35: 34-pin (male or female)
Power - Derives power from interface
Size - 0.9"Hx2.1"Wx4.3"D (2.2x5.5x9 cm)
Weight - 0.9 lb. (0.4 kg), including cable and connectors



| DESCRIPTION | PART# |
|---|---|
| EAZY V.24 - V.35 INTERFACE CONVERTER | 313549 |

***Phone (973) 325-3151 Fax (973) 325-2690***
***Email ncisales@trynci.com Hours Mon–Fri 9-4 EST***

NCI INC.

## SHIELDED 568A/B

NEW

**Shielded Keystone Jack Category 5, 568A or 568B, features AT&T 110 IDC connector. Provides a direct punch-down (with termination pattern the same as the UMI). 110 punch-down tool recommended for termination. Fits any Keystone port opening .580" x .790" common among competitor faceplates.**




CAT 5

SHIELDED 568A/B
PART #
538401

ICC's Engineering Department designs and develops new technologies for our interconnect customers. As an active member of the Telecommunications Industry Association, ICC guarantees our customers that every ICC product will meet or exceed the highest industry standards of quality and reliability.

ICC's Quality Control Department specifications ensure strict compliance to FCC, TIA, and UL standards by inspecting and testing every component before it leaves our warehouse. As a result, we have the lowest product defect and return rate in the industry.

ICC



Back of Modules

### FIBER OPTIC



PART #
312245
COLORS AVAILABLE **5-6-9**

### MODULAR CAT5 RJ45



PART #
312201
COLORS AVAILABLE **0-4-5-6-7-9**

### MODULAR CAT3 RJ45



PART #
312202
COLORS AVAILABLE **0-4-5-6-7-9**

### MODULAR 6P6C RJ12



PART #
312225
COLORS AVAILABLE **0-5-6-9**

### MODULAR MMJ



PART #
312243
COLORS AVAILABLE **5-6-9**

### FEEDTHROUGH COUPLERS MODULES RJ12



PART #
312205
COLORS AVAILABLE **0-6-9**

### FEEDTHROUGH COUPLERS MODULES



PART #
312207
COLORS AVAILABLE **0-6-9**

### FEEDTHROUGH BNC MODULES



PART #
311478
COLORS AVAILABLE **5-6-9**

### FEEDTHROUGH CATV MODULES



PART #
312229
COLORS AVAILABLE **5-6-9**

### BLANK FILL-IN MODULES



PART #
312221
COLORS AVAILABLE **5-6-9**

### ROUND HOLE INSERTS



PART #
312237
COLORS AVAILABLE **5-6-9**

### COLOR IDENTIFICATION



PART #
312235
COLORS AVAILABLE **0-4-5-6-7-9**

### 1 PORT SINGLE GANG FACE



PART #
312209
COLORS AVAILABLE **5-6-9**

### 2 PORT SINGLE GANG FACE PLATE



PART #
312211
COLORS AVAILABLE **5-6-9**

### 3 PORT SINGLE GANG FACE



PART #
312213
COLORS AVAILABLE **5-6-9**

### 4 PORT SINGLE GANG FACE PLATE




PART #
312215
COLORS AVAILABLE **5-6-9**

### 6 PORT SINGLE GANG FACE PLATE



PART #
312217
COLORS AVAILABLE **5-6-9**

### 12 PORT DOUBLE GANG FACE



PART #
312233
COLORS AVAILABLE **5-6-9**

### MOUNTING BOX

SINGLE & DOUBLE GANG



| TYPE | PART # |
|---|---|
| SINGLE GANG | 312223 |
| DOUBLE GANG | 312241 |

COLORS AVAILABLE **5-6-9**

### SURFACE MOUNT BOX



PART #
312203
COLORS AVAILABLE **5-6-9**

### SURFACE MOUNT BOX



PART #
312219
COLORS AVAILABLE **5-6-9**

### DUPLEX MODULAR MTNG PLATE




PART #
312231
COLORS AVAILABLE **5-6-9**

COLORS KEY SUFFIX 0=Black 4=Blue 5=White 6=Grey 7=Red 9=Ivory

# CONNECTORS

## TYPES

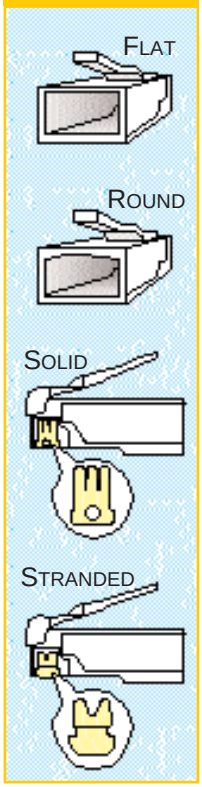




## AMP

| DESCRIPTION | PART # |
|---|---|
| RJ11 PLUG 6 POS X 4 CONTACT SOLID | 314915 |
| RJ12 PLUG 6 POS X 6 CONTACT | 315101 |
| RJ12 PLUG 6 POS X 6 CONTACT ROUND SOLID | 315102 |
| RJ45 PLUG 8 POS X 8 CONTACT CAT5 | 315015 |
| RJ45 PLUG 8 POS X 8 CONTACT | 414030-AMP |
| RJ45 PLUG 8 POS X 8 CONTACT ROUND SOLID TYPE | 414030RSO-AMP |
| RJ45 PLUG 8 POS X 8 CONTACT KEYED | 414031-AMP |
| RJ45 PLUG 8 POS X 8 CONTACT KEYED ROUND SOLID | 414031RSO-AMP |
| RJ45 PLUG 8 POS X 8 CONTACT ROUND STRANDED | 414030RST-AMP |
| MMJ PLUG 6 POS X 6 CONTACT | 315103 |
| MMJ PLUG 6 POS X 6 CONTACT ROUND SOLID | 315104 |

## NCI FLAT STRANDED TYPE

| DESCRIPTION | PART # |
|---|---|
| 4 POS HANDSET RJ22 | 414002 |
| 4 POS RJ11 | 414005 |
| 6 POS RJ12 | 414020 |
| 6 POS MMJ DEC TYPE | 414021 |
| 8 POS RJ45 | 414030 |
| 8 POS RJ45 KEYED | 414031 |
| 10 POS RJ69 | 414035 |
| 10 POS RJ69 KEYED | 414038 |

## ROUND STRANDED TYPE

| DESCRIPTION | PART # |
|---|---|
| 4 POS RJ11 | 414005RST |
| 6 POS RJ12 | 414020RST |
| 6 POS MMJ DEC TYPE | 414021RST |
| 8 POS RJ45 | 414030RST |
| 8 POS RJ45 KEYED | 414031RST |


## ROUND SOLID TYPE

| DESCRIPTION | PART # |
|---|---|
| 4POS RJ11 | 414005RSO |
| 6POS RJ12 | 414020RSO |
| 6POS MMJ DEC TYPE | 414021RSO |
| 8POS RJ45 | 414030RSO |
| 8POS RJ45 KEYED | 414031RSO |



## SHIELDED 8 POSITION CONNECTORS

| DESCRIPTION | PART # |
|---|---|
| 8POS RJ45 FLAT CABLE TYPE | 414056 |
| 8POS RJ45 ROUND STRANDED TYPE | 414057 |
| 8POS RJ45 ROUND SOLID TYPE | 414058 |
| 8POS RJ45 DELUXE CONNECTOR* | 414059 |



| DESCRIPTION | PART # |
|---|---|
| RUBBER STRAIN RELIEF PLUG PROTECTOR (BLACK) | 414034 |
| PLASTIC STRAIN RELIEF PLUG PROTECTOR (GREY)2 PIECE | 414034-GRAY |
| RUBBER STRAIN RELIEF PLUG PROTECTOR (RED) | 414034-RED |
| RUBBER STRAIN RELIEF PLUG PROTECTOR (YELLOW) | 414034-YELLOW |

## MODULAR TO D-SUB ADAPTERS

Modular to D-sub adapters are 1 or 2 Piece construction that have the modular jack leads pre-terminated with pins or sockets for loading into a D-sub connector. Easily assembled on site or can be custom configured by technicians.



| MOD ADAPTER TYPE | 4 COND RJ11 | 6 COND RJ12 | 6 COND MMJ | 8COND RJ45 | 10COND RJ69 |
|---|---|---|---|---|---|
| DB9 PIN 1 PIECE MALE | 441175 | 441171 | 441173 | 441205 | 441254 |
| DB9 PIN 1 PIECE FEMALE | 441170 | 441172 | 441174 | 441202 | 441255 |
| DB15 PIN 1 PIECE MALE | 441176 | 441177 | 441181 | 441208 | 441256 |
| DB15 PIN 1 PIECE FEMALE | 441178 | 441179 | 441182 | 441207 | 441257 |
| DB25 PIN 1 PIECE MALE | 441185 | 441190 | 441192 | 441210 | 441258 |
| DB25 PIN 1 PIECE FEMALE | 441180 | 441191 | 441193 | 441220 | 441259 |
| DB9 PIN 2 PIECE MALE | 441230 | 441231 | 441232 | 441233 | 441260 |
| DB9 PIN 2 PIECE FEMALE | 441234 | 441235 | 441236 | 441237 | 441261 |
| DB15 PIN 2 PIECE MALE | 441238 | 441239 | 441240 | 441241 | 441262 |
| DB15 PIN 2 PIECE FEMALE | 441242 | 441243 | 441244 | 441245 | 441263 |
| DB25 PIN 2 PIECE MALE | 441246 | 441247 | 441248 | 441249 | 441264 |
| DB25 PIN 2 PIECE FEMALE | 441250 | 441251 | 441252 | 441253 | 441265 |

**PRICING** .....1-24 ..... Per Adapter for Colors.
....25-49 .....
....50-99 .....
100-250 .....

STANDARD COLOR IS GREY. MOST ADAPTERS ARE ALSO AVAILABLE IN COLORS: 0=BLACK, 1=RED, 2=BLUE, 3=YELLOW, 4=GREEN ADD ADD FOR WIRING MOD TAPS

### DUAL MOD TAP

| DESCRIPTION | PART # |
|---|---|
| SPECIAL DUAL RJ45 TO DB25 MALE | 411270 |

## MODULAR ILINE COUPLERS



| DESCRIPTION | PART # |
|---|---|
| 4 COND (RJ11) HANDSET TYPE | 414060E |
| 4 COND (RJ11) STANDARD | 414060 |
| 6 COND (RJ12) STANDARD | 414060A |
| 6 COND MMJ TYPE | 414060B |
| 8 COND (RJ45) STANDARD | 414060C |
| 8 COND (RJ45) SHIELDED | 414060P |
| 8 COND (RJ45) CAT5 | 318315 |
| 10 COND (RJ69) STANDARD | 414060D |


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

## CAT5

| DESCRIPTION | PART # |
|---|---|
| TELCO HOOD 90° FOR CAT5 PLUG | 403249 |
| TELCO HOOD 120° FOR CAT5 PLUG | 403259 |
| TELCO PLUG CAT 5 | 403247 |


Telco Hood 90°


Telco Hood 120°

## 50 POSITION *24/26 AWG SOLID OR 24AWG STRANDED*

| DESCRIPTION | PART # |
|---|---|
| HOOD KIT 90° | 413050 |
| HOOD KIT 180° | 413051 |

| DESCRIPTION | MALE# | FEMALE # | 1-49 | 50-99 | 100-999 |
|---|---|---|---|---|---|
| CONNECTOR ONLY BAIL | 417073 | ---------- | | | |
| CONNECTOR ONLY SCREW | 413040 | 413045 | | | |

| DESCRIPTION | MALE# | FEMALE # | 1-49 | 50-99 | 100-999 |
|---|---|---|---|---|---|
| CONNECTOR KIT SCREW 90° | 413060 | 413065 | | | |
| CONNECTOR KIT SCREW 180° | 413061 | 413066 | | | |
| CONNECTOR KIT BAIL 90° | 413081 | ---------- | | | |
| CONNECTOR KIT BAIL 180° | 413082 | ---------- | | | |
| CONNECTOR KIT MALE/FEMALE BI 90° | -------411000-------- | | | | |

| DESCRIPTION | MALE# | FEMALE # | 1-49 | 50-99 | 100-999 |
|---|---|---|---|---|---|
| 22 AWG CONNECTOR KIT SCREW 90° | 413056 | 413057 | | | |



## 36 POSITION *24/26 AWG SOLID OR 24AWG STRANDED*

| DESCRIPTION | PART # |
|---|---|
| HOOD KIT 90° | 314932 |
| HOOD KIT 180° | 314931 |

| DESCRIPTION | MALE# | FEMALE # | 1-49 | 50-99 | 100-999 |
|---|---|---|---|---|---|
| CONNECTOR ONLY BAIL | 314934 | ---------- | | | |
| CONNECTOR ONLY SCREW | 314929 | 314928 | | | |

| DESCRIPTION | MALE# | FEMALE # | 1-49 | 50-99 | 100-999 |
|---|---|---|---|---|---|
| CONNECTOR KIT SCREW 90° | 314996 | 314938 | | | |
| CONNECTOR KIT SCREW 180° | 314940 | 314942 | | | |
| CONNECTOR KIT BAIL 90° | 314944 | 314946 | | | |
| CONNECTOR KIT BAIL 180° | 314948 | 314950 | | | |

## 24 POSITION *24/26 AWG SOLID OR 24AWG STRANDED*

| DESCRIPTION | PART # |
|---|---|
| HOOD KIT 90° | 413077 |
| HOOD KIT 180° | 413078 |

| DESCRIPTION | MALE# | FEMALE # | 1-49 | 50-99 | 100-999 |
|---|---|---|---|---|---|
| CONNECTOR ONLY BAIL | 413086 | ---------- | | | |
| CONNECTOR ONLY SCREW | 413070 | 413085 | | | |

| DESCRIPTION | MALE# | FEMALE # | 1-49 | 50-99 | 100-999 |
|---|---|---|---|---|---|
| CONNECTOR KIT SCREW 90° | 413046 | 413047 | | | |
| CONNECTOR KIT SCREW 180° | 413048 | 413049 | | | |
| CONNECTOR KIT BAIL 90° | 413083 | ---------- | | | |
| CONNECTOR KIT BAIL 180° | 413084 | ---------- | | | |

Also Available in 22 AWG

## TELCO CONNECTOR HARDWARE &



| DESCRIPTION | PART # |
|---|---|
| FEMALE BAIL LATCHES | 515071 |
| DUST COVER MALE BLUE | 515072 |
| DUST COVER FEMALE RED | 515073 |
| FINGER BOOTS 50PR 1- 2 | 515074 |
| FINGER BOOTS 75PR 1- 2- 3 | 515075 |
| FINGER BOOTS 100PR 1- 2- 3- 4 | 515076 |
| AMP 25 PAIR LACINGCOMB | 515066 |
| BUTTERFLY INSTALL TOOL WITH CASE | 515065 |
| T- HANDLE WIRE INSERTION TOOL | 515070 |

# V.35

These connectors are used in V.35 applications. Our special head comes with screwlocks and a superior stain relief. We carry contacts for 20- 24 AWG cable which have 30 mil gold plating.



## V.35 CONNECTORS

| DESCRIPTION | PART # |
|---|---|
| V.35 MALE CONNECTOR | 311420 |
| V.35 FEMALE CONNECTOR | 311425 |
| V.35 MALE COMPLETE KIT: HOOD, CONN, PINS | 311106 |

## V.35 HOOD KIT

| DESCRIPTION | PART # |
|---|---|
| HOOD KIT | 311430 |
| SHROUD | 311432 |
| HOOD KIT WITH SHROUD | 311431 |

## V.35 CONTACTS

| DESCRIPTION | PART # |
|---|---|
| MALE PINS 20- 24 AWG | 311440 |
| FEMALE PINS 20- 24 AWG | 311441 |

## V.35 TOOLS

| DESCRIPTION | PART # |
|---|---|
| EXTRACTION TOOL | 514053 |
| CRIMP TOOL | 514020 |



## AMP Insulation Displacement (IDC) Kits

| Description | Male | Female | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|---|
| DB9 IDC Kit | 315113 | 315115 | | | |
| DB15 IDC Kit | 315041 | 315043 | | | |
| DB25 IDC Kit* | 315007 | 315005 | | | |



## D-Subminiature Connector Kits

| Description | Male | Female | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|---|
| DB9 Crimp Kit Gray | 310311 | 310314 | | | |
| DB15 Crimp Kit Gray | 310331 | 310334 | | | |
| HD15 Crimp Kit Gray | 311310 | 311311 | | | |
| DB25 Crimp Kit Gray | 310351 | 310354 | | | |
| DB37 Crimp Kit Gray | 310371 | 310374 | | | |
| DB50 Crimp Kit Gray | 310391 | 310394 | | | |

Add suffix-S for Solder.



## Black Plastic Kit "AMP Type" - Crimp or Solder

| Description | Male | Female | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|---|
| DB9 Crimp Kit Black | 310310 | 310315 | | | |
| DB15 Crimp Kit Black | 310330 | 310335 | | | |
| HD15 Crimp Kit Black | 311312 | 311313 | | | |
| DB25 Crimp Kit Black | 310350 | 310355 | | | |
| DB37 Crimp Kit Black | 310370 | 310375 | | | |
| DB50 Crimp Kit Black | 310390 | 310395 | | | |

Add suffix-S for Solder.



## Metalized Plastic Kit - Crimp or Solder

| Description | Male | Female | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|---|
| DB9 Crimp Kit Metalized | 310312 | 310316 | | | |
| DB15 Crimp Kit Metalized | 310332 | 310336 | | | |
| HD15 Crimp Kit Metalized | 311314 | 311315 | | | |
| DB25 Crimp Kit Metalized | 310352 | 310356 | | | |
| DB37 Crimp Kit Metalized | 310372 | 310376 | | | |
| DB50 Crimp Kit Metalized | 310392 | 310396 | | | |

Add suffix-S for Solder.



## Metal Kit - Crimp or Solder

| Description | Male | Female | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|---|
| DB9 Crimp Kit Metal | 310313 | 310317 | | | |
| DB15 Crimp Kit Metal | 310333 | 310337 | | | |
| HD15 Crimp Kit Metal | 311316 | 311317 | | | |
| DB25 Crimp Kit Metal | 310353 | 310357 | | | |
| DB37 Crimp Kit Metal | 310373 | 310377 | | | |
| DB50 Crimp Kit Metal | 310393 | 310397 | | | |

Add suffix-S for Solder.



## Quick Snap Kit - Crimp or Solder

| Description | Male | Female | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|---|
| DB9 Crimp Kit Quick- Snap | 380300 | 380312 | | | |
| DB15 Crimp Kit Quick- Snap | 380302 | 380314 | | | |
| HD15 Crimp Kit Quick- Snap | 380310 | 380322 | | | |
| DB25 Crimp Kit Quick- Snap | 380304 | 380316 | | | |
| DB37 Crimp Kit Quick- Snap | 380306 | 380318 | | | |
| DB50 Crimp Kit Quick- Snap | 380308 | 380320 | | | |

Add suffix-S for Solder.



## D-Subminiature Accessories

| Description | Male | Independent | Female | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|---|---|
| DB Pins | 310151 | | 310155 | | | |
| High-Density Pins | 310153 | | 310154 | | | |
| Screwlock Kit | | | 300108 | | | |
| Screw & Retainer Kit | 315033 | | | | | |
| Hex Nut 6mm | | 380342 | | | | |
| Screw & Saddle Washer | | 380324 | | | | |
| Bail Lock Kit | | 380332 | | | | |
| Slide Latch for Ethernet Hood | | 380338 | | | | |
| Post Set | | 380340 | | | | |
| Screwlock (no washer - no nut) | | 332825 | | | | |

## Hoods for D-Sub Connectors

| Description | Part # |
|---|---|
| **DB9 Black Foldover** | **314201** |
| **DB15 Black Foldover** | **315023** |
| **DB25 Black Foldover** | **310277** |
| **DB37 Black Foldover** | **314903** |
| DB9 & HD15 Gray Plastic | 310220 |
| DB15 & HD26 Gray Plastic | 310240 |
| DB25 & HD44 Gray Plastic | 310270 |
| DB37 & HD62 Gray Plastic | 310280 |
| DB50 & HD78 Gray Plastic | 310290 |
| DB9 & HD15 Black Plastic | 310222 |
| DB15 & HD 26 Black Plastic | 310242 |
| DB25 & HD44 Black Plastic | 310272 |


| Description | Part# |
|---|---|
| DB37 & HD62 Black Plastic | 310282 |
| DB50 & HD78 Black Plastic | 310292 |
| DB9 & HD15 Metalized Plastic | 310325 |
| DB15 & HD26 Metalized Plastic | 310243 |
| DB25 & HD44 Metalized Plastic | 310273 |
| DB37 & HD62 Metalized Plastic | 310283 |
| DB50 & HD78 Metalized Plastic | 310293 |
| DB9 & HD15 Metal | 310230 |
| DB15 & HD26 Metal | 310245 |
| DB25 & HD44 Metal | 310274 |
| DB37 & HD62 Metal | 310284 |
| DB50 & HD78 Metal | 310294 |
| DB 9 & HD15 Quick Snap | 310227 |
| DB15 & HD26 Quick Snap | 310247 |
| DB25 & HD44 Quick Snap | 310277 |
| DB37 & HD62 Quick Snap | 310287 |
| DB50 & HD78 Quick Snap | 310297 |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST


Prices Change Frequently.
Please Call for Most Current Pricing.

## D-Subminiature Solder Type

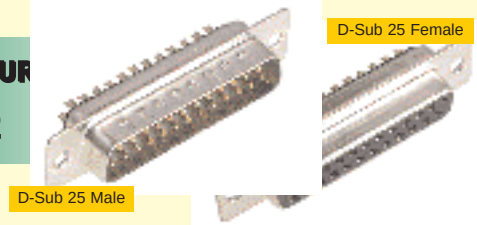


| Description | Male # | Female # |
|---|---|---|
| D-Sub 9 solder Connector | 310409 | 310410 |
| D-Sub 15 solder Connector | 310415 | 310420 |
| D-Sub 25 solder Connector | 310425 | 310427 |
| D-Sub 37 solder Connector | 310432 | 310435 |
| D-Sub 50 solder Connector | 310437 | 310438 |

## D-Subminiature Crimp T

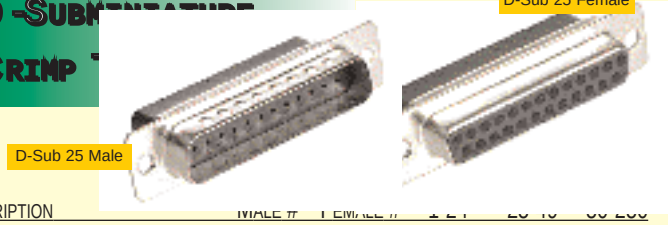


| Description | Male # | Female # |
|---|---|---|
| D-Sub 9 Crimp Connector | 310170 | 310175 |
| D-Sub 15 Crimp Connector | 310177 | 310178 |
| D-Sub 25 Crimp Connector | 310180 | 310185 |
| D-Sub 37 Crimp Connector | 310182 | 310183 |
| D-Sub 50 Crimp Connector | 310187 | 310188 |

## Contacts and Tooling for Crimp Type


| Description | Male # | 1-49 | 50 + |
|---|---|---|---|
| Male Contacts | 310151 | | |
| Female Contacts | 310155 | | |
| Insertion/Extraction Tool | 514055 | | --- |
| Contact Crimper | 514010 | | --- |
| D-Sub Crimp Tool LV | 514015 | | |

## D-Sub (IDC) AMP




| Description | Male # | Female # | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|---|
| D- Sub 9 IDC Connector | 310571 | 310576 | | | |
| D- Sub 15 IDC Connector | 310581 | 310586 | | | |
| D- Sub 25 IDC Connector* | 310591 | 310596 | | | |
| D- Sub 37 IDC Connector | 310602 | 310603 | | | |

## High Density D-Sub Connectors

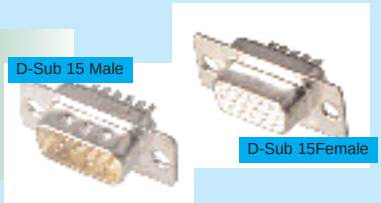


| Description | Male # | Female # | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|---|
| HD D-Sub 15 Solder Connector | 310482 | 310483 | | | |
| HD D-Sub 26 Solder Connector | 310486 | 310487 | | | |
| HD D-Sub 44 Solder Connector | 310491 | 310492 | | | |
| HD D-Sub 62 Solder Connector | 310495 | 310496 | | | |
| HD D-Sub 78 Solder Connector | 310497 | 310498 | | | |

## High Density D-Sub Connectors

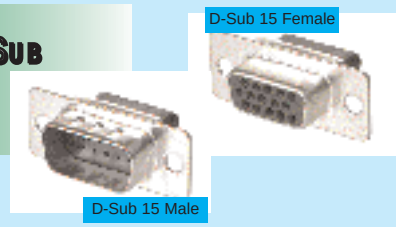


| Description | Male # | Female # | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|---|
| HD D-Sub 15 Crimp | 310480 | 310481 | | | |
| HD D-Sub 26 Crimp | 310484 | 310485 | | | |
| HD D-Sub 44 Crimp | 310489 | 310490 | | | |
| HD D-Sub 62 Crimp | 310493 | 310494 | | | |

## Contacts and Tooling for Crimp

| Description | Male # | 1-49 | 50 + |
|---|---|---|---|
| Male Contact | 310153 | | |
| Female Contact | 310154 | | |
| D-Sub Crimp Tool HV | 514011 | | -- |
| Insertion/Extraction High Density | 514058 | | ---D sub |
| Crimp Tool LV | 514015 | | |

## D-Sub TRW Cinch IDC All-Plastic Connectors



| Description | Male # | Female # | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|---|
| D- Sub 9 IDC Plastic | 310570P | 310575P | | | |
| D- Sub 15 IDC Plastic | 310580P | 310585P | | | |
| D- Sub 25 IDC Plastic | 310590P | 310595P | | | |
| **Special Grey Hoods For Above** | | | | | |
| DB9 | 310250 | | | | |
| DB15 | 310251 | | | | |
| DB25 | 310252 | | | | |

## D-Sub TRW Cinch IDC Metal Connectors

| Description | Male # | Female # | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|---|
| D- Sub 9 IDC Metal | 310570 | 310575 | | | |
| D- Sub 15 IDC Metal | 310580 | 310585 | | | |
| D- Sub 25 IDC MEtal | 310590 | 310595 | | | |
| **Special Black Hoods For Above** | | | | | |
| DB9 | 310281 | | | | |
| DB15 | 310276 | | | | |
| DB25 | 310278 | | | | |



# CONNECTORS



## COAXIAL 3 PCS CRIMP BNC

All machined Brass with nickel plating, gold plated pins and individually bagged

| DESCRIPTION | PART # |
|---|---|
| RG 59 & 62,140,210 PVC | 321055 |
| RG58,141 PVC | 321030 |
| RG6 PVC | 321031 |
| RG 59 & 62 *PLENUM* | 321032 |
| BELDEN 8281 | 321033 |
| RG 174,187,188,&316 | 321034 |
| RG 8X MINI 8 | 321035 |
| RG 58 AU | 321022 |
| RG58 *PLENUM* | 321039 |

| DESCRIPTION | PART # |
|---|---|
| RG 58 THINNET PVC | 321022 |
| RG 122 | 321040 |
| RG 142,400,223 | 321041 |
| RG 180,195 | 321042 |
| RG 303 | 321043 |
| RG 450 PROFLEX | 321044 |
| RG 179 | 321045 |
| BELDEN 8218 | 321046 |
| RG11 | 321047 |
| BELDEN 89907 | 321048 |



## COAXIAL 2 PCS CRIMP BNC

| DESCRIPTION | PART # |
|---|---|
| RG59 & 62 | 321057 |
| RG58 | 321066 |
| RG6 | 321067 |
| BELDEN 8281 | 321068 |
| RG59 & 62 TEFLON | 321058 |
| RG58 AU | 321069 |
| RG58 *PLENUM* | 321070 |
| RG58 THINNET* | 321071 |
| RG6 *PLENUM* | 321072 |



## COAXIAL 3 PCS SOLDER BNC

| DESCRIPTION | PART # |
|---|---|
| RG58 | 321214 |
| RG59 & 62 | 321216 |
| RG6 | 321218 |
| RG59 & 62 *PLENUM* | 321220 |
| RG8X MINI 8 | 321222 |
| BELDEN 8281 | 321224 |



## COAXIAL TWIST-ON BNC FEMALE

| DESCRIPTION | PART # |
|---|---|
| RG59 & 62 | 321236 |
| RG59 & 62 *PLENUM* | 321238 |
| RG58 | 321240 |
| RG58 *PLENUM* | 321242 |
| BELDEN 8281 | 321244 |
| RG6 | 321246 |



## BNC REMOVAL

| DESCRIPTION | PART # |
|---|---|
| 12" BNC REMOVAL TOOL | 512034 |



## COAXIAL TWIST-ON BNC

| DESCRIPTION | PART # |
|---|---|
| RG59 & 62* | 321200 |
| RG58 | 321202 |
| RG6 | 321204 |
| RG59 & 62 *PLENUM* | 321206 |
| BELDEN 8281 | 321208 |
| RG58 *PLENUM* | 321210 |
| RG 58 AU | 321212 |
| RG58 THIN NET | 321213 |



## COAXIAL RT. ANGLE TWIST-ON BNC

| DESCRIPTION | PART # |
|---|---|
| RG59 & 62 | 321200 |
| RG 59 & 62 PVC* | 321226 |
| RG 59 & 62 *PLENUM* | 321228 |
| RG 58 | 321230 |
| BELDEN 8281 | 321232 |
| RG6 | 321234 |



## BNC TWIN LEAD CONNECTORS

Use to terminate Belden 9272, RG78, RG108A

| DESCRIPTION | PART # |
|---|---|
| CLAMP TYPE | 321248 |
| CRIMP TYPE | 321250 |
| INLINE SPLICE F- F | 321252 |
| F- M- F "T" CONNECTOR* | 321254 |
| F- F- F "T" CONNECTOR | 321256 |
| DOUBLE MALE SPLICE | 321258 |



## BNC TERMINATORS

| DESCRIPTION | PART # |
|---|---|
| 50 OHM BNC TERMINATOR | 326901 |
| 50 OHM BNC TERMINATOR W/CHAIN | 326902 |
| 75 OHM BNC TERMINATOR | 326904 |
| 93 OHM BNC TERMINATOR* | 326907 |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# CONNECTORS

## F TYPE CONNECTORS





These connectors used in IEEE 802.5 Thicknet Cable.

| DESCRIPTION | PART # |
|---|---|
| RG59 WITH 1/4" RING (F- 59A) | 380056 |
| F TERMINATOR 75 OHM | 380057 |
| RG59 WITH 1/2" RING (F- 59ALM) | 380058 |
| RG59 TWIST ON PVC | 380060 |
| RG59 WITH 1/2" RING (TIN) | 380061 |
| RG59 WITH 1/2" RING *PLENUM* | 380062 |
| RG6 WITH 1/4" RING (F56A) | 380064 |
| RG6 WITH 1/2" RING (F56ALM) | 380066 |
| RG6 WITH 1/2" RING *PLENUM* | 380068 |
| RG6 TWIST- ON PVC | 380070 |
| RG11 WITH 1/5" RING | 380072 |
| RG11 3 PCS PVC | 380074 |
| RG11 3 PCS *PLENUM* | 380076 |

## F VIDEO- CATV ACCESSORIES

### SPLITTERS

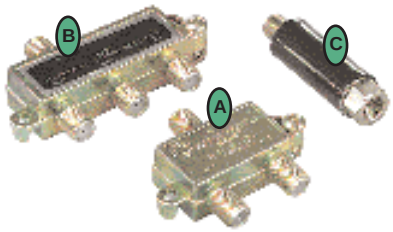


These splitters allow you to have one
outputs. Insertion loss ranges from 3
cast wall mountable with grounding lu

| DESCRIPTION | PART # |
|---|---|
| 2 WAY SPLITTER 3.5db (A) | 711050 |
| 3 WAY SPLITTER 3.5db- 6.5db (B) | 711052 |
| 4 WAY SPLITTER 6.5db | 711054 |
| 6 WAY SPLITTER 6.5db | 711056 |
| 8 WAY SPLITTER 12db | 711058 |
| INLINE BOOSTER 10db (C) | 711060 |
| INLINE SURGE PROTECTOR | 711053 |


## FIN-LINE SURGE PROTECTOR



This protects TV, LANS, CAMERAS, etc., against high voltage light strikes to outdoor cable. Place between equipment and incoming line. The best money you ever spent to save your equipment.


| DESCRIPTION | PART # |
|---|---|
| F SURGE PROTECTOR | 711053 |

## F ADAPTERS




| DESCRIPTION | PART # |
|---|---|
| M- M INLINE SPLICE F71 | 380078 |
| F- F INLINE SPLICE F81 | 380080 |
| F- F- F "T" ADAPTER | 380082 |
| M- F RIGHT ANGLE | 380084 |
| GROUNDING BLOCK WITH F- 81 | 380086 |

## VIDEO SWITCHES



These switches allow you to have one input. All 75 ohm input & output and push button style. 90db isolation.

| DESCRIPTION | PART # |
|---|---|
| AB- 2 WAY* | 711070 |
| ABC- 3 WAY | 711071 |

## MATCHING TRANSFORMERS







Provides the matching of 75ohms to 300ohms or vise-versa in video applications.

| DESCRIPTION | PART # |
|---|---|
| 75ohm- 300ohm INDOOR TYPE | 712220 |
| 75ohm- 300ohm OUTDOOR TYPE | 712221 |
| 300ohm DOWN LEAD- 75ohm INDOOR | 712222 |
| 300ohm SCREW TYPE- 75ohm PUSH- ON | 712223 |

## N SERIES CONNECTORS



These connectors used in IEEE 802.5 Thicknet Cable.

| DESCRIPTION | PART # |
|---|---|
| N- CRIMP PVC | 323070 |
| N- CRIMP *PLENUM* | 323071 |
| N- TWIST- ON PVC* | 323072 |
| N- TWIST- ON *PLENUM* | 323073 |
| N- COMPRESSION PLUG PVC | 323074 |
| N- COMPRESSION PLUG *PLENUM* | 323075 |
| N- COMPRESSION JACK PVC | 323076 |
| N- COMPRESSION JACK *PLENUM* | 323077 |

## N SERIES ADAPTORS &




| DESCRIPTION | PART # |
|---|---|
| F- F ADAPTER **(A)** | 321091 |
| M- M ADAPTER | 321092 |
| M- F RIGHT ANGLE ADAPTER | 321093 |
| M- M RIGHT ANGLE ADAPTER | 321094 |
| F- M- F "T" ADAPTER | 321095 |
| TERMINATOR PLUG, MALE- 50 OHM | 321096 |
| TERMINATOR JACK, FEMALE- 50 OHM **(B)** | 321097 |

## INTERSERIES ADAPTERS





These adapters are all machines with gold plated pins.
they allow you to connect one series type to another, ie BNC to UHF, etc...

| DESCRIPTION | PART # | DESCRIPTION | PART # |
|---|---|---|---|
| BNC(M)-UHF(F) | 322001 | N(M)-"F"(F) | 322007 |
| BNC(M)-UHF(M) | 322018 | N(F)-BNC(M) | 322005 |
| BNC(M)-RCA PLUG | 322022 | N(F)-BNC(F) | 322008 |
| BNC(F)- "F"(M) | 322043 | N(F)-"F"(M) | 322015 |
| BNC(F)-RCA(M) | 322030 | N(F)-"F" (F) | 322016 |
| BNC(F)-UHF(F) | 322021 | N(F)-UHF(F) | 322019 |
| BNC(F)-UHF(M) | 322000 | RCA(F)-RCA(F) | 322031 |
| BNC(F)-TNC(M) | 322009 | RCA(F)-BNC(M) | 322032 |
| "F"(F)-RCA JACK | 322029 | RCA(F)-UHF(M) | 322033 |
| "F"(F)-BNC(M) | 322034 | RCA(F)-3.5mmPLUG | 322038 |
| "F"(F)-UHF(M) | 322035 | RCA(F)-"F"(F) | 322039 |
| "F"(F)-RCA(M) | 322036 | SMA(F)-BNC(F) | 322045 |
| "F"(F)-3.5MM PLUG | 322037 | SMA(M)-BNC(F) | 322047 |
| "F"(F)-UHF(F) | 322042 | SMA(F)-BNC(M) | 322049 |
| "F"(F)-PAL(M) PLUG | 322044 | SMA(M)-BNC(M) | 322051 |
| MINS UHF(F)-TNC(M) | 322023 | TNC(F)-BNC(M) | 322010 |
| MINS UHF(F)-BNC(M) | 322024 | TNC(F)-N(M) | 322011 |
| MINS UHF(M)-BNC(F) | 322025 | TNC(F)-UHF(F) | 322041 |
| MINS UHF(F)-UHF(M) | 322026 | UHF(M)-N(F) | 322004 |
| MINS UHF(M)-TNC(F) | 322027 | UHF(F)-TNC(M) | 322012 |
| MINS UHF(M)-UHF(F) | 322028 | UHF(F)-3.5(M)PLUS | 322020 |
| N(M)-BNC(M) | 322013 | UHF(F)-RCA(M) | 322002 |
| N(M)-"F" (M) | 322017 | UHF(F)-N(M) | 322003 |
| N(M)-UHF(M) | 322014 | UHF(F)-"F"(F) | 322040 |
| N(M)-BNC(F) | 322006 | | |

## TWINAX

### Twinax Cable Connectors

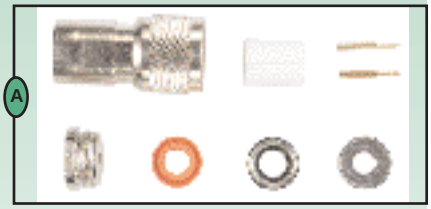








These connectors are used when installing Twinax cable for 3X and AS/400 systems. These precision connectors provide a quality termination.

| Description | Part# | Ref# |
|---|---|---|
| Male PVC- Crimp (A) | 325103 | |
| Male *Plenum* - Crimp | 325104 | |
| Male PVC- Solder | 325105 | 7362229 |
| Male *Plenum* - Solder | 325107 | 7362064 |
| Female PVC- Solder | 325109 | 6838959 |
| F-F Coupler (B) | 325110 | 7362230 |
| Feedthru Panel Jack | 325112 | 7369083 |
| Panel Jack Solder Type | 325114 | 7362179 |
| "T" Connector F-M-F (C) | 325120 | |
| "T" Connector F-F-F | 325125 | 6851167 |
| Terminator Male (D) | 325130 | 6091068 |
| Terminator female | 325131 | |

### Twinax Pins



| Description | Part # |
|---|---|
| Male Pins- Solder* | 325126 |
| Female Pins- Solder | 325127 |
| Male Pins - Crimp | 325128 |
| Female Crimp | 325129 |

## RIBBON CABLE CONNECTORS



### D-Sub Metal Shell Connectors

We carry a full line of Ribbon Cable Connectors from D-Sub to IDC Socket Types. All connectors have gold plated contacts and quality strain reliefs.

| Description | Male | Female | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|---|
| DB 9 Metal Shell | 380088 | 380090 | | | |
| DB15 Metal Shell | 380092 | 380094 | | | |
| DB25 Metal Shell | 380096 | 380098 | | | |
| DB37 Metal Shell* | 380100 | 380102 | | | |



### IDC Socket Standard .100"

| Description | Male | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|
| 10 Position | 380376 | | | |
| 14 Position | 380380 | | | |
| 16 Position | 380382 | | | |
| 20 Position | 380384 | | | |
| 24 Position | 380386 | | | |
| 26 Position | 380388 | | | |
| 34 Position | 380392 | | | |
| 40 Position | 380394 | | | |
| 50 Position | 380396 | | | |
| 60 Position | 380398 | | | |
| 64 Position* | 380400 | | | |




### D-Sub All-Plastic

| Description | Male | Female | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|---|
| DB 9 All-Plastic | 310930 | 310931 | | | |
| DB15 All-Plastic | 310932 | 310933 | | | |
| DB25 All-Plastic* | 310910 | 310915 | | | |
| DB37 All-Plastic | 310934 | 310935 | | | |



### IDC Card Edge

| Description | Male | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|
| 10 Position | 380402 | | | |
| 14 Position | 380404 | | | |
| 16 Position | 380406 | | | |
| 20 Position | 380408 | | | |
| 26 Position* | 380410 | | | |
| 34 Position | 380412 | | | |
| 34 Position With Key | 380414 | | | |
| 40 Position | 380416 | | | |
| 50 Position | 380418 | | | |
| 60 Position | 380420 | | | |
| 64 Position | 380422 | | | |

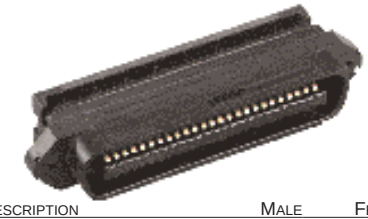

### IDC Centronics All Plastic

| Description | Male | Female | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|---|
| 14 Pin | 380344 | 380346 | | | |
| 24 Pin | 380348 | 380350 | | | |
| 36 Pin | 380352 | 380354 | | | |
| 50 Pin* | 310805 | 310810 | | | |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# DIN & MINI DIN

## DIN CONNECTORS



| DESCRIPTION | MALE | FEMALE | 1-24 | 25-49 | 50-250 |
|---|---|---|---|---|---|
| 3 PIN DIN 180 DEGREES | 311200 | 311202 | | | |
| 4 PIN DIN 210 DEGREES* | 311204 | 311206 | | | |
| 5 PIN DIN 180 DEGREES | 311208 | 311210 | | | |
| 5 PIN DIN 240 DEGREES | 311212 | 311214 | | | |
| 5 PIN DIN 360 DEGREES | 311216 | 311218 | | | |
| 6 PIN DIN 240 DEGREES | 311220 | 311222 | | | |
| 7 PIN DIN 270 DEGREES | 311224 | 311226 | | | |
| 8 PIN DIN 270 DEGREES | 311228 | 311229 | | | |
| 8 PIN DIN 262 DEGREES | 380424 | 380426 | | | |

## MINI DIN CONNECTORS



| DESCRIPTION | MALE | FEMALE | 10 | 25 |
|---|---|---|---|---|
| 3 PIN MINI DIN | 311230 | 311231 | | |
| 3 PIN MINI DIN SPLICE MALE | 311203 | 311217 | | |
| 4 PIN MINI DIN | 311232 | 311233 | | |
| 5 PIN MINI DIN | 311234 | 311235 | | |
| 6 PIN PS/2 TYPE* | 311236 | 311237 | | |
| 8 PIN MAC TYPE | 311238 | 311239 | | |

## MICRO PHONE XLR TYPE

| DESCRIPTION | PART # | 25 |
|---|---|---|
| 3 PIN XLR MALE* | 327132 | |
| 3 PIN XLR FEMALE | 327133 | |
| 3 PIN XLR MALE CHASSIS MT. | 327135 | |
| 3 PIN XLR FEMALE CHASSIS MT. | 327136 | |



# SCSI

SCSI3 Differential-Screw Type



SCSI2 Differential HPD68



SCSI1 Passive Cent50-Male Bail



SCSI3 Active-Clip Type



SCSI2 Differential DB50



SCSI1 Passive DB50-Screw Type



### SCSI3 - HPD68

| | DESCRIPTION | PART # |
|---|---|---|
| SCREW TYPE | ACTIVE | 332872 |
| | PASSIVE | 332873 |
| | DIFFERENTIAL | 332874 |
| CLIP TYPE | ACTIVE | 332875 |
| | PASSIVE | 332876 |
| | DIFFERENTIAL | 332877 |
| | LOOPBACK TESTER | 332578 |

### SCSI2 - HPD50

| | DESCRIPTION | PART # |
|---|---|---|
| CLIP TYPE | ACTIVE | Q04551 |
| | ACTIVE W/CHAIN | 332879 |
| | PASSIVE | Q04552 |
| | INTERNAL ACTIVE | 332887 |

**Other Types of SCSI Terminators and Connectors Available**

### SCSI1

| | DESCRIPTION | PART # |
|---|---|---|
| MALE BAIL | CENT 50ACTIVE | 332881 |
| | CENT50 PASSIVE | 410151 |
| SCREW TYPE | DB25 M-F ACTIVE | 332883 |
| | DB25 M-F PASSIVE | 332884 |
| | DB25 MALE ACTIVE | 332885 |
| | DB25 MALE PASSIVE | 332886 |
| | DB50 | 410152 |
| | DIFFERENTIAL DB50 | 332880 |
| | IDC SOCKET PASSIVE | 335150 |
| | IDC SOCKET ACTIVE | 335151 |
| | IDC SOCKET M-F | 335152 |

# CONNECTORS

GENDER MENDERS

Stop wear & tear on serial & parallel ports and correct gender mismatches with our slimline gender menders. We carry many types including the new Male/Female type. Featuring tin plating and gold plated pins.




## Slim Line D-Subminuature

| Description | Part # |
|---|---|
| DB9 Male to Male Gender Mender | 310750S |
| DB15 Male to Male Gender Mender | 310753S |
| DB25 Male to Male Gender Mender | 310785S |
| DB37 Male to Male Gender Mender | 310756S |
| DB50 Male to Male Gender Mender | 310759S |
| DB9 Male to Female Gender Mender | 310744S |
| DB15 Male to Female Gender Mender | 310745S |
| DB25 Male to Female Gender Mender | 310746S |
| DB37 Male to Female Gender Mender | 310747S |
| DB9 Female to Female Gender Mender | 310751S |
| DB15 Female to Female Gender Mender | 310754S |
| DB25 Female to Female Gender Mender | 310788S |
| DB37 Female to Female Gender Mender | 310757S |
| DB50 Female to Female Gender Mender | 310760S |



## High Density Gender Menders

| Description | Part # |
|---|---|
| HD15 Male to Male | 310762 |
| HD15 Male to Female | 310764 |
| HD15 Female to Female | 310763 |
| HD26 Male to Male | 310776 |
| HD26 Female to Female | 310766 |
| HD44 Male to Male | 310768 |
| HD44 Female to Female | 310769 |
| HD62 Male to Male | 310771 |
| HD62 Female to Female | 310772 |

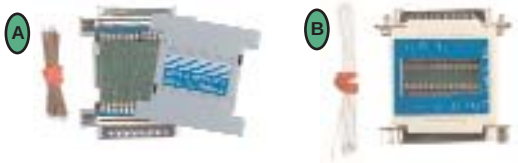


## DB25 Mini Patch Gender

Create your own custom adapter. Featuring 2 D-Sub connectors and jumper leads that you insert or solder or have NCI customize them for you.

| Description | Part # |
|---|---|
| DB25 Mini Patch Male to Male | 310740 |
| DB25 Mini Patch Female to Female | 310741 |
| DB25 Mini Patch Male to Female (Closed Solder Jumper Box) (A) | 310742 |
| DB25 Mini Patch Male to Female (Open Insertable Jumper Box) (B) | 310742-TEMP |



## Telco 50 Position Gender Mender

| Description | Part # |
|---|---|
| 50 pos Male to Male | 310777 |
| 50 pos Female to Female* | 310778 |



## Centronics Gender Mender

| Description | Part # |
|---|---|
| Cen 14 Male to Male | 310744 |
| Cen 24 Male to Male | 310745 |
| Cen 36 Male to Male | 310746 |
| Cen 50 Male to Male | 310747 |
| Cen 50 Male to Male Slimeline | 310774S |



## Centronics Gender Mender

| Description | Part # |
|---|---|
| Cen 14 Female to Female | 310748 |
| Cen 24 Female to Female | 310749 |
| Cen 36 Female to Female Slimline * | 310775S |
| Cen 50 Female to Female | 310752 |



Use a 36pin Centronics cable with a 25pin IBM PC, AT, OR, XT Compatible.

## Centronics to RS232

| Description | Part # |
|---|---|
| DB25M to Cen 36 M | 310790 |
| DB25F to Cen 36 M | 310791 |
| DB25M to Cen 36 F | 310792 |



## SCSI Adapters

| Description | Part # |
|---|---|
| SCSI3 68 pin Male - Cent 50 Fem | 332854 |
| SCSI3 68 pin Female - Cent 50 Fem | 332855 |
| SCSI3 68 pin Male - SCSI2 Female | 332856 |
| SCSI2 Female to Cent 50 Male | 332857 |
| SCSI2 Male to Cent 50 Female | 332858 |
| SCSI2 Male to DB 25 Female | 332859 |
| SCSI2 to DB 50 Male Changer | 332860 |
| SCSI2 Cent to Regular Cent 50 | 332861 |
| SCSI3 Male to SCSI2 Male Changer | 332862 |
| SCSI2 Female to Regular Cent 50 Male | 332863 |
| SCSI3 Male to Male | 332864 |
| SCSI3 Female to Female | 332865 |
| SCSI2 Female to 1200- 050 Converter | 332853 |
| DB-25 Male to Cent 50 Female | 332866 |
| DB-25 Female to Cent 50 Male | 332867 |
| SCSI2 Female to DB-50 Male | 332868 |
| SCSI2 Male to Cent Male | 332869 |
| SCSI3 Female to SCSI2 Male | 332870 |
| SCSI3 Male to SCSI2 Female | 332871 |



| Description | Part # |
|---|---|
| V.35 Male to Male* | 332833 |
| V.35 Female to Female | 332835 |
| V.35 Male - DB25 Male | 332843 |
| V.35 Female - DB35 Female | 332845 |

## V.35 Gender Mender & Adapters

## High Density to D-Sub Adapters

| Description | Part # |
|---|---|
| HD15 Male to DB9 Male | 310761 |
| HD15 Female to DB9 Male | 310758 |
| HD15 Female to DB9 Female | 310755 |
| HD15 Male to DB9 Female | 310776 |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

## Telco Adapters M&F 50 Pin



| Description | Part # |
|---|---|
| Telco Modular Adapter 50 pin Fem, 8 Pos RJ45 | 415013 |
| Telco Modular Adapter 50 pin Male, 8 Pos RJ45 | 415017 |

## IDC Header 50Pos/M





| Description | Part # |
|---|---|
| IDC Header 50 position Male | 380501 |

## TNC Connector



| Description | Part # |
|---|---|
| TNC Connector , RG59 & 62 Plenum | 380006 |

## RJ45 Solid Connector



| Description | Part # |
|---|---|
| 45 Solid 22/24awg Modular Connector | 513053 |

## RJ 45 Boot



| Description | Part # | Ref# |
|---|---|---|
| Ortronic RJ45 Boot | 311999 | 20300082-GRN |

## DB9 Plug Tin



| Description | Part # | Ref# |
|---|---|---|
| AMP DB9 Plug Tin | 315089 | 205204-4 |

# Local Area Network (LAN)

A data communications system designed to link computers and peripheral devices such as printers and modems. LAN cabling has a limited usable distance of up to 6 miles and 10 Km and is best used within a building or campus environment.

The advantages of using a LAN is that users can share peripheral devices connected to the LAN instead of having those devices attached to each computer. Network users can also share information stored in the network server(s) such as databases and programs. In addition, network users can communicate with each other via messaging or e-mail.

## Ethernet

A local area network used to connect computers and peripheral devices (printers, modems, etc.) so they can be shared by users of the network. Originally developed by Xerox, DEC, and Intel to run at 10Mbps, Ethernet networks can now run at 100Mbps. Named after the invisible substance thought by some to fill all space and transmit electromagnetic waves, Ethernet is the most widely used networking system in the world.

Ethernet can use twisted pair, coaxial, or fiber optic cabling and BNC, RJ45, or fiber optic connectors.

The IEEE (Institiute of Electrical and Electronic Engineers) created the 802.3 standard for the operation of 10 Mbps networks. There are different versions of 802.3, depending on the type of cabling used. The IEEE standard for Thick Ethernet is 10Base5 and for Thin Ethernet is 10Base2. The standard for twisted pair Ethernet is 10BaseT and the standard for fiber optics is 10BaseFL.

Ethernet accesses data using CSMA/CD - Carrier Sense Multiple Access with Collision Detection. This method allows multiple users to access the network through a common cable. All devices attached to the network check for transmissions in progress (signals are checked not only at the start of transmission but also during transmission). If no signals are present the transmission is sent. If a signal is detected then transmission is delayed. Collision detection is applied when two or more devices transmit at the same time. In this case each device stops transmission and attempts to retransmit after waiting a certain amount of time (different for each device and determined by an algorithm). The same occurs in the event of a collision. A device knows if a collision occurred when it does not receive its own transmission back.

**NCI**

**IEEE** stands for the Institute of Electrical and Electronic Engineers.

## Topologies

There are two topologies used with an Ethernet network and they are bus and star. BUS TOPOLOGY is used by 10 Base5 and 10 Base2. It consists of a shared common cable with a 50ohm terminator connected to each end. Devices can be attached anywhere on the cable with the use of a T-connector. Transmission signals are sent throughout the entire cable, however, only the device with the proper address receives the signal. Bus topology's disadvantage is that if a break occurs anywhere in the cable the entire network connected to it goes down. STAR TOPOLOGY is used by 10 BaseT & 10 BaseFL AND 100 BaseTX, 100 BaseT4, & 100 BaseFX. It connects workstations to a central hub via individual cables directly wired to the hub. Thus, a break in the cable only affects the individual device connected to the hub. However, if the central hub breaks down, then the entire network is down.

## Benefits of Using Ethernet

Fast & Accurate Transmission of Data with Speeds of up to 100Mbps

Varied Cable Types - Coax, Thin Coax, UTP, and Fiber Optic

2 Topologies - Bus and Star

Compatible with more LAN devices than any other standard.


ETHERNET

## 10BASE5 - STANDARD THICK ETHERNET

is called thick because of the thick coaxial cabling (trunk cable) used in its application. 10 is for 10 Megabits per second (Mbps) operation, BASE is for baseband operation, and 5 is for a maximum of 500 meters of cable segment length. Communication between stations is achieved through external transceivers attached to the shared cabling or segment. The external transceiver is connected to a Network Interface Card (NIC) via a transceiver cable.

### 10 BASE 5 PARAMETERS AND WIRING RULES

- Maximum Length per segment is 500 meters or 1640feet.
- Maximum of 100 stations per segment are allowed.
- Maximum of 1024 stations may be attached to a 10Base5 network.
- Bus topology.
- Up to 100 transceivers can be attached to a single 500 meter segment.
- Only transceivers without SQE test enabled should be used with repeaters.
- Minimum distance between transceivers is 2.5 feet.
- Maximum length of standard AUI transceiver drop cable is 50 meters.
- Maximum length of office transceiver cable is 12.5 meters.
- Repeaters may be used to extend the signal thereby increasing overall

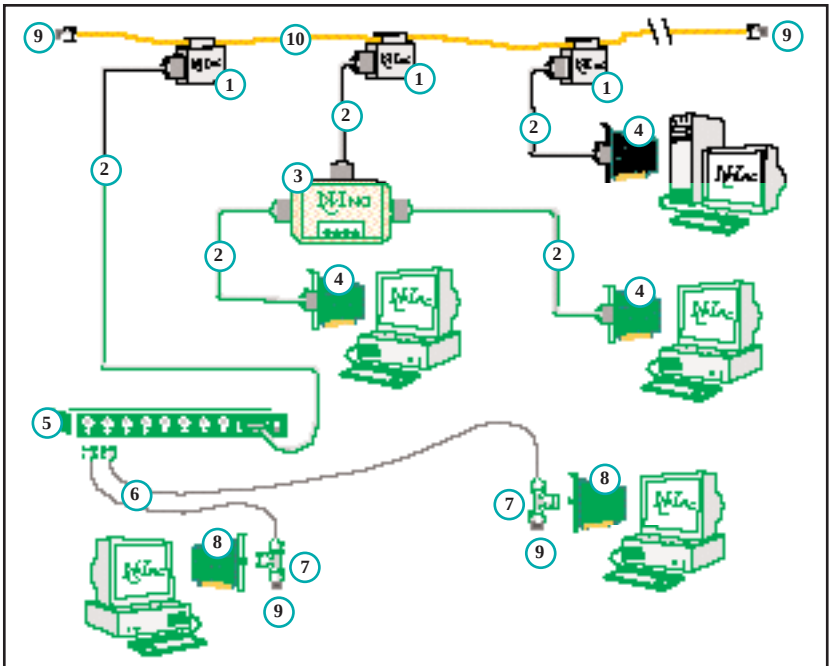


1. Transceiver - pg. 48, 49
2. Transceiver Cables - pg. 41
3. 2 Port AUI Fanout - pg. 49
4. Thicknet AUI Network Card - pg. 42
5. Thinnet Repeater - pgs. 43, 44, 50
6. PVC Thinnet Cable - pg. 41
7. BNC T- Connector - pg. 40
8. Thinnet BNC Network Card - pg. 42
9. 50 Ohm Terminator - pg. 40
10. Thick Ethernet Trunk Cable - pg. 41

## 10BASE2 - THIN ETHERNET

got its name because the coaxial cable it runs on is thinner than the cable used for Thick Ethernet. 10 is for 10 Mbps operation, Base is for baseband operation and 2 is for a maximum of 200 meters (actually, 187 meters) of cable segment length. The Network Interface Card (NIC) performs the functions of a transceiver so that no external transceiver is needed for workstations.

### 10 BASE 2 PARAMETERS AND WIRING RULES

- Maximum length per segment is 185 meters or 607 feet.
- Maximum of 30 stations per segment are allowed.
- Maximum of 1024 stations may be attached to a 10Base2 network.
- Bus topology.
- NIC's come with built-in transceivers so connections are made directly to NIC via T-connector.
- Typically, devices are daisy chained using T-connectors so there must be 2 cables connected to workstation; 1 going IN; 1 coming OUT.
- T-connectors must be plugged directly into NIC. There can not be any cable between T-connector and NIC.
- A minimum of 0.5 meter or 1.6 feet is allowed between T-connectors.
- BNC transceivers and transceiver cables must be used on NIC's that do not have built-in transceivers.
- Maximum transceiver cable length is 50 meters or 165 feet.
- External Transceivers must be placed at least 0.5 meters or 1.6 feet apart.
- Both ends of the cable segment must be terminated with a 50 ohm terminator.
- One end of the cable must be grounded. The other end must remain ungrounded.
- Terminator must be attached to open jack of T-connector at both ends of the segment. Do not attach terminator directly to cable without T-

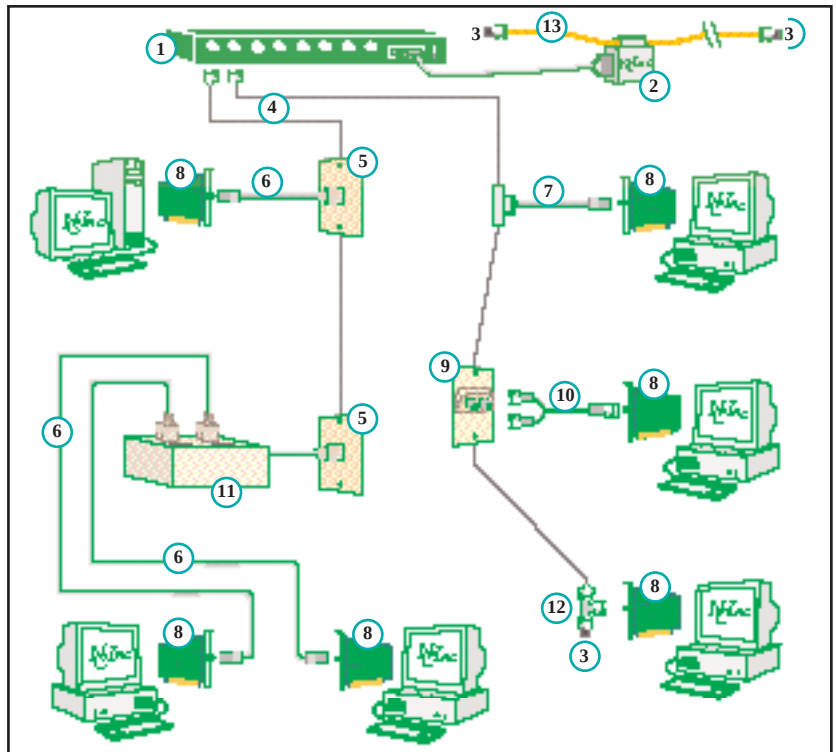


1. 8 port Repeater - pgs. 43, 44, 50
2. Transceiver - pg. 48, 49
3. 50 Ohm Terminator - pg. 40
4. PVC Thinnet Cable - pg. 41
5. Thinnet Tap Assembly & Wallplate - pg.40
6. Thinnet Drop Cable Assembly - pg. 41
7. Self Terminating Drop Cable Assembly- Call
8. Network Card - pg. 42
9. No Drop Wallplate - Call
10 . No Drop Cable Asmbly - Call
11. Thinnet Tap 4 Port Expansion Box - pg. 40
12. BNC T- Connector - pg. 40
13. Thick Ethernet Trunk Coax Cable - pg.41


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

## 10BaseFL Ethernet

cable consists of thin glass filaments that transmit light waves carrying very large amounts of data for very long distances. 10 is for 10 Mbps operation, Base is for baseband operation and FL is the fiber optic link to the network. Since signals are transmitted with the use of light waves, electromagnetic and radio frequency interference (EMI/RFI) is nonexistent. A fiber network is best for conditions where EMI/RFI interference is heavy. Fiber optic cable also offers added security because transmissions are safe from electronic bugging. In the diagram layout the fiber optic cable is being used as a backbone to connect a Thin Ethernet network to a 10BaseT network. Fiber optic cable is great for use as a backbone because it can be run for up to 2 km and interference is not a problem. Also great for building to building cabling.

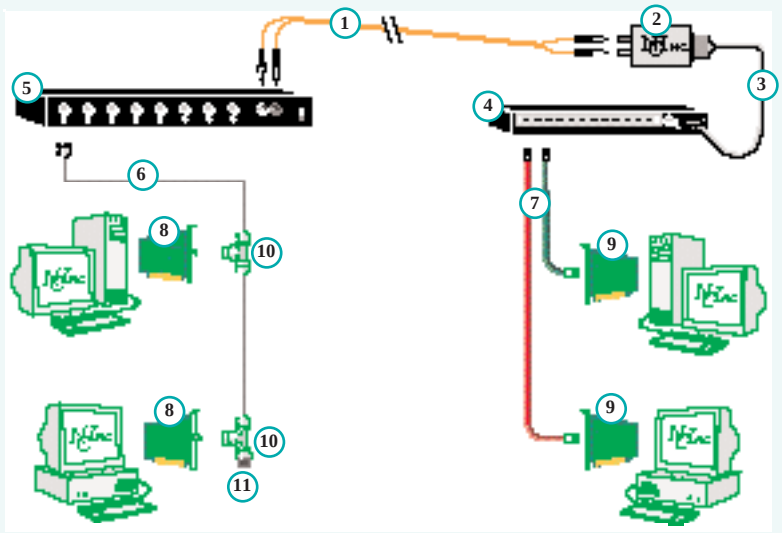



1. Fiber Optic Cable- pgs. 38, 56, 57, 58, 62, 63
2. Transceiver - pgs. 48, 49
3. Transceiver Cable - pgs. 38, 41
4. 10 Base T Hub - pgs. 43, 44
5. Thinnet Repeater - pg. 50
6. PVC Thinnet Cable - pgs. 38, 41
7. Cat 5 Color Coded Patch Cables - pg. 41
8. Thin Ethernet BNC Network Card - pg. 42
9. 10 Base T RJ45 Network Card - pg. 42
10. BNC T- Connector - pg. 40
11. 50 Ohm Terminator - pg. 40

### 10 BaseFL Parameters and Wiring Rules

## 10BaseT Ethernet

became popular due its ease of use, its usage of unshielded twisted pair (UTP) cabling and its low cost. 10 is for 10 Megabits per second (Mbps) operation, BASE is for baseband operation, and T is for the twisted pair cable used for the network. The Network Interface Card (NIC) performs the functions of a transceiver so that no external transceiver is needed for stations. 10BaseT requires the use of a hub or concentrator because it uses a star topology. The hub serves as a central switching station thus controlling the incoming and outgoing signals. When using star topology if a station goes down it does not affect the rest of the network. Typically a RJ45 connector is connected to UTP cabling and is run straight from the hub to the NIC (10BaseT NIC's have a built-in RJ45 transceiver). Pins 1 and 3 transmit data and pins 3 and 6 receive data (the other pins are not used).

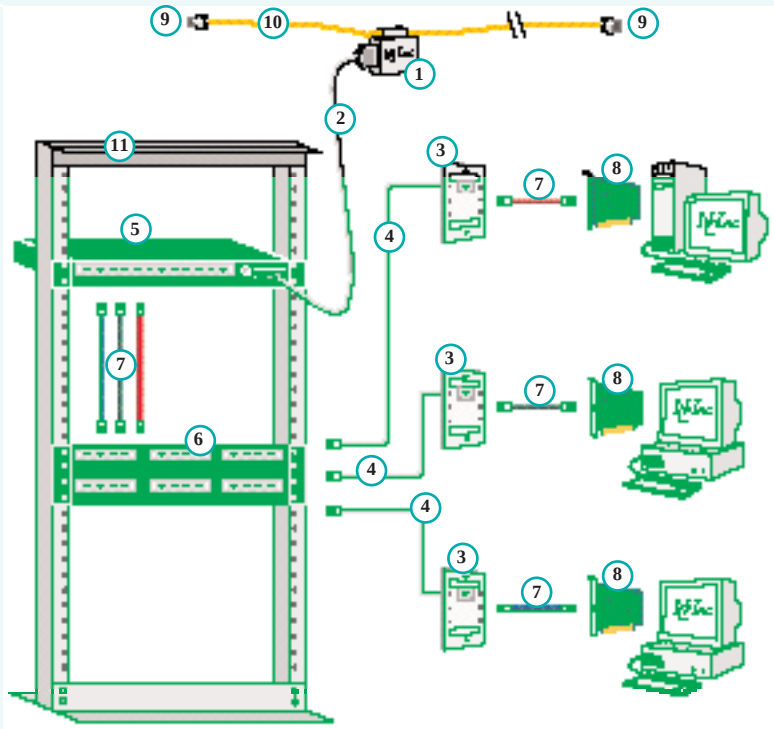


1. Transceiver - pgs. 48, 49
2. Transceiver Cable - pgs. 38, 41
3. Cat 5 Wallplate Assembly - pg. 54
4. Cat5 UTP Cable - pgs. 39, 41
5. 10 BaseT Hub - pgs. 43, 44
6. Cat 5 Patch Panel - pg. 54
7. Cat 5 Color Coded Patch Cables - pg. 41
8. 10 BaseT RJ45 Network Card - pg. 42
9. 50 Ohm Terminator - pg. 40
10. Thick Ethernet Trunk Cable - pgs. 38, 41
11. Equipment Rack - pg. 87

### 10 BaseT Parameters and Wiring Rules

- Maximum length per segment is 100 meters or 330 feet.
- Maximum of 2 devices per segment; one is the station and the other is the hub.
- Maximum of 2 Inter-Repeater Links between devices without using bridge or switch (A hub is a repeater ).
- Star topology.

## Ethernet Switching

How can I get more out of my Ethernet network?

If you find yourself asking this question then Ethernet switching may be your answer. An Ethernet Switch is basically a bridge that allows multiple user transmission.

Fast Ethernet has specific distance limitations that can be a problem if your network has many users. Switching overcomes these limitations because each port in the switch acts separately from the others. Distance calcualtions start an ew at each port.

Switches also work on 10 Mbps networks. For more info see below and check out our Ethernet Switching Section on page 45

## Ethernet Bridging

What is a Bridge?

A bridge is a device that

- **Full-Duplex** Simoultaneous bidirectional transmission.
- **Half-Duplex** Bidirectional transmission but not simoultaneous.


## 100 BaseT - Fast Ethernet

A system designed to achieve 100 Mbps access time on Ethernet networks, which is 10 times the speed of standard Ethernet. The IEEE* amended the 802.3 specifications to include 100 BaseTX, 100 BaseT4 and 100 BaseFX. 100 BaseT is configured in a star topology and therefore requires the use of a hub. Signals are transmitted from a central hub directly over one cable segment to the NIC's. Fast Ethernet makes use of the same CSMA/CD access method allowing multiple devices to operate while avoiding transmission collisions. Although Fast Ethernet works at 10 times the speed of standard Ethernet, it also operates at over 10 times less the maximum allowable network diameter - from 2500 meter to 210 meters over copper.

There are two classes of repeaters (hubs) in 100 BaseT - Class I and Class II. When using Class I, data should not pass through more than one repeater and two 100 meter cable segments. Class I has a latency of .7 or less microseconds. When using Class II, data should not pass through more than two repeaters, two 100 meter cable segments and one 10 meter interrepeater link. Class II has a latency of or less microseconds (latency is the waiting time).

The same rules apply as for 10BaseT except as noted above. The 100BaseT standard is made up of 3 versions:

100BASE TX is full-duplex capable in point to point unshared applications because it uses 1 pair to receive and 1 pair to transmit. Designed to run over 2 pairs of category 5 unshielded twisted pair cable with RJ45 connectors and EIA/TIA 568B pinning. It can also be run on IBM type 1 sheilded twisted pair (existing Token Ring wiring) with an impedence matching device and DB9 connectors or regular STP and DB9 connectors. Max segment length is 100m.

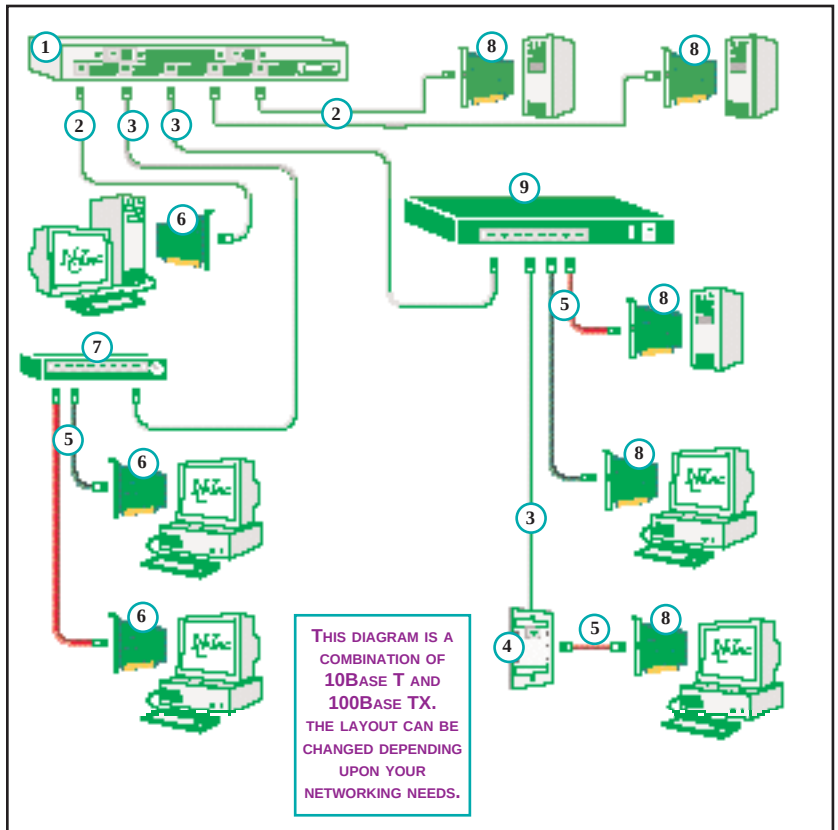


This diagram is a combination of 10Base T and 100Base TX. The layout can be changed depending upon your networking needs.

1. 10 / 100 Mbps Ethernet Switch - pg. 45
2. Cross Pinned Cat5 UTP Cable - pg. 41
3. Straight Pinned Cat5 UTP Cable -pg. 41
4. Cat 5 Wallplate Assembly - pg. 54
5. Cat 5 Color Coded Patch Cables - pg. 41
6. 10 BaseT Network Card - pg. 42
7. 10 BaseT Ethernet Hub - pgs.43, 44
8. 100 BaseT Network Card - pg. 42
9. 100 BaseT Fast Ethernet Hub - pg. 43


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

## 100VG AnyLAN

was developed by Hewlett Packard along with others to be the standard for Fast Ethernet. The IEEE gave that title to 100BASE T and 100VG AnyLAN wound up getting its own standard of 802.12. It is not Ethernet but it is compatible with either 802.3 Ethernet or 802.5 Token Ring (depending on the manufacturer). 100VG AnyLAN relies on the hub to control network access. The hub uses Token Passing, a method where each station receives and passes the right to use the single shared channel on the LAN. All stations are guaranteed access to the network at regular consistent intervals. This provides support for time sensitive applications like voice, video and multimedia. While Ethernet uses a CSMA/CD access scheme (see the Intro to Ethernet section for more details) 100VG AnyLAN uses a Demand Priority access scheme. Demand Priority allows one or more stations to send high priority transmissions first. If the hub receives a high priority request, it completes its current transmission and then immediately grants access to the high priority request. When all high priority requests are dealt with, normal operation resumes. Preventing time outs is simple: the hub grants temporary high priority status to normal priority requests. This creates a collision free network and is designed

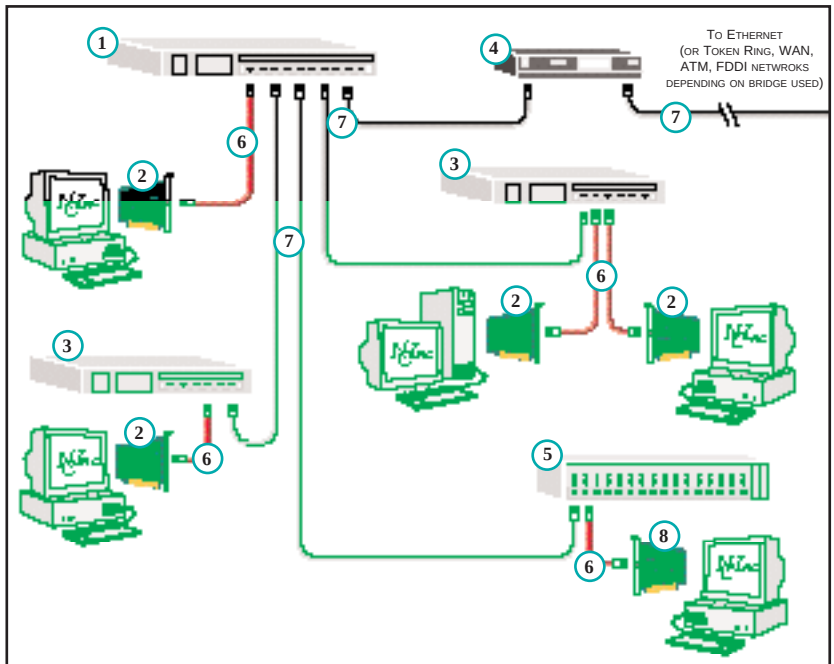



1. 100VG AnyLAN Hub - pg. 48
2. 100VG AnyLAN Network Card - pg. 48
3. 100VG AnyLAN Hub - pg. 48
4. 100VG to Ethernet Bridge - pg. 48
5. 10/100 Mbps Ethernet Switch - pg. 45
6. 4pair Cat5 Color Coded Patch Cables - pg. 41
7. 4 pair Cat5 UTP Cable - pg. 39
8. 10 BaseT Network Card - pg. 42

## Wireless Ethernet

uses spread spectrum technology to transmit data as radio waves, . Spread spectrum spreads the transmission over a broad frequency range, from 902 thru 928 MHz. Eavesdropping is virtually eliminated because only the receiving unit is able to un-spread the transmission. The concept for spread spectrum was created by actress Hedy Lamarr back in 1940. It was put to use in the 1960's for use in the military and is so effective that it is still in use today.

If you have a location that you cannot or do not want to install cabling, then wireless Ethernet is the solution to your problems. Wireless Ethernet has data throughput of 2Mbps and can be used for up to 3 miles depending upon the hardware installed (No FCC License is required).

We've covered security, speed and distance. How about costs? Well, if you have or are thinking

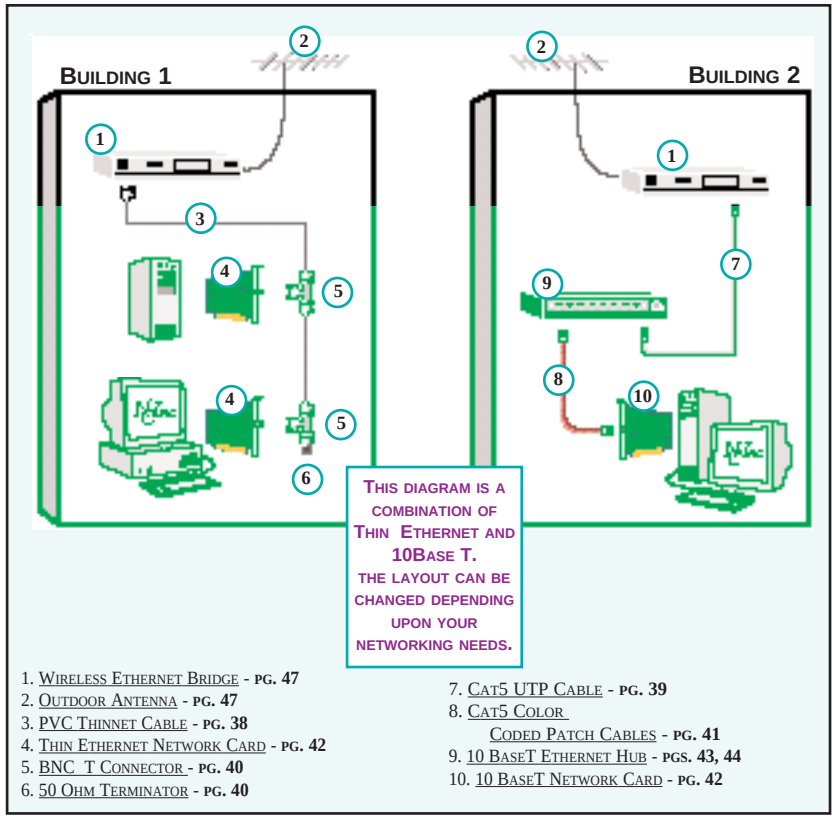


This diagram is a combination of Thin Ethernet and 10Base T. The layout can be changed depending upon your networking needs.

1. Wireless Ethernet Bridge - pg. 47
2. Outdoor Antenna - pg. 47
3. PVC Thinnet Cable - pg. 38
4. Thin Ethernet Network Card - pg. 42
5. BNC T Connector - pg. 40
6. 50 Ohm Terminator - pg. 40
7. Cat5 UTP Cable - pg. 39
8. Cat5 Color Coded Patch Cables - pg. 41
9. 10 BaseT Ethernet Hub - pgs. 43, 44
10. 10 BaseT Network Card - pg. 42

**Standard Package Lengths** - 1000ft reel

**Meets or Exceeds EIA/TIA 568 Standards**

**We stock all the bulk cable for your Ethernet installations. Comes in standard reel lengths, but we'll cut any length you need. Also available in boxes. For further specs see our Bulk Cable section.**

## Thin Ethernet 50 ohm RG58 coaxial cable



Used with 10Base2. Max. length per segment is 185 meters or 607 ft. Both ends of the cable must be terminated with a 50 ohm terminator and one end must be grounded. For further information on Thin Ethernet and 10Base2 see page 34 in our Introduction to Ethernet section.

**Sheild** - 95% TC+ Foil
**Center Conductor** - 20awg 19/33 TC stranded
**Nominal Attenuation** - 12dB/1000 ft.@10MHz
**Nominal Impedance** - 50 ohms

| Description | UL Type | Jacket | Dieletric | O.D. | Core O.D. | Weight per 1000' Reel | Nom.Cap. | Vel. of Prop. | Part # | 500'-999' | 1'-499' |
|---|---|---|---|---|---|---|---|---|---|---|---|
| RG58 A/U Thinnet | CL2 | PVC | Foamed PE | in | .101in | 27 lbs. | 26.2 pF/ft | 78% | 271080 | | |
| RG58 A/U Thinnet | CL2P | Plenum | Foamed FEP | in. | .101in. | 29 lbs. | 26.2 pF/ft | 78% | 291080 | | |

## Thick Ethernet 50 ohm coaxial trunk cable



Used with 10Base5. Maximum length per segment is 500 meters or 1640 ft. Both ends of the cable segment must be terminated with a 50 ohm terminator.

Marked every 2.5m for transceiver placement. For further info on Thick Ethernet see page 34 in our Introduction to Ethernet section.

**Sheild** - 2 foil + 2 90% TC braid
**Center Conductor** - 12 awg - .0855 in. solid BC
**Nominal Attenuation** - 5.2 dB/1000 ft. @ 10MHz
**Nominal Impedance** - 50 ohms
**Nominal Capacitance** - 25 pF/ft

| Description | UL Type | Jacket | Dieletric | Core O.D. | O.D. | Weight per 1000' Reel | Part # | 500'-999' | 1'-499' |
|---|---|---|---|---|---|---|---|---|---|
| Trunk Cable | CL2 | PVC Yellow | Foamed PE | in. | .247in. | 130lbs | 271120 | | |
| Trunk Cable | CL2P | Plenum Orange | Foamed FEP | in. | .247in. | 136lbs | 291120 | | |

## Transceiver

## AUI Transceiver Drop 4pair 20awg individually shielded cable




Used to connect a network device to a transceiver. Each pair is individually foil shielded and the cable has an overall foil shield with a 95% braid shield. Maximum segment length is 50 meters. For further information see page 33 in our Introduction to Ethernet section.

**Sheild** - Ind. foil + OA foil + 95% braid + Drain
**Center Conductor** - 20 AWG 7/28 Stranded
**Nominal Attenuation** -19d/1000ft. @ 10MHz
**Nominal Impedance** - 78 Ohms
**Nominal Capacitance** - 17 pF/ft

| Description | UL Type | Jacket | O.D. | Weight per 1000' Reel | Part # | 500'-999' | 1'-499' |
|---|---|---|---|---|---|---|---|
| 4pr Transceiver Drop Cable | CL2 | PVC | in. | 105 lbs. | 272055 | | |
| 4pr Transceiver Drop Cable | CMP | Plenum | in. | 108 lbs. | 292055 | | |

## Office Drop 3 pair 24awg 1pair 28 awg cable



Is smaller and more flexible than regular transceiver cable. Each pair is individually foil shielded with an overall foil shield and a 95% braid shield. Maximum segment length is 5 meters.

**Sheild** -Ind. foil + OA foil + 95% braid + Drain
**Center Conductor** - 1pair 24AWG / 3 pair 28AWG
**Nominal Impedance** - 78 ohms
**Nominal Capacitance** - 19.7 pF/ft

| Description | UL Type | Jacket | O.D. | Weight per 1000' Reel | Part # | 500'-999' | 1'-499' |
|---|---|---|---|---|---|---|---|
| Multipair Office Drop Cable | CL2 | PVC | in. | 44 lbs. | 272057 | | |

## 62.5 / 125 micron Duplex Multimode Cable



Used with 10BaseFL Ethernet and FOIRL. Max segment length is 2km or 1.2 miles. We have listed here the most commonly used Ethernet fiber optic cabling. Please check our Fiber Optic section for more types of fiber optic bulk cable.

**Crush Resistance** - 114 lbs/in.
**Wavelength** - 850 / 1300 nm
**Attenuation** - 3.3 / 0.8 dB/km
**Minimum Bandwidth** - 160 / 500 MHz/km
**Operating Temp.** - -20°C - +70°C

| Description | UL Type | Jacket | O.D. | Cladding Diameter | Buffer Diameter | Weight per 1000' Reel | Part # | ft, |
|---|---|---|---|---|---|---|---|---|
| 62.5/125 Micron | OFNR | PVC | 2.9x6.2mm | 125m m | 900 microns | 12 lbs. | 219132 | |
| 62.5/125 Micron | OFNR | PVC (White/Green) | 2.9x6.2mm | 125m m | 900 microns | 12 lbs. | 219132-WH/GREEN | |
| 62.5/125 Micron | OFNP | Plenum | 2.9x6.2mm | 125m m | 900 microns | 12 lbs. | 239132 | |

ALL CABLE SPECIFICATIONS MAY VARY AND ARE SUBJECT TO CHANGE



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# Ethernet Bulk Cable

# ETHERNET

**We stock all the bulk cable for your Ethernet installations. Comes in standard reel lengths, but we'll cut any length you need. For further specs see our Bulk Cable section.**

**Standard Package Lengths** - 1000ft reel or box

**Meets or Exceeds EIA/TIA 568 Standards**

**Nominal Impedance -** 100 ohms +/-15%

## 350 Mhz Enhanced Category 5 Unshielded Twisted Pair (UTP).

For use in 100BaseT applications. Maximum length per segment is 100 meters or 330 ft. Not recommended for areas with high electromagnetic or radio frequency interference (EMI/RFI).



| Description | Jacket | AWG | UL Type | Capacitance | Weight | Insulation | O.D. | Frequency | Attenuation | Crosstalk | Part# |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 2pr Cat 5 Solid | PVC | 24 | CMR | 17pF/ft. | 33 lbs. | PE | in. | 100 MHz | »»»64dB/Kft | »»32dB@Kft | 213002AL5-350 |
| 2pr Cat 5 Solid | Plenum | 24 | CMP | 17pF/ft. | 38 lbs. | FEP | in. | 100 MHz | »»»64dB/Kft | »»32dB@Kft | 233002AL5-350 |
| 4pr Cat 5 Solid | PVC | 24 | CMR | 17pF/ft. | 33 lbs. | PE | in. | 100 MHz | »»»64dB/Kft | »»32dB@Kft | 213004AL5-350 |
| 4pr Cat 5 Solid | Plenum | 24 | CMP | 17pF/ft. | 38 lbs. | FEP | in. | 100 MHz | »»»64dB/Kft | »»32dB@Kft | 233004AL5-350 |

## Category 5 Stranded Patch Cable.

Used for modular patch cords to connect your PC to a wallplate connected to your network.

*AVAILABLE IN THESE

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|---|---|---|---|---|---|---|---|
| BONE | RED | GREEN | BLUE | BLACK | YELLOW | WHITE | BROWN |



| Description | Jacket | AWG | UL Type | Capacitance | Weight | Insulation | O.D. | Frequency | Attenuation | Crosstalk | Part# |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 2pr Cat5 Stranded | PVC | 24 | CM | 13.5 pF/ft | 17 lbs. | PE | in. | 100MHz | »»»23dB/100m | »» 51dB | 203002AL5* |
| 3pr Cat5 Stranded | PVC | 24 | CM | 13.5 pF/ft | 20 lbs. | PE | in. | 100MHz | »»»23dB/100m | »» 51dB | 203003AL5* |
| 4pr Cat5 Stranded | PVC | 24 | CM | 13.5 pF/ft | 26 lbs. | PE | in. | 100MHz | »»»23dB/100m | »» 51dB | 203004AL5* |

## CAT5 & CAT3 24 AWG Unshielded Twisted Pair (UTP).

Used in 10BaseT applications, Category 3 or higher UTP is preferred. Maximum length per segment is 100 meters or 330 ft. Not recommended for areas with high electromagnetic or radio frequency interference (EMI/RFI).



| Description | Jacket | AWG | UL Type | Capacitance | Weight | Insulation | O.D. | Frequency | Attenuation | Crosstalk | Part# |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 2pr **Cat 5** Solid | PVC | 24 | CMR | 15pF/ft. | 15 lbs. | POLYOLEFIN | in. | 100 MHz | »»»»67dB/Kft | »»32dB@Kft | 213002AL5 |
| 4pr **Cat 5** Solid | PVC | 24 | CMR | 15pF/ft. | 24 lbs. | POLYOLEFIN | in. | 100 MHz | »»»»67dB/Kft | »»32dB@Kft | 213004AL5 |
| 25pr **Cat 5** Solid | PVC | 24 | CMR | 14pF/ft | 139 lbs. | PE | in. | 100 MHz | »»»»67dB/Kft | »»32dB@Kft | 213025AL5 |
| 2pr **Cat 5** Solid | Plenum | 24 | CMP | 15pF/ft. | 16 lbs. | FEP | in. | 100 MHz | »»»»67dB/Kft | »»32dB@Kft | 233002AL5 |
| 4pr **Cat 5** Solid | Plenum | 24 | CMP | 15pF/ft. | 25 lbs. | FEP | in. | 100 MHz | »»»»67dB/Kft | »»32dB@Kft | 233004AL5 |
| 25pr **Cat 5** Solid | Plenum | 24 | CMP | 14pF/ft. | 141 lbs. | FEP | in. | 100 MHz | »»»»67dB/Kft | »»32dB@Kft | 233025AL5 |
| 2pr **Cat 3** Solid | PVC | 24 | CMR | 19pF/ft. | 10 lbs. | SR PVC | in. | 16 MHz | »»»»40dB/Kft | »»13dB@Kft | 213002AL3 |
| 4pr **Cat 3** Solid | PVC | 24 | CMR | 19pF/ft. | 18 lbs. | SR PVC | in. | 16 MHz | »»»»40dB/Kft | »»13dB@Kft | 213004AL3 |
| 25pr **Cat 3** Solid | PVC | 24 | CMR | 22pF/ft. | 99 lbs. | SR PVC | in. | 16 MHz | »»»»44dB/Kft | »14.4dB@Kft | 213025AL3 |
| 2pr **Cat 3** Solid | Plenum | 24 | CMP | 20pF/ft. | 16 lbs. | LS PVC | in. | 16 MHz | »»»»40dB/Kft | »»13dB@Kft | 233002AL3 |
| 4pr **Cat 3** Solid | Plenum | 24 | CMP | 20pF/ft. | 20 lbs. | LS PVC | in. | 16 MHz | »»»»40dB/Kft | »»13dB@Kft | 233004AL3 |
| 25pr **Cat 3** Solid | Plenum | 24 | CMP | 20pF/ft. | 101 lbs. | LS PVC | in. | 16 MHz | »»»»44dB/Kft | »14.4dB@Kft | 233025AL3 |

Some pair counts available in **colors.** Please call for more info.

## Siamese Cat 5 UTP

Max length per segment is 100 meter or 330 ft. Not recommended for areas with high electromagnetic or radio frequency interference (EMI/RFI).



| Description | Jacket | AWG | UL Type | Capacitance | Weight | Insulation | O.D. | Frequency | Attenuation | Crosstalk | Part# |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 4pr Cat 5 Solid | PVC | 24 | CMR | 5.6nF/100m | 42 lbs. | PE | in. | 100MHz | »»»22dB/100m | »»» 32dB | 213004AL5ZIP |
| 4pr Cat 5 Solid | Plenum | 24 | CMP | 5.6nF/100m | 54 lbs. | FEP | in. | 100MHz | »»»22dB/100m | »»» 32dB | 233004AL5ZIP |

## 24 AWG Shielded Twisted Pair (STP).

Overall shield with drainwire. Recommended for areas with high electromagnetic or radio frequency interference (EMI/RFI).



| Description | Jacket | AWG | UL Type | Capacitance | Weight | Insulation | O.D. | Frequency | Attenuation | Crosstalk | Part# | 1k5k |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2pr Cat 5 Solid | PVC | 24 | CM | 15pF/ft | 21 lbs. | POLYOLEFIN | in. | 100MHz | »»»67dB/Kft | »»32dB@Kft | 227002AL5 | |
| 4pr Cat 5 Solid | PVC | 24 | CM | 15pF/ft | 34 lbs. | POLYOLEFIN | in. | 100MHz | »»»67dB/Kft | »»32dB@Kft | 227004AL5 | |
| 2pr Cat 5 Solid | Plenum | 24 | CMP | 15pF/ft | 29 lbs. | FEP | in. | 100MHz | »»»67dB/Kft | »»32dB@Kft | 229002AL5 | |
| 4pr Cat 5 Solid | Plenum | 24 | CMP | 15pF/ft | 37 lbs. | FEP | in. | 100MHz | »»»67dB/Kft | »»32dB@Kft | 229004AL5 | |

All Cable Specifications May Vary And Are Subject To Change


INTERNET
http://www.trynci.com
e-mail: ncisales@trynci.com

CONTACT
National Communications Inc.
Email ncisales@trynci.com
Hours Mon–Fri 9-4 EST

PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

# FOR CAT 5

## MODULAR CONNECTORS

Used with twisted pair cabling for solid or stranded trunk or patch cables. For more mudular connectors see page 24

10BaseT and 100BaseT



| TYPE | PART # |
|---|---|
| CAT5 RJ45 PLUG | |
| 8 POS X 8 CONTACT | 315015 |
| FLAT STRANDED | 414030 |
| ROUND STRANDED | 414030RST |
| ROUND SOLID | 414030RSO |
| FLAT STRANDED KEYED | 414031 |
| ROUND STRANDED KEYED | 414031RST |
| ROUND SOLID KEYED | 414031RSO |
| SHIELDED FLAT | 414056 |
| SHIELDED ROUND STRANDED | 414057 |
| SHIELDED ROUND SOLID | 414058 |
| SHIELDED DELUXE | 414059 |

## FIBER OPTIC CONNECTORS

**All connectors are 125m m multimode** for use in Fiber Optic Ethernet Applications. For more connectors see

10 Base FL



| TYPE | FERRULE | LOSS | REF # | PART # |
|---|---|---|---|---|
| NCI ST | CERAMIC/PC | <0.5dB | 3STCM125 | 410532 |
| AMP ZIP FDDI | CERAMIC | 0.6dB | 502015-1 | 410564 |
| NCI SMA905 | ST.STEEL | <0.8dB | 3905AM125 | 410574 |
| MOLEX | ZIRCONIA/PC | 0.2dB | 86061-0000 | 410636 |

## ETHERNET AUI CONNECTORS

For use in Ethernet transceiver applications using DB15 connectors.



| TYPE | PART # |
|---|---|
| DB15 ETHERNET HOODS 90° | 380334 |
| DB15 ETHERNET HOODS 180° | 380336 |
| BOOTS FOR 180° ETHERNET HOOD | 311407 |
| DB15 MALE CRIMP CONNECTOR | 310177 |
| DB15 FEMALE CRIMP CONNECTOR | 310178 |
| POSTS (SET) | 380340 |
| SLIDE LATCH | 380338 |

## BNC CONNECTORS & ADAPTERS

Used in ThinEthernet Applications. Our connectors are quality machined nickel plsted brass bodies with 50um gold flashed pins. Superior strain relief and finish make them a reliable termination. For more connectors and adapters see our Connectors section on page 28 & 29.

Thin Ethernet 10 BASE 2



| PVC THIN ETHERNET | PART# |
|---|---|
| MALE 3PC CONN. | 321022 |
| MALE 3PC CRIMP "AMP" | 321022-AMP |
| MALE 2PC CRIMP | 321071 |
| MALE COMPR. & SOLDER | 321053 |
| FEMALE 3PC CRIMP | 321024 |
| **PLENUM THIN ETHERNET** | **PART#** |
| MALE 3PC CONN. | 321023 |
| MALE 2PC CONN. | 321070 |
| **ADAPTERS THIN ETHERNET** | **PART#** |
| 50 OHM TERMINATOR | 326901 |
| 50 OHM TERMINATOR W/ GRND CHAIN | 326902 |
| T-CONNECTOR F-M-F | 323107 |

## N CONNECTORS & ADAPTERS

Used in Thick Ethernet Applications. Our connectors are quality machined nickel plsted brass bodies with 50um gold flashed pins. Superior strain relief and finish make them a reliable termination. For more connectors and adapters see our Connectors section on page 29.

Thick Ethernet 10 BASE 5



| PVC THICK ETHERNET | PART# |
|---|---|
| MALE CRIMP. | 323070 |
| MALE TWIST-ON | 323072 |
| MALE COMPRESSION PLUG | 323074 |
| FEMALE COMPRESSION JACK | 323076 |
| **PLENUM THICK ETHERNET** | **PART#** |
| MALE CRIMP. | 323071 |
| MALE TWIST-ON | 321073 |
| MALE COMPRESSION PLUG | 323075 |
| FEMALE COMPRESSION JACK | 323077 |
| **ADAPTERS THICK ETHERNET** | **PART#** |
| MALE 50 OHM TERMINATOR PLUG | 323066 |
| FEMALE 50 OHM TERMINATOR JACK | 323068 |
| T-CONNECTOR F-M-F | 321095 |

## The Thinnet Tap

Thin Ethernet 10 BASE 2

features a unique contact arrangement that provides an internal termination when the plug is disconnected. This eliminates the need for T-connectors and allows stations to be moved without disrupting the network. The system is a great solution to multi-user Ethernet LANs where moves and changes are frequent. The expansion box offers a perfect solution for small clusters in your office. Easy to install using a screwdriver, cutter and pliers.



| DESCRIPTION | PART # | REF # |
|---|---|---|
| THINNET TAP ASSEMBLY | 328102 | 222503-1 |
| THINNET TAP TERMINATOR | 328104 | 222504-1 |
| TERMINATOR W/GROUND WIRE | 328106 | 413661-1 |
| WALLPLATE | 328108 | 222754-1 |
| WALLPLATE DUST COVER | 328110 | 413294-1 |
| THINNET TAP DROP CABLE 8 ft. | 328112 | 222675-1 |
| THINNET TAP DROP CABLE 16ft | 328114 | 222675-3 |
| THINNET TAP DROP CABLE 25ft | 328116 | 222675-4 |
| THINNET TAP 4 PORT EXPANSION BOX | 328118 | 413507-1 |
| NO DROP PLATE | 328125 | |



PHONE / FAX

Phone (973) 325-3151 Fax (973) 325-2690

Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# CABLE ASSEMBLIES

All the Ethernet cables you will ever need are made at NCI. These cables feature the highest quality cable, connectors, strain reliefs, and workmanship. Custom lengths and

## THIN ETHERNET CABLE ASSEMBLIES



Our assemblies feature BNC connectors on each end, male or female, and are available in standard and custom lengths. Connect one end to your coax wallplate and the other end to a T-connector attached to a Network Interface Card (NIC).

**Thin Ethernet cable has a maximum length of 607 feet.**

Thin Ethernet 10 BASE 2

| LENGTH | PART # | REF # |
|---|---|---|
| 6 FT. PVC | M35006 | BC16M-✶✶✶ |
| 10 FT. PVC | M35010 | BC16M-✶✶✶ |
| 15 FT. PVC | M35015 | BC16M-✶✶✶ |
| 25 FT PVC. | M35025 | BC16M-✶✶✶ |
| 50 FT. PVC | M35050 | BC16M-✶✶✶ |
| CUSTOM LENGTHS - PVC | M35✶✶✶ | PVC |
| PLENUM | M36✶✶✶ | PLENUM |

✶✶✶ = LENGTH IN FEET

OPTIONAL- ADD SUFFIX -FB = FULLBOOT ASSEMBLY (ADD PER CABLE)
ADD SUFFIX -HB = HALFBOOT ASSEMBLY (ADD PER CABLE)

## THICK ETHERNET CABLE ASSEMBLIES



Our assemblies feature "N" type connectors on each end, male or female, and are available in standard and custom lengths. Marked every 2.5 meters to insure proper transceiver placement. Both ends must have a 50ohm terminator connected to it.

**Thick Ethernet has a maximum length of 1640 feet.**

Thick Ethernet 10 BASE 5

| LENGTH | PART # | REF # |
|---|---|---|
| 75 FT. PVC | M48075 | BHNE2B-✶✶✶ |
| 230 FT. PVC | M48230 | BHNE2B-✶✶✶ |
| 385 FT. PVC | M48385 | BHNE2B-✶✶✶ |
| 1640 FT. PVC | M481640 | BHNE2B-✶✶✶ |
| CUSTOM LENGTHS - PVC | M48✶✶✶ | PVC |
| PLENUM | M49✶✶✶ | PLENUM |

✶✶✶ = LENGTH IN FEET

## TRANSCEIVER CABLE ASSEMBLIES



Used to connect to transceivers. Strong outer jacket, great for long runs.

| LENGTH | PART # | REF # |
|---|---|---|
| PVC 15 FT. | M38015 | BNE3H-✶✶ |
| PVC 30 FT. | M38030 | BNE3H-✶✶ |
| PVC 65 FT. | M38065 | BNE3H-✶✶ |
| PVC 130 FT. | M38130 | BNE3H-✶✶ |
| CUSTOM LENGTHS - PVC | M38✶✶✶ | + FT. PVC |
| PLENUM | M39✶✶✶ | + FT. PLENUM |

✶✶✶ = LENGTH IN FEET

OPTIONAL - HOODING(STRAIGHT OR RIGHT ANGLE), AND HARDWARE(SLIDELATCH, POST, OR SCREWS)

## OFFICE DROP CABLE ASSEMBLIES



Each pair is individually foil shielded and the cable has an overall foil shield with a 95% braid shield. Great for short runs.

| LENGTH | PART # | REF # |
|---|---|---|
| 1 FT. | M37001-✶ | BNE4C-✶ |
| 2 FT. | M37002-✶ | BNE4C-✶ |
| 3 FT. | M37003-✶ | BNE4C-✶ |
| 5 FT. | M37005-✶ | BNE4C-✶ |
| 10 FT. | M37010-✶ | BNE4C-✶ |
| 15 FT. | M37015-✶ | BNE4C-✶ |
| CUSTOM LENGTHS | M37✶✶✶-✶ | + FT. |

ALL SIX AUI TRANSCEIVER CABLES LISTED ABOVE ARE OFFICE TYPE BOTH ENDS STRAIGHT.

✶✶✶ = LENGTH IN FEET
ADD SUFFIX -A = FEMALE LATCH - MALE POST
ADD SUFFIX -B = FEMALE LATCH - MALE SCREW

## CATEGORY 5 CABLE ASSEMBLIES



| LENGTH | PART# | |
|---|---|---|
| 3FT. | Q07211-003-? | |
| 8FT. | Q07211-008-? | |
| 10FT. | Q07211-010-? | |
| 15FT. | Q07211-015-? | |
| 25FT. | Q07211-025-? | |
| 30FT. | Q07211-030-? | |
| 50FT. | Q07211-050-? | |
| 100FT. | Q07211-100-? | |
| CUSTOM LENGTHS | Q07211-✶✶✶-? | + |

✶✶✶ = LENGTH IN FEET

?=Color: 1=Bone, 2=Red, 3=Green, 4=Blue, 5=Black, 6=Yellow

## CATEGORY 5 CROSS OVER CABLE ASSEMBLIES

| LENGTH | PART# | |
|---|---|---|
| 2FT. | N00056-002-? | |
| 3FT. | N00056-003-? | |
| 4FT. | N00056-004-? | |
| 5FT. | N00056-005-? | |
| 6FT. | N00056-006-? | |
| 8FT. | N00056-008-? | |
| 10FT. | N00056-010-? | |
| 15FT. | N00056-015-? | |
| 30FT. | N00056-030-? | |
| CUSTOM LENGTHS | N07211-✶✶✶-? | + |

✶✶✶ = LENGTH IN FEET

?=Color: 1=Bone, 2=Red, 3=Green, 4=Blue, 5=Black, 6=Yellow

# ETHERNET

## 100 Base-T Cards

### SMC

SMC's dual-speed EtherPower 10/100™ PCI card leads the industry in throughput, speed and efficiency. Installation takes less than 30 seconds. This card senses the hub or switch speed (10Mbps or 100Mbps). Use it in a 10Base-T network today and migrate to 100Base-TX Fast Ethernet when you need the additional bandwidth. Includes free SNMP agent and full complement drivers. FCC Class B compliant.

- **Cost effective 100Mbps technology • Installs in less than 30 seconds**
- **Seamless migration from 10 to 100Mbps • Free SNMP agent • Low CPU utilization**

| Description | Part# |
|---|---|
| EtherPower 10/100 | 534229 |
| EtherPower 10/100 PCI | 534231 |
| Ether 10/100 EISA | 534233 |

FREE SNMP Agent

### intel

- One step installation with high performance 32-bit architecture throughput at over 87M bps and lower CPU utilization under 30% • IEEE 802.3 compliant, seamless migration from 10 to 100Mbps Ethernet with support for 100Base-TX, T4 and 10Base-T • Now with Adaptive Technology which modifies the actual microcode that runs on the silicon • One connector and hub speed auto-sensing. Full-duplex capable (TX only), single RJ45 port and same driver

| Description | Part# |
|---|---|
| EtherExpress Pro/100 B PCI | 313629 |
| EtherExpress Pro/100 B PCI (5 pack) | 313631 |
| Pro/100 ISA | 313633 |
| EtherExpress Pro/100 EISA | 313635 |
| Pro 100-T4 PCI | 313637 |
| EtherExpress Pro/100 PCI Smart Mod. Adapt | 313639 |

### Xircom

Portable PC users can now connect to both 10 or 100 Mbps Fast Ethernet networks with this high performance PC Card. Autonegotiation of 10 to Mbps speeds provide a seamless connection in both network environments. These Upgradeable models are 10Mbps adapters for those who plan to implement Fast Ethernet in the future.

| Description | Part # |
|---|---|
| CreditCard 10/100 Ready | 331903 |
| CreditCard 10/100 Upgr 10-T | 331905 |
| CreditCard 10/100 Upgr 10-T Combo | 331907 |
| 10/100 Mbps Upgradeable Kit | 331909 |

### BOCA RESEARCH INC

The new BOCALAN card 10/100 provides an affordable high-performance 100Mbps Ethernet solution for IEEE 802.3 100Base-TX networks. It features a 32-bit PCI 10-pin bus and provides ten times the bandwidth of existing 10Base-T networks. This enables higher data transfer rates, increased throughput and low CPU overhead.

FAST Ethernet Card

| Description | Part# |
|---|---|
| BOCALAN card 10/100 | 339205 |

### 3Com

3Com's Fast EtherLink 10/100 adapters are the easiest, most affordable way to move to 100Mbps networking. Install the adapter once, and it will operate with all major 10Base-T and 100Base-TX hub types - no software or hardware changes are necessary. Like 3Com's market-leading EtherLink III family, Fast Etherlink adapters provide Parallel Tasking® performance, one-step installation with AutoLink™ software, a money-back guarantee of compatibility with PCI-compliant machines.

| Description | Part# |
|---|---|
| Fast EtherLink ISA 10/100 Base-TX Adapter (5 Pack) | 337702 |
| Fast EtherLink ISA 10/100 Base-TX Adapter | 337704 |
| Fast EtherLink 10/100 EISA UTP | 337723 |
| Fast EtherLink 10/100 EISA UTP (5 pack) | 337725 |
| Fast EtherLink 10/100 PCI | 337727 |
| Fast EtherLink 10/100 PCI UTP (20 pack) | 337729 |
| Fast EtherLink 10/100 PCI (5 pack) | 337731 |
| Fast EtherLink XL100 PCI | 337733 |
| Fast EtherLink XL100 PCI (5 pack) | 337735 |
| Fast EtherLink XL100 PCI (20 pack) | 337737 |



- Instant migration from 10 to 100Mbps networking • LED indicators for easy monitoring of Link integrity and data traffic • Plug n Play • Full-Duplex • Lifetime warranty • Deluxe NCI card is a 32-bit PCI 10/100 Ethernet Adapter. Supports any existing 10 Mbps network while providing simple integration to 100Mbps.

| Description | Part# |
|---|---|
| Deluxe 10/100 PCI | 403239 |
| Deluxe 10/100 PCI (5 pack) | 403241 |

Best

### Allied Telesyn International

The AT-2560TX is the impressive, new 10/100 PCI adapter card from Allied Telesyn International. The AT 2560TX delivers maximum network bandwidth, while utilizing very little CPU resources to get the job done. A sophisticated 32 bit, Bus-Mastering architecture makes sure important network data moves at top speed on and off the LAN.Auto sensing technology makes changing from 10 to 100Mb a nobrainer. You can install the cards today running at 10mb. As you upgrade your hubs, all affected workstations are instantly updated.

| Description | Part# |
|---|---|
| AT-2560 TX | 313219 |
| AT-2560 TX (5pack) | 313221 |

NEW

### digital

Parallel cut-through bus master architecture and other patented features maximize data throughput and minimize CPU utilization. Automatically adjusts to 10Mb/s or 100Mb/s network speeds. Cards support full-duplex for increased bandwidth up to 200Mb/s. Supports many platforms. Easy installation.

| Description | Part# |
|---|---|
| Fast Etherwork PCI 10/100 | 536103 |
| Fast Etherwork PCI 10/100 (5 pack) | 536105 |
| Fast Etherwork PCI 10/100 (25 pack) | 536107 |

### ASANTÉ

***Adapter PC Edition***

- Instant migration from 10Mbps to 100Mbps networking • N-Way Auto-negotiation • The PCI adapter's 32-bit bus mastering design allows maximun throughput without loading the host CPU • Easily visible LEDs indicate 10 Mbps operation,100Mbps operation, link integrity and data traffic. All-in-one compatibility to 10Base-T and 100Base-Tx Ethernet networks. A single RJ-45 port and all drivers support both 10 and 100Mbps operation.Available in 20 packs

| Description | Part# |
|---|---|
| AsanteFAST 10/100 PCI | 400705 |
| AsanteFAST 10/100 PCI (5 pack) | 400707 |

All-in-one compatibility to 10Base-T and 100Base-TX Ethernet networks. The AsanteFAST 10/100 offers compatibility with both Macintosh and PC PCI bus computers and works with existing 10Mbps Network. When it's time to switch your department to 100Mbps simply plug the network cable into a Fast Ethernet hub and your AsanteFAST 10/100 is ready to run at 100Mbps. The adapter will automatically connect at the correct speed. Available in 5 and 20 packs.

| Description | Part# |
|---|---|
| 10/100 Adapter (Mac/PC) | 400709 |
| 10/100 NuBus Adapter | 400711 |

## 10 Base-T Cards

### SMC

***EtherEZ™ Plug and Play*** - SMC's EtherEZ adapters support the Plug and Play (PnP) specification, making them fully auto-configurable in a PnP computer - simply install and power up!
***EtherPower™ PCI*** - SMC's PCI adapters are auto-configurable - just install and power up the system
***EtherPower 10/100™ PCI Adapter*** - With these dual speed, bus-master adapters, you can future-proof your network. Set them for 10Mbps to operate with all 10Base-T devices. When you need additional bandwidth simply set them to 100Mbps

| Description | Part# |
|---|---|
| ***EtherPower™ PCI Cards*** | |
| PCI Card RJ45 | 534277 |
| PCI Card RJ45 5 Pack | 534279 |
| PCI Card RJ45/BNC | 534281 |
| PCI Card RJ45/BNC 5 Pack | 534283 |
| ***EtherEZ™ Plug and Play Cards*** | |
| Plug and Play RJ45 | 534285 |
| Plug and Play RJ45 5 Pack | 534287 |
| Plug and Play BNC | 534289 |
| Plug and Play BNC 5 Pack | 534291 |
| Plug and Play RJ45/BNC | 534293 |
| Plug and Play RJ45/BNC 5 Pack | 534295 |

### BOCA RESEARCH INC

***Affordable BOCALAN Cards 2000+***

- **Easy to install • Software configurable • Programmable diagnostic LED • New lower Price**
- **Fully NE2000 compatible • Fully software configurable, jumperless design • Free technical support**

The BOCALAN Card 2000+ Combo is a lower price, easy to install Ethernet card for ISA bus systems that connects to10Base-T and 10 Base-2 networks. The BOCALAN Card 2000+ ensures compability with all NE2000 network operating systems.

***BOCALAN Card Plug and Play Adapters***

- **High performance, low priced adapters • Easy to install • Intel & Microsoft Plug and Play design**
- **IEEE 802.3 compliant**

The BOCALAN Card TP and Combo 16-Bit Ethernet Adapters for ISA bus systems feature a jumperless design and Plug and Play/Windows 95. These high performance, low priced, easy-to-install Ethernet Adapters are fully software configurable and come with one RJ45 jack for 10Base-T or an RJ45 and BNC for 10Base-T and 10Base-2 networks.

| Description | Part# |
|---|---|
| ***Affordable BOCALAN Cards 2000+*** | |
| 10Base-T | 339207 |
| 10Base-T / 10Base-2 | 339209 |
| ***BOCALAN Card Plug and Play Adapters*** | |
| 10Base-T | 339211 |
| 10Base-T / 10Base-2 | 339213 |

***AE-200 Plug and Play*** • Supports full duplex operation on the 10 Base-T and BNC port • On-board Remote Boot ROM socket for diskless workstations • LED indicators for Activity and Port Link detection.
***32 Bit PCI Bus Ethernet Adapter*** • Low Power consumption with sleep mode • Jabber timer for detecting transmitter failure

| Description | Part# |
|---|---|
| Adapter Combo | 541401 |
| Adapter Combo 5 Pack | 541403 |
| Adapter Combo 20 Pack | 541405 |
| ***NCI's AE-200 Plug and Play*** | |
| Plug and Play 10Base-T | 541407 |
| AE-200 Plug and Play Combo | 541409 |
| ***Bit PCI Bus Ethernet Adapter*** | |
| AE-380 PCI Bus Master PCI Card | 541411 |
| AE-360 Non Bus Mastering PCI Card | 541413 |

Plug - n - Play

### intel

***Plus Adapter*** - Intel's New EtherExpress™ PRO 10+ Adapters give you superior networking performance, simple Plug and Play installation, and standards based node management for your high powered PCs.
***Plus Adapter with Flash*** - Intel's PRO 10+ adapters with flash also provide centralized driver updates pre-boot virus protection and have limited lifetime warranty.
***PCI Plus Adapter*** - High performance with low CPU utilization, make the connection with the new EtherExpress™ PRO/10+PCI Adapter

| Description | Part# |
|---|---|
| EtherExpress PRO 10+ RJ45 | 313655 |
| EtherExpress PRO 10+ RJ45 5 Pack | 313657 |
| EtherExpress PRO 10+ RJ45/BNC | 313659 |
| EtherExpress PRO 10+ RJ45/BNC 5 Pack | 313661 |
| EtherExpress PRO 10+ Combo | 313663 |
| EtherExpress PRO 10+ Combo 5 Pack | 313665 |
| EtherExpress PRO RJ45 w/Flash | 313667 |
| EtherExpress PRO 10+ RJ45/BNC w/Flash | 313669 |
| EtherExpress PRO 10+ Combo w/Flash | 313671 |
| PRO 10+ PCI 10Base-T | 313673 |
| PRO 10+ PCI 10Base-T 5 Pack | 313675 |
| PRO 10+ PCI Combo | 313677 |
| PRO 10+ PCI Combo 5 Pack | 313679 |

### Allied Telesyn International

Improve Performance with this 10Mbit PCI card. Auto-configurable on power-up and supports full duplex operation.Windows 95 certified. ***Series 2000 Plus*** - Reliable and cost effective jumpers-less the NE2000-compatible solution is easy to install and maintain. ***Series 1700 Plus - ASIC ISA*** Software configurable jumpers allow simple, trouble freeinstallation. 32 KB on-board memory for programmed I/O

| Description | Part# |
|---|---|
| AT-2450T RJ45 | 536741 |
| AT-2550BT RJ45 and BNC | 536743 |
| AT-2450T 5 Pack + 1 Free | 536745 |
| AT-2550BT 5 Pack | 536747 |
| ***Series 2000 Plus*** | |
| AT-2000 10Base-T | 536749 |
| AT-2000 10Base-T BNC/AUI | 536751 |
| AT-2000 10Base-T 5 Pack + 1 Free | 536753 |
| AT-2000 10Base-T BNC/AUI 5 Pack + 1 Free | 536755 |
| ***Series 1700 Plus*** | |
| 10 Base-T | 536757 |
| 10 Base-T 5 Pack | 536759 |
| 10 Base-T & 10 Base-2 | 536761 |
| 10 Base-T & 10 Base-2 5 Pack | 536763 |
| 10 Base-T & 10 Base-FL | 536765 |
| ***Series 1720 Plus MCA*** | |
| 10 Base-T | 536767 |
| 10 Base-T & 10 Base-2 | 536769 |
| 10 Base-T & 10 Base-FL | 536771 |

| Description & Part# | Single | 5 pack | 20 Pack |
|---|---|---|---|
| **EtherLink III UTP only** | 536965 | 536965-A | 536965-B |
| **EtherLink III UTP/AUI** | 536967 | 536967-A | 536967-B |
| **EtherLink III BNC/AUI** | 536969 | 536969-A | 536969-B |
| **EtherLink III Combo** | 536971 | 536971-A | 536971-B |
| **EtherLink III UTP 32-Bit EISA** | 536973 | 536973-A | ------ |
| **EtherLink III XL PCI UTP only** | 536975 | 536975-A | 536975-B |
| **EtherLink III XL Combo** | 536977 | 536977-A | 536977-B |
| **EtherLink III BNC 32-Bit EISA** | 536979 | 536979-A | ------ |
| **EtherLink III PCI UTP only** | 536981 | 536981-A | 536981-B |
| **EtherLink III PCI Combo** | 536983 | 536983-A | 536983-B |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# 100 Base-T Hubs



## Bay Networks

- 12 100Base TX UTP Ports - Stack up to 6 BayStack 100TX Hubs
- NetGauge offers easy-to-read hub status
- Optional BayStack management module avialable - Optional redundant power supply available

| DESCRIPTION | PART# |
|---|---|
| 100 BASE-T FAST ETHERNET STACKABLE | 315551 |
| HUB CABLE | 315553 |

## NEW

- 8 or 16 100Base -TX ports - Expandible from 8 to 64 users - Plug-and-play with software to configure - Built-in LEDs clearly indicated individual port status - Uplink switch simplifies network extension - IEEE 802.3u standard compliant

| DESCRIPTION | PART# |
|---|---|
| TX 8 PORT | 315555 |
| TX 16 PORT | 315557 |

- Class 1 fast Ethernet compliant - Two daisy-chain ports for stackability
- Strict compliance with the IEEE 802.3 standards

| DESCRIPTION | PART# |
|---|---|
| T4 12 PORT | 333315 |
| TX 12 PORT | 333317 |
| FX 12 PORT | 333319 |

| DESCRIPTION | PART# |
|---|---|
| LINKBUILDER FMS TX 12 PORT | 337749 |
| LINKBUILDER FMS HUB EXPANSION CABLE | 337751 |
| LINKBUILDER FMS MGMT. MODULE | 337753 |
| TRASCEND WORKGROUP MANAGER. FOR WINDOWS V.4.0 | 337755 |

## 3Com

- SuperStack II Hub support for category 3 UTP cable
- SuperStack II UPS power supply keeps your network running during your blackouts • High-performance 100Mbps hbs • Each hub support 12 100Mbps ports and an optional 13 port for downlink • Stackable system allows for growth from 12 ports to 144
- Optional redundant power supply endures maximun network uptime • Front panel provides LEDs for cheking port status • Both offer 3Com performance and reability • User-friendly slide in SNMP management module lets you add network management when you need it • Lifetime manufacturer's warranty

| DESCRIPTION | PART# |
|---|---|
| SUPERSTACK II TX HUB | 337739 |
| SUPERSTACK II T4 HUB | 337741 |
| SUPERSTACK II UPS BACKUP | 337743 |
| SUPERSTACK II MGMT. MODULE | 337745 |
| SUPERSTACK II UPS MGMT. MODULE | 337747 |

NEW



## Best

| DESCRIPTION | PART# |
|---|---|
| 8 PORT HUB | 541550 |
| 12 PORT HUB | 541552 |

## ASANTÉ

- Connects from 12 to 180 users per stack running 100Base TX Fast Ethernet • Class II stackable architecture supports up to 358 ports in one collision domain • AsantéFAST 100 Management Module snaps on to the hub stack for full SNMP management • Auto positioning isolates problems ports and keeps networks running

| DESCRIPTION | PART# |
|---|---|
| TX 12 PORT | 400713 |
| TX / FX 8 PORT | 400715 |
| FAST ETHERNET MANAGEMENT MODULE | 400717 |

- 6 and 12 port hubs that connect your users to a 100Base TX Fast Ethernet Network - 10 times the performance of 10 Mbps Ethernet for workgroups with high-band width requirements - Plug it in and power it up! - No switches, no jumpers, and no software required

| DESCRIPTION | PART# |
|---|---|
| TX 6 PORT | 400719 |
| TX 12 PORT | 400721 |

## intel

The Intel Experss Stackable Hub combines the high-performance of modular hubs with the low-cost and flexibility of stackable hubs. The Intel Express Stackable 12 Port Hub also includes an expansion slot for a management module, and a media slot for uplinks to fiber.

| DESCRIPTION | PART# |
|---|---|
| TX STACKABLE & 10 PRO 100 PCI CARDS | 313641 |
| ETHEREXPRESS STACKABLE TX 12 PORT | 313643 |

## digital

- Compact Fast Ethernet hub for high-performance workgroups
- A single hubs support 8 users or daisy-chain 2 hubs for 14 users
- Auto-partitioning, auto-polarity detection and auto-jabber lock-up to minimize performance disruptions

| DESCRIPTION | PART# |
|---|---|
| ETHERWORKS 8TX HUB 8 PORT | 536109 |

**HUBS:** Just because you have a small LAN doesn't mean you have to go overboard on your hub. We offer many styles and sizes that allow for easy growth cascading when your needs change. These hubs come in BNC, 10 Base-T, and combination port configurations. Need a special hub? **Ask your salesperson! We can supply your requirements.**

# 10 Base-T Hubs

## Accton

### 5-PORT SMART ETHERNET HUB

• Portable, lightweight • At a glance network diagnostics • Connects 5 PCs together using 10Base-T • Can daisy chain up to 3 hubs together • Additional RJ45 port provided for cascading to other hubs • Can be used on the desktop or mounted anywhere with enclosed velcro patch

| DESCRIPTION | PART# |
|---|---|
| VENUS 5 PORT | 333115 |

### 8 & 16 PORT HUBS W/ SMARTWATCH

• Microprocesor-based design monitors network utilization, collisions, link and port status • Complete diagnostic LEDs simplify troubleshooting and display overall hub activity

| DESCRIPTION | PART# |
|---|---|
| 8 PORT | 333117 |

| DESCRIPTION | PART# |
|---|---|
| CROSSBOW 681 24 PORT | 537401 |
| CROSSBOW 682 24 PORT | 537403 |
| CROSSBOW CC6030Z MODULE | 537405 |
| CROSSBOW CC6035Z MODULE | 537407 |
| CROSSBOW CC6039Z MODULE | 537409 |

| DESCRIPTION | PART# |
|---|---|
| 9 PORT ETHERNET UNMANAGED | 537501 |
| 16 PORT UNMANAGED | 537503 |
| 16 PORT MANAGED | 537505 |

| DESCRIPTION | PART# |
|---|---|
| 4 PORT UTP RPTR 1/ AUI | 332507 |
| 4 PORT UTP RPTR 1/ BNC | 332509 |
| 4 PORT MINI RPTR | 332511 |
| 8 PORT UTP RPTR 1/ AUI | 332513 |
| 8 PORT UTP RPTR 1/ BNC | 332515 |
| 8 PORT ETHERNET SWITCH | 332517 |
| 8 PORT MINI RPTR | 332519 |
| 8 PORT MINI RPTR INTL VERSION | 332521 |
| 9 PORT UTP RPTR | 332523 |

| DESCRIPTION | PART# |
|---|---|
| MSX2500 12 PORT SLAVE RJ45, SNMP | 537601 |
| MSX2500 12 PORT MASTER RJ45, SNMP | 537603 |
| MSX2500 12 PORT BASIC RJ45, SNMP | 537603 |

| DESCRIPTION | PART# |
|---|---|
| MR415T MINI 4 PORT | 313224 |
| MR815T MINI 8 PORT | 313225 |
| MR820TR MINI 8 PORT AUI OR BNC | 313227 |

## Allied Telesyn International

The 12, 16 and 24 port full-size hubs offer both AUI and BNC uplink ports can be used simultaneosly and also feature a sturdy metal chassis for long-term durability. All Allied Telesyn hubs offer easy-to-read LED status

| DESCRIPTION | PART# |
|---|---|
| F3012 12 PORT AUI OR BNC | 313229 |
| F3016 16 PORT AUI OR BN | 313231 |
| F3024 24 PORT AUI OR BNC | 313233 |

• Optimal configuration flexibity system redundancy to connect users in stand-alone LANs • Reconfigured by the user or preconfigured at the factory • Using a chassis provide up to 104 ports • Chassis support horizontal and vertical mounting • Can be mounted in 19" racks or directly on the wall.

| DESCRIPTION | PART# |
|---|---|
| 12 PORT UTP | 313235 |
| 12 PORT UTP W/1 AUI | 313237 |
| 16 PORT UTP W/1 AUI | 313239 |
| AUI/AUI SINGLE PORT REPEATER | 313241 |
| BNC/BNC SINGLE PORT REPEATER | 313243 |
| 12 PORT W/SNMP, TELCO/AUI | 313245 |
| 12 PORT W/SNMP, TELCO/BNC | 313247 |
| 12 PORT W/SNMP, RJ45, AUI | 313249 |
| 12 PORT W/SNMP, RJ45, BNC | 313251 |
| 12 PORT SNMP MGMT. UTP | 313253 |
| 12 PORT SNMP MGMT. UTP RPTR. | 313255 |
| 8 PORT BNC W/SNMP, BNC/AUI | 313257 |
| 6 PORT FL CONCENTARTOR W/SNMP, ST/AUI | 313259 |
| 6 PORT F.O. SNMP MGMT. RPTR. | 313261 |
| 6 PORT F.O. SNMP MGMT. RPTR. | 313263 |
| 8 PORT BNC W/SNMP | 313265 |
| 8 PORT BNC SNMP MGMT. RPTR. | 313267 |
| 8 PORT BNC SNMP MGMT. RPTR. | 313269 |
| 24 PORT (AUI, TELCO) | 313271 |
| 24 PORT UTP W/1 AUI, 1 BNC | 313273 |
| 24 PORT W/SNMP, RJ45/AUI | 313275 |
| 24 PORT W/SNMP, TELCO/AUI | 313277 |
| 24 PORT SNMP MGMT. TELCO RPTR. | 313279 |
| 24 PORT SNMP MGMT. TELCO RPTR. | 313281 |
| 24 PORT SNMP MGMT. UTP RPTR. | 313283 |
| 24 PORT SNMP MGMT. UTP RPTR. | 313285 |
| SLAVE SNMP MGMT. RJ45 RPTR. | 313287 |
| 24 PORT W/ SECURITY SEG. | 313289 |
| 3600 2 SLOT CHASIS | 313291 |
| 3600 4 SLOT CHASIS | 313293 |
| 3600 8 SLOT CHASIS | 313295 |
| 19" RACK MOUNT BRACKET 3600 | 313297 |

## Allied Telesyn International

Workgroup Concentrators are standard-based hubs that provide networking solutions for small to medium size Ethernet local area networks. It can be used in a stanalone enviromtent, or two units can be stacked together via an expansion cable. An optional 3101 network management module is also available which provides SNMP, Telnet, and local management capabilities.

- 24 or 48 Base-T ports with shielded RJ45 connectors
- Port security features
- Selectable backbone ports

| DESCRIPTION | PART# |
|---|---|
| 3100 SERIES 24 PORT | 536701 |
| 3100 SERIES 48 PORT | 536703 |
| 3101 SNMP MGMT MODULE | 536705 |
| MOUNTING BRACKET | 536707 |

Canary Communications is dedicated to the design, development, and production of innovative products to meet the needs of the network customers

| DESCRIPTION | PART# |
|---|---|
| MINI ENET HUB 4 PORTS, 4 RJ45, 1 BNC | 333321 |
| MINI HUB 4 PORTS, 4 AUI | 333323 |
| THINNET REPEATER 4 PORTS | 333325 |
| MINI ENET HUB 8 PORTS, 4 RJ45, 1 BNC/AUI | 333327 |

## Best

| DESCRIPTION | PART# |
|---|---|
| 4 PORT HUB | 541554 |
| 8 PORT HUB | 541556 |
| 12 PORT HUB | 541558 |

**PRICES CHANGE OFTEN. CALL NCI FOR MOST CURRENT PRICES**

INTERNET
http://www.trynci.com
e-mail: ncisales@trynci.com

CONTACT
National Communications Inc.
Email ncisales@trynci.com
Hours Mon–Fri 9-4 EST

PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

# ETHERNET

# 10 Base-T Hubs

## 3Com

SuperStack™II stackable hubs provide complete media flexibility and manageability. It provides features like high-performance RMON, resilient links, and powerful security. This simple, cost-effective connectivity solution is ideal for local, wide area, and SNA networks.

| Description | Part# |
|---|---|
| SuperStack II 12 Port | 337757 |
| SuperStack II 24 Port | 337759 |
| SuperStack II Port Switch Hub - 12 Port | 337761 |
| SuperStack II Port Switch Hub - 24 Port | 337763 |
| SuperStack II 48 Port System | 337765 |
| SuperStack II UPS Backup | 337767 |
| SuperStack II 6 Port Fiber Hub | 337769 |
| LinkBuilder II 12 Port | 337771 |
| LinkBuilder II 24 Port | 337773 |
| LinkBuilder II 6 Port Fiber Hub | 337775 |
| LinkBuilder II Management Module | 337777 |
| Transcend Workgroup Manager v.4.0 | 337779 |
| EtherLink SmartAgent for NetWare | 337781 |

The basic OfficeConnect hub/8TPO supplies eight twisted-pair ports and simple LEDs for network monitoring. For offices that plan to expand, the 8TCP features a ninth, coaxial port that permits connection of other devices. The 8TPM offers the added power of support for transcend Quick Configuration Manager software via an integral SNMP SmartAgent

**- Easy Installation & use - Simplified administration**

**- Complete network control - Full interoperability - Convenient expandability**

| Description | Part# |
|---|---|
| 8 TPO | 337783 |
| 8 TPC | 337785 |
| 8 TPM | 337787 |
| Print Server | 337789 |
| Fax Server | 337791 |
| Remote 510 | 337793 |
| Remote 530 | 337795 |

**• Optimized for small LAN's • Configuration flexibility • Manufacturer's Lifetime Warranty**

| Description | Part# |
|---|---|
| TP/ 12 Hub | 337797 |

DECrepeater Stackable hub products provide network connectivity for any type of Ethernet device --from a PC to a mainframe system. All products can be used as standalone devices or snapped into the DEChub 90 or DEChub 900 backplane chassis. DEChub products connect any vendor's devices that support IEEE 802.3

**• Automatically indentifies and isolates faulty ports • Front panel LEDs indicate power, network activity and port status at a glance • Plug-and-Play --fully operational at start-up; modules can be easily "hot-swapped" • Same products can be used as a standalone or hub • Simple, low-cost, graphical MS-Windows based graphical management • DEChub products can be used both in a stack standalone or in a hub with out modification • Only stackables in the industry with this features.**

## digital

| Description | Part# |
|---|---|
| 90 TS 8 Port Stackable | 536111 |
| 90 TS 8 Port Module | 536113 |
| 90 FL 4 Fiber, 1 BNC | 536115 |
| 90 FA 1 Fiber, 1 AUI, 1 BNC | 536117 |
| 90 C 6 Port BNC Stackable | 536119 |
| 90 FC Stackable 2 Fiber, 1 AUI | 536121 |
| 90 Backplane Chassis | 536123 |
| 900 Multi switch Backplane | 536125 |

DECrepeater 90T-16 is a 16 port, manageable Ethernet 10Base-T Digital MultiStack System stackable hub. It can be SNMP managed using single Digital 90-series repeater manager including: a DECrepeater 90TS, DECrepeater 90FS or DECagent, along with ClearVISN Stack Manager a Windows-based management application.

| Description | Part# |
|---|---|
| 90 T 16 Port w/ Clear VISN Stack Manager | 536127 |

## TurboStack

**2 different types of switches • shared or segmented backplane chassis products • SNMP managed and slave/manageable modules • hot swappability • SNMP redundancy in the stack • 3 types network management**

| Description | Part# |
|---|---|
| 12 Port w/SNMP | 536129 |
| 24 Port w/SNMP | 536131 |
| 6 Port Fiber ST | 536133 |
| 12 Port Fiber ST | 536135 |
| 16 Port Switch w/100 Base-T TX Uplink | 536137 |

## SMC

Whether you choose the 5, 8 or 16 port model, you get no-configuration installation - no switches or software. With LED indicators for link, traffic and partition status of each port, plus network utilization and collision levels you're always informed. Each hub includes a daisy-chain port. You can cascade hubs to meet growing needs.

**- 8-Port model features a BNC port for thin coax backbone con nection - 16-Port models included both BNC and AUI ports to link to larger networks - Manufacturer's lifetime warranty on all models**

| Description | Part# |
|---|---|
| 5 RJ45 Ports | 534255 |
| 8 RJ45 Ports | 534257 |
| 16 RJ45 Ports | 534259 |

EASY

The most versatile hubs on the market today! Use them stand-alone for small workgroups. As your network grows, stack them eight high to build a multimedia Ethernet hub with up to 224 ports. Separate the stack into as many as 32 individual 10 Mbps segments for workgroups that need additional bandwidth but do not need to share data. Top the stack with an switch to interconnect the segments, so your workgroups can communicate with each other without losing any bandwidth.

**- Stackable up eight units high to form a 224-port multimedia hub - Segmentable up to 32 Ethernet segments per stack - Scalable up to 320 Mbps of aggregate bandwidth - Manageable via SNMP In-band, Out-of-band or remote**

| Description | Part# |
|---|---|
| 12 RJ45 Ports, 1 BNC port, 1 AUI Port | 534267 |
| 26 RJ45 Ports, 1 BNC port, 1 AUI Port | 534269 |
| 14 RJ45 Ports | 534271 |
| 28 RJ45 Ports | 534273 |
| Optional Network Management Module | 534275 |
| Stacking Cable | 534277 |
| SNMP-Based Network Management Software | 534279 |

## Bay Networks

| Description | Part# |
|---|---|
| 3308B 10BT Host Module 12 Ports | 670387 |
| 3304A Fiber Host Module (6 FOIRL Ports | 670389 |
| 3000N Premise Concentrator Ethernet | 670400 |
| 3030-OIHW 4 Slot Ethernet Chassis w/Pwr Spply | 670404 |
| 3301 Ethernet 8 Port Thinnet Host Module | 670408 |
| 3307HD 24 Port 10 Base T Host Mod (2 Telco 50) | 670415 |
| 3308B 10 Base-T RJ45 12 Port | 670416 |
| 3333 Retiming Module w/AUI Port | 670417 |
| 3334-ST Retiming Module w/Fiber ST Port | 315503 |
| 3514ST Token Ring Module w/Fiber Optic Repeater | 315507 |
| 3000SR Token Ring Chassis Concentrator 12 Slot | 315525 |
| 3505B 12 Port STP/UTP Token Ring Host Module | 315533 |
| 3314SA Enet Network Mgmt Mod FOIRL & ADV | 315545 |
| 5000N Ethernet Chassis 14 Slots | 315511 |
| 5001 Power Supply AC | 315513 |
| 5310A Network Mgmt Mod | 315515 |
| 5311A Ethernet DCE for 5310 | 315517 |
| 5308-AF 16 Port 10 Base T Host Module | 315519 |
| 5308A 24 Port 10 Base T Host Module | 315521 |
| 5110 Supervisory Module | 315523 |
| Token-Ring NMM with DCE | 315527 |
| 5575F Token-Ring Cluster | 315531 |
| 5304P Fiber Host Mod w/Retiming 10 Port | 315535 |
| 5310SA Enet Network Mgmt Module with NCE | 315539 |
| 5378-F Quad Cluster 4 ST & 10 10 Base T | 315543 |
| 810M 8PT 10 Base-T Hub w/Basic Mgmt | 315509 |

**- SNMP managed through Optivity® software, with full RMON functionality - Redundant power supplies and clocks assure reliability - Compatible with full range of BayStack switches routers and 100 Base-T hubs for a complete managed solution - Hot-swappable**

| Description | Part# |
|---|---|
| 12 RJ45 | 536801 |
| 24 RJ45 | 536803 |
| AUI Media Adapter | 536805 |
| 10 Base2 Media Adapter | 536807 |
| BaseFL Media Adapter | 536809 |
| Media Adapter | 536811 |
| Basic Network Mgmt Module | 536813 |
| Advanced Network Mgmt Module | 536815 |
| SA Adv. Network Mgmt Module | 536817 |
| Cascade Cable | 536819 |

**- Scalability: Expand from 12 to 24 ports; stack six units for 132 managed hubs**

**- Manageability: Optivity® plus Advanced agent management**

| Description | Part# |
|---|---|
| 12 Port | 536821 |
| 24 Port | 536823 |
| FL Fiber Module | 536825 |
| Hub to Hub Cable | 536827 |
| SNMP Module Kit | 536829 |
| Advanced Network Mgmt. Module | 536831 |

## HEWLETT PACKARD

HP AdvanceStack 10Base-T networking products offer low-cost choices and a flexible platform for stand alone and interconnected workgroups. Entry-level hubs and modules, ideal for relatively small businesses, let you "pay as you grow." Interconnected workgroups will find the HP AdvanceStack 10Base-T hubs and modules are aggressively priced.
Choose from 12, 24 and 48 port hubs. Add one SNMP expansion module and you can manage a stack of 16 hubs (784 nodes) up to 185 meters apart!
HP AdvanceStack hubs are designed and built with HP quality and backed by a Manufacturer's Lifetime Warranty.

**- Provides "hot swap" capabilities - Includes Intel i960 RISC-based processor, 1Mbyte RAM and 256 Kbytes Flash EEP-ROM - Free management software (StackManager) - Expansion modules available for bridge/routing, security, and dial-in/dial-out capability - Upgradeable to advanced management capabilities (DMM or SNMP modules)**

EASY

### Standalone Workgroups

| Description | Part# |
|---|---|
| 8E Port | 315629 |
| 8U Port | 315631 |
| 8U Port w/SNMP | 315633 |
| 16U Port | 315635 |
| 16U Port w/SNMP | 315637 |

### Managed Workgroups

| Description | Part# |
|---|---|
| 12 Port | 315639 |
| 12 Port w/SNMP | 315641 |
| 12 Port ,12RJ45, 1BNC | 315643 |
| 24 Port | 315645 |
| 24 Port w/SNMP | 315647 |
| 48 Port | 315649 |
| 48 Port w/SNMP | 315651 |
| 48 Port w/ 1 AUI | 315653 |
| 210 Router Module v.35 | 315655 |
| 210 Router w/SNMP v.35 | 315657 |
| Etherwist CX 9 Plus 9BNC, 1AUI | 315659 |
| Etherwist FO 8 Plus | 315661 |

### Managed Workgroups

| Description | Part# |
|---|---|
| SNMP Module | 315663 |
| AUI Port Module | 315665 |
| Twisted Pair Transceiver Module | 315667 |
| Thinlan Transceiver Module | 315669 |

The SynOptics 2000 family of 10Base-T workgroup hubs consist of the Model 2803/2804 and the 2813/2814.In stand-alone configurations, the Model 2803 and 2804 offer simple connectivity and low-level management. Both models provide connectivity and a choice of Standard and Advanced agent management options. The Model 2803 and 2804 feature 16 modular RJ45 unshielded twisted pair host ports, as well as front-panel AUI (Model 2803) or ST-type 10Base-FL compatible (Model 2804) up-ports for connecting to a variety of network backbones. A series of front-panel LEDs report hub traffic, collisions, management control and expansion status, while per-port LEDs indicate link and partition status for individual connectors.

| Description | Part# |
|---|---|
| 2803 - 16 Port Manageable w/ AUI Port | 315559 |
| 2803 - 16 Port, AUI Interconnection Port,Unmgnd | 315561 |
| 2804 - 16 Port Manageable w/ Fiber Port | 315563 |
| 2804 - 16 Port, Fiber Interconnection Port, Unmgnd | 315565 |
| 2813 04 - 16 Port Managed w/ AUI Port and Adv. SNMP Mgnt (RMNO | 315567 |
| 2813 04 - 16 Port, AUI Interconnection Port, Adv Mgnt. | 315569 |
| 2813 05 - 16 Port Managed w/ AUI Port and Standard SNMP Mgnt | 315571 |
| 2813 03 -16 Port, AUI Interconnection Port,Basic,Mgnt | 315573 |
| 2813SA - 16 Port, AUI Interconnection Port, Adv. Analyzer Mgnt | 315575 |
| 2814 04 - 16 Port Managed w/ Fiber Port and Adv. SNMP Mgnt (RMNO) | 315577 |
| 2814 04 -16 Port,Fiber Interconnection Prt,Adv. Mgnt | 315579 |
| 2814 05 -16 Port,Fiber Interconnection Port,BasicMgnt | 315581 |
| 2814SA - 16 Port, Fiber Interconnection Port, Adv. Analyzer Mgnt | 315583 |
| 2813 04 - 16 Port Managed w/ Fiber Port and Standard SNMP Mgnt | 315585 |
| Lic. Adv. Mgnt. Agent for 281X. | 315587 |
| 281X Expansion Cable. | 315589 |

The Model 800 10Base-T Workgroup Hub supports small offices and standalone networks requiring simple connectivity. Eight ports offer a plug-and-play solution for linking equipment such as PCs, printers, and servers. The Model 800M 10Base-T Workgroup Hub is just like the Model 800, with the addition of integrated SNMP management capabilities that make the hub a perfect solution for small LANs requiring connectivity to the corporate network. Built-in SNMP firmware allows the Model 810M to be managed port-by-port from a central management station. The Model 2800A 10Base-T Workgroup Concentrator, from Bay Networks™ delivers a compact and affordable solution for small networks supporting up to 16 users, bringing market leading quality to low-end Ethernet market.

| Description | Part# |
|---|---|
| Model 800 | 315591 |
| Model 810M | 315593 |
| 2800 16 Port | 315595 |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# SWITCHES

## How can I get more out of my Ethernet network?

If you find yourself asking this question then Ethernet switching may be your answer. An Ethernet Switch is basically a bridge that allows multiple user transmission. Fast Ethernet has specific distance

### 3Com

- Open up server bottlenecks with a 100Mbps Fast Ethernet Uplink
- LAN security architecture automaticaly disconnects unauthorized devices
- The LinkSwitch 1000 offers full SNMP management, including Remote management (RMON)
- Get detailed per-port statitcs 3Com's LinkSwitch products have revolutionized the workgroup switching with fast, simple, low-cost, highly-manageable designs.

| Description | Part# |
|---|---|
| SuperStack II Switch 1000 12 Port | 536901 |
| SuperStack II Switch 2200 | 536903 |
| LinkSwitch 1000 24 Port | 536905 |
| LinkSwitch 1000 12 Port | 536907 |
| LinkSwitch 500 | 536909 |
| LinkSwitch 2200 | 536911 |
| LinkSwitch 3000TP | 536913 |
| LinkSwitch 3000 Fiber | 536915 |
| SuperStack II Switch 1000 24 Port | 536917 |

### ASANTÉ

*4 Port 10Base-T Ethernet switch plus 100 Base-TX Fast Ethernet link*

- Plug-and-Play installation is transparent to network users
- SNMP-manageable from any SNMP network manager, Telnet or console Port

| Description | Part# |
|---|---|
| 5216 Switch | 400723 |

- Support simultaneous packet transfers at full Ethernet bandwidth
- 10Mbps ports leverage existing network infrastucture-no need to rewire, change adapters, or management system

| Description | Part# |
|---|---|
| Ready Switch 5104 | 400725 |

### Bay Networks

- Performance: Segments existing shared-media networks for increased per formance
- Simplicity: Easy to install and configure
- Reliability:Redundant power and SNMP management ensures uninterrupted performance
- Affordability: Cost-effective- use wherever bandwidth is an issue

The Bay Networks™ Ethernet Workgroup Switch offers performance-enhan cing switching solutions for high-density wiring closets. It's a simple, cost-effective method for segmenting networks to improve performance and eliminate data bottle-necks. In addition to the 10Mbps switch ports, an optional 100Mbps 100Base T Fast Ethernet switched port supports high-speed connections to high-utilization servers and backbones. Plug-in Media Adapters offering 100Base TX or 100Base FX connectivity are available for supporting 100Base T Fast Ethernet over Category 5 unshielded twisted pair (UTP) for Fiber Optic Cabling.

| Description | Part# |
|---|---|
| Ethernet Workgroup Switch | 536833 |
| Ethernet Workgroup Switch w/ 1000BaseT | 536835 |

### CiscoPro Etherswitch CPW

- Inmediate Plug and Play capability • 16 10Base-T switched ports ans 2 expansions slots • Error-FREE cut-through and store-and-Foward Switching • Address filtering on source and destination addresses • 1700 addresses per port • IEEE 802.1 compliant • Bridge MIB, EthernetMIB, SNMP MIBII and EtherSwitch extensions • Flash PROM for software updates

| Description | Part# |
|---|---|
| EtherSwitch 1600A 16RJ45/1 AUI/SNMP | 537201 |
| EtherSwitch 1600A 16RJ45/1 AUI/SNMP Full Duplex | 537203 |
| EtherSwitch 1600A 16RJ45/1 AUI/SNMP Full Duplex 8MB for 10K addresses | 537205 |
| ***CPW 1600 Expansion Module Option*** | |
| Single Port CPW100T Mod. adds 100Base-TX Connect | 537207 |
| Single Port CPW100F Mod. adds 100Base-FX Fiber Optyic Connectivity | 537209 |
| 3 Port CPW310F Mod. adds 100Base-F Fiber Optic Connectivity | 537211 |
| 4 Port CPW410t adds additional 10 Base-T | 537213 |
| CPW Stack port w/ 280Mbps + cable | 537215 |
| CPW0800-A EtherSwitch Stack Matrix Chasis+ Matrix Switch Connects 3 to 8 CPW 1600's | 537217 |




### Accton

- Creates 8 network segments, up to 80Mbps in total bandwidth
- Supports Hall and full Duplex modes simultanously

Accton's SwitchHub-8s is the perfect upgrade to your existing network group, providing easy installation and full-duplex power at a low price.
This Plug-and-Play unit installs in minutes increasing your current network per-formance up to 8 times!

NEW

| Description | Part# |
|---|---|
| SwitchHub 8s | 333121 |

### SMC

NEW

SMC's EZSwitch™ is the easy way to boost the bandwidth of your Ethernet work-group. This switch provides dedicated 10Mbps connections to your hubs, server, and power users. It features high-speed, cross-bar switching matrix, "on-the-fly" switching design that supports multiple conversions for increased troughput and server availability, and EZWatch LEDS.
The EZ Switch Plus™ offers everything the EZ Switch has, plus one 100Base-TX port. The new TigerSwitch£ XFE Switch has 16 10Base-T ports and one 100Base-TX Fast Ethernet port, each supporting filtering and forwarding at full wire speed.

| Description | Part# |
|---|---|
| TigerSwitch XFE | 534261 |
| EZSwitch | 534263 |
| EZSwitch Plus | 534265 |

NEW

### Microdyne

- Uses enhanced store-and-forward switching technology
- Communicates at wire speed
- Installs quickly, easily and transparently into your current LAN
- Provide superior LAN performance with maximun throughput, minimun response time, and efficient utilization of bandwidth

| Description | Part# |
|---|---|
| Eagle Switch 4x4 | 537101 |

| Description | Part# |
|---|---|
| Eagle Switch 4x100 | 537103 |

### intel

The Intel Experss 100Base-TX 5 Port Switching Hub gives you the band-width to connect Fast Ethernet hubs, servers and clients for a tenfold performance increase over 10Mbps Ethernet.

| Description | Part# |
|---|---|
| Express 10Base-TX Switching Hub | 313645 |
| Express 10Base-TX Switching Uplink Mod. | 313647 |
| Express 10Base-TX Switching Uplink Mod. | 313649 |

**PRICES CHANGE OFTEN. PLEASE CALL NCI FOR MOST CURRENT PRICES**

INTERNET
http://www.trynci.com
e-mail: ncisales@trynci.com

CONTACT
National Communications Inc.
Email ncisales@trynci.com
Hours Mon–Fri 9-4 EST

PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

# ETHERNET

## PCMCIA

### 3Com



**EthetLink III Parallel Tasking**

Delivers Full Parallel Tasking performance in a credit card-size package, outpacing competitive cards by up to 110%

- **AutoLink auto-installation software for NetWare automatically configures the I/O base address, interrupt request level, and transceiver type.**
- **A real power conserver, the twisted-pair adapter draws less than 50 milliamps for longest use between battery charges**

EtherLink III Lan+Modem PC Card combines the functions of a powerful Ethernet adapter and a high speed 28.8 Kbps Fax/Modem can operate simultaneously or separately.

| Description | Part# |
|---|---|
| 3Com EtherLink III PCMCIA 10T | 536953 |
| 3Com EtherLink III PCMCIA Combo | 536955 |
| 3Com EtherLink III 28.8 Fax/Modem & 10BaseT | 536957 |

### SMC



**EtherEZ & EtherEZ with**

SMC's Ether-EZ PC Card is the easy way to make all your Ethernet connections. SilmulTasking™ technology gives you top network performance, and EZStart makes installation a snap. The EtherEZ PC Card provides the features you want most-speed, compatibility, ease-of-use, and low power consumption. The card comes with a full set of network drivers, CSS, and a travel pouch. The Combo model comes with RJ-45 and BNC connectors. The 10 Base-T model provides an RJ-45 connector. The EtherEZ with Modem combines the functions of an Ethernet adapter with a 28.8 Kbps data/14.4 fax modem in a single PC card.

| Description | Part# |
|---|---|
| EZ PCMCIA 10Base-T | 534269 |
| EZ PCMCIA 10Base-2 | 534271 |
| EZ PCMCIA 10Base-T & 28.8 Modem | 534273 |
| EZ PCMCIA 10Base-2 & 28.8 Modem | 534275 |

### Xircom

**CreditCard Ethernet Adapter IIps &**



**• Advanced Look Ahead Pipelining for unprecedented performance • Full-duplex capability for peak network performance, optimum utilization of 20Mbps full-duplex environments with IIps • Supported by Windows 95 and Windows NT for immediate "Plug & Play" • Support for Hotswap and suspend/resume allows you to retain your network connection while integrated power management preserves your PC's battery life • Intuitive Windows-based user utility for easy adapter management.**

| Description | Part# |
|---|---|
| CreditCard Ethernet Adapter IIps 10-T | 381911 |
| CreditCard Ethernet Adapter IIps 6 Pack 10-T | 381913 |
| CreditCard Ethernet Adapter IIps 10-T/10-2 | 381915 |
| Pocket Ethernet Adapter III 10-T | 381917 |
| Pocket Ethernet Adapter III 10-T/10-2 | 381919 |
| CreditCard Modem 28.8 | 381921 |
| CreditCard Ethernet Modem 28.8 10-T | 381923 |
| CreditCard Ethernet Modem 28.8 10-T/10-2 | 381925 |

### FUJITSU



#### *LAN/SCSI Combo Card*

The SCSI components is compatible with most SCSI devices and achieves a transfer rate of up to 2.6MB per second. Includes SCSI accelerator software. The LAN component offers a bus transfer rate of up to 10 Mbps plus a 16 Kbyte buffer, and a 16 bit data bus. The LAN/SCSI Combo card works with any computer that supports PCMCIA

#### *10Base-T and 10Base-T/2 Ethernet Adapters*

The 10Base-T and 10Base-T2 Ethernet cards from Fujitsu are the fastest way to access data. The adapters maintain a bus transfer rate of up to 10 Mbps and utilize a 16 Kbyte buffer and 16 bit data bus!

#### *SCSI 600 Interface Adapters*

Transfer data at rates up to 2.6MB. Complete with common drivers and compatible with most SCSI devices. Work with any computer that supports PCMCIA. Includes SCSI Accelerator Software

#### *Serial Card*

Fujitsu's Serial card has a 115.2 Kbps baud rate. The Serial cards meet PCMCIA Type II standards, and have an internal 16550 UART. Use your current serial peripherals without swapping cables. And Microsoft Windows-based installation software automatically configures your PC!

#### *ISDN Internet Surfer PC Card*

The Fujitsu Internet Surfer PC Card is an ISDN terminal adapter that's designed for graphics-intensive Internet access. Fujitsu's ISDN PC Card allows you to access the internet at speeds twice as fast as a standard 28.8 fax/modem. And it provides Point-to point Protocol (PPP) and complies with all Card and Socket Services for installation and configuration.

#### *28.8 Fax/Modem Adapters*

Fujitsu's 28.8 Fax/Modem cards offer (v.34) bps data transmission speeds and Windows-based installation software that automatically sets-up and configures your PC. Both cards can be used with any analog PBX systems and are Type II Cards, Both support Class I and Class II fax. Both 288 and 144 cards come with an easy-to-use SafeJack adapter providing two standard phone cord sockets!

#### *Stereo Sound Adapter*

Get a 16 bit sound for virtually all of your multimedia needs! Whether you need sound for games or software, the Fijitsu Stereo Sound card provides maximum stereo performance, multiple sound interfaces, and a 16 bit D/A converter.

| Description | Part# |
|---|---|
| LAN/SCSI Combo Card | 541301 |
| 10Base-T Adapters | 541303 |
| 10Base-T/2 Ethernet Adapters | 541305 |
| SCSI 600 Interface Adapters | 541307 |
| ISDN Internet Surfer PC Card | 541309 |
| Serial Card | 541311 |

| Description | Part# |
|---|---|
| Stero Sound Adapter | 541313 |
| 28.8 Fax/Modem Card | 541315 |
| 14.4 Fax/Modem Card | 541317 |
| 28.8 Cellular | 541319 |
| 33.6 Fax/Modem | 541321 |
| 33.6 LAN/Modem | 541323 |

### ThunderCard

SBE REMOTE CONNECTIVITY




Offering spectacular performance in a tiny package, ThunderCard provides convenient PCMCIA ISDN support. Telecommuters can install ThunderCard in a portable PC for the utmost in high-speed remote access. Your current communication programs will control ThunderCards just like they control a regular modem.
High-speed ISDN connectivity between your remote offices can be achieved by plugging ThunderCard into SBE's netXpand family of remote connectivity products. Simply insert one or more ThunderCards into a netXpand SoHo, Central, or Routeman. You can even use ThunderCard for high-speed ISDN access to the Internet. ThunderCard supports the full 128Kbps capacity of ISDN and can connect at Speeds up to 256Kbps with netXpand's compression feature. NT1 Included.

| Description | Part# |
|---|---|
| ThunderCard Adapter | 541201 |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# WIRELESS LAN

# ETHERNET

**The ARLAN 600 family of wireless networking products offers high speed wireless LAN connectivity to most any Ethernet network. These products incorporate Aironet's microcelular architecture and direct sequence spread spectrum radio technology to provide true LAN Connectivity.**

Access points (cell controllers) attach to an Ethernet backbone or are configured as wireless repeaters, and provide connectivity for wireless client adapters. wireless clients move through cells seamlessly, maintaining a single network connection. Each adapter is shipped with NDIS, ODI, and packet driver software, enabling connectivity to most any popular network. Test software is also included which enables a wireless client to verify a radio cell coverage. All ARLAN products are available in the 900 Mhz and 2.4 Ghz band. **These products may be operated in the US and Canada without a radio license.**

## ARLAN

The ARLAN 640 Wireless Ethernet Bridge enables high speed, wireless data connections between separate Ethernet-cable LANs up to six miles apart. The ARLAN 640 is based on spread spectrum radio technology to provide fast and reliable wireless bridging. The ARLAN 640 can be operated without a radio license in the US and Canada.



**• Ethernet (802.3 and Type II) MAC-layer bridging • Full learning bridge (default), configurable filtering and forwarding • Configurable via console connection or via Telnet session • Configurable as wireless repeater enabling greater coverage • SNMP (MIB II and Aironet Enterprise MIB) support • 10Base-T, 10Base2 and 10Base5 connections • Configurable data rate enabling lower speed/longer speed range -** Maximum 860 Kbps data rate (900 Mhz products) - Maximum 2 Mbps data rate (2.4Ghz products) • **Multiple, non- overlapping channels -** Maximum 1 860 Kbps data rate (900 Mhz products) - Maximum 3 2 Mbps data rate (2.4Ghz products).

***SPECIFICATIONS:***

FREQUENCY: 900 MHZ
DATA RATE: SELECTABLE UP TO 860 KBPS
POWER: 125 VAC ADAPTER (SUPPLIED)
MODULATION: DIRECT SEQUENCE SPREAD SPECTRUM
MEDIA ACCESS: PACKET SWITCHED
TRANSMIT POWER: 620 MILIWATS
RANGE: UP TO 6 MILES
ANTENNAS: 6" DETACHABLE DIPOLE STANDARD

## ARLAN

The ARLAN 630 is an Ethernet backbone and acts as a cell controller for wireless repeater, thereby increasing range even where a backbone connection is impractical. The ARLAN 630 has a 10Base-T,10Base2, and 10Base5 connectors. It can be configured via a console port or via a Telnet session. The 630 also supports SNMP (MIB and Aironet Enterprise MIB). Configuration is stored in flash ROM, insuring proper configuration even after a power line failure. The ARLAN 630 is shipped with a detachable dipole antenna. External antennas and cabling are also available.

***SPECIFICATIONS:***

FREQUENCY: 900 MHZ
DATA RATE: SELECTABLE UP TO 860 KBPS
INDEPENDENT CHANNELS: 1 AT 860 KBPS
POWER: 125 VAC ADAPTER (SUPPLIED)
MODULATION: DIRECT SEQUENCE SPREAD SPECTRUM
MEDIA ACCESS: PACKET SWITCHED
TRANSMIT POWER: 620 MILIWATS

## ARLAN

The ARLAN 655 is a half-size ISA card wireless LAN adapter. It communicates to a LAN backbone via an ARLAN 630. Peer-to peer wireless configurations (no 630) are also supported. The ARLAN 655 provides true LAN connectivity to most any Ethernet LAN. NDIS, ODI and Packet Driver software is included, along with link test (RF coverage verification) utility software. The ARLAN 655 is shipped with a detachable dipole antenna.

## ARLAN

The ARLAN 670 is a full-size Micro Channel card wireless LAN adapter. It communicates to a LAN backbone via an ARLAN 630. Peer-to-peer wireless configurations (no 630) are also supported. The ARLAN 670 provides true LAN connectivity to most any Ethernet LAN. NDIS, ODI and Packet Driver software is included along with link test (RF coverage verification) utility software. The ARLAN 670 is shipped with a detachable dipole antenna.

## ARLAN

The ARLAN 690 is a two piece PCMCIA wireless LAN adapter. It communicates to a LAN backbone via an ARLAN 630. Peer-to-peer wireless communications are also supported The ARLAN 670 supplied with NDIS, ODI and Packet Driver software along with link test utility software. The ARLAN 670 is shipped with a detachable dipole antenna.

Aironet™

| DESCRIPTION | PART# |
|---|---|
| WIRELESS ETHERNET BRIDGE 640 | 541101 |
| ACCESS POINT 630 | 541103 |
| WIRELESS HALF-SIZE ISA CARD 655 | 541105 |
| WIRELESS MICRO CHANNEL CARD 670 | 541107 |
| WIRELESS PCMCIA CARD 690 | 541109 |

## FreePort Wireless Ethernet




Windata's Free Port Wireless Ethernet LAN System is an inbuilding wireless LAN that provides easy network environments and in disaster recovery, rapid deployment or temporary situations.

**• 16Mbps aggregate data rate • Spread spectrum radio technology • Ethernet compatibility • SNMP network management • License free • Fast and easy installation • Hub based architecture • Seamless integration with wired networks • Cost effective**

WINDATA

| DESCRIPTION | PART# |
|---|---|
| FREEPORT WIRELESS HUB+ANTENNA | 541001 |
| SINGLE ETHERNET TRANSCEIVER | 541003 |
| 8 PORT ETHERNET TRANSCEIVER | 541005 |
| SEE PORT NETWORK MANAGEMENT SOFTWARE | 541007 |

## WINDATA

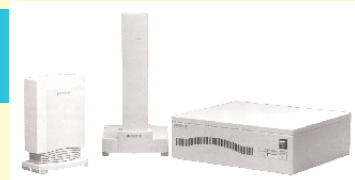


***AirPort I™***

The AirPort I is an interbuilding connectivity solution primarily designed for smaller distances and window-to window access. (1000 ft.) with general line of sight to the point of connection. Utilizing a wireless hub/remote architecture, the AirPort I relies on a standalone hub to manage the product's remote device. This ensures optimal performance and a reliable data channel in the face unpredictable atmospheric conditions.

| DESCRIPTION | PART# |
|---|---|
| AIRPORT I, ANTENNA,SNMP,AUI,+RJ45 | 541009 |
| AIRPORT REMOTE | 541011 |
| HUB RACK MOUNT KIT | 541013 |
| WALL MOUNT BRACKET API,ANT+REMOTE | 541015 |

## AirPort II Wireless



***AirPort II™***

The AirPort II provides an interbuilding connectivity solution with the flexibility to be installed indoors or outdoors. It can communicate at distances up to 1.4 kilometers (4750 feet) with general line of sight to the point of connection. Remote-Hub_Remote access is 2.8 kilometers. Similar to the AirPort I, the AirPort II features a wireless hub/remote architecture providing reliability and low error rates rates in inherently difficult communication environments.

| DESCRIPTION | PART# |
|---|---|
| AIRPORT II HUB INDOOR ANTENNA | 541017 |
| AIRPORT II HUB OUTDOOR ANTENNA | 541019 |
| DISTRIBUTION UNIT MULTIPLE ANTENNAS | 541021 |
| REMOTE W/INDOOR ANTENNA | 541023 |
| REMOTE W/OUTDOOR ANTENNA | 541025 |
| ADDITIONAL INDOOR ANTENNA | 541027 |
| ADDITIONAL OUTDOOR ANTENNA | 541029 |
| ANTENNA EXTENSION CABLE 50' LENGTH | 541031 |
| INSTALLER'S KIT | 541033 |

## 100VG & TX Adapters and




HEWLETT PACKARD

- IEEE compliance provides flexible, switch-configurable Ethernet and Token Ring frame support over existing cabling
- "Plug-and-Forget" installation set-up and configuration time
- Industry-leading, Manufacturer's lifetime warranty

See our diagram layout on page 37.


| Description | Part# |
|---|---|
| AdvanceStack 7 Port 100VG 7E hub | 315685 |
| AdvanceStack 7 Port Managed 7M 110VGhub | 315687 |
| AdvanceStack 14 Port 100VG 14 hub | 315689 |
| HP 110VG SNMP/Bridge Module | 315691 |
| Desk Direct 10/100VG PCI Adapter | 315693 |
| Desk Direct 10/100VG ISA Adapter | 315695 |
| Desk Direct 10/100VG EISA Adapter | 315697 |
| Desk Direct 10/100VG TX PCI | 315699 |
| Desk Direct 10/100VG TX PCI 6 Pack | 537001 |
| Desk Direct 10/100VG TX PCI 24 Pack | 537003 |

## Transceivers

Transceivers provide the electronic and physical interface between Coaxial and AUI type Ethernet segments. Microtransceivers allow for compact interface to the PC LAN card. Available in a variety of configurations. Featuring LEDs for link, polarity, and heartbeat status. If you need a small cluster of users in one area, try our Fanout units. They allow from 1 to 4 nodes off your Ethernet bus in a "cubical type" office area.

### Transceivers 100 Mbps

| Description | Part# |
|---|---|
| Fiber SC - MII 2 Km max | 333329 |
| Fiber SC - MII 500 mm max | 333331 |
| Fiber ST - MII 2 Km max | 333333 |
| Fiber ST - MII 500 mm max | 333305 |
| 100 Base-TX - MII (must use Cat 5) | 333335 |
| 100 Base-T4 - MII (must use Cat 5) | 333337 |

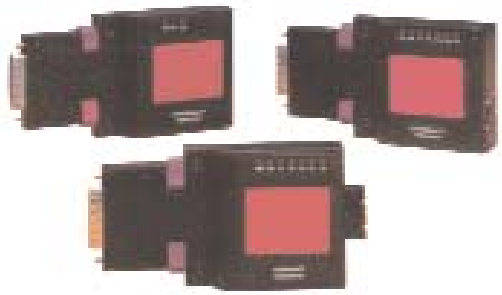

### Transceivers 10 Mbps

These transceivers bring Thin Ethernet, UTP, for Fiber Optic wiring directly to your workstations, so you save on cabling costs. The 10Base-T (UTP) and 10Base-2 (Thin Coax) units support distances up to 100 meters and 185 meters respectively. The Fiber Optic Units are the latest in Ethernet fiber-optic LAN Micro Transceivers and are plug-compatible with IEEE.802.3 hardware On all models, the Signal Quality Error (SQE)/heartbeat test can easily be enable via a switch on the outside of each unit.



| Description | Part# |
|---|---|
| Micro Transceiver 10Base-FL SMA | 333339 |
| Micro Transceiver 10Base-FL SC | 333341 |
| Micro Transceiver 10 Base-FL ST | 670466 |
| Micro Transceiver 1 RJ45 - 1 AUI | 313203 |
| Micro Transceiver 1 BNC - 1 AUI | 670464 |
| Micro Transceiver1 BNC - 2 AUI | 670470 |
| Micro Transceiver1 BNC - 4 AUI | 670472 |
| Micro Transceiver1 RJ45 - 4 AUI | 670474 |
| Micro Transceiver1 VTAP - 1 AUI | 670476 |
| VTAP Thicknet Coring Tool (used w/ Part# 670476) | 314981 |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# FANOUT TRANSCEIVER

## 2 and 4 Port Fanout Transceiver



Use these Fanouts to create local workgroups on your larger network or your own self-contained mini-network. Can be powered from the workstation connected to port 1 or by the included power pack. Diagnostic LED's show full status at a glance, SQE can be disabled for use with repeaters. 10Mhz throughput to all ports.

| DESCRIPTION | PART# |
|---|---|
| 2 PORT FANOUT (UPLINK PORT OPTIONAL) | 313921 |
| 4 PORT FANOUT (UPLINK PORT OPTIONAL) | 313923 |
| 4 PORT FANOUT TRANSCEIVER W/AUI | 313925 |
| EXPANSION MODULES: | |
| 10BASE-T UNSHIELDED TWISTED PAIR | 313927 |
| 10BASE-2 COAX (BNC) | 313929 |
| 10BASE-FL FIBER OPTIC (ST) | 313931 |
| 10BASE-5 THINCKNET AUI (D15) | 313933 |

## CentreCOM Multiport Fanouts

Allied Telesyn International




***2 and 4 Port Fanout***

• IEEE 802.3 compliant, ethernet Version 1.0 and 2.0 compatible AUIs • Powered by DTE, no external power required • Transparent to installed hardware • Two or four AUIs from a single transceiver drop cable • Simple installation with no additional AUI cables • Status and diagnostic LEDs • Five year warranty • Dimensions: 2 Port: 6.4"x 2.8"x1.3" - 4 Port: 6.4"x2.8"x2.2"



***8 Port Fanout with LEDs, Slim-line***

• IEEE 802.3 compliant, ethernet Version 1.0 and 2.0 compatible AUIs • Cascade up to 64 ports • Standalone network or attach to an Ethernet backbone • Switch-selectable SQE test; local and remote operation • Slim-line chassis occupies just one slot in a 19" rack • On Line, Transmit and Transceiver Power LEDs per port • Receive and Collision LEDs • Standalone or rack mountable • One year warranty • Dimensions: 8 Port: 17.0"x 9.9"x1.7"

| DESCRIPTION | PART # |
|---|---|
| 2 PORT FANOUT | 536709 |
| 4 PORT FANOUT | 536711 |
| 8 PORT FANOUT W/LEDS | 536713 |

# PRINT SERVERS

## HP JetDirect Cards & HP JetDirect Ex Print Server





HEWLETT PACKARD

- **Internal print server for HP Printers**
- **Includes support for LocalTalk networks**
- **Supports up to 16 Netware file servers and 64 print queues**
- **Throughput up to 350Kbps**

Use the HP JetDirect EX interface card to connect parallel-based printers anywhere on an Ethernet or Token Ring LAN.

Fully compliant with Novel NetWare security features, the JetDirect features automatic network/protocol switching environments, with data transfer rates of up to 230Kbps. The JetDirect EX Plus 3 supports 3 parallel printers.

| DESCRIPTION | PART# |
|---|---|
| ***HP JETDIRECT CARDS*** | |
| ETHERNET/802.3 - RJ45 (10BASE-T) 8 PIN MINI DIN | 315673 |
| ETHERNET LOCAL TALK /802.3 /BNC/RJ45 8 PIN MINI DIN | 315675 |
| TOKEN RING 802.5 - DB9/RJ45 | 315677 |
| ***HP JETDIRECT EX PRINT SERVER*** | |
| JETDIRECT EX PLUS | 315679 |
| TOKEN RING 802.5 - DB9 | 315681 |
| ETHERNET EX PLUS 3 /802.3 /BNC/RJ45 | 315683 |

## LANpress MP Print Servers



CASTELLE

The LANpress MP print server family set the standard for simplified access and management of network printing resources, giving you the flexibility to locate your printers next to your workgroup where they are needed. Castelle print servers fit easily into mixed environments with the flexibility of multi-protocol support, while still providing easy installation, proven reliability, high performance, and cost effectiveness.Castelle's support NetWare, Unix, TCP/IP, Windows NT, LAN Server/Manager, and EtherTalk networks environments. The entire LANpress family features full NetWare NDS compatibility and FLASH memory for easy upgradability.

| DESCRIPTION | PART# |
|---|---|
| LANPRESS JR. ETHERNET | 537301 |
| LANPRESS 1P ETHERNET | 537303 |
| LANPRESS 2+1 ETHERNET | 537305 |
| LANPRESS 3+1 ETHERNET | 537307 |

## NetportExpress Pro

intel




**• Faster performance at over 200Kbps • Native multi-protocol support • Integrates with enterprise management consoles • Centralized management by logical domains • Bi-directional communications boost print reliability**

Intel NetPort Express PRO Print Servers make it easy to add, use and control printers anywhere on your network. The compact external and internal versions offer an easy-to-use tool for single installation and configuration. External print server offers one serial and two parallel ports for connecting multiple printers.

| DESCRIPTION | PART# |
|---|---|
| NETPORTEXPRESS PRO ETHERNET (INTERNAL) | 313651 |
| NETPORTEXPRESS PRO ETHERNET (EXTERNAL) | 313653 |

## Modular MultiPort/ MultiMedia Repeater

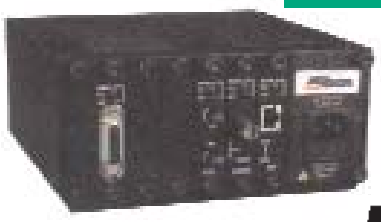

LANCAST

Ideal for networks that demand superior design flexibility. The modular design supports up to seven segments. Mix and match any media to any media. The repeater is fully compliant to IEEE 802.3 standards for 10Base-T, 10Base-5, 10Base-2, 10Base-FL and FOIRL, plus meets all the requirements of a repeater such as signal level, retiming, preamble regeneration and automatic partitioning. Each module has LED's to aid in network diagnosis and management and are hotswappable should a failure occur. A universal power supply supports 90-250/VAC at 50Hz or 60 Hz. Select the segments you need today and expand with future segments tomorrow.

| Description | Part# |
|---|---|
| Chasis w/Power Module | 312821 |
| Fiber Optic Module w/ ST | 312823 |
| Coax Module w/ BNC | 312827 |
| Twisted Pair Module w/RJ45 | 312829 |
| AUI Module w/DB15 Female | 312831 |
| AUI Module w/DB15 Male | 312833 |
| Blank Filler Panel | 312835 |

## Addtron 5 Segment MultiPort Repeater

ADDTRON



The Addtron Multi Port Repeater is a compact, 5 segment Ethernet repeater that enhances you multi-wiring network by allowing 5 segment combinations to connect to either Thin or 10Base-T environments. It includes two BNC Thin Coaxial ports and two RJ45 UTP ports. Media flexibility is further enhanced with a Thick Ethernet AUI segment for connection to a backbone or remote facility.

| Description | Part# |
|---|---|
| 5 segments Multi-Port Repeater | 408303 |

## 2 or 6 Port MultiMedia Repeater



TRANSITION networks


- **One AUI port standard**
- **Two or six slots for optional mix and match SICs (Slide in cards)**
- **LEDs for Power & Receive; individual port Receive, Collision & Partition**

No two ethernet networks are alike. That's why we developed the Multi Media Repeater-an Ethernet hub supporting multiple types of media. The base unit contains one AUI port and two or six slots for optional Slide-in-Cards (SICs)
SICs can be mixed and matched in a unit in any combination. They easily install by inserting them into an expansion slot. Your investment is preserved when your environment changes because you only add or replace the Slide-in-Cards. No jumpers are used. No additional configuration required.
All multimedia products comply with IEEE 802.3 Ethernet specifications and are UL listed. They meet FCC Class A standards and have a two year limited warranty.

| Description | Part# |
|---|---|
| 2 port Multimedia Repeater | 314325 |
| 6 port Multimedia Repeater | 314327 |
| 10Base-T Slide-in-Card | 314329 |
| BNC Slide-in-Card | 314331 |
| AUI Slide-in-Card | 314333 |

## Two-Port Micro Repeaters

Allied Telesyn International

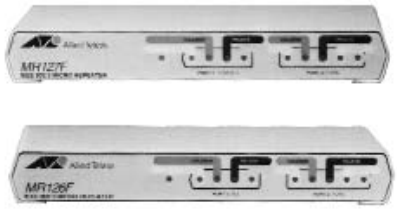

- **Fully IEEE Compliant**
- **Desktop, wall mount, or optional rack mount installation**
- **BNC ports with user-selectable termination switch**
- **Low cost -High Quality**
- **Coax, UTP, Thick Ethernet, and Fiber Optics support**

Fully compliant, compact repeaters offer low-cost solutions for media conversion and LAN extension applications.
These two-port Ethernet repeaters/media converters let you connect UTP, Thin coax, and Fiber in any combination. Segments on either side of the unit support full length, fully-repeated Ethernet transmission as specified by the IEEE. The repeaters will extend segments of any media type and are 802.5 compliant.
The Allied Telesyn family of repeaters combines all Ethernet media types with the features and functionality of larger repeaters. The small size allows for easy desktop, wall mount, or rack mount installation.

| Description | Part# |
|---|---|
| BNC/RJ45 | 536715 |
| AUI/RJ45 | 536717 |
| AUI/BNC | 536719 |
| AUI/AUI | 536721 |
| BNC/BNC | 536723 |
| RJ45/ST | 536725 |
| AUI/ST | 536727 |
| BNC/ST | 536729 |


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

## 100Base-FX to TX Converter



The "twister" is our new 100Base-TX to FX Fast Ethernet Converter which permits transparent integration of UTP Category 5 and Fiber Optic Fast Ethernet segments. It provides users with an affordable and reliable means of media conversion.
A shielded RJ45 connector supports 100Base-TX links up to 100 meters over Category 5 unshielded twisted pair cable. An SC type fiber optic connector supports the 100Base-FX link up to 2km over 50/125µm, 62.5/125µm, or 100/140µm multimode duplex fiber optic cable.

| Description | Part# |
|---|---|
| TX to FX Fast Ethernet Converter | 313847 |

## NCI Fast Ethernet Converters



NCI Inc.

***Compatible with IEEE 802.3***
***13 Diagnostic LED indicators***
***Dimensions:1.50"/8"/5.12"***

Fast Ethernet media converters convert 100Base-FX to 100Base-TX and vice versa. Simply plug-in the cables. These units convert media without adding delay to the network making use of state-of-the-art integrated circuits and surface-mount technology.
Consequently they do not impact the repeater budget of Fast Ethernet.
Is a two port converter with a RJ45 100Base-TX port on one side and a SC-type Fiber Optic on the other side.The is essentially the same device expect that the fiber optic connector is the ST-type.
Both converts support a 100Base-TX transmission range up to 100 meters over Category 5 unshielded twisted pair cable. Both SC-type and ST-type Fiber Optic converters support a transmission range of 2km (full Duplex) and 400 meters (half duplex), duplex 50/125, 62.5/125 and 100/140 Fiber Optic cable.
The converters both support auto-negotiate half or full duplex operation.

| Description | Part# | |
|---|---|---|
| 100 Base-TX Media Converter (SC to RJ45) | 403243 | Call |
| 100 Base-TX Media Converter (ST to RJ45) | 403245 | Call |

## AT-MC12T Universal Media Converters




Allied Telesyn International

The AT-MC12T CentreCom universal media converter provides connection between unshielded twisted pair media and female Attachment Unit Interface (AUI) with slide latch. Any Ethernet transeiver with a standard male AUI interface can be connected and locked to the AT-MC12T. With Surface Mount Technology and the latest IC designs, they provide compact, simple, and very inexpensive solutions to Ethernet media conversion.

| Description | Part# |
|---|---|
| AUI to UTOP | 536731 |
| UTP to BNC Kit | 536733 |
| UTP to ST Kit | 536735 |

**10Base-2 to Fiber**



**10Base-2 to 10Base-T**



**10Base-T to 10Base-FL**



**100Base-TX to 100Base-FX**



**10Base-T to Fiber 8port**



## 10Base-2 to Fiber SMA

Connect a 10Base-2 segment to a fiber optic segment and extend network distance up to 2000 meters (6600 feet) with the Coax to Fiber Media Converter. Easily connect an existing 10Base-2 segment or device to an Ethernet Fiber Optic backbone. Switch selectable coax termination: 50 ohm, 25ohm, or NO termination.

## 10Base-2 to Fiber ST

Make the transition from thin to fiber easy with this media converter. Just hook your existing thin network through the converter and take advantage of the longer distance available through fiber optics (up to 2000meters). You can connect a 10Base-2 device or a thin coax segment to a fiber optic device or a fiber hub. The functions as a media converter therefore you won't lose a repeater budget.
This compact unit measures up at only 2.75" x 2.25" x 0.95" (7.0cm x 5.6cm x 2.3cm), has switch selectable coax termination of 50 ohm, 25 ohm or none and has three status LEDs; Main: Power & Jabber; Fiber: Receive, Link & Collision and Coax: Collision & Receive.

TRANSITION networks

## 10Base-2 to 10Base-T

Transition's Coax to 10Base-T Media Converter reduces the price per port when installing a 10Base-T network with existing coax cabling. This unit can support up to 24 devices daisy chained on one coax segment (per twisted pair segment).
External terminator switch allows the user to either connect it directly onto a coax terminal.

## 10Base-T to 10Base-FL

Designed to allow direct conversion of 10Base-T devices to fiber optic cabling over Ethernet utilizing the IEEE 802.3 10Base-FL standard, this Bi-directional converter allows 10Base-T nodes or hubs at distances up to 2 kilometers without adding delay. Plug and Play compatibility with other 10Base-FL FOIRL, and older AT&T Starlan UTP Ethernet equipment is guaranteed since it is compliant with the 10Base-FL and 10Base-T standards.

## Fast Ethernet 100Base-TX to 100Base-FX

Increase the flexibility of your Ethernet cabling installation by connecting a 100Base-T twisted pair device to a 100Base-FX compliant port that has either an ST or SC fiber optic connector. Extend the network distance between two 100Base-T devices using the converters back-to-back such as full duplex switch and a file server up to 2000 meters (6600 feet).

## 10Base-T to Fiber Full Duplex

The 10Base-T to Fiber full duplex media converter connects a UTP segment to 10Base-FL compliant ports (either ST or SMA) with the added capability of supporting the faster line speeds of full duplex installations. Now you can connect an existing 10Base-T segment or device, such as a printer that does not support a fiber optic connection, to an Ethernet Fiber Optic backbone.
When two of these converters are used back to back, they can extend the distance between two 10Base-T devices up to 2000 meters (6600 feet) without using a repeater!
The new 10Base-T to Fiber 8 port Media Converter provides 8 connections with power one supply. A more economical solution than 8 separate converters when many connections are needed. Simple installation.

| Description | Part# |
|---|---|
| 100Base-TX to 100Base-FX | 314323 |
| 10Base-T to 10Base-FL Full Duplex | 314325 |
| 10Base-T to 10Base-FL | 314327 |
| 10Base-T to 10Base-2 | 314329 |
| 10Base-2 to Fiber SMA | 314331 |
| 10Base-2 to Fiber ST | 314333 |
| 10Base-T to Fiber 8 Port | 314335 |

# ETHERNET

ISDN Bridges and Routers extend your network to include the home office as well as any size remote branch office. Users are able to easily access both multi-user host and client/server based network resources at any time.

## ISDN Brigdes & Routers

Bay Networks

### *Nautica CLAM - Corporate LAN Access Module*

Multi-user host and client/server based network resources can be easily accessed at any timevia the Nautica Clam Bridge/Router. Offers a high-performance, scalable and easy-to-use design making it an ideal choice for evolving ISDN networks.

The CLAM is ideal for home offices or small branch offices. It is equipped with one BRI port and one Ethernet port.

**Supports ISDN Basic Rate Interface (BRI) and Primary Rate Interface (PRI), and a wide range of routed protocols including Novell IPX/SPX, TCP/IP, Netbios, Microsoft WINS and Banyan VINES, as well as the OSPF and RIP1 and RIP2 routing protocols.**

**• Also Supports Industry Standard Point-to-Point Protocol (PPP) and Multilink PPP (RFC 1717) ensuring interoperability with central site routers that also support Multilink PPP and other third party routers on the Internet.**

| Description | Part# |
|---|---|
| Clam Bridge ISDN BRI/Cable 10BT LAN | 536835 |
| Clam Router ISDN Bri/Interface 10BT DB9 Adapter w/Software | 536837 |

Farallon



*FARALLON*

### *Netopia ISDN Internet Router*

Whether connecting multiple sites or connecting a single location directly to the Internet, Netopia is the only choice.

Netopia includes:

**• Shared ISDN Internet Access for workgroups • Plug and Play, built-in BRI NT1 with U interface, Dual 10BT, AUI, Local Talk • Extensive security including PAP, CHAP, IP firewall filtering, and callback • 100% compatible with major Internet services providers • Includes "best-of-class" Internet software • TCP/IP, AppleTalk, AURP Routing • Built-in LocalTalk to Ethernet Routing • Built-in DHCP/MacIP Server for automated IP address allocation • Up to 512K throughput • PPP, MultiLink PPP for transparent bandwidth on demand.**

| Description | Part# |
|---|---|
| Netopia w/IP Routing 5 user | 538701 |
| Netopia w/IP Routing | 538703 |
| Netopia w/IP and AppleTalk | 538705 |

3Com®

### *AccessBuilder Remote ISDN Bridge/Routers*



| AccessBuilder Description | Part# |
|---|---|
| Remote Office 600 ISDN Basic Rate Bridge/Router with U Interface | 536945 |
| Remote Office 600 ISDN BRI Bridge/Router - Dual BRI with 2 U Interfaces | 536949 |
| Remote Office 500 ISDN BRI Bridge/Router with U Interface | 536947 |
| Remote User 400 ISDN BRI Bridge/Router with U Interface | 536951 |

#### High Speed ISDN BRI Remote Routing

*Fast, affordable connections for IP and IPX Ethernet LANs*

End-to-end AccessBuilder® Remote ISDN connections speed remote networking and save time and money. The bridge/routers provide data compression for cost-efficient data transmission over dial or leased lines and they support IPX/SPX spoofing (session emulation) to minimize dial-up line charges in Netware® environments.

The AccessBuilder ISDN bridge/routers offer many features that remove complexity from network administration.

Whether an organization needs to interconnect many remote offices or provide a single link to the Internet, these bridge/routers deliver speed, ease of use and value.

**• High Performance - AccessBuilder ISDN BRI (Basic Rate Interface) bridge/routers utilize data compression and channel aggregation to deliver up to 512 Kbps throughput.**

**• Novell IPX/SPX spoofing - Eliminates most polling traffic to reduce usage charges for ISDN dial-up lines.**

**• Security - Data encryption, authorized bridge tables, calling-line identification and support for third party authentication servers provide robust security.**

**• Simplified Management - AccessBuilder ISDN bridge/routers offer intuitive configuration and convenient central management through SNMP and telnet plus local monitoring through front panel LCD/LED indicators.**

**• Easy Field Upgrades - Flash EPROM memory ensures fast, simple software upgrades on site or remotely.**

**• Supports MAC level bridging, TCP/IP, Novell IPX, FCP, PPP, MP, BACP and DHCP.**

**• Analog Support - The Remote Office 500 supports analog telephony equipment.**



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

**What is a Bridge?** A bridge is a device that connects 2 or more networks and forwards packets between them using the MAC layer source and destination addresses. Bridges have the same net number on either side.

**What is a Router?** A router acts much like a bridge, but operate using different methods. Routers use the IP portion of the transmission packet to access the network address. They can find the best route between networks even if there are several networks in between. Routers have different net numbers on each end.

**When do I need a Router?** You need a router if you want to connect to the internet, or if

## 2265 Local Bridge




*RETIX*

The 2265 Local Bridge provides a simple and efficient way to connect IEEE 802.3 networks, including Ethernet, Thin Ethernet and StarLAN. When used to divide a large network into a smaller, interconnected segments, Retix bridges offer dramatic increases in traffic capacity and improved fault isolation. The 2265 has 4 ports, two thin and thick Ethernet, but only 2 each can be used at one time.

- **Connects two IEEE 802.3/Ethernet LANs, using any topology**
- **Increase effective LAN bandwidth by intelligent traffic filtering**
- **Improve LAN reliability by partitioning and segmentation**
- **Automatically locate and learn end station addresses**
- **Interoperate with all Retix centrally managed internetworking products**

| Description | Part# | |
|---|---|---|
| Local Bridge 2265 | 538501 | Call |

## 4660 High Performance Local

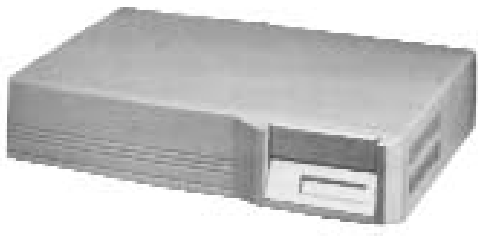

*RETIX*

The 4660 Local Bridge provides a simple and efficient way to connect IEEE 802.3 networks, including Ethernet, Thin Ethernet FOIRL and twisted pair wiring. When used to divide a large network into smaller interconnected segments, the 4660 offer dramatic increases in traffic capacity and improved fault isolation.

- **Segments a network to maximize network performance**
- **Improves network reliability & identify problem areas quickly**
- **Interconnect different LAN media to provide network flexibility**
- **Expand network past cable length limit & repeater restrictions**
- **Uses autolearning functions for easy installation and easy use**
- **Improves control over the network with management systems**
- **Operates at top speed for high throughput**

| Description | Part# | |
|---|---|---|
| Local Bridge 4660 | 538503 | Call |
| Interface Module BNC | 538505 | Call |
| Interface Module AUI | 538507 | Call |
| Interface Module RJ45 | 538509 | Call |
| Interface Module FOIRL | 538511 | Call |

## 8229 Bridge



*IBM*

The 8229 bridge is a functional enhancement and replacement to the 8209 bridge, as of July 1994. The enhancements to the 8229 include modular design, rack mountable, flash memory for code downloading, increased media speed, enhanced management and the addition of a WAN bridge. The bridge comes in three models, with connection of either two local Token Ring, a local Token Ring and a local Ethernet, or a two remote Token Ring over a Wide Area Network at speeds up to T1/E1. The enhanced management provides the ability to be managed via either IBM LAN Network Manager (LNM) or a ANMP manager such as IBM AIX Netview/6000

| Description | Part# | |
|---|---|---|
| Chassis connects 2 Local Token Ring | 316121 | Call |
| Chassis connects 1 Local Token Ring & 1 local Ethernet | 316123 | Call |
| Chassis connects local Token Ring & Remote Token Ring via WAN | 316125 | Call |
| Single Port token Ring Module | 316127 | Call |
| Dual Port token Ring Module | 316129 | Call |
| Ethernet Module | 316131 | Call |
| WAN Module | 316133 | Call |

## Ethernet Bridges



*Allied Telesyn*

- **Self-learning MAC layer bridges**
- **Sustained 25,000 packets/second filtering**
- **Sustained 12,500 packets/second forwarding**
- **Two media options per network segment - BNC or AUI**
- **Supports up to 2000 MAC addresses in filter table**
- **Standalone or rack-mount installation**

| Description | Part# |
|---|---|
| Learning Bridge | 536737 |
| SNMP Mang. Learning Bridge | 536739 |

## NB-20E Local Ethernet-to-Ethernet



The NB-20E is a low-cost, medium-performance bridge that connects two 10 Mbps Ethernet segments. This bridge features a software filtering system that determines which packets are allowed to pass through the bridge. The NB-20E can be configured as the root bridge and also to filter broadcast packets.

Media Supported: STP/UTP, Fiber Optic, Coaxial, AUI
Type of Interface: AUI

| Description | Part# | |
|---|---|---|
| NB-20E | 538601 | Call |

## NB-25E Managed Local Ethernet-to-Ethernet




The NB-25E is a high-performance bridge that connects two 10 Mbps Ethernet segments. This bridge features a hardware filtering system that determines which packets are allowed to pass through the bridge without imposing a load on the host CPU. This allows increased bridge speed and permits the use of a large Source Address Table. The NB-25E can be configured as the root bridge and also to filter broadcast packets.

| Description | Part# | |
|---|---|---|
| NB-25E | 538603 | Call |

## Ethernet Bridges

The transceiver-sized MicroConnect is the world's smallest. It is designed to separate workgroups from the building backbone and support up to 256 users per workgroup. Its plug and play feature makes for easy installation and requires no external power. The EtherConnect IL Bridge supports Spanning Tree Algorithm and SNMP. It also has extensive filtering options which include static and dynamic address, protocol, and port-map filtering. They both have automatic address learning and aging, plus full wire speed filtering and forwarding at 14,880 pps.The EtherConnect IL Router incorporates both bridging and routing functions to deliver maximum performance, security, and easy management. Routed protocols include IP/IPX, with all other protocols being bridged. It also supports Spanning Tree Algorithm and SNMP management.

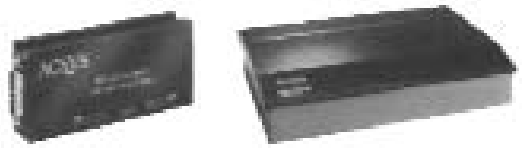

*ACSYS/ CONNECTWARE*

| Description | Part# | |
|---|---|---|
| MicroConnect Ethernet Local Bridge | 538801 | Call |
| EtherConnect Intelligent Local Bridge | 538803 | Call |
| EtherConnect Intelligent Local Router | 538805 | Call |


# ETHERNET


Cat 5 is a telecommunication cabling standard. In order for cable to be labeled Cat 5 it must meet the performance benchmarks that the EIA/TIA provide for UTP wiring. This allows Cat 5 to reach transmission speeds of up to 100 Mbps. Cat 5 not only supports Ethernet but also RS-232,

NCI INC.

12PT Panel


Closed 110/568B Open

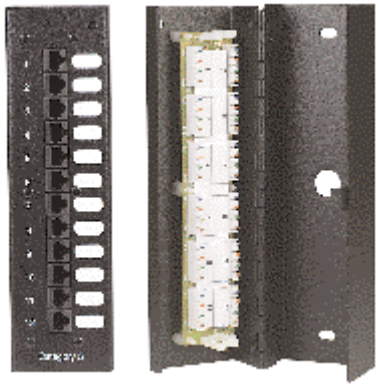

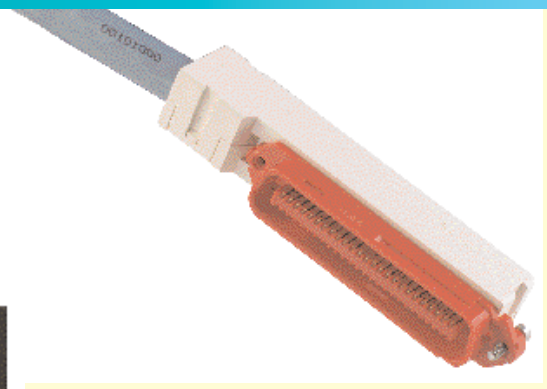


| Description | Part# |
|---|---|
| 25PR. Male Plug | 403247 |
| Color-Code Bar for Butterfly Tool | 403257 |
| 90˚ Hood w/ Strain-Relief | 403249 |
| 120˚ Hood w/ Strain-Relief | 403259 |
| 25PR. 24PT Panel T568B to Telco Fem | 403251 |
| 25PR. 6PT Dist Box Panel T568B | 403253 |
| 110 Type 6PT Dist Box | 403255 |
| 12PT Panel 110/568B | 860404 |

With Unicom's CAT5 In-line Coupler you can easily join CAT5 patch cords and still maintain the high standard of EIA/TIA Category 5. Moves, adds and changes are hassle-free. You'll save time and money by using this In-Line Coupler and your existing CAT5 Patfch cords.

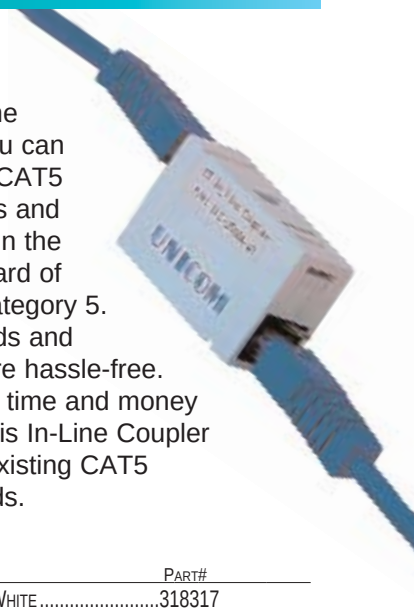


| Description | Part# |
|---|---|
| In-Line Coupler White | 318317 |
| In-Line Coupler 16PT Panel | 318318 |

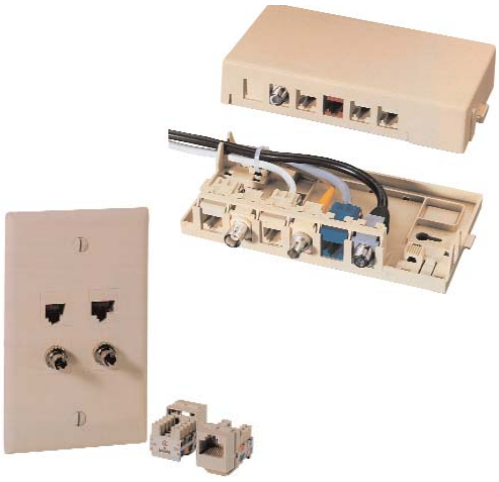

| Description | Part# |
|---|---|
| RJ45 Jack | 312415-Ivory |
| 6 PT Surface Mt | 312419-Ivory |
| 3 PT Wallplate w/ 1 Blank | 312413-Ivory |
| Ivory Blanks 10 Pack | 312417-Ivory |
| 24 Port Cat 5 Panel 568B | 312421-Ivory |

CONTACT SALES PERSON FOR MORE LEVITON PRODUCTS

AT&T



| Description | Part# |
|---|---|
| RJ45 Jack 568B | 400037 |
| Single Outlet Faceplate | 400097 |
| Duplex Outlet Faceplate | 400099 |
| 24 PT 568B Panel | 313415 |

CONTACT SALES PERSON FOR MORE AT&T PRODUCTS





| Description | Part# |
|---|---|
| 1 RJ45 JACK 568B | 311991 |
| 2 RJ45 JACK 568B | 311901 |
| Single Gang Wallplate | 311905 |
| Double Gang Wallplate | 311921 |
| Blank Module | 311903 |
| Single Gang Box | 311939 |
| Dual Gang Box | 311923 |
| 24 PT 568B Panel | 311913 |

CONTACT SALES PERSON FOR MORE ORTRONICS PRODUCTS



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# Ethernet 5 Port Hub



| DESCRIPTION | PART# |
|---|---|
| AXEL H-5 ETHERNET, 5 PORT HUB | 535901 |

**Technical Specification**

- Standard: IEEE 802.3 10BASE-T
- Number of Twisted-Pair Ports: 5
- Cascading: "Uplink"
- LED Indicators: 5 for Link/Rx, 1 for Power, 1 for Collision
- EMI: FCC Class A
- DC Input: 7.5VDC/9VDC (AC power adapter), 5VDC (Keyboard power extractor)
- Power consumption: 2W max
- Power Source: AC power adapter or keyboard power extractor
- Dimension: 81x102x26mm (3.02x4.12x1.02in)
- Weight: 108 grams (excluding power adapter)
- Operating Temperature: degrees Celsius
- Humidity: 10-90% non-condensing

# Ascend Bridge/Router



| DESCRIPTION | PART# |
|---|---|
| ASCEND PIPELINE 75 BRIDGE/ROUTER | 542501 |

# Black Box Local Repeater




Black Box Local Repeater
Model LE602A-R3

**Specifications**
Ports: 2 BNC
Interface: 10Base2
Cable Required: RG58 coaxial
Maximum Distance: 185 m (607 ft.) of Thin Ethernet cable
Data Rate: 10 Mbps
Connectors: 1 Rear-mounted IEC 320 male power inlet, both BNC ports female
Power: Input: 90 to 260 VAC, 47 to 63 Hz into internal autosensing power supply
6ft. power cord with NEMA 5-15P plug and IEC 320 female outlet
MTBF: 40,000 hours
Cooling Method: Convection
Temperature Tolerance: Operating: 32 to 122º F (0 to 50º C)
Storage: -4 to 140º F (-20 to 60º C)
Humidity Tolerance: 10 to 95% noncondensing
Size: 1.8"H x 8.5"W x 5.4"D (4.6 x 21.6 x 13.7 cm)
Weight: 2.5 lb. (1.1 kg)

| DESCRIPTION | PART# |
|---|---|
| BLACK BOX LOCAL REPEATER, 2 PORT | 313531 |

# 3Com 10Base-T Hub



- simple installation in less than 10 minutes
- Easy connections for up to 8 workstations
- Ergonomic design saves space and ensures silent operation
- Convenient "stacking clips" for easy expandability and secure stacking of multiple OfficeConnect units
- Unique "Alert" LED to simplify troubleshooting
- For home or office use
- True compatibility with Windows®95, NetWare®, and other network operating systems

**Connections**
8 10BASE-T RJ45 ports (Port 8 is switchable, allowing connection of multiple units using 10BASE-T cable).
**Dimensions**
Width 220 mm (8.7 in)
Height 35.8 mm (1.4 in)
Depth 135.4 mm (5.3 in)
**Power**
11 VA
**Standards**
Functional
ISO 8802/3
IEEE 802.3
EMC
EN 55022 Class B
EN 50082-1
FCC Part 15 Class B Verified
C108.8 Class B
VCCI Class 2
Screened (shielded) cables must be used to ensure compliance with these standards.

**System Requirements**
To create a complete Ethernet network with the OfficeConnect Hub/8TPO you will need the following items:
- A network adapter with 10BASE-T connection installed in each PC to be connected to the hub. If you don't already have adapters in place, 3Com offers a complete family of EtherLink® III adapters-the world's best-selling and easiest-to-install network adapters.


- A "straight-through" 10BASE-T cable (up to 100 meters [328 feet] long) for each PC or device being connected.

- Network operating system software. 3Com's OfficeConnect Hub/8TPO is fully compatible with all leading network operating system software, including Windows 95, Windows NT, Novell NetWare, and more than 100 other PC and network operating systems.

| DESCRIPTION | PART# |
|---|---|
| 3COM OFFICE CONNECT, 10BASE-T HUB | 536920 |


# ETHERNET

## Canary Transceiver




| DESCRIPTION | PART# |
|---|---|
| CANARY, MTX-1070 TRANSCEIVER | 333312 |

## Ethernet Card

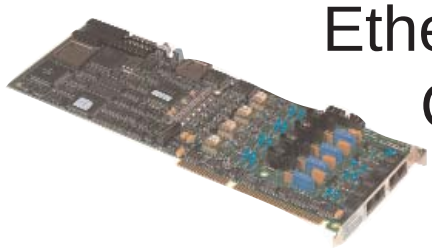

| DESCRIPTION | PART# |
|---|---|
| DIALOGIC 41D-INT | 542401 |

## Accton Ether Hub




| DESCRIPTION | PART# | REF# |
|---|---|---|
| ACCTON ETHERHUB-8S | 670337 | EN2040 |

## 10 Base-T Hub



| DESCRIPTION | PART# | REF# |
|---|---|---|
| ALLIED TELESYN 24PT 10BT HUB | 536967 | 3024TR |

## 2500CAT5 Modular Panel - 24 Port

The front of the panel is equipped with 24 8-pin modular jacks designed to accomodate modular plug-ended jumper cords.
The rear of the panel is equipped with four RJ-21 type 50-pin jacks, designed to accomodate cables terminated in the corresponding plug. A Velcro™ fastener is furnished to secure each individual plug to the panel.



| DESCRIPTION | PART# | REF# |
|---|---|---|
| AT&T 24PORT 2500CAT5 MODULAR PANEL | 451313 | 107641250 |

## 16 Port Lattishub




| DESCRIPTION | PART# | REF# |
|---|---|---|
| BAY NETWORKS 16PT LATTISHUB W/AUI | 670388 | 2803 |

# Fiber Optics

Fiber optic cable consists of thin glass filaments that transmit lightwaves carrying very large amounts of data for very long distances. Since signals are transmitted with the use of light waves, electromagnetic and radio frequency interference (EMI / RFI) is nonexistent. Lightning and high voltage interference is also eliminated. A fiber network is best for conditions where EMI / RFI interference is heavy or where safe operation free from sparks and static is a must. Fiber optic cable also offers added security because transmissions are safe from electronic eaves-dropping.

## WHY DO I NEED IT ?

If you're planning a new network or adding to an existing one, fiber optic is an ideal choice! Fiber optic cable is a so great because it carries a very large amount of data for very long distances in a small package. If you install fiber now you won't need to reinstall some other media in the future because fiber is the cable of the future.

Fiber optic cabling also offers a higher signal bandwidth and very low attenuation rates. That means increased transmission capacity and fewer repeater, making it a great choice for broadcast and telecommunications use.

## WHERE DO I NEED IT ?

1) Point to point applications like:
   a) Local area network bridging
   b) CAD/CAM
   c) Video
   d) Modems
   e) Computer channel extenders
   f) Voice/ data multiplexers
2) Local area network applications
3) Broadcast & Telecommunications
4) Static-Free Environments
5) Military applications

## What You'll

So you've decided to go with a fiber optic network. Great! You are going to need certain things to get started. The following list should help you dive into the brand new world of fiber optic networking.

1.) The cable length. You'll need to get an estimate of how much cable you'll be using. Don't forget to add for slack, future considerations and murphy's law.

2.) Figure out what kind of cable you'll need. The cable type (aerial,burial or interbuilding) and its construction (i.e. simplex, duplex, etc.).

3.) Find out your cable specs. We'll need to know the fiber core/clad size (i.e. 62.5/125m m see page 56 and the fiber count (i.e. 4 count).

4.) We will connectorize the cable ends for you so we'll also need to know the connector type (i.e. ST, SMA, etc. see pages 59, 60, 61).


5.) Keeping your cable ends in order is easy with an Enclosed Patch Panel (see pages 79, 80). If you order your Mating Sleeves (see page 64) with us we will install them free of charge.

6.) Determine how many Patch Cords you'll need and how long they need to be.

## Benefits of Using Fiber Optics

Fast & accurate transmission of data with speeds of up to 100Mbps.
Future-ready system frees you from constant upgrading.
Immune to EMI / RFI, Lightning and Electronic Eavesdropping.
Data transmission can reach lengths of more than 20 km

## NCI's Fiber Facts




**BUFFER** - Coating applied directly over core and cladding for strength and protection. Sizes range from 250µm to 900µm (µm = micron).

**CLADDING** - A coating of material on the core of a lower refractive index than the core that causes reflection within the core so that lightwaves can travel through the cable.

**CORE** - The center of the fiber optic cable usually made of glass or plastic where the light is transmitted. Cores are either multimode or singlemode.

**FIBER SIZE** - This consists of the core, cladding, and buffer sizes. A measurement of 62.5/125/900 means the core is 62.5µm, the cladding is 125µm and the buffer coating is 900µm. Sometimes only the core and clad sizes are shown.

**FIBER TYPES** - There are 2 basic types:

**SINGLEMODE:** Fiber optic cable designed to carry the single wavelength selected for transmission. Best used when clear transmission for long distances is required. Typical diameter is 8µm.

**MULTIMODE:** Fiber optic cable designed to carry multiple signals set apart by frequency or phase. Best used where broadband information-capacity is required. The core is much larger than singlemode fiber, usually 25 to 200 µm. The fiber core may be either step index or graded index. ***Step index*** fiber has a uniform refractive index within the core and a sharp step-like decrease in refractive index of the core and cladding. ***Graded index*** fiber has a core with many layers of glass each having a lower index of refraction as you go outward from the axis. This reduces dispersion or fading of the transmission.


**MICRON (µm)** - Unit of measurement equal to one millionth of a meter.

## 62.5 / 125 micron Multimode Breakout Cable



Used *within buildings* in riser shafts or under computer room floors and *between buildings* in dry conduit runs below the frost line. This cable is constructed for individual routing of cables and quick and easy installation of connectors. *Each fiber has kevlar reinforcement and a 2.4mm jacket*. There is no need for splicing or breakout kits.

***UL Listed riser rated OFNR.***





12 FIBER DISTRIBUTION CABLE

| COUNT | USAGE | WGT /1000' | DIAMETER | 850/1300nm TYPICAL ATTENUATION | 850/1300nm MIN. BANDWIDTH | OPERATING TEMPERATURE | PART # |
|---|---|---|---|---|---|---|---|
| 4 FIBER | INDOOR | | 11mm | 3.5 / 0.9 dB/km | 160/500 Mhz-km | -20˚C to +70˚C | 219145 |
| 6 FIBER | INDOOR | | 13mm | 3.5 / 0.9 dB/km | 160/500 Mhz-km | -20˚C to +70˚C | 219146 |
| 4 FIBER | IN/OUTDOOR | 49LBS | 8mm | 3 / 1 dB/km | 160/500 Mhz-km | -40˚C to +85˚C | 219213 |
| 6 FIBER | IN/OUTDOOR | 60LBS | 9.5mm | 3 / 1 dB/km | 160/500 Mhz-km | -40˚C to +85˚C | 219215 |
| 12 FIBER | IN/OUTDOOR | 106LBS | 12.5mm | 3 / 1 dB/km | 160/500 Mhz-km | -40˚C to +85˚C | 219217 |


PLENUM CABLE AND HIGHER COUNTS ALSO AVAILABLE. PLEASE CALL FOR MORE INFO.

## 62.5 / 125 micron Multimode Distribution Cable



Used for point to point applications. *Within buildings* it can be run in conduits, as a backbone or over dropped ceilings. To run *between buildings* , cable must be riser rated and be run in dry conduits. *Each fiber has 900 µm buffer* but no individual strength member. Distribution cables are a cost effective solution for a wide range of network applications.

***UL Listed riser rated OFNR.***




24 FIBER BREAKOUT CABLE

| COUNT | USAGE | WGT /1000' | DIAMETER | 850/1300nm TYPICAL ATTENUATION | 850/1300nm MIN. BANDWIDTH | OPERATING TEMPERATURE | PART # |
|---|---|---|---|---|---|---|---|
| 6 FIBER | INDOOR | | 5.4mm | 3.5 / 0.9 dB/km | 160/500 Mhz-km | -20˚C to +65˚C | 219143 |
| 12 FIBER | INDOOR | | 7.7mm | 3.5 / 0.9 dB/km | 160/500 Mhz-km | -20˚C to +65˚C | 219144 |
| 4 FIBER | IN/OUTDOOR | 22LBS | 5mm | 3 / 1 dB/km | 160/500 Mhz-km | -20˚C to +65˚C | 219219 |
| 6 FIBER | IN/OUTDOOR | 24LBS | 5.5mm | 3 / 1 dB/km | 160/500 Mhz-km | -20˚C to +65˚C | 219221 |
| 12 FIBER | IN/OUTDOOR | 30LBS | 6.5mm | 3 / 1 dB/km | 160/500 Mhz-km | -20˚C to +65˚C | 219223 |
| 24 FIBER | IN/OUTDOOR | 49LBS | 8mm | 3 / 1 dB/km | 160/500 Mhz-km | -20˚C to +65˚C | 219225 |

PLENUM CABLE AND HIGHER COUNTS ALSO AVAILABLE. PLEASE CALL FOR MORE INFO.


ALL CABLE SPECIFICATIONS MAY VARY AND ARE SUBJECT TO CHANGE


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

## Simplex Cable

For use in Data communications and campus wide applications. Great for making patch cords. This cable has a tight buffer construction and is reinforced with Kevlar making it a great choice for your fiber applications.

**Diameter** - 2.9mm
**UL Type** - OFNR (Riser listed)
**Operating Temp.** - -20°C - +70°C

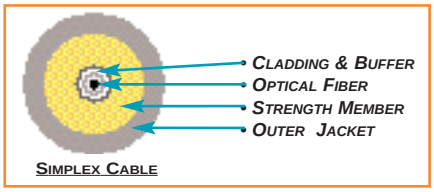

SIMPLEX CABLE




| DESCRIPTION | FIBER TYPE | 850/1300 nm TYPICAL ATTENUATION | 850/1300 nm MINIMUM BANDWIDTH | PVC # | PER FT. | PLENUM # | PER FT. |
|---|---|---|---|---|---|---|---|
| 9/125 | SINGLEMODE | - / 0.5 dB/km | - - - - - | 219150 | | 239150 | |
| 50/125 | MULTIMODE | 3 / 1 dB/km | 400/400 Mhz Km | 219120 | | 239120 | |
| 62.5/125 | MULTIMODE | 3.5 / 0.9 dB/km | 160/500 Mhz Km | 219130 | | 239130 | |
| 100/140 | MULTIMODE | 4.5 / 2 dB/km | 100/100 Mhz Km | 219140 | | 239140 | |


## Duplex Cable

Used for Ethernet and FDDI applications, our duplex cable features high quality optical fiber with Kevlar reinforcement.

**Diameter** - Zipcord: 2.9mm x 6.2mm
Round PVC : 4.4mm
Round Plenum: 4.8mm
**UL Type** - OFNR (Riser listed)
OFNP (for plenum)
**Operating Temp.** - -20°C - +70°C

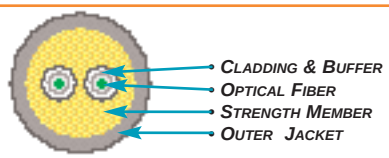

ROUND DUPLEX CABLE




ZIPCORD DUPLEX CABLE



| DESCRIPTION | CONSTRUCTION | 850/1300 nm TYPICAL ATTENUATION | 850/1300 nm MINIMUM BANDWIDTH | PVC # | PER FT. | PLENUM # | PER FT. |
|---|---|---|---|---|---|---|---|
| 9/125 | ZIPCORD | - / 0.5 dB/km | - - - - - | 219152 | | 239152 | |
| 50/125 | ZIPCORD | 3 / 1 dB/km | 400/400 Mhz Km | 219122 | | 239122 | |
| 62.5/125 | ZIPCORD | 3.5 / 0.9 dB/km | 160/500 Mhz Km | 219132-ORANGE | | 239132 | |
| 62.5/125 | ZIPCORD | 3.5 / 0.9 dB/km | 160/500 Mhz Km | 219132-WH/GREEN | | ------ | --- |
| 62.5/125 | ROUND FDDI | 3.3 / 0.8 dB/km | 160/500 Mhz Km | 219227 | | 239227 | |
| 100/140 | ZIPCORD | 4.5 / 2 dB/km | 100/100 Mhz Km | 219142 | | 239142 | |

## Micro Cable

Used in areas where cable conditions are crowded, micro cable works like standard fiber optic cabling. Micro cable optical fiber has a 125µm clad diameter, a 250µm coating, and a 900µm outer jacket diameter. Available in singlemode or multimode.

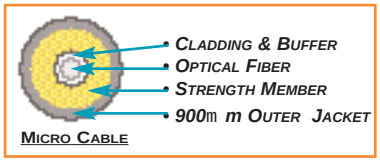

MICRO CABLE

| DESCRIPTION | FIBER TYPE | PART# |
|---|---|---|
| MICRO CABLE 9/125 | SINGLEMODE | 219229 |
| MICRO CABLE 62.5/125 | MULTIMODE | 219231 |

## Innerduct


Innerduct provides additional mechanical protection and identification for exposed fiber optic cabling and our innerduct will not break under sub zero temperatures. It has an O.D. of 1.365" and an I.D. of 1.049".



| DESCRIPTION | PART # |
|---|---|
| INNERDUCT WITHOUT PULL LINE | 401002 |
| INNERDUCT WITH PULL LINE* | 401004 |
| INNERDUCT PLENUM | 401005 |

## Pulling Eye Grip

Assists in the pulling of cable through conduits, blocks or sheaves. Pulling tension remains uniform along the cable. Provides protection against damage of cable. We can install the grip on for you. For more info, call our sales department.

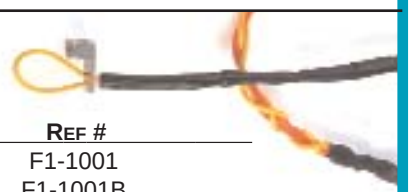

| DESCRIPTION | PART # | REF # |
|---|---|---|
| PULLING EYE GRIP FOR MULTIFIBER | 410477 | F1-1001 |
| PULLING EYE GRIP FOR SIMPLEX & DUPLEX | 874113 | F1-1001B |
| PULLING EYE GRIP INSTALLED BY NCI | 874115 | F1-1001A |


ALL CABLE SPECIFICATIONS MAY VARY AND ARE SUBJECT TO CHANGE

## Loose Tube Cable

Designed for general purpose outdoor applications where extreme temperatures and high moisture conditions exist. High quality fiber is contained in loose gel filled buffer tubes and is suitable for outdoor duct, aerial and direct burial installations.This cable is run between buildings and when entering a building should typically not exceed 50 ft. *Also available with armored construction.*

| Type | Size | Mode | Diameter | Part # |
|---|---|---|---|---|
| 2 fiber | 62.5/125 | MM | 5mm | 219147 |
| 4 fiber | 62.5/125 | MM | 8mm | 219153 |
| 6 fiber | 62.5/125 | MM | 12.7mm | 219148 |
| 12 fiber | 9/125 | SM | 12.7mm | 219149 |

Higher Fiber Counts Also Available. Call our Sales Dept. for More Info.



24 Fiber Breakout Cable

**Wavelength -** 850 / 1300 nm
**Typical Attenuation** - 3.5 / 0.9 dB/km
**Minimum Bandwidth -** 160 / 500 MHz/km
**Operating Temp.** - -40°C to +70°C

## 62.5 / 125 Aerial Cable

Used for aerially supported applications. Designed to be self-supporting and




requires no support cable. Our aerial cable is a 12 fiber figure 8 messenger cable with a 190ft. span length, medium storm load rating and galvanized steel strength member. Before you order, you'll need to know your span lengths, mid-span sag limitations and storm load rating. If you dont know what they are, give us a call. We'll be happy to help you.

**Cable Diameter : 6.5 mm**
**Messenger Diameter : 8.5 mm**

| Description | Wgt /1000 ft | Part # | |
|---|---|---|---|
| 12 fiber | 201 lbs | 219154 | ( *when you buy 3280ft. (1km)* ) |

Other Specs and Fiber Counts Available. Call Us for More Info.



12 Fiber Aerial Cable

**Wavelength -** 850 / 1300 nm
**Typical Attenuation** - 3 / 1 dB/km
**Minimum Bandwidth -** 160 / 500 MHz/km
**Operating Temp.** - -55°C to +85°C

## Buried Marker Tape

"Caution Fiber Optic Cable Buried Below". Available in detectable and undetectable versions. Comes in 3" wide and 1000' long rolls.

| Description | Part # |
|---|---|
| Detectable Marker Tape | 541415 |
| Undetectable Marker Tape | 541417 |

## Plastic Cable

Used for short run optical data transmission, sensing and illumination. Practical applications include robotics, light guides, lamp monitors and sensor heads. Available in a 2.2mm diameter polyethylene jacket with a 960m m core and a 40m m cladding. ST connectors are recommended.

| Description | Jacket | Core | Clad | Part # |
|---|---|---|---|---|
| Simplex | 2.2mm | 960µm | 40µm | 219156 |
| Duplex | 2.2mm x 2 | 960µm | 40µm | 219157 |

| Accessories | Part # | |
|---|---|---|
| Plastic Cable ST Connector (1mm) | 219159 | |
| Plastic Cable ST Mating Sleeve | 219161 | Call |
| Plastic Cable Connectorization Kit | 219163 | Call |
| Plastic Cable Splice | 219165 | Call |

**Wavelength -** 660 nm
**Typical Attenuation** - 300 dB/km
**Operating Temp.** - -20°C to +60°C



Plastic Cable

## Bare Fiber

Singlemode and multimode available.

| Description | Part # |
|---|---|
| 9/125 | 219167 |
| 62.5/125 | 219169 |

## Buffered Fiber

Singlemode and multimode available.

| Description | Part # |
|---|---|
| Simplex | 219171 |
| Duplex | 219173 |

All cable specifications may vary and are subject to change


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

# CONNECTORS

## ST Type Connector

ST stands for straight tip and was originally designed by AT&T. NCI carries many different makes of ST type fiber optic connector. We want to give you a wide selection to make your fiber optic installation as easy as possible. ST connectors use a bayonet style coupling mechanism for latching. Our NCI ST connectors are top quality y at low cost. Rear-crimp design attaches directly to cable and strength members creating a very secure strain relief. Comes with a 3mm boot (900µm boots available). Available in either **Singlemode (SM)** or **Multimode (MM)** versions.



| ST Make | Type | Size | Ferrule | Typ.Loss | Part # | Ref # |
|---|---|---|---|---|---|---|
| AMP | SM | 126µm | Ceramic | 0.3dB | 410516 | 502579-2 |
| AT&T | SM | 125µm | Ceramic | 0.5dB | 410514 | 105143911 |
| Molex | SM | 126µm | Zirconia | 0.3dB | 410520 | 86012-5000 |
| NCI | SM | 126µm | Ceramic | 0.2dB | 403224 | F1-0069 |
| 3M | SM | 126µm | Zirconia/PC | 0.2dB | 410522 | 8106 |
| 3M | SM | 127µm | Zirconia/PC | 0.2dB | 410523 | 8107 |
| AMP | MM | 125µm | Zirconia/PC | 0.5dB | 410551 | 504766-3 |
| AMP | MM | 125µm | Zirconia/PC | 0.3dB | 410526 | 501380-1 |
| GTE | MM | 125µm | Ceramic/PC | 0.5dB | 410544 | WO 3756 |
| Molex (Metal Housing) | MM | 125µm | Ceramic | 0.6dB | 336411 | 86012-0000 |
| Molex (PlasticHousing) | MM | 125µm | Ceramic | 0.6dB | 410540 | 86010-0000 |
| Molex (900µm) | MM | 125µm | Ceramic | 0.6dB | 410542 | 86010-0500 |
| NCI | MM | 125µm | Polymer | 0.3dB | 403226 | F1-0059 |
| NCI | MM | 125µm | S.S. Alloy | 0.4dB | 410528 | F1-0061 |
| NCI | MM | 140µm | S.S. Alloy | 0.5dB | 410530 | F1-0063 |
| NCI | MM | 230µm | S.S. Alloy | 0.5dB | 403228 | F1-0064 |
| NCI | MM | 125µm | Ceramic | 0.3dB | 410532 | F1-0066 |
| NCI | MM | 140µm | Ceramic | 0.5dB | 410534 | F1-0067 |
| Siecor | MM | 125µm | Composite/PC | 0.2dB | 312515 | 95-101-02 |
| Siecor | MM | 125µm | Ceramic/PC | 0.2dB | 312517 | 95-101-44 |
| 3M | MM | 125µm | Zirconia/PC | 0.2dB | 410524 | 6105 |
| 3M Push Pull | MM | 125µm | Zirconia/PC | 0.4dB | 314629 | 6102 |
| NCI Plastic Fiber .1mm | S.S. Alloy | 0.5dB | | 0.5dB | 403229 | F1-0065 |
| AT&T ST II Crimp Tool | | | | | 410546 | 60-3010 |
| CAP - ST Female Cover | | | | | 410547 | |
| CAP - ST Male Cover | | | | | 410549 | |

## SC Type Connector

SC stands for square connector and was originally designed by NTT (Nippon Telephone & Telegraph). NCI carries many different makes of SC type fiber optic connector. We want to give you a wide selection to make your fiber optic installation as easy as possible. SC connectors use a push-pull coupling mechanism which allows for dense packaging and its internal spring-loaded ferrule resists shock, vibration and temperature stress. Available in either **Singlemode (SM)** or **Multimode (MM)** versions.



| SC Make | Type | Size | Ferrule | Typ.Loss | Part # | Ref # |
|---|---|---|---|---|---|---|
| AMP | SM | 126µm | Zirconia/PC | 0.3dB | 410632 | 502882-2 |
| Molex | SM | 126µm | Zirconia/PC | 0.15dB | 410630 | 86061M5000 |
| Siecor | SM | 127µm | Zirconia/PC | 0.2dB | 312519 | 95-200-08 |
| 3M | SM | 126µm | Zirconia/PC | 0.3dB | 410628 | 8306 |
| AMP | MM | 125µm | Zirconia/PC | 0.3dB | 410638 | 502883-1 |
| Molex | MM | 125µm | Zirconia/PC | 0.2dB | 410636 | 86061M0000 |
| Siecor | MM | 125µm | Zirconia/PC | 0.2dB | 312521 | 95-100-48 |
| 3M | MM | 125µm | Zirconia/PC | 0.3dB | 410634 | 6306 |

## FC Type Connector

FC stands for face contact and was originally designed by NTT (Nippon Telephone & Telegraph). NCI carries many different makes of FC type fiber optic connector. We want to give you a wide selection to make your fiber optic installation as easy as possible. FC connectors use a threaded keyed design and are compatible with NTT-FC and NEC-D3 hardware. The anti-rotation key prevents fiber endface damage and rotational sensitivity and the floating ferrule prevents shock and vibration. Available in either **Singlemode (SM)** or **Multimode (MM)** versions.



| Make | Type | Size | Ferrule | Typ.Loss | Part # | Ref # |
|---|---|---|---|---|---|---|
| AMP | SM | 126µm | Ceramic/PC | 0.3dB | 410598 | 501505-3 |
| Molex | SM | 2.4-3mm | Zirconia/PC | 0.2dB | 410604 | 86057M5000 |
| NCI | SM | 126µm | Zirconia/PC | 0.2dB | 403231 | F1-2069 |
| Siecor | SM | 126µm | Zirconia/PC | 0.2dB | 312523 | 95-200-10 |
| 3M | SM | 126µm | FC/PC III Zirconia | 0.3dB | 410602 | 8203 |
| 3M | SM | 127µm | FC/PC I Zirconia | 0.3dB | 314631 | 8207 |
| Molex | MM | 2.4-3mm | Zirconia/PC | 0.2dB | 336413 | 86057M3000 |
| NCI | MM | 125µm | Zirconia/PC | 0.3dB | 403233 | F1-2066 |
| NCI | MM | 125µm | Metal Alloy | 0.3dB | 410610 | |
| NCI | MM | 140µm | Metal Alloy | 0.3dB | 410612 | |
| Siecor | MM | 125µm | Zirconia/PC | 0.2dB | 312525 | 95-100-10 |
| 3M | MM | 125µm | FC/PC III Zirconia | 0.3dB | 410608 | 6202 |

# CONNECTORS

## SMA Type Connector



SMA stands for subminiature type A. The SMA905 connector is a straight ferrule design and the SMA906 is a stepped ferrule design using a plastic sleeve for alignment. NCI carries different makes of SMA type fiber optic connector. We want to give you a wide selection to make your fiber optic installation as easy as possible. Available in **Multimode (MM)** version.

| Make | Type | Size | Ferrule | Typ.Loss | Part # | Ref # |
|---|---|---|---|---|---|---|
| Augat | 905 | 125µm | ARCAP AP10 | 0.8dB | 410586 | 698-DSC-125A |
| Molex | 905 | 125µm | Alumina/PC | 0.25dB | 410584 | 86021-0000 |
| LCS | 905 | 125µm | Stainless Alloy | 0.8dB | 410574 | 3905AM125 |
| AMP* | 906 | 125µm | Stainless Steel | 0.6dB | 410580 | 504094-1 |
| AMP | 906 | 140µm | Stainless Steel | 0.6dB | 410582 | 504094-3 |
| Augat | 906 | 125µm | ARCAP AP10 | 0.8dB | 410588 | 698-JSC-125A |
| LCS | 906 | 125µm | Stainless Alloy | 0.8dB | 410576 | 3906AM125 |
| LCS | 906 | 140µm | Stainless Alloy | 0.8dB | 410578 | 3906AM140 |


## D4 Type Connector



D4 stands for DIN 4. DIN stands for Deutsche Institut fur Normung (German Institute for Standardization). Used primarily in European electronic applications, and also used throughout the world. NCI carries different makes of D4 type fiber optic connector. We want to give you a wide selection to make your fiber optic installation as easy as possible. Available in **Singlemode(SM) and Multimode (MM)** versions.

| Make | Type | Size | Ferrule | Typ.Loss | Part # | Ref # |
|---|---|---|---|---|---|---|
| Amp* | SM | 126µm | Ceramic | 0.3dB | 410640 | 501508-3 |
| Specail PC Polish Disc for AMP D4 Connector | | | | | 410646 | 501867-1 |
| LCS | SM | 126µm | Zirconia | 0.3dB | 410644 | 5D4SM126 |
| Seiko | SM | 125µm | Zirconia/PC | 0.3dB | 410643 | SDP-1Z-PD-S5 |
| Seiko | MM | 125µm | Zirconia/PC | 0.3dB | 410645 | SDP-1Z-PD-S5 |

## Biconic Connectors



Developed by AT&T, it is a precision molded screw-on type design that yields low dB insertion loss. Used on interconnect cable and buffered or unbuffered fiber. Used for cable-cable or cable-equipment single fiber connections. Available in **Singlemode (SM) or Multimode (MM).**

| Make | Type | Size | Typ.Loss | Part # | Ref # |
|---|---|---|---|---|---|
| AT&T | SM | 125µm | 0.5dB | 410616 | 104310032 |
| 3M | SM | 127µm | 0.6dB | 410620 | 8002 |
| 3M | MM | 125µm | 0.6dB | 410622 | 6001 |
| Porta* | MM | 125µm | 0.6dB | 410624 | 4001071125 |
| Porta | MM | 126µm | 0.6dB | 410625 | 4201071126 |

## AMP Mini BNC Connector

Specified by IBM and Rolm. Fast termination with easy connection. Works with 3mm cable jacket. Available in **Multimode (MM).**

| Type | Size | Ferrule | Typ.Loss | Part # | Ref # |
|---|---|---|---|---|---|
| Multimode | 125µm | Stainless Steel | 0.2db | 410594 | 504002-1 |
| Multimode | 140µm | Stainless Steel | 0.2db | 410596 | 504002-2 |

## FDDI Connectors



FDDI stands for Fiber Distributed Data Interface. This duplex fiber optic connector is fully compatible w/ANSI FDDI PMD document. Used for Zip Cord or *Plenum* cable. NCI carries different makes of FDDI type fiber optic connector to give you a wide selection and make your fiber optic installation as easy as possible. FDDI connectors use latch mating sign.

**DUPLEX CONNECTORS**

| FDDI Make | Size | Ferrule | Typ.Loss | Part # | Ref # |
|---|---|---|---|---|---|
| AMP Zipcord | 125µm | Ceramic | 0.6dB | 410564 | 502015-1 |
| AMP Round | 125µm | Ceramic | 0.6db | 410566 | 501780-1 |
| *AMP Assembly Fixture Kit* | | | | *410572* | *502023-1* |
| Molex Zip or Plenum | 125µm | Ceramic | 0.3dB | 336415 | 86030-0200 |
| Molex Round | 125µm | Ceramic | 0.3dB | 336417 | 86030-0100 |
| Siecor Zip or Round | 125µm | Zirconia | 0.3dB | 312511 | 95-100-05 |

## Escon Connectors



Escon connectors use a free floating ferrule structure and a positive latch mating design. Escon connectors use standard ST polish and a special 2 die crimper. Available in **Multimode (MM).**

| Escon Make | Size | Ferrule | Typ.Loss | Part # | Ref # |
|---|---|---|---|---|---|
| Molex for Zipcord | 125µm | Zirconia | 0.15dB | 336419 | 86040-3200 |
| Molex for 4.8mm Round | 125µm | Zirconia | 0.15dB | 336421 | 86040-3100 |

## SC Duplex Connectors



SC duplex connectors use a non-optical disconnect push-pull latching design. Meets NTT-SC and Bellcore standards. Works with 3mm jacketed fiber. Available in **Singlemode (SM) or Multimode (MM).**

| SC Duplex Make | Size | Ferrule | Typ.Loss | Part # | Ref # |
|---|---|---|---|---|---|
| Molex Singlemode | 126µm | Zirconia | 0.15dB | 336423 | 86066-5000 |
| Molex Multimode* | 125µm | Zirconia | 0.34dB | 336407 | 86066-0000 |
| SC Duplex Mating Sleeve | | | | 336425 | 86166-0010 |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# CONNECTORS

## HOT MELT

3M Hot Melt connectors have adhesive already applied to the connector so that no application of epoxy is needed. That means you don't need a syringe or an applicator and no mixing. That saves time and money! A Hot Melt kit is available with all the tools you need to connectorize.

### 3M ST Hot Melt
### 3M ST Push Pull Hot Melt

ST stands for straight tip and was originally designed by AT&T. The ST type Hot Melt fiber optic connector from 3M uses a bayonet style coupling mechanism for latching. NCI also carries the 3M Push Pull Hot Melt connector. It connects with a push and disconnects with a pull. Simple, huh? In order to disconnect you must pull on the housing of the connector so don't worry about someone pulling on the cable Great in areas where less space is available. Converting to duplex is a snap! Simply clip together the 2 connectors using the duplex clips (see below).


| Type | Size | Ferrule | Typ.Loss | Part # | Ref # |
|---|---|---|---|---|---|
| Multimode | 125µm | Zirconia/PC | 0.4dB | 410552 | 6100 |
| ST Hot Melt Termination Kit | | | | 410556 | 6150A |
| Hot Melt Conversion Oven, Holder and Cooling Stand | | | | 410554 | 6156 |
| Push Pull Multimode | 125um | Zirconia/PC | 0.2db | 410558 | 6102-H |
| 4 Duplex Clips & 2 Duplex Caps | | | | 410562 | 6199-DC |



### 3M SC and FC Hot Melt Connectors

3M's SC type Hot Melt connector has a push-pull coupling mechanism for ease of installation.

FC connectors use a threaded keyed design. The anti-rotation key prevents fiber endface damage and rotational sensitivity and the floating ferrule prevents shock and vibration




| Type | Size | Ferrule | Typ.Loss | Part # | Ref # |
|---|---|---|---|---|---|
| SC Multimode | 125µm | Zirconia/PC | 0.3dB | 314633 | 6300 |
| FC Multimode | 125µm | Zirconia/PC | 0.3dB | 314635 | 6200 |
| SC / FC Hot Melt Termination Kit | | | | 314637 | 6150A |
| Hot Melt Conversion Oven, Holder and Cooling Stand | | | | 314639 | 6156 |

**3M's** new crimplok connector provides quick and easy installation and superior performance. Installs in about 2 minutes. The fiber passes thru the back of the connector beyond the end of the activation cap. Pressing the cap locking arm closes the metal element around the fiber.

**AMP's** Lightcrimp connector uses precision molding and crimping to provide a strong and reliable termination. This is done with a 2-step crimp, cleave and 30 second polish. A no-epoxy installation in less than 2 minutes.

| Make | Type | Size | Ferrule | Typ.Loss | Part # | Ref # |
|---|---|---|---|---|---|---|
| 3M Crimplok | ST | 125µm | Zirconia | 0.3dB | 314641 | 6901 |
| 3M Crimplok | SC | 125µm | Zirconia | 0.3dB | 314643 | 6900 |
| AMP LightCrimp | ST | 125µm | St. Steel | 0.38 dB | 410548 | 504034-1 |
| Lightcrimp XTC Tool Kit | | | | | 410550 | 503125-1 |
| XTC Crimp Tool | | | | | 315047 | 503568-1 |
| XTC Cleave Tool | | | | | 315049 | 502700-2 |



NCI'S Specialty SPC, UPC and APC cables are designed to meet your needs for whatever application you are using. These specialty cables are used mostly by the telecommunications and cable TV industries where lasers are used for transmitting signals. These cables will not bounce back light into the laser and will not erode the laser. These cables feature the highest quality cable, con-

## Super PC (SPC) Patch Cords >-40dB

Typical return losses of > -40dB. These cables are designed for super PC requirements and are tested to insure low return loss.


| DESCRIPTION | PART # | |
|---|---|---|
| ST-ST SIMPLEX | F01S3SS★★★★1 | + |
| FC-FC SIMPLEX | F01S3LL★★★★1 | + |
| SC-SC SIMPLEX | F01S3MM★★★★1 | + |
| D4-D4 SIMPLEX | F01S3RR★★★★1 | + |




## Ultra PC (UPC) Patch Cords >-50dB

Typical return losses of > -50dB. These cables are designed for ultra PC requirements and are tested to insure low return loss.


| DESCRIPTION | PART # | |
|---|---|---|
| ST-ST SIMPLEX | F01S3NN★★★★1 | + |
| FC-FC SIMPLEX | F01S3QQ★★★★1 | + |
| SC-SC SIMPLEX | F01S3PP★★★★1 | + |




## Angled PC (APC) Patch Cords >-60dB

Typical return losses of > -60dB with a typical mating loss of dB, not exceeding .5dB . The Angled PC connectors are ground to an 8 degree angle and are then polished to the required finish. They are then tested to insure low return loss.

| DESCRIPTION | PART # | |
|---|---|---|
| ST-ST SIMPLEX | F01S3UU★★★★1 | + |
| FC-FC SIMPLEX | F01S3TT★★★★1 | + |
| SC-SC SIMPLEX | F01S3VV★★★★1 | + |




## FURCATION TUBING

Available in 3mm, 1.2mm and 900µm diameters. The 3mm tubing receives 250 µm, 500µm or 900µm buffered fiber. The 1.2mm tubing receives 250µm, 500µm or 900µm diameter coated or buffered fiber.

| COLOR | SIZE | PART# | REF# | |
|---|---|---|---|---|
| ORANGE | 3mm | 403250 | 001-FT-SF-3 | PER FT. |
| WHITE | 1.2mm | 403259 | 001-FT-SF-1.2 | PER FT. |
| CLEAR | 900µm | 403260 | 001-FT-SF-900 | PER FT. |

## STRAIN RELIEF BOOTS

Works on or crimp. and comes in 900µm and 3mm sizes.



| DESC. | PART# | |
|---|---|---|
| 900µm BOOT | 403261-★ | EA. |
| 3mm BOOT | 403262-★ | EA. |
| AMP 90° 3mm BLACK BOOT | 315108-★ | EA. |

REPLACE ★ WITH COLOR DESIRED: 1-**RED**, 2- **GREEN**, 3- YELLOW, 4- **BLACK**.



## DUST CAP

Covers all types ST, SC and FC terminated connectors. Cap fits over ferrule and is held on to cable by strap.

| PART# | REF# | |
|---|---|---|
| 403263 | 900-111-2006-1 | EA. |


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

All the fiber optic cables you will ever need are at NCI. These cables feature the highest quality cable, connectors, strain reliefs, and workmanship. Custom lengths and configurations with same day shipping is our specialty. All cables

## SIMPLEX PATCH CORDS



| DESCRIPTION | PART # |
|---|---|
| ST-ST SIMPLEX MULTIMODE PVC 62.5/125 3FT | F01S3JJ00031 |
| CUSTOM LENGTHS - PVC | F01S3JJ****1 |
| PLENUM | F01S3JJ****2 |
| FC-FC SIMPLEX SINGLEMODE PVC 9/125 3FT. | F01S3CC00031 |
| CUSTOM LENGTHS - PVC | F01S3CC****1 |
| PLENUM | F01S3CC****2 |
| FC-FC SIMPLEX MULTIMODE PVC 62.5/125 3FT. | F01S3CC00031 |
| CUSTOM LENGTHS - PVC | F01S3CC****1 |
| PLENUM | F01S3CC****2 |
| BICONIC-BICONIC SIMPLEX SM PVC 9/125 3FT | F01S1AA00031 |
| CUSTOM LENGTHS - PVC | F01S1AA****1 |
| PLENUM | F01S1AA****2 |
| D4-D4 SIMPLEX SINGLEMODE PVC 9/125 3FT | F01S1BB00031 |
| CUSTOM LENGTHS - PVC | F01S1BB****1 |
| PLENUM | F01S1BB****2 |
| SC-SC SIMPLEX MM PVC 62.5/125 3FT | F01S3FF00031 |
| CUSTOM LENGTHS - PVC | F01S3FF****1 |
| PLENUM | F01S3FF****2 |

## DUPLEX PATCH CORDS



| DESCRIPTION | PART # |
|---|---|
| ST-ST DUPLEX MULTIMODE 62.5/125 3FT | F02D3JJ00031 |
| CUSTOM LENGTHS - PVC | F02D3JJ****1 |
| PLENUM | F02D3JJ****2 |
| SC-SC DUPLEX MULTIMODE 62.5/125 3FT | F02D3FF00031 |
| CUSTOM LENGTHS - PVC | F02D3FF****1 |
| PLENUM | F02D3FF****2 |
| SMA906-SMA906 DUPLEX MM 62.5/125 3FT | F02D3HH00031 |
| CUSTOM LENGTHS - PVC | F02D3HH****1 |
| PLENUM | F02D3HH****2 |
| SMA906-ST DUPLEX MM PVC 62.5/125 3FT | F02D3HJ00031 |
| CUSTOM LENGTHS - PVC | F02D3HJ****1 |
| PLENUM | F02D3HJ****2 |
| FDDI-FDDI DUPLEX MM PVC 62.5/125 3FT | F02D3DD00031 |
| CUSTOM LENGTHS - PVC | F02D3DD****1 |
| PLENUM | F02D3DD****2 |
| FDDI ESCON® - FDDI ESCON® DUPLEX MM PVC 62.5/125 3FT | F02D3KK00031 |
| CUSTOM LENGTHS - PVC | F02D3KK****1 |
| PLENUM | F02D2KK****2 |
| FDDI-ST DUPLEX MM PVC 62.5/125 3FT | F02D3DJ00031 |
| CUSTOM LENGTHS - PVC | F02D3DJ****1 |
| PLENUM | F02D3DJ****2 |

## NCI INC.

How many Fibers do you need?

What Type of Fiber Construction do you need?

What size Fiber do you need?

What Type of Connector End & Polish do you need?

How long should your cable be?

What Type of Jacket do you need?

**F- □□ - □ - □ - □/□ - □□□□ - □**

| FIBER | TYPE | MODE | CONNECTOR TYPES | LENGTH IN FEET | JACKET |
|---|---|---|---|---|---|
| 01 - 99 | B = BREAKOUT<br>I = DISTRIBUTION<br>S = SIMPLEX<br>D = DUPLEX (ZIPCORD)<br>L = LOOSE TUBE<br>X = OTHER | SINGLEMODE<br>1 = 9µm<br>MULTIMODE<br>2 = 50 µm<br>3 = 62.5 µm<br>4 = 100 µm<br>5 = OTHER | A = BICONIC<br>X = BLUNT<br>B = D4<br>C = FC<br>D = FDDI<br>K = FDDI ESCON<br>E = MINI-BNC<br>F = SC<br>W= SC DUPLEX<br>G = SMA 905<br>H = SMA 906<br>J = ST-CERAMIC<br>I = ST-STAINLESS<br>Z = OTHER | SPECIAL POLISHING<br>ANGLED<br>T = FC-APC<br>V = SC-APC<br>U = ST-APC<br>SUPER<br>R = D4-SPC<br>L = FC-SPC<br>M= SC-SPC<br>S = ST-SPC<br>ULTRA<br>Q = FC-UPC<br>P = SC-UPC<br>N = ST-UPC | 0001 - 9999 | 1= PVC<br>2= PLENUM |

### CALL FOR YOUR FIBER PRICES

WE WOULD LIKE TO LIST ALL PRICES FOR FIBER ASSEMBLIES,
BUT THERE ARE TOO MANY VARIATIONS TO LIST !
CALL FOR A QUICK QUOTE.

WE WILL SOON HAVE A BUILD-YOUR-OWN FIBER ASSEMBLY PAGE
ON OUR WEB SITE @ http://www.trynci.com !

EXAMPLE: F-02-B-1-A/A-0025-1


# MATING SLEEVES

Mating sleeves do what they say. They mate two connectors. They allow you to attach to a patch panel and to interconnect your fiber optic network.



## ST Mating Sleeves

| Make | Type | Design | Housing | Sleeve | Part # | Ref # |
|---|---|---|---|---|---|---|
| Molex | SM | Threaded | Polymer | Zirconia | 410654 | 86110-0000 |
| NCI | SM | Threaded | Metal | Zirconia | 403237 | F1-8200 |
| 3M | MM | Threaded | Metal | Copper | 410662 | 6110 |
| 3M | MM | Flanged | Metal | Copper | 410656 | 6111 |
| AMP | MM | Threaded | Metal | Metal | 410664 | 501381-1 |
| Methode | MM | Threaded | Metal | Polymer | 410668 | 908-213-01 |
| Molex | MM | Threaded | Polymer | Polymer | 403235 | 86113-0000 |
| NCI | MM | Threaded | Metal | Polymer | 403239 | F1-8100 |
| T&B | MM | Threaded | | | 410670 | 91840 |



## SC Mating Sleeves

| Make | Type | Design | Sleeve | Part # | Ref # |
|---|---|---|---|---|---|
| AMP | SM/MM | Flanged | Metal | 410696 | 502632-1 |
| Methode | SM/MM | Flanged | Bronze | 338107 | 308-102-02 |
| Methode | SM/MM | Duplex | Bronze | 338109 | 308-104-02 |
| Molex | SM/MM | Flanged | Zirconia | 410698 | 86161-0000 |




## FC Mating Sleeves

| Make | Type | Design | Housing | Sleeve | Part # | Ref # |
|---|---|---|---|---|---|---|
| AMP | SM/MM | Square-Flanged | Metal | Bronze | 410679 | 501506-2 |
| Methode | SM/MM | Square Flanged | Metal | Ceramic | 338111 | 408-4A3-02 |
| Molex | SM/MM | Threaded D-Hole | Metal | Ceramic | 410681 | 86152-1000 |
| NCI | SM/MM | Square-Flanged | Metal | Bronze | 410682 | F1-9229 |
| Seiko | SM/MM | Square-Flanged | Metal | Bronze | 410680 | SAA-1 |
| FC Singlemode Mating Sleeve with Chain and Metal Cap | | | | | 403240 | |
| Chain with Metal Cap without sleeve. | | | | | 403244 | |




## SMA Mating Sleeves

| Make | Type | Design | Housing | Sleeve | Part # | Ref # |
|---|---|---|---|---|---|---|
| AMP | MM-905/906 | Threaded | Metal | Metal | 410674 | 501049-1 |
| Molex | MM-905/906 | Threaded | Polymer | Polymer | 410672 | 86121-0000 |



## Duplex Mating Sleeves

| Make | Type | Design | Housing | Part # | Ref # |
|---|---|---|---|---|---|
| AMP | MM | FDDI-FDDI | Polymer | 410700 | 501926-1 |
| Methode | SM/MM | ESCON-ESCON | Polymer | 338113 | 508-202-01 |
| Methode | SM/MM | ESCON-ESCON | Polymer | 338115 | 508-202-02 |



## All Other Mating Sleeves

| Make | Model | Type | Design | Sleeve | Part # | Ref # |
|---|---|---|---|---|---|---|
| AMP | D4 | SM/MM | Flanged | Metal | 410690 | 501509-2 |
| GTE | D4 | SM/MM | Flanged | Metal | 410692 | WO1558 |
| LCS | D4 | SM/MM | Flanged | Metal | 410694 | 3ADAD4SM |
| NCI | D4 | SM/MM | Flanged | Copper | 403248 | F1-7100 |
| 3M | Biconic | SM | Flanged | Polymer | 410684 | 8010 |
| Methode | Biconic | SM | Flanged | Polymer | 410686 | 708-10X-01 |
| Porta | Biconic | SM | Flanged | Polymer | 403627 | 4270001000 |
| Methode | Biconic | MM | Flanged | Polymer | 410688 | 708-20X-01 |
| AMP | Optimate | MM | Flanged | Polymer | 410676 | 501185-1 |
| Sumitomo | Mini BNC | MM | Flanged | Metal | 410678 | ILAMBNC |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# ATTENUATORS

**An attenuator is a device that reduces signal amplitude by a specific amount with no added distortion.**
(Excessive light during transmission, at the detector location, can cause system failure).

## BULKHEAD ATTENUATORS

Mounted Directly on the Patch Panel or Breakout Box.

### 3M ST Bulkhead Attenuator

Available in Singlemode or Multimode.
Attenuation for Multimode is slightly lower than Singlemode.



| Type/Attenuation | Part # | Ref # |
|---|---|---|
| ST / 5dB* | 410770 | 8121S |
| ST / 10dB | 410772 | 8122S |
| ST / 15dB | 410774 | 8123S |
| ST / 20dB | 410776 | 8124S |

### 3M SC Bulkhead Attenuator

Available in Singlemode or Multimode.
Attenuation for Multimode is slightly lower than Singlemode.



| Type/Attenuation | Part # | Ref # |
|---|---|---|
| SC / 5dB | 314618 | 8321S |
| SC / 10dB | 314620 | 8322S |
| SC / 15dB | 314622 | 8323S |
| SC / 20dB | 314624 | 8324S |

### 3M FC/PC Bulkhead Attenuator


Available in Singlemode. This bulkhead attenuator replaces FC/PC mating sleeve.



| Type/Attenuation | Part # | Ref # |
|---|---|---|
| FC/PC / 5dB* | 410762 | 8221S |
| FC/PC / 10dB | 410764 | 8222S |
| FC/PC / 15dB | 410766 | 8223S |
| FC/PC / 20dB | 410768 | 8224S |

### NCI D4 Bulkhead Attenuator

Available in Singlemode. This bulkhead attenuator replaces D4 mating sleeve.



| Type/Attenuation | Part # | Ref # |
|---|---|---|
| D4 / 5dB* | 410754 | F1-7215-5 |
| D4 / 10dB | 410756 | F1-7215-10 |
| D4 / 15dB | 410758 | F1-7215-15 |
| D4 / 20dB | 410760 | F1-7215-20 |

## VARIABLE ATTENUATORS


### Variable Attenuator

By simply twisting the top mounted screw this variable attenuator provides increments of 0.5dB. Use with a power meter and light source to ascertain the fixed attenuator value your system requires.
Available in 2 meter length and insertion loss of 3dB.

| Variable Attenuator Type | Part # | Ref # |
|---|---|---|
| SM with 8-9µm core - no connectors | 540901 | F1-0031 |
| SM with ST connectors | 540903 | F1-0031-ST |
| SM with FC connectors | 540905 | F1-0033-FC |
| SM Low Back Reflection w/FC connectors | 540907 | F1-0033-LBR |
| MM with 62.5µm core - no connectors | 540909 | F1-1033 |
| MM with ST connectors | 540911 | F1-1033-ST |

### Air-Gap Variable Attenuator

NCI's air-gap variable attenuator is able to accomodate either ST or FC connectors. A tool is provided to increase attenuation to dB needed. This attenuator can be attached directly to a patch panel or breakout box and can be used in either single or multimode applications.
Insertion loss of .15dB.



| Variable Attenuator Type | Part # | Ref # |
|---|---|---|
| ST Variable Air Gap | 540931 | F1-2250 |
| FC Variable Air Gap | 540933 | F1-2251 |

### Variable Attenuator Connector

| Type | Part # | Ref # |
|---|---|---|
| ST Variable Attenuator Connector | 540913 | F1-0822FC |
| FC Variable Attenuator Connector | 540915 | F1-0822ST |

This connector has the ability to increment in units of 0.1dB. Can be used in either single or multimode applications.




## INLINE ATTENUATORS

### Inline Attenuator

| Type | Part # | Ref # |
|---|---|---|
| SM with 8-9µm core - no connectors | 540917 | F1-0031 |
| SM with ST connectors | 540919 | F1-0031-ST |

NCI's Inline Attenuator has the ability to increment in units of 0.1dB and has an a low insertion loss. Can be used in either single or multimode applications.



## FIXED ATTENUATORS

NCI's fixed attenuators are shaped like washers and are fitted at the light source.

The mated connectors are spaced causing attenuation. Fixed attenuators can be placed on more than one mated location thereby increasing total attenuation. Each colored attenuator is a different width so each one has different dB values. The table shows typical loss but specific loss is not set because it varies depending on different conditions. NCI's fixed attenuators are sold individually or in packs. Packets of 5 different widths are available, so you can find out what size you need. After you have the right width, you order just the width you need in packs or individually.

| Type | Qty. | Color | Part # | Ref # |
|---|---|---|---|---|
| ST | 5 pack | 1 each color | 540921 | A450 |
| ST | 10 pack | Your Choice | 540923 | A450-20 |
| SMA | 5 pack | 1 color | 540925 | A40D |
| SMA | 10 pack | Your Choice | 540927 | A40D-20 |
| FDDI | 10 pack | 2 color | 540929 | A450-FDDI |

| Color | Typical Attenuation 850nm | 1300nm |
|---|---|---|
| Silver | 6.0 dB | 11.7 dB |
| Gold | 5.5 dB | 11.3 dB |
| Green | 4.8 dB | 10.2 dB |
| Blue | 3.6 dB | 9.1 dB |
| Red | 2.5 dB | 7.4 dB |

### Individual Fixed Attenuators

| Color | ST Part# | SMA Part# | FDDI Part# |
|---|---|---|---|
| Silver | 410724 | 410734 | 410744 |
| Gold | 410730 | 410740 | 410750 |
| Green | 410728 | 410738 | 410748 |
| Blue | 410726 | 410736 | 410746 |
| Red | 410732 | 410742 | 410752 |

# ADAPTERS

## MALE TO MALE ADAPTERS



NCI's **Male to Male** adapters are 2 connectors bonded to each other and sharing a common fiber.


| TYPE | CORE/CLAD | PART # | REF # |
|---|---|---|---|
| ST to ST | 62.5/125 | 403264 | F1-8704-ST |
| ST to SMA | 62.5/125 | 403265 | F1-8704-SMA |
| ST to FC | 9/125 | 403266 | F1-8704-FC |

## FEMALE TO FEMALE ADPATERS

ST-FC



ST-Escon



SC-FC



| ST - SC | TYPE | PART # | REF # |
|---|---|---|---|
| AMP | ST TO SC | 315051 | 502780-1 |
| METHODE | ST TO SC | 338117 | 308-192-02 |

| ST - FC | TYPE | PART # | REF # |
|---|---|---|---|
| AMP | ST TO FC | 315053 | 502782-1 |
| METHODE | ST TO FC | 338119 | 408-292-02 |

| ST - SMA | TYPE | PART # | REF # |
|---|---|---|---|
| NCI | ST-SMA | 540126 | F1-4732 |

| ST - FDDI | TYPE | PART # | REF # |
|---|---|---|---|
| MOLEX | ST-FDDI | 336405 | 86133A0300 |

| ST - ESCON | TYPE | PART # | REF # |
|---|---|---|---|
| MOLEX | ST TO ESCON | 403246 | 86143-0300 |

| SC - FC | TYPE | PART # | REF # |
|---|---|---|---|
| AMP | SC TO FC | 315055 | 502781-1 |
| METHODE | SC TO FC | 338121 | 308-342-02 |

St-M SC



## MALE TO FEMALE ADPATERS

CI's **Male to Female** adapters let you onnect one type of fiber optic connecto another of a different gender.

St-Male to FC-Fem



| TYPE | CORE/CLAD | PART # | REF # |
|---|---|---|---|
| ST-MALE TO ST-FEMALE | 62.5/125 | 403285 | F1-8705-ST |
| ST-MALE TO SC-FEMALE | 62.5/125 | 403287 | F1-8705-SC |
| ST-MALE TO FC-FEMALE | 62.5/125 | 403289 | F1-8706-ST |
| FC-MALE TO ST-FEMALE | 62.5/125 | 403291 | F1-8705-FC |
| SMA-MALE TO ST-FEMALE | 62.5/125 | 403293 | F1-8705-SMA |

## BARE FIBER ADAPTERS



Great for power meter hook-up and temporary system repair. Strip and cleave 125µm fiber and insert into adapter. It's that easy. Use piano wire (see consumable section) to remove broken fibers. Can be re-used over and over.

| TYPE | PART # | REF # |
|---|---|---|
| ST BARE FIBER ADAPTER | 403295 | F1-8194 |
| FC BARE FIBER ADAPTER | 403297 | F1-8294 |
| SMA 905 BARE FIBER ADAPTER | 403299 | F1-8394 |

## CUSTOM HYBRID ADAPTERS

We custom make male hybrid adapters to your specifications. You'll need the appropriate mating sleeve to join your fiber optic cable. Please look on pages **59, 60, 61** to select the connectors needed for your hybrid.

| TYPE | PART # | |
|---|---|---|
| CUSTOM HYBRID ADAPTER | 410722-*** | OF 2 CONNECTORS |

***= LENGTH IN FEET

# COUPLERS / SPLITTERS

## NETWORK COUPLERS



Available in Singlemode or Multimode. Also available with Singlemode 1300/1500 **W**ave **D**ivision **M**ultiplexer. Specify core/clad size, connector style and type, and split ratio.


| DESCRIPTION | PART # | REF # |
|---|---|---|
| 1 x 2 - ST OR FC | 403267 | F1-93205-S2 |
| 1 x 4 - ST or FC | 403269 | F1-93205-S4 |
| 1x2 with SM 1300/1500 WDM | 403271 | F1-93205-S6 |

## GOULD 2x2 COUPLER / SPLITTER



Available in Singlemode or Multimode. 50/50 splitting ratio with a typical loss of <0.5 dB on Singlemode and <0.4dB on Multimode. Singlemode ar 1300nm and Multimode at 850-1300nm.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 2x2 SINGLEMODE 9/125 | 403268 | 22303315022201 |
| 2x2 Multimode 62.5/125 | 403270 | 15312005022101 |



## NCI COUPLERS

Available in Singlemode or Multimode. 50/50 splitting ratio w/ insertion loss of <0.5 dB. Operating temperatures are -40˚ to +80˚C. NCI will install furcation tubes and connectors on coated fibers.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 1 x 2 SINGLEMODE | 329151 | F1-93205-I |
| 1 x 2 MULTIMODE | 329153 | F1-93205-IM |
| 2 x 2 SINGLEMODE | 329161 | F1-93205 |
| 2 x 2 MULTIMODE | 329163 | F1-93205-M |
| 1 x 4 SINGLEMODE | 329171 | F1-93205-4 |
| 1 x 4 MULTIMODE | 329173 | F1-93205-4M |

## WDM - WAVE DIVISION MULTIPLEXER



1300nm and 1500nm light goes into singular singlemode fibers and comes out with a combined signal output in one fiber and you can reverse this process. Specify connector type.

| TYPE | CORE/CLAD | PART # | REF # |
|---|---|---|---|
| ST to ST | 62.5/125 | 403272 | F1-8704-ST |
| ST to SMA | 62.5/125 | 403274 | F1-8704-SMA |
| ST to FC | 9/125 | 403276 | F1-8704-FC |

ALL SPECIFICATIONS MAY VARY AND ARE SUBJECT TO CHANGE.



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

## Fusion Splicer

What is a fusion splicing? Attaching 2 fibers, forming an interface between them and then removing the common surfaces, thereby removing the interface, so that no reflection or refraction occurs. Great for systems maintenance or emergency restorations.



**Features:** 50X microscope, rechargeable battery good for 80 splices (AC arc), piezo drive controls Z-axis movement.
**Dimensions:** 4"x6"x1.75". **Weight:** < 2 lbs.

| Description | Part # | Ref # |
|---|---|---|
| Fusion Splicer | 408609 | MRINI |

## Protection Sleeve Oven



Works with NCI protection sleeves up to 2.5 inches long. Shrinks in only one minute Comes with a 12volt DC adapter. Optional battery pack will work 100 times on one charge.
**Dimensions:** 2"x4"x2.7" **Weight:** 1.5 lbs.

| Description | Part # | Ref # |
|---|---|---|
| Protection Sleeve Oven | 540945 | F1-1722 |
| Battery Pack | 540947 | F1-1722 |

## Fusion Splice Protection Sleeves

Protection sleeves protect a fusion splice. NCI's sleeves replace Raychem and Sumimoto sleeves saving you lots of money. Inner Tube-EVA; Outer Tube-Polyolefin; Operating Temp-105˚C; Final Shrink Dimension-.0625"; Rod Diameter-.0625"; Length 2.3"

| Description | Part # | Ref # |
|---|---|---|
| Protection Sleeve | 540941 | F1-1002 |
| Ribbon Protection Sleeve | 540943 | F1-1012QP |
| Splice Protection Housing | 540939 | F1-1002M |

## NCI Splice Trays w/Splice Holders



Comes with a press-on "L" bracket for looping to either entry side or exit side. **Features:** Plastic coated aluminum body, foam padded cover, radius sides and punched end holes.

| Type | Capacity | Holder | Part # | Ref # |
|---|---|---|---|---|
| Fusion | 12 | Soft | 410794 | F1-6707F |
| Mechanical | 12 | Soft | 410796 | F1-6707M |
| Bare Fiber | 12 | Rigid | 540936 | F1-6707B |
| Heat Shrink | 6 | Rigid | 540937 | F1-6707H |

## Splice Holders



| Type | Capacity | Holder | Part # | Ref # |
|---|---|---|---|---|
| Fusion | 12 | Soft | 540948 | F1-6707FC |
| Mechanical | 12 | Soft | 540949 | F1-6707MC |
| Bare Fiber Fusion | 12 | Rigid | 540950 | USC-FN12 |
| Heat Shrink | 6 | Rigid | 540951 | USC-HS6 |
| Universal | 12 | Soft | 540952 | USC-1200 |

Splice Closures, Patch Panels and Interconnects are in our Fiber Optic Hardware section on pages 79, 80

## Universal Splice Trays



Works with single fusion, mass fusion, ribbon or mechanical splices. Also works with Fibrlok splices. Uses a single strap to fit into the following closures: *3M 2178; AT&T LG/SCI 2600; Siecor SC Series; Keptel LG-600; Preformed Reddiseal.*
**Features:** Clear plastic cover, interchangeable inserts, inline or butt splicing capable, and a low profile tray.


| Version | Capacity | Part # | Ref # |
|---|---|---|---|
| Universal Splice Tray | 24 | 410804 | LL-8400 |
| Tray Strap | | 410806 | 91724-00 |

## Fusion Splice Trays

Available in either Bare FIber or Protection Sleeve versions.
Comes with a clear plastic cover. Holds up to 12 bare fiber fusion splices or 12 NCI protection sleeves. **Dimensions:** 12" x 4" ; fits most interconnect boxes.

| Version | Capacity | Part # | Ref # |
|---|---|---|---|
| Tray for Bare Fiber | 12 | 410794 | F1-8729B |
| Tray for Protection Sleeves | 12 | 410795 | F1-8729 |

## 3M Fibrlok Splice Tray



Holds up to 24 Fibrlok splices and receives up to 8 buffer tubes (holding up to 48 fibers). Buffer tubes are secured with channel snaps eliminating cable ties. Trays are stackable by snapping together. **Dimensions:** 15.5" x 4.25"

| Version | Capacity | Part # | Ref # |
|---|---|---|---|
| 3M Fibrlok Splice Tray | 24 | 410802 | 2524 |

## Ultra Splice



This reusable and tuneable splice works on any size buffer from 250µm to 1mm. To install simply cleave and insert the fibers, check fiber location in glass capillary and twist locking nut to finish. Avg. Ins. loss <0.2dB.

| Description | Part # | Ref # |
|---|---|---|
| Singlemode | 410956 | 33G8228 |
| Multimode | 410958 | 33G8227 |
| Multimode 100/400µm | 410960 | |

## 3M Fibrlok II



Splices buffer size from 250 to 900µm. Splicin seconds after preparing fiber ends. 2501 tool n assembly. Works on both singlemode and mult Average Insertion Loss <0.1dB.

| Description | Part # | Ref # |
|---|---|---|
| Fibrlok Splice | 950956 | 2529 |
| Fibrlok Assembly Tool | 950957 | 2501 |

## Amp Corelink



This reusable and tuneable splice works on 250 to 900µm buffer. Transparent housing allows fiber alignment to be seen. Comes with 2 splice keys and 12 splices. Average Insertion Loss < 0.1dB.

| Description | Part # | Ref # |
|---|---|---|
| Amp Corelink Splice | 540953 | Corelink12 |

## Siecor CamSplice



Splices any size buffer from 250 - 900µm. Features "cam" locking and self centering fiber alignment. Works on both singlemode and multimode fiber. Avg. Insertion Loss<0.2dB. Blind (non-tuned) Insertion Loss <0.5dB typical.

| Description | Part # | Ref # | |
|---|---|---|---|
| Cam Splice (sold individually) | 950954 | 95-000-04 | ea. |
| Assembly Fixture | 950955 | 2104040-01 | |

## Siecor Lab Splice

| Description | Part # | Ref # |
|---|---|---|
| **Siecor Lab Splice -** 120-145um, Single or Multimode | 409007 | WO1140 |

This reusable elastomeric splice accepts 125µm to 145µm cladding diameters. Works on both singlemode and multimode fiber.



All Specifications May Vary and Are Subject To Change.

# Fiber Optics

## Termination Kit

TOOL KITS

NCI provides you with the selection of tools and consumables you'll need to quickly & efficiently **terminate about 100 connectors.** When you use up your consumables, just order more and you are ready to go (hardware & tools need not be reordered). Items may be ordered individually or as a consumables kit (see our consumables section). Kits come standard with a flashlight and a Clauss stripper unless otherwise specified (see below). Sturdy case holds and protects contents. **Ovens not Included**. Add – for oven version.



**Included in Termination Kits:** (for a list of instructions, ask your salesperson) ST Continuity Tester ***or*** Flashlight ***(Choose One)***, Miller Stripper ***or*** Claus Stripper ***(Choose One)***, Workmat, **Polish Disc (*spec ify connector type*)**, PC Polish Pad, **Glass Polish Plate**, Universal Crimp Tool, **100x microscope with Adapter**, 5 packs of 2-part Epoxy, **Epoxy Mixer**, Epoxy Applicator, **5 Syringes**, 9"x13" Polish Film (5pcs 5µm, 5pcs 1µm, 10pcs 0.3µm), **No-Nik Strippers w/Red Handle**, Jacket Stripper, **Buffer Tube Stripper**, Pliers, **4-bit Screwdriver**, Diamond Scribe, **Utility Razor**, Scissors, **Tweezers**, Piano Wire, **Canned Air**, Cotton Swabs, **Alcohol**, **Kim Wipes**, Matching Gel, **Tape Measure**, Black Electrical Tape, **Storage Box**, Cable Markers, **Cable Ties**, Red, Black and Green Shrink Tubing and **Fusion Splice Sleeves**.

| Kit Type | Part # | Ref # |
|---|---|---|
| ST* | 410310 | F1-0053-ST |
| SC | 410311 | F1-0053-SC |
| FC | 410314 | F1-0053-FC |
| SMA | 410312 | F1-0053-SMA |
| FDDI | 410318 | F1-0053-FDDI |

## Splice Kit

NCI provides you with the selection of tools and consumables you'll need to quickly restore breaks in your fiber optic cabling system. Kits come standard with flashlight and a Clauss stripper unless otherwise specified (see below).
Sturdy case holds and protects contents.

**Included in NCI Splice Kit:** Siecor pocket cleaver. A Fitel cleaver may be substituted for an additional – . **Please specify your choice.**

**Included in U.V. Splice Kit:** Power U.V. Lamp, U.V. Adhesive, Goggles and Batteries.

**Included in Fibrlok Splice Kit:** Fibrlok Assembly Tool.

**Included in All Kits:**
ST Continuity Tester ***or*** Flashlight ***(Choose One)***, Miller Stripper ***or*** Claus Stripper ***(Choose One)***, **No-Nik Strippers w/Red Handle**, Jacket Stripper, **Buffer Tube Stripper**, 4-bit Screwdriver, **Pliers**, Diamond Scribe, **Utility Razor**, Scissors, **Tweezers**, Piano Wire, **Canned Air**, Cotton Swabs, **Alcohol**, Kim Wipes, **Matching Gel**, Tape Measure, **Black Electrical Tape**, Storage Box, **Cable Markers**, Cable Ties, **Red, Black and Green Shrink Tubing** and Fusion Splice Sleeves.

| Description | Part # | Ref # |
|---|---|---|
| Splice Kit - *Fusion, Corelink, Ultra Splice, Finger Splice & Lab Splice Kit* | 410301 | F1-0053-FF |
| U.V. Curing Splice Kit | 410304 | F1-0053-UV |
| Fibrlok Splice Kit | 410306 | F1-0053-FI |

## Basic Tool Kit

NCI provides you with the selection of tools and consumables you'll need to manage your fiber optic cabling system. Sturdy case holds and protects contents. Extra space in this kit allows this basic tool kit to be used as a termination or splice kit by purchasing additional items. Kit comes standard with flashlight and a Clauss stripper unless otherwise specified (see below).

**Included in Kit:**
ST Continuity Tester ***or*** Flashlight ***(Choose One)***, Miller Stripper ***or*** Claus Stripper ***(Choose One)***, **No-Nik Strippers w/Red Handle**, Jacket Stripper, **Buffer Tube Stripper**, 4-bit Screwdriver, **Pliers**, Diamond Scribe, **Utility Razor**, Scissors, **Tweezers**, Piano Wire, **Canned Air**, Cotton Swabs, **Alcohol**, Kim Wipes, **Matching Gel**, Tape Measure, **Black Electrical Tape**, Storage Box, **Cable Markers**, Cable Ties, **Red, Black and Green Shrink Tubing** and Fusion Splice Sleeves.

| Description | Part # | Ref # |
|---|---|---|
| Basic Tool Kit | 410300 | F1-0053 |


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

# MORE KITS

## CONSUMABLES REPLACEMENT KITS

All the replacement supplies needed for your Basic, Splice, or Termination kits.



**All Consumables kits include:** 1 can air, 4oz. alcohol, 100 swabs, 1 box Kim wipes.
**Termination kit also includes:** 5 packs of 2-part epoxy, 5 syringes, 9" x 6.5" polishing film (25 pcs each- 5µm, 1µm & 0.3µm).

| TYPE | PART # |
|---|---|
| BASIC OR SPLICE | 410324 |

## NCI EDUCATIONAL KIT

NCI provides you with the selection of tools and consumables you'll need to recreate an operational fiber optic system in your training room or classroom. For more information check out our training section on page 84 or call our sales department.

| DESCRIPTION | PART # |
|---|---|
| EDUCATIONAL KIT | 403286 |
| KIT WITHOUT POWER METER & LIGHT SOURCE | 403288 |
| LAB MANUAL 2ND ED. | 403290 |
| Consumable Replacement Kit | 403292 |

## UNIVERSAL BREAKOUT KIT

The instructions and supplies you'll need to terminate loose tube fibers. Number of terminations depends on fiber count and length.



**Incl. in Kit:** 25 meters (82 ft.) of 1.2mm & 3mm furcation tubing, 13mm & 26mm diameter black shrink tubing, 2 packs gel remover and 2 packs of 2gram Hysol epoxy.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| UNIVERSAL BREAKOUT KIT | 403278 | F1-5527 |


## UV KIT

NCI supplies you with the equipment you'll need to cure your epoxy applications. Our U.V. lamp is battery operated so it goes where you go with no need for an outlet.
**Included in Kit:** 1 U.V. Lamp with high intensity bulb, 1 oz. bottle U.V. Epoxy, goggles and batteries.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| U.V. KIT | 403280 | WO1067 |
| REPLACEMENT BULB | 403282 | WO1063 |
| SAFETY GLASSES | 403284 | WO1067G |

# SIECOR FAN-OUT KITS

## SIECOR SPIDER FAN-OUT KIT (ENHANCED)



Designed for both factory & field termination of loose tube (250µm) cable of up to 24 fibers, this Spider Fan-Out Kit provides a low-cost option for multi-fiber terminations. No special tools or heat shrinks required. **Incl. in Kit:** 900µm Fan-Out Assembly and Furcation Unit.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 6 FIBER 250µm MULTIMODE | 312529 | SFK-P-06-250-M |
| 12 FIBER 250µm MULTIMODE | 312531 | SFK-P-12-250-M |
| 24 FIBER 250µm MULTIMODE | 312533 | SFK-P-24-250-M |

## SIECOR BUFFER TUBE FAN-OUT KIT

Designed specifically for the indoor termination of 6 or 12 fiber buffer tubes. Requires no more hardware or space than needed for terminating tight buffer cable. Excellent for field installations of connectors.
**Incl. in Kit:** 900µm Fan-Out Assembly and Furcation Unit.

| FIBERS | TUBE LENGTH | TUBE SIZE | PART # | REF # |
|---|---|---|---|---|
| 6 | 25IN. | 2.4mm | 312535 | FAN-BT25-06 |
| 6 | 36IN. | 3 mm | 312537 | FAN-BT36-06 |
| 12 | 25IN. | 2.4mm | 312539 | FAN-BT25-12 |
| 12 | 36IN. | 3mm | 312541 | FAN-BT36-12 |

# BARE FIBER KITS

## MESON BARE FIBER KIT

Designed to hold fiber diameters of 125µm. Great for use on temporary coupled connector applications and power meter & light source connections. Easy to use: simply cleave and insert bare fiber.
**Incl. in Kit:** ST, SC, FC, SMA & Biconic Connectors, Holding Clamp, Fiber Removal Wire and Case.



| DESCRIPTION | PART # | REF # |
|---|---|---|
| MESON BARE FIBER KIT | 540701 | JU828-125 |

## NCI BARE FIBER KIT

Adapters are assembled with snap-on clip.
Easy use: strip, cleave and insert. That's it.
Works with both singlemode and multimode.
**Incl. in Kit:** ST, SC, FC & SMA Connectors, Optic Prep Wipes, Fiber Removal Wire and Carrying Case.



| DESCRIPTION | PART # | REF # |
|---|---|---|
| NCI BARE FIBER KIT | 403294 | F1-23458 |

## FIBER OPTIC CRIMP TOOLS

These low-cost, fully rachetable crimp tools are available in various hex sizes to accomodate your specific connector types. Look at descriptions to find correct tools for your application.



| MAKE | STYLE | PART # |
|---|---|---|
| AMP | ST, SC, FC, D4 SMA, MINIBNC | 410424 |
| AMP | FDDI | 315002 |
| AUGAT | SMA | 410426 |
| LCS/AMP | ST, FC | 315004 |
| LCS/AMP | SMA | 410426 |
| METHODE | ALL TYPES | 410426 |
| MOLEX | ST (860102000) | 410426 |
| MOLEX | SC, FC, SC DUPLEX | 410521 |
| MOLEX | FC DIE FOR SC TOOL | 410525 |
| MOLEX | FDDI, | 410527 |
| MOLEX | ESCON | 336402 |
| NCI | ST | 540122 |
| SIECOR | ST, SC, FC | 312544 |
| SIECOR | FDDI | 312513 |
| 3M℠ | ST, ST HOT MELT, FC(8206) | 410426 |
| 3M | ST PUSH-PULL, SC, FC(8203) | 310671 |
| **AMP REPLACEMENT DIE** | | **314952** |
| **REPLACEMENT DIE** | | **410428** |

# STRIPPERS

### NO NIK FIBER STRIPPERS



Most widely used strippers. They come in various color coded handles for different size stripping needs.

MUSTARD - FOR LOOSE TUBE 250µm COATING
BLUE, **WHITE**, DARK GREEN - LOOSE TUBE
RED - 250µm OR 500µm COATING & 900µm BUFFER TUBE

| TYPE | COLOR | PART# | REF# |
|---|---|---|---|
| 175µm | MUSTARD | 539101 | NN175 |
| 200µm | RED | 410432 | NN203 |
| 250µm | BLUE | 410434 | NN254 |
| 300µm | WHITE | 410436 | NN305 |
| 350µm | DARK GREEN | 410438 | NN014 |

### MILLER STRIPPER



Strips 250µm coated loose tube fiber and removes 900µm buffer tube when stripping coatings. Spring action handle and .006" laser drilled hole ensures quick super smooth stripping.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| MILLER STRIPPER | 410444 | WO-1224 |

### CLAUSS STRIPPER



This stripper has 2 holes. The first hole strips 250µm or 500µm coating ***and*** 900µm buffer tube. The second hole strips up to a 3mm jacket.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| CLAUSS STRIPPER | 539301 | WO-1225 |

### JACKET STRIPPER



Strip and cut jackets from simplex fiber cable. Removal of jacket kevlar member is easy with a Dual V notch blade and spring.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| JACKET STRIPPER | 410454 | F1-0016 |

### SUMITOMO STRIPPER



Sumitomo offers 2 top quality strippers.
The JR-2 strips 250µm coating.
The JR-11 strips the coating from 250µm ***and*** 900µm buffer.

| STRIPPER TYPE | PART# | REF# |
|---|---|---|
| 250µM | 539401 | JR-2 |
| 250µM & 900µm | 539403 | JR-11 |

### BUFFER TUBE STRIPPER



The grey stripper is great for stripping jacket from simplex fiber both vertically and horizontally without nicking. 3 blades adjust to most fibers up to 1/8" diameter.
The blue buffer tube stripper works on coaxial cable from 1/8" to 7/32".

| DESCRIPTION | PART# | REF# |
|---|---|---|
| GREY BUFFER TUBE STRIPPER℠ | 410456 | F1-0017 |
| BLUE BUFFER TUBE STRIPPER | 539103 | F1-0018 |
| 3 REPLACEMENT BLADES | 410458 | F1-0021 |


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

# STRIPPERS, SLITTERS & CUTTERS

## AUGAT STRIP TOOL KIT



Removes buffer and jacket without nicking. Blades and tube guides are interchangeable and replaceable.
**Included in Starter Kit:** 5 Blades, 2 Blade Holders, 1 Blade Holder Cleaner and 7 Tube Guides.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| STARTER KIT | 410446 | 698-STK-100 |
| BLADES - VIOLET (STRIPS TO 125um) | 410448 | 698-RMS-4A-06 |
| BLADES - WHITE (STRIPS TO 250um) | 410450 | 698-RMS-4A-12 |
| BLADES - BLUE (STRIPS TO 500um) | 410452 | 698-RMS-4A-21 |
| BLADE HOLDER | 539501 | 698-TMS-1G01 |
| REPL. TUBE GUIDES (254-554µm) | 539503 | 698-RMS-5A-10 |
| REPL. TUBE GUIDES (254-343µm) | 539505 | 698-RMS-5A-13 |
| REPL. TUBE GUIDES (457-573µm) | 539507 | 698-RMS-5A-21 |

## CERAMIC KEVLAR FIBER CUTTER



Lightweight, non-conductive and ergonomically designed. Superhard ceramic blades last up to 50 times longer than stainless blades.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| CERAMIC CUTTER | 410472 | PA-1510A |

## ROUND CABLE JACKET SLITTER

This tool is used to strip jacket off of a multifiber cable with max O.D. of 1.5" and max jacket thickness of .187".

| DESCRIPTION | PART# | REF# |
|---|---|---|
| CABLE SLITTER | 410460 | PA-1820 |
| DELUXE STRIPPER | 410461 | --- |
| 2 REPL. BLADES | 410462 | PA-2109 |

## KEVLAR CUTTER



This serrated blade, made from high carbon steel, cuts kevlar clean and quickly and comes with a spring actioned handle. Low-cost scissors are available as well..

| DESCRIPTION | PART# | REF# |
|---|---|---|
| KEVLAR CUTTER | 410470 | F1-6430 |
| METAL SCISSORS | 410471 | F1-0020 |

# SCRIBES

## DIAMOND HAND SCRIBES



The retractable 60° cone point is shaped out of diamond and banded to a stainless steel shaft in a deluxe metal or economy plastic holder.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| DELUXE METAL SCRIBE | 410464 | WO-1223 |
| ECONOMY PLASTIC SCRIBE | 410466 | FO-90-C |

## WEDGE DIAMOND SCRIBE



The 90° wedge scribe provides a wider surface to achieve scribe. Available in a rugged plastic holder.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| 90° WEDGE SCRIBE | 410468 | FO-90-W |

## SAPPHIRE SCRIBES



The 90° sapphire scribe provides a wider surface to achieve scribe. Available in a deluxe metal holder.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| 90° SAPPHIRE SCRIBE | 539105 | FO-90-S |

## SIECOR CARBIDE SCRIBES



Siecor's carbide scribe provides a wide surface to achieve scribe. Available in a deluxe metal holder.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| SIECOR CARBIDE SCRIBE | 322543 | FO-90-B |

# Fiber Optics

## Cleavers

### Seicor Pocket Cleaver



A diamond edge cleaver made of high impact plastic. Provides precise endface quality with typical cleave angles of 1-2° and cleave lengths of 0.125" to 0.75". Works on singlemode and multimode fiber.
**Dimensions:** 3.5" x 0.45" diameter.

| Description | Part# | Ref# |
|---|---|---|
| GTE Pocket Cleaver | 410474 | WO-2220 |

### York Cleaver



York's **FK11-4** cleaver is the top of the line. Accepts titanium impregnated and polarization maintaining fiber. Cleave angles of ±0.16° or better than 0.5°. Cleave fiber diameters of 80-200µm. Powered on one 9V battery and performs over 10,000 cleaves. Blade performs over 20,000 cleaves before replacement is needed. The **FK12** is an angled cleaver that adjusts from 0 to 15° with 1° repeatability at 8°.

| Description | Part# | Ref# |
|---|---|---|
| York Cleaver | 539601 | FK11-4 |
| York Angled Cleaver | 539603 | FK12 |

### York Field Cleaver



York's **MR-1** field cleaver performs over 10,000 cleaves before diamond blade needs replacement. Cleave angles of <0.1°. Works on both singlemode and multimode fiber with nominal diameters at 125µm.

| Description | Part# | Ref# | |
|---|---|---|---|
| York Field Cleaver | 539605 | MR-1 | |
| Repl. Blade | 539607 | | Call |

### Fitel Cleaver



The ceramic blade performs over 6000 cleaves with 90° at <1° for fusion splices and 99% at <2° for mechanical splices. Works on singlemode and multimode fibers. Comes with carrying case.

| Description | Part# | Ref# |
|---|---|---|
| Fitel Cleaver | 410476 | F1-0010 |
| Repl. Blade | 410475 | CL008 |

### T & B Cleaver



Excellent for laboratory or stringent loss budgets. The tool can precisely scale a cleave length 3 to 20mm. Works on singlemode and multimode fibers.
**Incl. with tool:** Bench Mounting Clamp, Hand Carrying Strap, and Rugged Case.

| Description | Part# | Ref# |
|---|---|---|
| Cleave Tool | 410478 | 92208 |
| Breaking Clamp Replacement | 410479 | --- |

### Alcoa Fujikura Cleaver



Cleaves more than 8000 times before circular blade needs replacement. Cleaver accepts 250-900µm fiber and performs precise splices at <0.5dB. Cleave length is adjustable. Works on Singlemode and Multimode fibers

| Description | Part# | Ref# |
|---|---|---|
| Alcoa Fujikura Cleaver | 539701 | CT07 |
| Replacement Blade | 539703 | S006244 |

## Curing Ovens

### Heat Oven



Cures up to **24 FC, ST, D4, SMA,** or up to **20 Biconic connectors** (Biconic holding block sold sep.). Even heat distribution minimizes connector loss. Uses standard outlet and has a detachable cord.

| Description | Part # | Ref # |
|---|---|---|
| 24 Connector Heat Oven | 409042 | 9551 |
| Biconic Holding Block | 409044 | 9060 |
| Curing Stand | 409050 | 9451S |
| FDDI (10) Holding Block | 409043 | 9090 |

### Mini Ovens



NCI has 2 models available. The first cures up to **6 ST or SMA connectors.** The second model cures **1 FDDI and up to 4 ST or SMA connectors.**.

| Description | Part # | Ref # |
|---|---|---|
| ST/SMA Mini Oven -Cures 6 | 409046 | 80865-000 |
| Multicure Mini Oven- 1-FDDI & 4-ST/SMA | 409048 | 80871-000 |


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

# SCOPES & GAUGES

## NCI INSPECTION MICROSCOPE



Perfect for bare fiber, cleave or multimode connector inspection. The 100x scope has a built-in, battery-powered illuminator. Batteries not included and are not needed for some applications.
**Incl. in Kit:** 100x Scope, ST, SC, FC and SMA Adapters and Hardwood Stand.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| NCI INSPECTION SCOPE KIT | 410482 | F1-0111-E |
| SCOPE (NO ADAPTERS) | 410484 | F1-0111 |
| ST ADAPTER | 410488 | F1-0111-B |
| SC ADAPTER | 410492 | F1-0111-F |
| FC ADAPTER | 410492 | F1-0111-D |
| SMA ADAPTER | 410486 | F1-0111-A |
| BICONIC ADAPTER | 410490 | F1-0111-C |
| HARDWOOD STAND | 410494 | F1-0111-S |

## BUEHLER FIBRSKOPE



This **portable** scope provides high optical resolution quality that allows you to view surface imperfections on connector endfaces. Works great on both singlemode and multimode connector inspection. Available in 400x or 200x magnification.
**Incl. with Scopes:** FC, SMA and Biconic adapters, accessories. and case **(ST and SC adpaters sold sep.).**

| DESCRIPTION | PART# | REF# |
|---|---|---|
| BUEHLER 400X | 410498 | 0801-0502 |
| BUEHLER 200X | 410496 | 0801-0500 |
| ST ADAPTER | 410500 | 0810-0223 |
| SC ADAPTER | 539801 | 0810-0248 |
| REPLACEMENT BULB | 539803 | 0818-0110 |

## AMP INSPECTION SCOPE



100x scope works on both singlemode and multimode connectors. 20x eye piece adapter converts scope to 200x. Scope comes with ST adapter. Everything else sold separately.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| 100X SCOPE W/ ST ADAPTER | 315048 | 502978-1 |
| 20X ADAPTER CONVERTS TO 200X | 315050 | 502969-2 |
| ST ADAPTER | 315052 | 502973-1 |
| FC ADAPTER | 315054 | 502974-1 |
| D4 ADAPTER | 315056 | 502975-1 |
| SC ADAPTER | 315057 | 502976-1 |
| SCOPE TRIPOD | 315058 | 502965-1 |
| AC/DC PLUG ADAPTER | 315059 | 502967-1 |
| REPLACEMENT BULB | 315060 | 502964-1 |

## BICONIC GAUGE



Needed to measure tip length during polishing procedure of a biconic connector. The gauge comes complete with a calibration reference plug to assure accurate readings. NCI can calibrate your gauge for you (see below).

| DESCRIPTION | PART# | REF# |
|---|---|---|
| BICONIC GAUGE | 410512 | F1-3689 |
| CALIBRATION CHARGE | 410513 | |

# HEAT GUNS

## HEAT GUN



Great for heat shrinking protection sleeves or shrink tubing. This heat gun has a variable heat control setting to allow user to adjust heat to desired level.

| DESCRIPTION | PART # |
|---|---|
| STANDARD | 537901 |
| HEAVY DUTY (PRINCESS) | 537903 |

## MINI TORCH



A low-cost alternative to our higher priced heat gun. This hand-help micro torch is great for heat shrink applications. Refill with common butane lighter fluid.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| MINI TORCH | 539109 | F1-0811 |


Polishing is a precise process involving the movement of the fiber end over a rough surface. NCI provides polish discs, polish film and polishing machines of the highest quality

## POLISH DISCS



**ST** - Prepares all types including PC style and AT&T STII. *Available in low-cost plastic version good for 100 polishes.*

| DESCRIPTION | PART# | REF# |
|---|---|---|
| ST DISC | 409020 | F1-6925 |
| ST PLASTIC DISC | 539111 | 503304-1 |



**SC & ST PUSH-PULL** - Prepares SC and ST Push-Pull connectors.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| SC & ST PUSH-PULL DISC | 539113 | F1-6928 |



**FC/PC** - Available in standard flat style or AMP's curved style. If polishing pre-radius PC connector it is recommended that you use Blue Dye Epoxy (# 410332) at ferrule end.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| AMP FC/PC CURVED DISC | 409014 | 501861-1 |
| FC/PC FLAT DISC | 409016 | F1-8705 |

**BICONIC** - Works on Singlemode and Multimode connectors. NCI recommends using a Biconic Gauge for accurate polish length.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| BICONIC DISC | 409026 | F1-6927 |
| BICONIC GUAGE | 410512 | F1-3689 |




**4 POSITION ST** - Polish 4 ST type connectors at once, saving time and money. Comes with instructions.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| 4 POSITION ST DISC | 539115 | F1-6977ST |



**FDDI** - Polishes AMP and Methode FDDI connectors. Works on both ferrules at once. For ease of use, we recommend that you order 2 assembly fixture kits with each disc.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| AMP FDDI DISC | 409022 | 501791-1 |
| AMP ASSEMBLY FIXTURE KIT | 409024 | 502023-1 |



**SMA** - Prepares SMA 905 &906 connectors. Polishes to precise length, so you don't need a length measurement gauge

| DESCRIPTION | PART# | REF# |
|---|---|---|
| SMA 905 & 906 DISC | 409018 | F1-2280 |

**D4 & MINI BNC** - D4 disc accepts a 2mm ferrule. The AMP 501505-3 D4 connector requires the AMP D4 polish dIsc. The mini-BNC polish disc polishes the min-BNC connector.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| NCI D4 DISC | 409030 | F1-6926 |
| AMP D4 DISC | 409032 | 501867-1 |
| MINI BNC DISC | 409034 | CAT-006 |

## POLISHING MACHINES



### BUEHLER FIBRMET POLISH MACHINE

Capable of flat or angled (APC) polishing in < 2 minutes (avg). Discs designed for repeatable results with no special skill needed. Works with commercially available connectors and bare optical fibers.

**Incl. with Polisher:** 2 Aluminum Polishing Wheels, 20-3µm & 10-.3µm Polishing Discs, Storage Area for Discs, Water Bottle, self-contained carrying case with strap + more.

**Size:** 12"W x 9.5"H x 13"D. **Weight:** 30lbs (14kg).

**(ADAPTERS SOLD SEP.)**

| DESCRIPTION | PART# | REF# |
|---|---|---|
| FIBRMET POLISH MACHINE | 539805 | 69-3000-160 |
| ST ADAPTER | 539807 | 69-3086 |
| FC ADAPTER | 539809 | 69-3062 |
| BUEHLER 3µm DISCS - 50 PACK | 539811 | F1-0110-3 |
| BUEHLER .3µm DISCS - 50 PACK | 539813 | F1-0110-03 |

**CALL FOR ANGLED (APC) ADAPTER PRICING & AVAILABLILITY**

### 3M POLISH MACHINE



3M's portable one-step polish machine uses dry, single paper technology. Since no water is needed, there is no clean-up. Comes standard with ST adapter. When polishing Hot Melt connectors the 2µm polish film is recommended. 12V DC unit comes with 110V AC adapter.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| 3M POLISH MACHINE | 409038 | 6850-A |
| POLISH FILM - 2µm 4" DIA.-50 PACK | 409040 | 6192B |
| SC HOLDER ADPATER | 314648 | 6392 |
| FC HOLDER ADPATER | 314650 | 6292 |


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

# POLISHING (LAPPING) FILM

## POLISHING FILM



These films come in Aluminum Oxide **(AO)** or Silicon Carbide **(SC)** versions. They vary in abrasiveness from 15µm to 0.3µm for final polish. We recommend using the polish extender to maximize and enhance polishing.

**Color coded as follows**: WHITE- 0.3µm, GREEN- 1µm, BLUE- 2µm, PINK- 3µm, Lt.Gray- 5µm, LT.BLUE- 9µm, DK.GRAY- 8µm.

Polishing film sheets come in 9x6.5" or 9x13" sizes and come in 25piece packs.
Machine polishing film comes in 4" or 5" discs and in 50 piece packs.

| 9x6.5" SHEETS | PART# | 25PCS |
|---|---|---|
| **AO** - 0.3µm | 410392 | |
| **AO** - 1µm | 410394 | |
| **AO** - 2µm | 539117 | |
| **AO** - 3µm | 410396 | |
| **SC** - 5µm | 410398 | |
| **AO** - 9µm | 539119 | |
| **AO** - 15µm | 410402 | |

| 9x13" SHEETS | PART# | 25PCS |
|---|---|---|
| **AO** - 0.3µm | 410404 | |
| **AO** - 1µm | 410406 | |
| **AO** - 2µm | 539121 | |
| **AO** - 3µm | 410408 | |
| **SC** - 5µm | 410410 | |
| **AO** - 9µm | 539123 | |
| **AO** - 15µm | 410414 | |

| POLISH MACHINE FILM | PART# | 50PCS |
|---|---|---|
| BUEHLER **AO** - 4" DISC - 3µm | 410416 | |
| BUEHLER **AO** - 4" DISC - 0.3µm | 410418 | |
| 3M **AO** - 4" DISC - 2µm | 410420 | |
| 3M **AO** - 5" DISC - 2µm | 539125 | |
| **AO** - 4" DISC - 0.05µm | 539127 | |
| **AO** - 4" DISC - 30µm | 539129 | |

| DESCRIPTION | PART# | REF# |
|---|---|---|
| POLISH EXTENDER - 32 OZ. | 539131 | 2031 |
| APPLICATOR BOTTLE | 539135 | F1-7302 |


## 3 IN 1 TRI-COAT POLISHING FILM



One sheet with 3 different grades of abrasive surface. 0.3µm, 1µm and 5µm strips spaced evenly on a 9"x13" sheet. One sheet allows you to polish a connector without having to switch.

| DESCRIPTION | PART# |
|---|---|
| TRI-COATING POLISHING FILM - 25 PCS | 539137 |

## DIAMOND POLISHING FILM



Available in either 4" diamond disc or 3"x6" diamond sheet. Our 4" diamond disc polishing films are for use with the Seikoh Giken polishing machine or comparible model.

| COLOR | SIZE | TYPE | PART# | |
|---|---|---|---|---|
| PINK | 3µm | 4" DIAMOND DISC | 539141 | EA. |
| BROWN | 6µm | 4" DIAMOND DISC | 539143 | EA. |
| GREEN | 30µm | 4" DIAMOND DISC | 539145 | EA. |
| VIOLET | 1µm | 3"x6" DIAMOND SHEET | 539147 | EA. |
| PINK | 3µm | 3"x6" DIAMOND SHEET | 539149 | EA. |
| GREEN | 30µm | 3"x6" DIAMOND SHEET | 539151 | EA. |

# ACCESSORIES

## SOFT POLISH PAD & GLASS PLATE



In order to polish fiber connectors properly you must have a strong and flat surface. We offer 2 sizes of glass plates, 6"x9" and 9"x13". The Soft Polish pad is used over the glass plate when polishing PC style pre-readius connectors.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| 6"x9" GLASS POLISH PLATE | 539139 | F1-9111A |
| 9"x13" GLASS POLISH PLATE | 409028 | F1-9111 |
| SOFT POLISH PLATE | 409036 | 05-00053 |

## CONNECTOR CLEANER

Special polyester film cleans dust, lint and grease from connector ends. Works in 2 strokes replacing the need for alcohol swabs and solvents. Saves time and money.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| CONNECTOR CLEANER | 539153 | F1-6270 |
| REPLACEMENT FILM | 539155 | F1-6271 |

# EPOXY

## Epoxy



Each packet of epoxy has 2 parts inside. When a seperation pin is removed, epoxy is mixed within the packet. Each 2 gram packet supplies 25-35 connectors.
**NOTE:** The longer the cure times, the less stress on the fiber.

| Type | Pot Life | Cure Time | Heat Cure Time | Heat Cure Temp | Part# | Ref# |
|---|---|---|---|---|---|---|
| Standard Epoxy | 30min. | 24hrs. | 1 hr | 65°C | 539157 | BAF110 |
| 5 Min Epoxy | 5min. | 2hrs. | N/A | N/A | 539159 | BAF120 |
| Low Pot Life 15 Min Epoxy | 60min. | N/A | 15min. | 110°C | 539161 | BAF230 |
| High Pot Life 15 Min Epoxy | 2hrs. | N/A | 15min. | 110°C | 539163 | BAF253 |
| Blue Dye Epoxy | 2hrs. | 24hrs. | 1 hr | 65°C | 539165 | BAF113 |
| Epoxy Mixer | | | | | 539167 | 501202-1 |

## HySol Epoxy

Comes in 2 tubes: 1 glue tube and 1 hardener tube. They must be mixed and then either time or heat cured. Quick-dry 4 gram packet is available with a cure time of 5-10 minutes.

| Type | Pot Life | Cure Time | Heat Cure Time | Heat Cure Temp | Part# | Ref# |
|---|---|---|---|---|---|---|
| Hysol Epoxy - 3.3 oz. | 30min. | 24hrs. | 30min. | 100°C | 410338 | F1-7070 |
| Quick Dry 4 Gram Packet | 3min. | 5-10min. | N/A | N/A | 410340 | F1-7070PL |

## EPO-TEK® Epoxy



This heat sensitive epoxy comes in two containers. They are mixed at a 1 to 10 ratio. Once heat is applied the liquid epoxy hardens and turns an amber color.
**Pot Life: 6 hrs.**
**Cure Time:** 1 min.@150°C or 5 min.@100°C
**NOTE: Heat must be applied to harden epoxy.**

| Description | Part# | Ref# |
|---|---|---|
| EPO-TEK Epoxy - 8 oz. Kit | 410339 | 353ND |

EPO-TEK is registered trademark of Epoxy Technology.

## Self-Curing Epoxy

Cures in only a few minutes. Comes with 10 filled syringes and 2 primer vials.
**NOTE: Applicator needles sold sep.**

| Description | Part# | Ref# |
|---|---|---|
| Self-Curing Epoxy with Primer | 539179 | F1-7171 |



## Application Syringes and Needles

These are empty syringes with a 1.2mm needle. Great for use with epoxy.
We also have a larger needle for use with 3M connectors #8203, 8306, 6306 and 6102.

| Description | Part# | Ref# |
|---|---|---|
| Empty Syringe with 1.2mm Needle | 410380 | 501473-3 |
| 25 pack Syringes | 410382 | 501473-3 |
| Needle for 3M Connectors | 539177 | F1-4012 |

## UV Kit

NCI supplies you with the equipment you'll need to cure your epoxy applications. Our U.V. lamp is battery operated so it goes where you go with no need for an outlet.
**Included in Kit:** 1 U.V. Lamp with high intensity bulb, 1 oz. bottle U.V. Epoxy, goggles and batteries.

| Description | Part # | Ref # |
|---|---|---|
| U.V. Kit | 539167 | WO1067 |
| Replacement Bulb | 539169 | WO1063 |
| Safety Glasses | 539171 | WO1067G |

## Ultra-Violet Adhesive

This is the same adhesive that comes with the U.V. kit. Cure time relative to light intensity with peak sensitivity @ 365µm)Yields aprox. 55 splices.

| Description | Part# | Ref# |
|---|---|---|
| 1 oz. U.V. Adhesive | 539173 | WO1057 |

## U.V. Adhesive Syringe

Pre-filled 3cc syringes.

| Description | Part# | Ref# |
|---|---|---|
| 3cc Syringe U.V. Adhesive | 539175 | FS453 |


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

# CONSUMABLES

## CONSUMABLES REPLACEMENT KITS

All the replacement supplies needed for your Basic, Splice, or Termination kits. **All Consumables kits include:** 1 can air, 4oz. alcohol, 100 swabs, 1 box Kim wipes.
**Termination kit also includes:** 5 packs of 2-part epoxy, 5 syringes, 9" x 6.5" polishing film (25 pcs each- 5µm, 1µm & 0.3µm).



| TYPE | PART # | REF # |
|---|---|---|
| BASIC OR SPLICE | 410324 | F1-0053C |
| TERMINATION | 410326 | F1-0053D |

## MATCHING GEL

Reduces Fresnel reflections when applied to mechanical splices and connectors. A Gel-filled syringe is available.



| DESCRIPTION | PART# | REF# |
|---|---|---|
| 0.4 OZ.MATCHING GEL | 410386 | F1-0001 |
| GEL-FILLED SYRINGE | 410380 | 9006 |

## CABLE GEL REMOVER

Water-based solvent for cleaning loose tube cable filling gel. Great for greasy cleanup jobs.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| 12 PACK WIPES | 410364 | F1-1011 |
| 32 OZ. SPRAY BOTTLE | 410366 | F1-1091S |
| 1 GALLON CONTAINER | 410368 | F1-1091G |
| 3 GALLON CONTAINER | 410370 | F1-1091 |
| POLYWATER - 1 GALLON | 539181 | F1-1091GP |
| POLYWATER - 3 GALLON | 539183 | F1-1091P |

## PULLING LUBRICANT

Designed to reduce friction when pulling fiber thru jacket. Works with all types of fiber jackets.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| 1 GALLON | 410372 | F-320 |
| 1 QUART SQUEEZE BOTTLE | 410374 | F-35 |

## PIANO WIRE

Perfect for removing broken fibers from inside ferrule or bare fiber adapters. Simply attach wire to supplied holder and insert to remove broken fiber. Comes in 2" long 125µm pieces.



| DESCRIPTION | PART# | REF# |
|---|---|---|
| PIANO WIRE - 8 PCS. | 410384 | F1-8265 |

## ISOPROPYL ALCOHOL

Used for cleaning connector ends.
**NOTE:** All alcohol must be ground shipped. Not for consumption.



| DESCRIPTION | PART# | REF# |
|---|---|---|
| 4 OZ. PLASTIC DISPENSER | 410344 | F1-0007 |
| 12-PAK | 410346 | F1-0007 |
| GALLON CONTAINER | 410348 | F1-0007-G |
| 4 OZ. CANNED | 410349 | F1-0068 |
| 8 OZ. EMPTY DISPENSER | 539185 | F1-007P |

## KIMWIPES EX-L

Kimberly-Clark, the leader in innovative wiping systems, offers Kimwipes, a nearly lint-free wiper. Used with alcohol to clean fiber and connector ends.



| DESCRIPTION | PART# | REF# |
|---|---|---|
| 1 BOX - 280 WIPERS | 410350 | 34-155 |
| 12 PACK - 2856 WIPERS | 410352 | 34-155 |

## OPTIC PREP WIPE

Use this pre-moistened lens tissue (instead of alcohol and wipes) to clean and polish optical grade surfaces such as fibers and connector ends.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| 1 BOX - 50 PREPS | 410360 | F1-1003 |

## SWABS

Available from NCI are 2 swab types. A foam swab designed with a flexible handle and a 2.5mm size. Eliminates the need to remove the bulkhead from any 2.5 mm equipment. Great for ST, SC and FC connectors.
We also carry regualr cotton swabs on 6" wood handle.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| 2.5mm FOAM SWABS - 50 COUNT | 410356 | F1-0005 |
| COTTON SWABS - 100 COUNT | 410354 | F1-0006 |

## CANNED AIR


Ozone-free, moisture-free, clean pressurized air. Blasts away dirt and lint.



| DESCRIPTION | PART# | REF# |
|---|---|---|
| CANNED AIR - 10 OZ. | 889115 | F1-1007 |


# ACCESSORIES

## CABLE MANAGEMENT




2"x 2"x 6' FIBER OPTIC DUCT W/COVER

| PART# | REF# |
|---|---|
| 539189 | ...FRS-STWC-22RG |




2"x 2"x 6' SLOTTED F.O. DUCT W/COVER

| PART# | REF# |
|---|---|
| 539191 | FRS-SLWC-22RG |




2"x 2" FIBER OPTIC DUCT SPLICE

| PART# | REF# |
|---|---|
| 539193 | FRS-SPLC-22RG |




2"x 2" CABLE RETAINER

| PART# | REF# |
|---|---|
| 539195 | FRS-CR22 |



2"x 2" HORIZONTAL "T"

| PART# | REF# |
|---|---|
| 539197 | FRS-ITC-22RG |



2"x 2" VERTICAL "T"

| PART# | REF# |
|---|---|
| 539199 | FRS-VTC-22RG |



2"x 2" 90° HORIZONTAL ELBOW

| PART# | REF# |
|---|---|
| 539198 | FRS-9HE-22RG |



2"x 2" 90° VERTICAL "DOWN" ELBOW

| PART# | REF# |
|---|---|
| 539196 | FRS-9VOE-22RG |


### INNERDUCT



Innerduct provides additional mechanical protection and Identification for exposed fiber optic cabling and our innerduct will not break under sub zero temperatures. It has an O.D. of 1.365" and an I.D. of 1.049".

| DESCRIPTION | PART # |
|---|---|
| WITHOUT PULL LINE | 401002 |
| WITH PULL LINE | 401004 |
| INNERDUCT PLENUM | 401005 |

### PULLING EYE GRIP

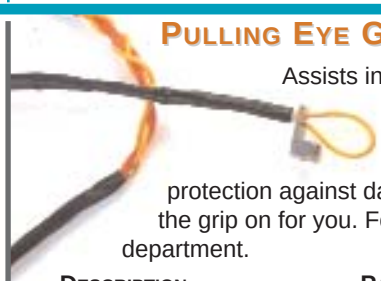

Assists in the pulling of cable through conduits, blocks or sheaves. Pulling tension remains uniform along the cable. Provides protection against damage of cable. We can install the grip on for you. For more info, call our sales department.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| FOR MULTIFIBER | 410477 | F1-1001 |
| FOR SIMPLEX & DUPLEX | 874113 | F1-1001B |
| GRIP INSTALLED BY NCI | 874115 | F1-1001A |

### CABLE NETTING

Goes around connector as added protection. Expands to 2 inches and pulls down to 1/2 inch.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| CABLE NETTING | 539187 | F1-5700 |

### LABELS

**WA**= Wrap Around **WO**= Write On
**SA**= Self Adhesive **TO**= Tie On

| DESCRIPTION | PART# | |
|---|---|---|
| 8" - **WA** "FIBER OPTIC CABLE" | 540101 | EA |
| 4" - **WA** "FIBER OPTIC CABLE" | 540102 | EA |
| 2.75"x 4" **SA** "WARNING FIBER OPTIC CABLE" | 540103 | EA |
| 3.25"x 1.75" **SA** "WARNING ..." 25 PACK | 540104 | |
| 3.5"x 1.75" **TO** "CAUTION ..." 25 PACK | 540105 | |
| 5"x 8" - LASER WARNING | 540106 | EA |

FOR MORE CABLE SUPPLIES
SUCH AS SHRINK TUBING, CABLE TIES,
CABLE MARKERS AND MORE,
TURN TO OUR CABLE MANAGEMENT SECTION
ON PAGE 121



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

## FIBER

### 3M FIBER MANAGEMENT SYSTEM

Set up a central access point for splicing and interconnection of fiber optic cabling. System includes a connector module, providing interconnection for 12 or 24 ST splices, and a splice module, where cable is spliced and excess cable is stored. Can be used alone or combined with additional modules allowing for expansion and flexibility. All metal construction makes it a rugged unit and door locks make it secure.

**DIMENSIONS:** CONNECTOR MODULE: 8.75"x 8.75"x 4" SPLICE MODULE: 14"x 17.6"x 5"

| DESCRIPTION | PART# | REF# |
|---|---|---|
| 12 PORT ST CONNECTOR MODULE | 410830 | 8173 |
| 24 PORT ST CONNECTOR MODULE | 410831 | 8174 |
| SPLICE MODULE - HOLDS 12 SPLICE TRAYS | 410832 | 8570 |

### NCI FIBER MANAGEMENT SYSTEM

One interconnect module protects up to 12 connectors. Module can be used as a splice module as well as a combination interconnect/splice module. Our wall mountable module can be rack-mounted with a rack-mount bracket (sold sep.).

**CONSTRUCTION:** INJECTION MOLDED. **DIMENSIONS:** 12"Hx 12"Wx 4"D

| INTERCONNECT MODULE TYPE | PART# | REF# |
|---|---|---|
| MODULE W/12 POS. ST/FC BULKHEAD PLATE | 540107 | F1-2010 |
| MODULE W/12 POS. SC BULKHEAD PLATE | 540108 | F1-2010 SC |
| MODULE W/12 ST ADAPTERS MOUNTED | 54019 | F1-2010 LL |
| MODULE W/12 FC ADAPTERS MOUNTED | 540110 | F1-2010 LLFC |
| MODULE W/12 SC ADAPTERS MOUNTED | 540111 | F1-2010 LLSC |
| MODULE W/12 ST PIGTAILS | 540112 | F1-2010 LP |
| MODULE W/19" BRACKET AND SPLICE TRAY (*PLEASE SPECIFY FUSION OR MECHANICAL*) | 540113 | F1-2010C |
| ST/FC SIDE BULKHEAD PLATE | 540114 | F1-2010BST |
| SC SIDE BULKHEAD PLATE | 540115 | F1-2010BSC |
| 19" RACK MOUNT BRACKET (BEIGE) | 540116 | F1-2010P |

### DITEL FIBER DISTRIBUTION CENTER

This 72 fiber termination and connection housing unit can be equipped with 6 pack panels for direct termination or with 6 pack modules for splicing. Use the reversible frame mounting brackets to install in either a 19" or 23" rack.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| FIBER CONNECTION HOUSING UNIT | 540301 | FCH-7200 |
| ST SIX PACK PANEL - UNLOADED | 540303 | FCH-6ST |
| FC SIX PACK PANEL - UNLOADED | 540305 | FCH-6FC |
| D4 SIX PACK PANEL - UNLOADED | 540307 | FCH-6D4 |
| SC SIX PACK PANEL - UNLOADED | 540309 | FCH-6SC |

## CLOSURES &

### 3M FIBRDOME CLOSURE




Protects fiber from the elements while providing fast and easy no-cost re-entry. Weatherproof, water-tight and U.V. resistant. Re-entry is a breeze. Just pull the latch. No special tools needed. Can be installed in above-ground pedestals, hand-holes and mounted on poles and strands.

Splices are enclosed in a polypropylene dome clamped together with a stainless steel latch and sealed with an O-ring. Pre-stretched tubing is slipped over the base of the closure and onto a gel-sealing collar.

**INCLUDED IN ALL CLOSURES:** 1TRANSITION TRAY AND 1 SPLICE TRAY.
**FD06 CLOSURE HAS THE CAPACITY FOR 1 MORE SPLICE TRAY .**
**FD08 CLOSURE HAS THE CAPACITY FOR 3 MORE SPLICE TRAYS .**

| DESCRIPTION | PART# | REF# |
|---|---|---|
| FD06 FIBRDOME CLOSURE | 310651 | FD06 |
| FD08 FIBRDOME CLOSURE | 310652 | FD08 |

### KEPTEL CLOSURE




Weatherproof, water-tight and U.V. resistant. Great for all aerial, burial and pdestal applications. Using 3 splice trays the closure holds 36 single fused fibers or 96 mass fused ribbon fibers.

**INCLUDED IN KIT:** MAIN CORE FRAME WITH FIVE PILLOW BLOCKS AND SEALS, PRESSURE VALVE, CABLE SHEATH CLAMPS, CSM TIE DOWNS, FIBER ROUTING RINGS, DOME WITH V- CLAMP AND 2 C-HALF SEALS. **(SPLICE TRAY SOLD SEP.)**

| DESCRIPTION | PART# | REF# |
|---|---|---|
| KEPTEL CLOSURE | 535403 | LG-100 |
| MINI SPLICE TRAY (1) | 535405 | LL-2450 |

### 3M 2178 SPLICE CASE



Protect your fiber optic splices with the 3M 2178 Splice Case.The rigid non-filled case withstands moisture, temperature extremes, cable flexing, and is flame retardant. Requires no special tools or complicated training for installation. Four cable entry ports (2 per end) accomodate 0.4 to 1" diameter fiber. The 2180 re-entry kit has all materials needed for re-entry. Aerial bracket kit has the materials for aerial installation.

**INCLUDED IN RE-ENTRY KIT:** 2 PLUGS, 2 HOSE CLAMPS, 8 CABLE TIES (4 GREEN & 4 BLUE), 1 HEX KEY, 48 SEALING WASHERS, 1 BOX SEALING CORD, 1 BOX SEALING TAPE.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| 3M 2178 SPLICE CASE | 410808 | 2178 |
| RE-ENTRY KIT | 410810 | 2180 |
| AERIAL BRACKET KIT | 410812 | 2182 |
| FIBRLOK SPLICE TRAY | 410802 | 2524 |

## ENCLOSURES

### WALL MOUNT SPLICE ENCLOSURE

This wall-mounted unit comes in 2 types. One type protects up to 12 fusion splices with protection sleeves and the other protects up to 12 low profile mechanical splices. Splices are secured to splice holder within the enclosure.

| ENCLOSURE TYPE | PART# | REF# |
|---|---|---|
| FOR FUSION SPLICES | 540117 | F1-4868-F |
| FOR MECHANICAL SPLICES | 540119 | F1-4868-M |

### AMP 12 OR 24 PORT WALL MOUNT ENCLOSURE

This wall-mounted unit is available in either a 12 port or 24 port version. Both versions have ST type adapters connected right on the box. Great for fast field installation.

| ENCLOSURE TYPE | PART# | REF# |
|---|---|---|
| 12 ST PORTS | 540121 | 559094-1 |
| 24 ST PORTS | 540123 | 559237-1 |

## PATCH PANELS

### PATCH PANELS



These 12 port 19" patch panels are all metal construction, and accommodate ST, SC, FC, D4, SMA and FDDI type adapters. MM=MULTIMODE SM=SINGLEMODE

| DESCRIPTION | TYPE | PART# |
|---|---|---|
| PATCH PANEL UNLOADED | N/A | 540125 |
| UNLOADED PANELWITH REAR PANEL | N/A | 540126 |
| PATCH PANEL WITH ST ADAPTERS | MM | 540127 |
| PATCH PANEL WITH SC ADAPTERS | SM | 540128 |
| PATCH PANEL WITH FC ADAPTERS | SM | 540129 |
| PATCH PANEL WITH D4 ADAPTERS | | 540130 |
| PATCH PANEL WITH SMA ADAPTERS | MM | 540131 |
| PATCH PANEL WITH FDDI ADAPTERS | MM | 540132 |

### THOMAS & BETTS RACKMOUNT PANEL



Patch fiber links and store fiber terminations with this 24 port T&B rackmount panel. We ship it unloaded or with up to 24 ST adapters. Rear panel measures 9"x 17". Steel construction.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| UNLOADED 24 PORT PANEL | 330517 | 025-10 |
| OPTICAL COVER | 330519 | 025-1024-C |

## RACKS



WE'LL KNOCK YOU OVER WITH OUR SELECTION OF RACKS AND ENCLO-SURES AND OUR LOW



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

## ST Test Set Kit

Install connectors, repair broken fibers and test optical losses with our Test Set kit. Everything you need to do the job is included. A must have for any fiber optic techinician or contractor.

**Included In Kit:**

ST Continuity Tester ***or*** Flashlight ***(Choose One)***, Miller Stripper ***or*** Claus Stripper ***(Choose One)***, Hand Held Power Meter, **Dual Light Source,** 2 ST-ST Patchcords (1m), **ST Mating Sleeve**, 6 ST Multimode Connectors, **6 ST Singlemode connectors,** 100x microscope with Adapter, **ST Polish Disc,** PC Polish Pad, **Glass Polish Plate**, 25 pcs.Tri-coated 3-in-1 Polish Film, **Epoxy Mixer,** 5 packs of 2-part Epoxy, **Epoxy Mixer Pad**, Epoxy Applicator, **5 Syringes**, 1 bottle Alcohol, **Kim Wipes**, Universal Crimp Tool, **4-bit Screwdriver**, Scissors, **Utility Razor**, Diamond Scribe, **Jacket Stripper,** Tweezers, **Piano Wire,** Black Tape, **Canned Air**, Cotton Swabs, **Matching Gel** and Tape Measure.

| Description | Part # | Ref # |
|---|---|---|
| ST Test Set Kit | 540133 | F1-0053TS-ST |

## Deluxe Power Meter

Our Deluxe Power Meter has six wavelength settings from 670nm thru 1550nm and a .01dBm resolution. It also has zero reset capability for direct loss readout of fiber. Readout can be displayed in dB, dBm or watts on the LCD display. Comes with AC/DC power supply, carrying case and FC adapter. Our Deluxe Power Meter also uses 4 AA Ni-Cad batteries and lasts 10 to 16 hours depending on usage.

**Calibrated Settings:** 670, 780, 850, 1300, 1310 and 1550nm

**Wavelength Range:** 850- 1550nm
**Detector:** Germanium
**Resolution:** dB
**Display:** LCD w/ dB, dBm, mw, uw or nw
**Operating Temperature:** 10°C to 50°C

**Measurement Range:** -70 to +3dBm
**Accuracy:** ±0.2dB (±5%)
**Linearity:** + 0.02dB
**Bulkhead:** FC (Standard), ST, SC, D4 or SMA
**Weight:** 1.1 lbs.

| Description | Part # | Ref # |
|---|---|---|
| Deluxe Power Meter | 540134 | F1-1550DLX |

## NCI Power Meter

The NCI Power Meter is a low cost and **accurate** alternative to the high priced "name" brands. There are three wavelength settings: 850nm, 1310nm and 1550nm.Uses a 2mm diameter germanium detector sensing area and accomodates many different adapter types. Let your saleperson know which adapter you need; ST, FC, D4, SMA or Biconic. Uses 4 AA alkaline batteries and has it's own carrying case.

**Comes with a 2 year warranty.**

**Calibrated Settings:** 850, 1310 and 1550nm

**Wavelength Range:** 850- 1550nm
**Detector:** Germanium
**Display:** LCD w/ dBm
**Operating Temperature:** -5°C to +50°C

**Measurement Range:** -60 to +3dBm
**Resolution:** 0.1 dB
**Bulkhead:** ST, FC, D4, SMA or Biconic
**Weight:** 1 lb.

| Description | Part # | Ref # |
|---|---|---|
| NCI Power Meter *please specify adapter choice* | 540147 | F1-8513HH |
| ST Adapter | 540149 | F1-8513ST |
| SMA Adapter | 540150 | F1-8513SMA |
| FC Adapter | 540151 | F1-8513FC |
| D4 Adapter | 540152 | F1-8513D4 |
| Biconic Adapter | 540153 | F1-8513BI |
| **NOTE: CATV Power Meter has a measurement range of -45 to +16dBm** | | |
| CATV Power Meter | 540154 | **F1-8513HHCATV** |

## NCI Light Source

Available in single and dual wavelength models. Uses a high performance edge emitting diode that focuses more light into the fiber core. When using our Power Meter the NCI Light Source provides a 35dB budget on singlemode fiber. Comes with an ST or FC adapter. Uses 4 AA alkaline batteries and has it's own carrying case. **2 year warranty.**

**Operating Temperature:** -5°C to 50°C **Weight:** 1 lb.

| | | |
|---|---|---|
| **Operating Wavelength:** | **850nm** | **1300nm** |
| **Spectral Bandwidth:** | 45nm | 60nm |
| **Optical Power:** | -22dBm @ 1300nm on 9/125 fiber | |
| **Bulkhead:** | ST | FC |

| Description | Part # | Ref # |
|---|---|---|
| Dual Light Source | 540154 | F1-8513HS |
| 850nm Light Source w/ST adapter | 540155 | F1-0850HS |
| 1300nm Light Source w/FC adapter | 540156 | F1-1300HS |

## Heavy Duty Power Meter

Germanium detector provides measurement capability for 850nm, 1300nm and 1550nm wavelengths. Supplied with a rechargeable Ni-Cad battery and an ST or SMA adapter (please specify). **Comes with a 2 year warranty on parts and labor.**

**Wavelength Range:** 850- 1550nm **Measurement Range:** -60 to +3dBm
**Operating Temperature:** -20°C to +50°C **Weight:** 3lbs.

| Description | Part # | Ref # |
|---|---|---|
| Heavy Duty Power Meter | 540135 | F1-1550RM |
| ST Adapter | 540136 | F1-8513ST |
| SMA Adapter | 540137 | F1-8513SMA |
| FC Adapter | 540138 | F1-8513FC |
| D4 Adapter | 540139 | F1-8513D4 |
| Biconic Adapter | 540140 | F1-8513BI |

## Heavy Duty Light Source

Available in single and dual wavelength models. All models come standard with rechargeable Ni-Cad batteries and continuous wave (CW) & 2 KHz modulation. 1300nm lightsource can be used on both single and multimode fiber with a 35dB budget on singlemode when used with our power meters. **Comes with 2 year warranty on parts and labor.**

**Operating Temperature:** -5°C to 50°C **Weight:** 3 lbs. **Operating Wavelength:** **850nm** **1300nm**

| | | |
|---|---|---|
| **Spectral Bandwidth:** | 45nm | 60nm |
| **Optical Power:** (62.5 core) | -15dBm | -17dBm |
| **Bulkhead:** | ST | ST or FC |

| Description | Part # | Ref # |
|---|---|---|
| Heavy Duty Dual Light Source | 540141 | F1-8513RS |
| Heavy Duty 850nm | 540142 | F1-0850RS |
| Heavy Duty 1300nm | 540143 | F1-1300RS |

## Heavy Duty Test Set

This is a combination of our Power Meter and Light Source in one.
A germanium detector provides measurement capability for 850nm, 1300nm and 1550nm wavelengths. 1300nm light source can be used on both single and multimode fiber with a 35dB budget measuring distances up to 75km in singlemode fiber when used with our power meter. Supplied with a rechargeable Ni-Cad battery and an ST or SMA adapter (please specify). **Comes with a 2 year warranty on parts and labor.**

Same Specifications As Our Heavy Duty Power Meter And Light Source.

| Description | Part # | Ref # |
|---|---|---|
| Heavy Duty Test Set - Power Meter w/ Dual Light Source | 540144 | F1-8513TS |
| Test Set w/850nm Light Source | 540145 | F1-0850TS |

## Laser Light Source

Available 1310nm and 1550nm wavelength models. Achieves an optical output of 0dBm (1mw) in singlemode fiber. Comes with an FC adapter standard (optional ST or SC).Uses 4 AA alkaline batteries and has it's own carrying case. 2 year warranty. Works with NCI Power Meter.

**Operating Temperature:** -5°C to 50°C **Weight:** 1 lb.
**Operating Wavelength:** 1310nm and 1550nm
**Spectral Bandwidth:** 2nm typical, 5nm maximum
**Optical Power:** 1mw
**Bulkhead:** FC (standard), ST or SC

| Description | Part # | Ref # |
|---|---|---|
| 1310nm Laser Light Source | 540157 | F1-1300HL |
| 1550nm Laser Light Source | 540158 | F1-1550HL |

## Power Meter Conversion Module

Converts multimeters into power meters. Simply plug in the module and your multimeter can measure 850nm, 1300nm and 1550nm wavelengths Multimeter display is shown in dBm.
Available with ST adapters.

| Description | Part # | Ref # |
|---|---|---|
| Conversion Module | 540159 | MOP-1-LG |

## Fiber Optic O/E Converter

Converts optical signals to electrical. Conveniant BNC connector mounts directly to oscilloscope or digitizer. Great for quickly checking operation of a laser source, optical transmitter or output of a fiber communications line.

| Description | Part # | Ref # |
|---|---|---|
| Optical/Electrical Converter | 540160 | TIA-500 |


17XTG


2XT


3XT


7XT

## 3M PHOTODYNE 3XT OPTICAL MINI METER

This pocket-sized low-cost mini-meter is used with the Photodyne 2XT Optical Mini-Light Source to provide complete optical power measure-ment. Unit uses a germanium detector and is calibrated to 3 wave-length settings: 850nm, 1300nm and 1550nm. Universal interface makes changing adapters easy. Uses 9V alkaline battery and lasts about 20 hours.

**OPERATING TEMPERATURE:** 0°C to 40°C **WEIGHT:** 4 oz.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| MINI-METER W/ST ADAPTER | 310653 | 3XT-2041 |
| MINI-METER W/FC ADAPTER | 310654 | 3XT-2021 |

## 3M PHOTODYNE 2XT OPTICAL MINI SOURCE

This pocket-sized low-cost mini-light source is used with the Photodyne 3XT Optical Mini-Meter to provide complete optical power measurement. Available in 2 dual wavelength models: 850/1300nm and 1300/1550nm. Uses 9V alkaline battery and lasts about 10 hours.

**OPERATING TEMPERATURE:** 0°C to 40°C **WEIGHT:** 4.5 oz.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 850/1300nm W/ST ADAPTER | 310655 | 2XT-8513T |
| 1300/1550nm W/FC ADAPTER | 310656 | 2XT-1315J |

## 3M PHOTODYNE ADAPTERS

These adapters mate Photdyne sensors to a wide variety of industry standard fiber optic connectors.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| ST ADAPTER | 310657 | 2041 |
| SC ADAPTER | 310659 | 2058 |
| FC ADAPTER | 310661 | 2021 |

## 3M PHOTODYNE 17XTG HAND-HELD POWER METER

The most powerful, full-featured optical power meters on the market. For use with the Photodyne 7XT Light Source. Works with singlemode and multimode fiber. Great for use on LAN's, ATM, SONET, analog cable TV systems and Erbium-Doped Fiber Amplifiers (EDFA). Perfect for maintenance, restoration, engineering, testing and link commissioning. Seven different wavelengths standard: 780, 820, 850, 980, 1300, 1480 and 1550nm plus 30 more wavelengths in 10nm increments.
Store & recall up to 1200 readings in 600 memory locations.
Rs232C and RJ-11 interfaces allow for printing or uploading.
Comes with AC adapter and carrying case and also uses 9V alkaline battery that lasts about 20 hours.

**CALIBRATED SETTINGS:** 780, 820, 850, 980, 1300, 1480 and 1550nm
**WAVELENGTH RANGE:** 780- 1550nm **DYNAMIC RANGE:** -64 to +20dBm@1550nm
**DETECTOR:** Germanium **RESOLUTION:** dBm
**DISPLAY:** LCD **BULKHEAD:** ST, FC, D4, SMA or Biconic
**OPERATING TEMPERATURE:** -5°C TO +50°C **WEIGHT:** 1.1 lbs.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 17XTG METER W/ST ADAPTER | 310663 | 17XTG-2041-01 |
| 17XTG METER W/FC ADAPTER | 310665 | 17XTG-2021-01 |

## 3M PHOTODYNE 7XT LASER LIGHT SOURCE

Used alone as a single-mode light source or used in combination with the 17XTG Power Meter to provide a variety of optical power measurements Available in a dual 1310/1550nm wavelength model. Great for attenuation testing, return loss measurement, link conformance testing and fiber identification. Comes with AC adapter and carrying case and also uses 9V alkaline battery that lasts about 12 hours.

**OPERATING TEMPERATURE:** 0°C to 40°C **WEIGHT:** 1.1 lbs.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| LASER LIGHT SOURCE W/ST ADAPTER | 310669 | 7XT-1315T-01 |

## LASER PRECISION FIBER IDENTIFIER

Simple and non-destructive signal detection for jacketed fiberoptic cable. The LP Fiber identifier ndicates the presence and direction of traffic on fiber. Works on jacketed or bare fiber singlemode or multimode fiber types. Also detects modulated or CW signal. Unit interfaces with the LP 5025 Optical Power Meter.

**NOTE:** *You must have the Laser Presicion LP5025 series Optical Power Meter in order to operate the LP AM-450.*



| DESCRIPTION | PART # | REF # |
|---|---|---|
| LP FIBER IDENTIFIER | 319046 | AM-450 |

## MINI LID SYSTEM (LOCAL INJECTION DETECTION)

Portable unit has an LCD display and is not much bigger than a video cassette. Works with both singlemode and multimode with coating diameters of ≤ 250µm. Provides optical port for pigtail usage. System comes with five pigtail adapters: ST, SC, FC, D4 and Biconic. Also included are instructions and a carrying case. PLEASE CALL FOR FULL SPECS.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| MINI LID SYSTEM | 540171 | F1-8118 |

## WILCOM FIBER IDENTIFIER

Works with 250µm or 900µm fiber, 3mm colored patchcords and ribbon fiber. Simply insert fiber into guide and as the unit gently and safely bends fiber just enough to detect light presence and traffic direction. Unit also detects 270Hz, 1kHz and 2kHz modulated carrier tone.
Operates on one 9v battery (included). types simply use a patch cord and mating sleeve.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| WILCOM FIBER IDENTIFIER | 540407 | F6121A |

## FIBER CONTINUITY TESTER

This flashlight style hand-held unit is rugged, low cost and easy to use. After you connect to an ST or SMA connector*, and click the rear switch on, a red LED light transmits across fiber to end. Red light is easily seen, especially when you have a handfull of cable ends. Uses 2 "C" batteries.
*for other connector types simply use a patch cord and mating sleeve.

| DESCRIPTION | PART # | REF # | |
|---|---|---|---|
| ST CONTINUITY TESTER | 540172 | F1-5000 | – |
| SMA CONTINUITY TESTER | 540173 | F1-5000SMA | – |

## VISUAL FAULT FINDER

Operates with a 4mw laser that transmits 670nm of red light. The Visual Fault Finder actually lets you see if there are breaks or macrobends in the fiber because the intensity of light is that strong. The red laser light can be seen through a 3mm PVC jacket if there is a break or macro-bend in the cable. Works where OTDR cannot because of dead zones. Great for detecting, isolating and optimizing you fiber breaks. Also works as a continuity tester. Operates on one 9v battery (included).

OPTIMIZED FOR SINGLEMODE=SM OPTIMIZED FOR MULTIMODE=MM

| DESCRIPTION | PART # | REF # |
|---|---|---|
| SM/MM - WITH ST CONNECTOR | 548174 | OF-1000S |
| MM - WITH ST CONNECTOR | 548175 | OF-1000M |
| SM - WITH FC CONNECTOR | 548176 | OF-1000SFC |

## INFRARED DETECTION CARD

Special phosphorous compound glows when infrared light is shined on to the card. Smaller than a credit card, It can detect 850nm wavelength light or 1300/1550 wavelength light. Lasts for years.

| DESCRIPTION | PART # | REF # | |
|---|---|---|---|
| 850nm DETECTION CARD | 548177 | F1-4101 | – |
| 1300/1550nm DETECTION CARD | 548178 | F1-4103 | – |


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

## Laser Precision Light Sources

A variety of light sources in different wavelengths. Both LED and Laser light sources are available.
ST adapters are standard.
Constructed of high impact Lexan.
**Please Call For Full Specs.**



Multimode=MM Singlemode=SM

| Description | Source | Part # | Ref # |
|---|---|---|---|
| 850nm-MM | LED | 319003 | LP-5100 |
| 1300nm-MM | LED | 319004 | LP-5110 |
| 850/1300nm-MM | LED | 319006 | LP-5150 |
| 1310nm-SM | Laser | 319008 | LP-5210A |
| 1550nm-SM | Laser | 319010 | LP-5220A |

## Laser Precision Power Meters

NCI offers 2 of laser precision's best power meters: the LP-5000 Standard Power Meter and the LP5025 Deluxe Power Meter. These low-cost power meters are high quality and give you the features you need. The Deluxe unit features extended measurement range with 27 selectable wavelengths, port for AM-450 Fiber Identifier, rugged weather resistant construction, memory for up to 100 loss readings, reports printing capabilities, and a pass/fail mode with a user defined loss threshold.



Please Call For Full Specs.

| Description | Part # | Ref # |
|---|---|---|
| LP Standard Power Meter | 410918 | LP-5000 |
| LP Deluxe Power Meter | 319028 | LP-5025 |
| Thermal Printer w/Cable for Deluxe Meter | 319030 | FF-105 |
| *LP Fiber Identifier | 319032 | AM-450 |

## NCI Test Box

Simulates a fiber optic system. Used for calibration, training, testing or demonstration. Please Specify fiber size, length and connector types. Also include location and desired losses of any splices and system loss in dB. Custom boxes available.

Singlemode=SM Multimode=MM

| Description | Part # | Ref # |
|---|---|---|
| SM- 1100m Test Box w/3 Splices | 540160 | PS-1100TB |
| MM- 1100m Test Box w/3 Splices | 540162 | PS-1100TB |

Please Call For Full Specs.

## OTDR Consumable Supplies

An assortment of supplies to be used with Laser Precisions OTDR equipment. Thermal paper for use with TD 1000 and TD1001. Floppy disks, plotter paper and pens are for use with th L.P. TD9950, TD9960 and TD2000.

| Description | Part # | Ref # |
|---|---|---|
| Thermal Paper - 3rolls | 319034 | F1-0030-1 |
| 3.5" Floppy Disk - 10 pak | 319036 | F1-0070 |
| Plotter Paper - 3 rolls | 319038 | F1-0030 |

## Wilcom Fiber Ranger

Designed to measure the distance to fiber events along fiber cables in optical fiber systems. Multimode unit comes with ST adapter for 50/125 fiber. For use with fiber diameters of 50um and higher. Data cable and program disk allow user to connect to a PC for data logging, graphic display and index refraction correction factor.



| Description | Part # | Ref # |
|---|---|---|
| 850nm Multimode Fiber Ranger | 540401 | FRM-5M |
| 1310nm Singlemode Fiber Ranger | 540403 | FRM-5S |
| Data Cable and Program Disk | 540405 | FRM-5S |

Please Call For Full Specs.

## NCI Pulse Suppressor Build-Out Box

Terminated Corning fiber is housed in a heavy duty case. Metal cable wrap-around provides fast and easy return of cable. For use with OTDR operations, trouble shooting, installations and lab use. Specify connector types, fiber type and length.

Singlemode=SM Multimode=MM

| Description | Part # | Ref # |
|---|---|---|
| SM- 500m Pulse Suppressor | 540163 | PS-500 |
| MM- 500m Pulse Suppressor | 540164 | PS-500 |
| SM- 1100m Pulse Suppressor | 540165 | PS-1100 |
| MM- 1100m Pulse Suppressor | 540166 | PS-1100 |

## NCI Mini-Pulse Suppressor Build-Out Box

Designed to test connectors using the latest version OTDR. Specify connector type.

| Description | Part # | Ref # |
|---|---|---|
| SM- 100m Mini-Pulse Suppressor | 540167 | BOB100 |
| MM- 100m Mini-Pulse Suppressor | 540168 | BOB100 |
| SM- 200m Mini-Pulse Suppressor | 540169 | BOB200 |
| MM- 200m Mini-Pulse Suppressor | 540170 | BOB200 |




**WHAT IS OTDR?**

An **Optical Time Domain Reflectometer** is a test and measurement device used to check the accuracy of fusion splices and the location of fiber optic breakers. It measures the send and return time of a lightwave pulse.

## Laser Precision Hand Held OTDR

All the features of a mainframe OTDR are found in these portable test sets at half the price. These Mini-OTDRs let you test fiber optic cable with the touch of a finger. Simply press the TEST or FAULT LOCATE button and you'll perform a complete test in less than one minute. All information is displayed: length of fiber, end of fiber, number of features found, loss for each event, total loss, and reflectance of each event. No special training needed. The TD-1000 series also has Optical Return Loss (ORL) capability with signal and gain control.

**Operating Temperature:** 0°C to 40°C **Weight:** 9 lbs. Please Call For Full Specs.

| Description | Part # | Ref # |
|---|---|---|
| 1310nm Singlemode OTDR | 319014 | TD1000B |
| 850nm Multimode OTDR | 319016 | TD1000E |
| 1300nm Multimode OTDR | 319018 | TD1000F |
| 850/1310nm Dual OTDR | 319020 | TD1000D |
| 1310/1550nm Singlemode OTDR | 319022 | TD1001A |
| 1310nm Singlemode OTDR | 319024 | TD1001B |

## Laser Precision Optical Loss Test Set

Easy to use, rugged and water- resistant unit that provides accuracy and linearity. Measurement modes and parameters are set with a combination of soft and hard keys. Backlit LCD display.



| Description | Part # | Ref # |
|---|---|---|
| 1310/1550nm Test Set | 319042 | LP-5025-S50 |

Please Call For Full Specs.

## OTDR Calibration Box Test Box

Provides quick inspection of your OTDR. Initial scan is required as a reference. Simply printout results and match against next scan. Can also be used as a test box for lab or educational purposes. Specify fiber, connector type, desired length and splice type.

| Description | Part # | Ref # |
|---|---|---|

# Fiber Optics Specialized Equipment

## Fiber Optic Video System

Video transmission over fiber provides immunity to electronic eavesdropping and travels for distances up to 2.5km. Setup is quick and easy. The camera hooks up to the transmitter and the monitor hooks up to the receiver via BNC connectors. Then interconnect with 62.5/125 simplex fiber optic cable with ST connectors. It's that easy! Units are powered by 12 volt power supplies. Comes *with* ***or*** *without* camera, monitor and fiber.

**Bandwidth**: 0 to 5mHz
**Dynamic Range**: 10dB on multimode fiber
**Operating Temperature**: 0°C to 50°C

| Description | Part # | Ref # |
|---|---|---|
| Transmitter & Receiver with 2 Power Supplies | 410890 | F1-5386 |
| Video System with Transmitter, Receiver, Camera & Monitor | 540183 | F1-5387 |
| Simplex 62.5/125 Fiber Cable | 219130 | - |

## Thomas & Betts Data Interface Connector

Now you can interconnect between your RS-232 and fiber optic ST connections. Features include full-duplex async data transfer at rates of up to 19.2kB and 6 control/handshake lines over one duplex fiber cable. Immune to EMI/RFI and transmission can travel up to 2.5 km. Operates on external plug-in power supply or directly through DB25 connector.

DTE- Data Terminal Equipment DCE- Data Communications Equipment

| Description | Part # | Ref # | |
|---|---|---|---|
| DTE - Female RS-232 | 410892 | 94811FG | |
| DTE - Male RS-232 | 410896 | 94811G | |
| DCE - Female RS-232 | 410894 | 94812FG | |
| DCE - Male RS-232 | 410898 | 94812G | |
| Power Supply | 410900 | 94802PS | – |

Talk sets are great when doing installations and testing of fiber optic cable. They are designed to allow users to communicate over fiber. The advantages to this become obvious during testing, when launch and receive conditions have to be exact. Telephones are not always near and walkie-talkies are affected by EMI/RFI. Fiber optic talk sets are

## Ixian Fiber Optic Talk Set




Used when installing and testing fiber optic cable, these talk sets are designed to allow users to communicate over that cable. Ixian offers 3 different models to choose from. **Sold in pairs.**

**OVC-JS-85** - 25dB budget on SM fiber.
Uses 9v batt.(included) and lasts about 15 hrs
**OVC-JS-1300** - 30dB budget on SM fiber.
Uses 9v batt.(included) and lasts about 15 hrs.
**OVC-JS-1300DF** - Laser powered. 40dB budget on SM fiber.
Uses rechargeable Ni-Cad batteries and lasts over 8 hrs. Comes with 2 wallmount charges, 2 dual-ear headsets and carry case.

MM-Multimode SM-Singlemode

| Description | Part # | Ref # |
|---|---|---|
| MM Talk Set w/ ST Adapter | 410933 | OVC-JS-85S |
| SM/MM Talk Set w/ FC Adapter | 410935 | OVC-JS-1300F |
| SM Laser Talk Set w/ FC Adapter | 410929 | OVC-JS-1300DF |

## NCI Fiber Optic Talk Set



Used when installing and testing fiber optic cable, these talk sets are designed to allow users to communicate over that cable via an internal speaker/micro-phone. Headsets are available but are sold sep. These talk sets are available in either singlemode or multimode models.
Singlemode model has 30dB budget.
Multimode model has 25dB budget.
Operates on 9v batteries. **Sold in pairs.**

MM-Multimode SM-SingleMode

| Description | Part # | Ref # |
|---|---|---|
| MM Talk Set w/ ST Adapter | 540179 | F1-108-M |
| SM Talk Set w/ FC Adapter | 540180 | F1-108-S |
| Plug-In Headsets - 2 Sets | 540181 | F1-108-HS |
| Deluxe Case | 540182 | F1-108-CA |

# Training Equipment

## NCI Educational Kit

NCI provides you with the selection of tools and consumables you'll need to recreate an operational fiber optic system in your training room or classroom. Comes with or without Power Meter and Light Source. All tools are re-usable. Only consumables and connectors need to be re-ordered. Topics cover fiber prep and splicing, fiber termination, light loss, power meter and light source operation, OTDR and much more.

| Description | Part # | Ref # |
|---|---|---|
| Educational Kit | 540183 | F1-0060 |
| Kit without Power Meter & Light Source | 540184 | F1-0060S |
| Lab Manual 2nd Ed. | 540185 | F1-0062 |
| Consumable Replacement Kit | 540186 | F1-0062C |

## Connectorizer Training Kit



NCI provides you with the tools and consumables you'll need to terminate 2 ST fiber optic connectors. You'll end up with either an ST patch cable or 2 terminated connectors. Easy to follow step by step instructions allow user to learn how it is done right. Great for training purposes.

**Included in Kit**: 2 Ceramic ST Connectors, ST Adapter, 1 meter of 62.5/125 Simplex Fiber Cable, 1 pack Epoxy, 1 ST Polish Disc, 2 pcs Polish Film, 1 bottle Acetone, 1 Optic Prep Wipe, 1 Razor, Set of Instructions.

| Description | Part # | Ref # | |
|---|---|---|---|
| Connectorizer Training Kit | 540187 | F1-7701 | – |


## NTSC Training Videos

Comprehensive fiber optic training videos.
Subjects range from theory to troubleshooting.



| Description | Part # | Ref # |
|---|---|---|
| Introduction to Fiber Optic Theory and Structure | 540188 | F1-4500 |
| Fiber Optic Cable Preperation and Installation | 540189 | F1-4550 |
| Fiber Optic Splicing, Connectorization & Patch Panels | 540190 | F1-4600 |
| Fiber Optic Testing, Troubleshooting and Documentation | 540191 | F1-4650 |
| Fiber Optic Applications | 540192 | F1-4700 |
| Fiber Optic Safety | 540193 | F1-4750 |
| Fiber Optic System Design | 540194 | F1-4850 |
| Fiber Optic Installation | 540195 | F1-4900 |
| Fiber Optic LED's, Lasers and Detectors | 540196 | F1-4950 |

## CI&M Training Videos





Cable Installation & Maintenance Magazine has produced a series of informative Installer Tips Videos.
Each video is 30 minutes long and includes 5 tips each. Each procedure is shown, start to finish, so that you can see exactly how it is done. Videos may be purchased separately or as a 4 pack. Installer tips booklet included for reference.

| Description | Part # | Ref # |
|---|---|---|
| Video Installer Tips 4 pack - Includes all 4 Videos | 540197 | F1-4000 |
| Fiber Optic Testing and Troubleshooting | 540198 | F1-4100 |
| Cable Pulling | 540199 | F1-4200 |
| LAN Testing & Troubleshooting | 540118 | F1-4300 |
| Cable Management | 540120 | F1-4400 |


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

# AMP Mating Sleeve



| DESCRIPTION | PART # | REF # |
|---|---|---|
| AMP MATING SLEEVE | 410701 | 504663-1 |

Lym-Tech cleaning pads are lint free, saturated with isoproply alcohol and are safe for skin contact. They are very effective cleansers for CRT Keyboards, Screens, Magnetic Tape Heads, Discs, Telephones, and other similar surfaces. Removes Dust, Dirt, Oxides and most Contaminants


# Cleaning Pads




| DESCRIPTION | PART # | REF # |
|---|---|---|
| LYM TECH LINT FREE CLEANING PADS (QTY 60) | 316301 | C-43 |

# Video Receiver

The VR4010 is designed to convert a frequency modulated 850 nm optical (light) signal from an attached fiber optic cable to a broadcast quality electrical video output signal for Closed Circuit Television (CCTV) monitoring.

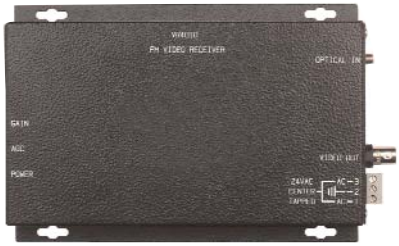


| DESCRIPTION | PART |
|---|---|
| VIDEO RECEIVER VR4010 | 410927 |

## NETWORKING PRODUCTS

[redacted]

**NetWare 4.1**

5- user CD ..... H60001
10- user CD ..... H60003
25- user CD ..... H60005
50- user CD ..... H60007
100- user CD ..... H60009

**NetWare**

5- user 3.5" ..... H60011
10- user 3.5" ..... H60013
25- user 3.5" ..... H60015
50- user 3.5" ..... H60017
100- user 3.5" ..... H60019

**GroupWise V4.1**

Multilingual client/admin CD ..... H60021
Single-user license ..... H60023
5- user license ..... H60025
25- user license ..... H60027
50- user license ..... H60029

**ManageWise V2.0**

10- user CD ..... H60031
50- user CD ..... H60033
100- user CD ..... H60035

**LAN WorkPlace V5.0**

Single- user CD ..... H60037
10- user CD ..... H60039
100- user CD ..... H60041

**BackOffice Server V2.0**

Version upg Cd ..... H60043
Comp upg CD ..... H60045
Full version CD ..... H60047
5- client license ..... H60049
20- client license ..... H60051

**Windows NT S1**

Server upg CD ..... H60053
Server CD ..... H60055
Network Value Pack upg ..... H60057
Netware Value Pack w/internet Info Server ..... H60059
Single- client license ..... H60061
20- client license pack ..... H60063

**Windows NT Server V4.0**

Upg + 5- client license CD ..... H60065
Upg + 10- client license CD ..... H60067
Comp upg + 5- client license CD ..... H60069
Comp upg + 10- client license CD ..... H60071
Server + 5- client license CD ..... H60073
Server + 10- client license CD ..... H60075
Single- client license upg ..... H60077
Single- client license ..... H60079

**Microsoft SQL Server V6.5**

Server + 5- client license CD ..... H60081
Server + 10- client license CD ..... H60083
Server + 25- client license CD ..... H60085
5- client license ..... H60087
20- client license ..... H60089

**Microsoft Systems Mgmt Server V1.1**

SMS Server CD ..... H60091
SMS Server upg CD ..... H60093
Single-client license ..... H60095
20- client license ..... H60097

**Microsoft SNA Server V2.11**

SNA Server CD ..... H60099
Single-client license ..... H60101
20- client license pack ..... H60103

**Microsoft Exchange Server V4.0**

Server + 5- client license CD ..... H60105
Server + 10- client license CD ..... H60107
Server + 25- client license CD ..... H60109

**LANtastic V7.0**

Starter kit 3.5" + CD ..... H60111
Add-on kit 3.5" + CD ..... H60113
1-user comp upg CD ..... H60115
10-user comp upg CD ..... H60117

**ModemShare V7.0**

1 shared port, unlimited users ..... H60119
4 shared ports, unlimited users ..... H60121
32 shared ports, unlimited users ..... H60123

## DATA STORAGE

Eagle96 TBU internal ..... H60125
Eagle TR-3 3.2GB TBU internal ..... H60127
EXB-8700LT 5/10GB TBU external ..... H60129

Jumbo 350 350MB TBU internal ..... H60131
Jumbo 1400 1.3GB TBU internal ..... H60133
Trakker 350MB TBU parallel ..... H60135
T1000E 800MB TBU parallel ..... H60137

Zip drive 100MB parallel ..... H60139
Zip drive 100MB SCSI ..... H60141
Ditto Easy 800MB Travan internal ..... H60143
Ditto Easy 800MB Travan external ..... H60145
Jaz drive 1GB internal SCSI-2 ..... H60147
Jaz drive 1GB external SCSI-2 ..... H60149
Jaz drive 1GB cartridge ..... H60151

10XTREME 10X CDR internal ..... H60153
RCD 5040 2X CDR recorder internal ..... H60155
RCD 5040 2X CDR recorder external ..... H60157
Vertex 2.6GB optical hard drive internal ..... H60159
Vertex 2.6GB optical hard drive external ..... H60161

EZ135 135MB IDE internal ..... H60163
EZ135 135MB SCSI external ..... H60165
EZ135 135MB external ..... H60167
EZ135 135MB cartridge ..... H60169
EZFlyer 230MB SCSI external ..... H60171
EZFlyer 230MB external ..... H60173
EZFlyer 230MB cartridge ..... H60175

## MULTIMEDIA

ADS TV Superscan 2 PC to TV converter ..... H60177
Connectix QuickCam for Windows ..... H60179
Connectix Color QuickCam for Windows ..... H60181
EXP 8X CD w/game port PCMCIA ..... H60183
EXP 8X CD w/sound module PCMCIA ..... H60185
Microsolutions 4X CD parallel ..... H60187
Microsolutions 6X CD w/sound parallel ..... H60189
Microsolutions 8X CD parallel ..... H60191
Minolta Snappy video still capture ..... H60193
NEC 4x4 4X CD 4-disc changer internal ..... H60195
NEC 4x4 4X CD 7-disc changer external ..... H60197
NEC 6Xi 6X CD internal ..... H60199
NEC 6Xe 6X CD external ..... H60201
NEC 8V 8X CD internal IDE ..... H60203
NEC 8Xi 8X CD internal SCSI-2 ..... H60205
NEC 8Xe 8X CD external SCSI-2 ..... H60207
Panasonic portable 4X CD SCSI ..... H60209
Sony portable 4X CD Discman ..... H60211
SunMoonStar 6X CD portable ..... H60213
SunMoonStar 8X CD intrnal IDE/ATAPI ..... H60215
SunMoonStar 8X CD portable ..... H60217

## INPUT DEVICES

Desktop GlidePoint ..... H60219
GlidePoint Windows 95 keyboard ..... H60221

Drawing Slate II 6x9 w/pressure pen ..... H60223
Drawing Slate II 12x12 w/pressure pen ..... H60225

PhotoPC digital camera ..... H60227
ActionScanning System II ..... H60229
ES1000C color scanner ..... H60231
ES1200C Pro color scanner ..... H60233

HEWLETT PACKARD

HP ScanJet 4s desktop scanner ..... H60235
HP ScanJet 4p flatbed scanner ..... H60237
HP ScanJet 4c flatbed scanner ..... H60239
HP ScanJet 4c document feeder ..... H60241

DC20 Digital Science Camera ..... H60243
DC40 Digital Science Camera ..... H60245
DC50 Digital Science Camera ..... H60247

MouseMan 96 ..... H60249
Cordless MouseMan ..... H60251
TrackMan Marble ..... H60253
TrackMan Live! cordless pointer ..... H60255
PageScan color scanner ..... H60257

PageWiz compact scanner ..... H60259
ScanMaker E3 color flatbed ..... H60261

Vista-S6E SOHO scanner ..... H60263
Vista S-12 scanner ..... H60265

PaperPort Vx scanner ..... H60267
PaperPort ix scanner ..... H60269

## MONITORS

Mag Innovision DX1595 PnP 15" .28mm ..... H60271
Mag Innovision DX1795 PnP 17" .26mm ..... H60273
Mag Innovision DX15T 15" .26mm ..... H60275
Mag Innovision DX17T 17" .26mm ..... H60277
Mag Innovision MXP17F 17" .26mm ..... H60279
Mag Innovision MX21F 21" .28mm ..... H60281
Magnavox CM2099 14" .28mm ..... H60283
Magnavox CM2015 15" .28mm ..... H60285
Magnavox CM1215 15" .28mm ..... H60287
Magnavox CM4018 17" .28mm ..... H60289
Magnavox 20CM64 20" .31mm ..... H60291
NEC C400 14" .28mm ..... H60293
NEC XV15+ 15" .28mm ..... H60295
NEC M500 15" .25mm ..... H60297
NEC XV17+ 17" .28mm ..... H60299
NEC XE21 21" .28mm ..... H60301
NEC XP21 21" .28mm ..... H60303
Samsung 17GLi 17" .28mm ..... H60305
Samsung 17GLsi 17" .26mm ..... H60307
Sony Multiscan 15sx 15" PnP .25mm ..... H60309
Sony Multiscan 15sfII 15" PnP .25mm ..... H60311
Sony Multiscan 17sfII 17" PnP .25mm ..... H60313
Sony Multiscan 17sell 17" PnP .25mm ..... H60315
Sony Multiscan 20sfII 20" PnP .30mm ..... H60317
ViewSonic 15GS 15" .27mm ..... H60319
ViewSonic 17GS 17" .27mm ..... H60321
ViewSonic G810 21" .25mm ..... H60323
ViewSonic P810 21" .25mm ..... H60325
ViewSonic P815 21" .25mm ..... H60327
ViewSonic PT810 21" .30mm ..... H60329

## VIDEO BOARDS

ATI 3D Xpression PCI 2MB ..... H60331
ATI Graphics Xpression PCI 2MB ..... H60333
ATI Graphics Xpression ISA 2MB ..... H60335
ATI Graphics Pro Turbo PCI 2MB ..... H60337
ATI Graphics Pro Turbo PCI 4MB ..... H60339
ATI Video Xpression PCI 2MB ..... H60341
Diamond Stealth64 2120 PCI 1MB ..... H60343
Diamond Stealth64 Video 3240XL PCI 2MB ..... H60345
Matrox Millennium PCI 2MB WRAM ..... H60347
Matrox Millennium PCI 4MB WRAM ..... H60349
Matrox Mystique PCI 2MB WRAM ..... H60351

## OVERDRIVE PROCESSORS

Intel OverDrive DX4/75 ..... H60353
Intel OverDrive DX4/100 ..... H60355
Intel OverDrive Pentium 63MHz ..... H60357
Intel OverDrive Pentium 83MHz ..... H60359
Intel OverDrive Pentium
120/133MHz upg for 5/60, 5/66 ..... H60361
Intel OverDrive Pentium125MHz upg for 5/75 ..... H60363
Intel OverDrive Pentium150MHz upg for 5/90 ..... H60365
Intel OverDrive Pentium 166MHz upg for 5/100 .. H60367

## PC CARDS

3Com Etherlink IIIC ..... H60369
3Com Etherlink III 28.8 Enet 10BT ..... H60371
Adaptec APA 1460 SCSI-2 ..... H60373
Hayes EZJack 14.4 w/fax ..... H60375
Hayes EZJack V.34 28.8 w/fax ..... H60377
IBM 14.4 modem ..... H60379
IBM Ethernet adapter 10BT ..... H60381
IBM 28.8 data/fax modem ..... H60383
IBM Token Ring 16/4 ..... H60385
Megahertz 10BT Enet adapter w/XJACK ..... H60387
Megahertz 28.8 V.34 data/fax w/XJACK ..... H60389
Megahertz 28.8 V.34 cellular w/XJACK ..... H60391
Megahertz 28.8/Enet cellular w/XJACK ..... H60393
Megahertz 28.8/Enet combo cellular w/XJACK ... H60395
Megahertz AllPoints wireless ..... H60397
Motorola Montana 28.8 cellular ..... H60399
New Media 22.8 NetSurfer fax/modem ..... H60401
Simple 14.4 modem + voice ..... H60403
Simple 28.8 Communicator Cellular ..... H60405
Simple 28.8 Communicator ..... H60407
SMC EtherEZ 10BT ..... H60409
SMC EtherEZ combo ..... H60411
USR Sportster V.34 28.8 with DataView ..... H60413
Xircom Ethernet 10BT ..... H60415
Xircom Ethernet combo ..... H60417
Xircom Ethernet + modem 28.8 10BT ..... H60419
Xircom Ethernet + modem 28.8 combo ..... H60421

## COMPUTERS

**Satellite & Satellite Pro Notebooks**

100CS 5/75 8MB 500MB 10.4" dual ..... H60423
110CS 5/100 8MB 810 11.3" dual ..... H60425
110CT 5/100 8MB 810 11.3" active ..... H60427
410CS 5/90 8MB 772MB 11.3" dual ..... H60429
410CDT 5/90 8MB 772MB 11.3" active 4X CD ... H60431
420CDS 5/100 8MB 810MB 11.3" dual 6X CD .... H60433
420CDT 5/100 8MB 1.26GB 11.3" active 6X CD. H60435

**Portege Notebooks**

500CS 5/120 16MB 1.26GM 12.1" dual ..... H60437
500CDT 5/120 16MB 1.26GB12.1" active 6X CD H60439
610CT 5/90 8MB 720MB 9.5" active ..... H60441
650CT 5/133 16MB 1.26GB 11.3" active ..... H60443

**Tecrta Notebooks**

720CDT 5/133 16MB 1.2GB 2.1" active 6X CD ... H60445
730CDT 5/150 16MB 2GB12.1" active 6X CD ..... H60447

**Ascentia Notebooks**

J10 5/75 8MB 500MB 10.4" dual ..... H60449
J20 5/100 8MB 540MB 11.3" dual ..... H60451
J30 5/100 8MB 800MB 10.4" dual ..... H60453
J30 5/100 8MB 800MB 10.4" active ..... H60455
J50 5/133 8MB 800MB 10.4" active ..... H60457
P30 5/100 8MB 800MB 11.3" dual 4X CD ..... H60459
P30 5/100 8MB 1.2GB 11.3" dual 4X CD ..... H60461
P40 5/120 16MB 1GB 11.3" active 6X CD ..... H60463
P40 5/120 16MB 2.1GB 11.3" active 6X CD ..... H60465
P50 5/133 8MB 800MB 11.3" active 4X CD ..... H60467
P50 5/133 8MB 1.2GB 11.3" active 4X CD ..... H60469
P50 5/133 24MB 1GB 12.1" active 6X CD ..... H60471
P50 5/133 24MB 2.1GB 12.1" active 6X CD ..... H60473

**Advantage! Lifestyle Mini-towers**
9312 5/166 16MB 2.5GB 8X CD ..... H60475
9310 5/166 24MB 2.5GB 8X CD ..... H60477
9315 5/166 32MB 2.5GB 8X CD ..... H60479
9316 5/200 32MB 2GB 8X CD ..... H60481

**Advantage! 9300 Series Mini-towers**
9304 5/133 24MB 1.6GB 8X CD ..... H60483
9308 5/166 24MB 2.5GB 8X CD ..... H60485
9314 5/200 24MB 4GB 8X CD ..... H60487

**Bravo Desktops**
LC 5100 5/100 8MB 630MB ..... H60489
LC 5100 5/100 16MB 1.2GB ..... H60491
LC 5133 5/133 8MB 630MB ..... H60493
LC 5133 5/133 16MB 1.2GB ..... H60495
LC 5166 5/166 16MB 1.2GB ..... H60497
MS 5100 5/100 16MB 1.2GB ..... H60499
MS 5100 5/100 16MB 2.1GB ..... H60501
MS 5133 5/133 16MB 1.2GB ..... H60503
MS 5133 5/133 16MB 2.1GB ..... H60505
MS 5166 5/166 16MB 2.1GB ..... H60507

**Bravo Mini-towers**
MS-T 5100 5/100 16MB 1.2 GB ..... H60509
MS-T 5100 5/100 16MB 2.1GB ..... H60511
MS-T 5133 5/133 16MB 1.2GB ..... H60513
MS-T 5133 5/133 16MB 2.1GB ..... H60515

**Versa Notebooks**
2400 5/100 8MB 810MB 11.3" dual ..... H60517
2400CD 5/100 16MB 1GB 11.3" dual 6X CD ..... H60519
4200 5/100 8MB 810MB 10.4" active ..... H60521
4230 5/133 8MB 1GB 10.4" active 6X CD ..... H60523
4050H 5/90 8MB 810MB 10.4" active ..... H60525
4080H 5/120 8MB 1GB 10.4" active ..... H60527
6000H 5/100 16MB 1.08GB 11.3" active 6X CD .H60529
6030H 5/133 16MB 1.35GB 12.1" active 6X CD .H60531
6030X 5/133 16MB 1.44GB 12.1" active 6X CD .H60533

**Extensa Notebooks**
510 5/100 8MB 810MB 10.4 dual ..... H60535
560CDT 5/75 8MB 1.2GB 10.4" active 4X CD ..... H60537
570CD 5/100 8MB 810MB 11.3" dual 6X CD ..... H60539
570CDT 5/100 8MB 1.2GB 10.4" active 4X CD ... H60541

**TravelMate Notebooks**
TM5100 5/90 8MB 10.4" dual ..... H60543
TM5200 5/120 8MB 1.2GB 11.3" active ..... H60545
TM5300 5/120 8MB 1.2GB 11.3" active ..... H60547
TM6020 5/120 8MB 1.08GB 11.3" active ..... H60549
TM 6030 5/133 16MB 1.35GB 12.1" active ..... H60551

HEWLETT PACKARD

**Vectra 500 Series Desktops**
510CD 5/120 16MB 1.28GB 6X CD ..... H60553

**Vectra 500 Series Mini-towers**
515CCx 5/120 16MB 1.28GB 6X CD ..... H60555
515CD 5/133 16MB 1.62GB 6X CD ..... H60557
515MCx 5/133 16MB 1.62GB 6X CD ..... H60559
515MCx 5/150 16MB 1.62GB 6X CD ..... H60561
515MCx 5/166 16MB 1.62GB 6X CD ..... H60563

**Armada Notebooks**
1120 5/100 8MB 810MB 10.4" dual ..... H60565
1120T 5/100 8MB 810MB 10.4" active ..... H60567
4110 5/100 8MB 810MB 11.3" dual ..... H60569
4110D 5/100 8MB 810MB 11.3" dual ..... H60571
4120 5/120 16MB 1.08GB 11.3" dual ..... H60573
4120T 5/120 16MB 1.08GB 11.8" active ..... H60575
4130 T 5/133 16MB 1.08GB 11.8" active ..... H60577

**LTE 5000 Series Notebooks**
5000 5/75 8MB 810MB 10.4" active ..... H60579
5100 5/90 8MB 810MB 10.4" active ..... H60581
5100 5/90 8MB 810MB 10.4" active 2X CD ..... H60583
5150 5/100 8MB 810MB 11.3" dual ..... H60585
5200 5/120 8MB 1.35GB 10.4" active ..... H60587
5250 5/120 16MB 810MB 10.4" active ..... H60589
5280 5/120 16MB 1.3GB 11.3" active ..... H60591
5300 5/133 16MB 1.3GB 12.1" active ..... H60593
5380 5/133 16MB 2.16GB 12.1" active ..... H60595

**Deskpro 2000 Series Desktops**
5100/630 5/100 8MB 630MB ..... H60597
5100/1200 5/100 8MB 1.2GB ..... H60599
5100/1200 5/100 16MB 1.2GB ..... H60601
5120/1200 5/120 8MB 1.2GB ..... H60603
5120/1200 5/120 16MB 1.2GB ..... H60605
5133/1200 5/133 16MB 1.2GB ..... H60607
5133/2500 5/133 16MB 2.5GB ..... H60609
5166/1200 5/166 16MB 1.2GB ..... H60611
5166/2500 5/166 16MB 2.5GB ..... H60613
5200/2500 5/200 32MB 2.5GB ..... H60615
6180/1200/CD 6/180 16MB 1.2GB 8X CD ..... H60617
6200/2500/CD 6/200 16MB 2.5GB 8X CD ..... H60619

**Deskpro 2000 Series Mini-towers**
5133/2500/CD 5/133 16MB 2.5GB 8X CD ..... H60621
5166/2500/CD 5/166 32MB 2.5GB 8X CD ..... H60623
6200/2500/CD 6/200 32MB 2.5GB 8X CD ..... H60625

**Deskpro 4000 Series Desktops**
5120/1080 5/120 16MB 1.08GB ..... H60627
5120/1620/LS 5/120 16MB 1.62GB ..... H60629
5133/1080 5/133 16MB 1.08GB ..... H60631
5133/1620 5/133 16MB 1.62GB ..... H60633
5166/1620 5/166 16MB 1.62GB ..... H60635
5166/2500/LS 5/166 16MB 2.5GB ..... H60637
6180/1620/CDS 6/180 32MB 1.62GB ..... H60639
6200/2500/LS/CDS 6/200 32MB 2.5GB ..... H60641

**Deskpro 4000 Series Mini-towers**
5133/1620/LS 5/133 32MB 1.62GB ..... H60643
5166/2500/CDS 5/166 32MB 2.5GB ..... H60645

**Deskpro 6000 Series Desktops**
5166/1080/CDS 5/166 16MB 1.08GB 8X CD ..... H60647
5166/1080/CDS 5/166 32MB 1.08GB 8X CD ..... H60649
5200/1080/CDS 5/200 32MB 1.08GB 8X CD ..... H60651
6180/2150/CDS 6/180 32MB 2.15GB 8X CD ..... H60653
6200/2150/CDS 6/200 32MB 2.15GB 8X CD ..... H60655
6200/4200/PDS 6/200 32MB 4.2GB PD-CD ..... H60657

**Deskpro 6000 Series Mini-towers**
5166/2150/CDS 5/166 32MB 2.15GB 8X CD ..... H60659
6200/4200/PDS 6/200 32MB 4.2GB PD-CD ..... H60661

**ThinkPad Notebooks**
365ED 5/100 8MB 540MB 10.4" dual 4X CD ..... H60663
365X 5/100 8MB 810MB 10.4" dual ..... H60665
365X 5/100 8MB 810MB 10.4" active ..... H60667
365XD 5/100 8MBf 810MB 10.4" dual 4X CD ..... H60669
365XD 5/120 8MB 1GB 11.3" dual 4X CD ..... H60671
365XD 5/120 8MB 1GB 10.4" active 4X CD ..... H60673
560 5/100 8MB 810MB 11.3" dual ..... H60675
560 5/120 8MB 810MB 12.1" active ..... H60677
560 5/133 8MB 1GB 12.1" active ..... H60679
760E 5/120 8MB 810MB 12.1" active ..... H60681
760E 5/120 8MB 1.2GB 12.1" active ..... H60683
760E 5/120 16MB 1.08GB 12.1" active ..... H60685
760ED 5/133 16MB 1.2GB 12.1" active 4X CD ... H60687
760EL 5/100 8MB 810MB 11.3" dual ..... H60689
760ELD 5/100 8MB 810MB 12.1" active 4X CD .. H60691
760EL 5/120 8MB 810MB 11.3" dual ..... H60693
760EL 5/120 8MB 1.08GB 12.1" active ..... H60695
760EL 5/133 16MB 1.08GB 12.1" active ..... H60697

**Aptiva Series Desktops**
C33 5/133 16MB 1.6GB 8X CD ..... H60699
C65 5/166 16MB 2GB 8X CD ..... H60671
C73 5/200 16MB 2.5GB 8X CD ..... H60673

**PC300 Series Desktops**
PC330 5/133 16MB 1.2GB 3 bays ..... H60675
PC330 5/133 16MB 1.6GB 3 bays ..... H60677
PC340 5/100 16MB 1.2GB 4 bays ..... H60679
PC340 5/133 16MB 1.2GB 4 bays ..... H60681
PC350 5/100 16MB 1.2GB 5 bays ..... H60683
PC350 5/133 16MB 1.2GB 5 bays ..... H60685
PC350 5/133 16MB 1.6GB 5 bays ..... H60687
PC350 5/133 16MB 1.6GB 5 bays 6X CD ..... H60689
PC350 5/166 16MB 1.6GB 5 bays ..... H60691

**PC700 Series Desktops**
PC700 5/100 16MB 1.2GB 5 bays ..... H60693
PC700 5/133 16MB 1.2GB 5 bays ..... H60695
PC700 5/166 16MB 1.2GB 5 bays ..... H60697

## PRINTERS

BJ30 monochrome ..... H60699
BJC70 ..... H60701
BJC210 ..... H60703
BJC610 ..... H60705
BJC4100 ..... H60707
MultiPASS 800 print/copy/scan/fax ..... H60709
MultiPASS C2500 color print/copy/scan/fax ..... H60711

AP5000+ ..... H60713
DFX5000+ ..... H60715
DFX8000 ..... H60717
FX870 ..... H60719
FX1170 ..... H60721
LQ870 ..... H60723
LQ1070+ ..... H60725
LQ2170 ..... H60727
LX300 ..... H60729
Stylus 1500 ..... H60731
Stylus Color 500 ..... H60733
Stylus Color II ..... H60735
Stylus Color IIs ..... H60737
Stylus Pro Color ..... H60739
Stylus Pro XL color ..... H60741

HEWLETT PACKARD

HP DeskJet 400 printer ..... H60743
HP DeskJet 340 portable inkjet printer ..... H60745
HP DeskJet 682C color printer ..... H60747
HP DeskJet 820Cse color printer ..... H60749
HP LaserJet 5L Xtra printer ..... H60751
HP LaserJet 5P printer ..... H60753
HP OfficeJet inkjet fax/copier/printer ..... H60755
HP OfficeJet 350 inkjet fax/copier/printer/scanner ... H60757

4039 10 Plus ..... H60759
Optra E ..... H60761
Optra LX+ ..... H60763
Optra N ..... H60765
Optra R+ ..... H60767
Optra Rt+ ..... H60769

184 Turbo ..... H60771
320 Turbo ..... H60773
321 Turbo ..... H60775
ML395 ..... H60777
ML520 ..... H60779
ML521 ..... H60781
ML590 ..... H60783
ML591 ..... H60785
Okipage 4w ..... H60787
OL600e ..... H60789
OL610e/PS ..... H60791
OL810E ..... H60793

1150 ..... H60795
2023 ..... H60797
2130 ..... H60799
KX-P6500 Laser ..... H60801

microLaser Pro/8 ..... H60803
microLaser PowerPro/12 ..... H60805

## HARD DRIVES & CONTROLLERS

540MB EIDE ..... H60807
1.6GB Fast-ATA ..... H60809
2.0GB Fast-ATA ..... H60811

631MB Fast-ATA ..... H60813
1.08GB Fast-ATA2 ..... H60815
1.08GB Fast SCSI-2 ..... H60817
2.1GB Fast ATA-2 ..... H60819
2.14GB Fast SCSI-2 ..... H60821
2.14GB F/W SCSI-2 ..... H60823
4.29GB Fast SCSI-2 ..... H60825
9GB Fast SCSI-2 ..... H60827

Caviar 853MB EIDE ..... H60829
Caviar 1.2GB EIDE ..... H60831
Caviar 1.62GB EIDE ..... H60833
Caviar 2.1GB EIDE-2 ..... H60835
Caviar 2.5GB EIDE-2 ..... H60837

**CONTROLLER**
Acculogic SIDE-4+ w/par 2 serial game ..... H60839
Acculogic SIDE-3+ w/on-board BIOS ..... H60841
Adaptec AVA1505 SCSI-2 CD Kit ..... H60843
Adaptec 1542CP SCSI Master Kit ..... H60845
Adaptec PCI Ultra Wide SCSI Kit ..... H60847
Promise EIDEMAX ISA 2HD on-brd BIOS ..... H60849
Promise EIDE2300+ VLB 4HD on-brd BIOS 6550 .... H60851

## MODEMS

ACCURA 144 internal w/fax ..... H60853
ACCURA 144 external w/fax ..... H60855
ACCURA 288 V.34 internal w/fax ..... H60857
ACCURA 288 V.34 external w/fax ..... H60859
ACCURA 288 DSVD internal ..... H60861
ACCURA 228 DSVD external ..... H60863
OPTIMA 288 Business Modem external ..... H60865
OPTIMA 288 V.34 internal w/fax ..... H60867

DeskPorte V.34 28.8S external ..... H60869
DeskPorte V.34 28.8P external ..... H60871
WWWebPorte Internet kit V.34 28.8S external ..... H60873

BitSURFR ISDN adapter internal ..... H60875
BitSURFR ISDN adapter external ..... H60877
BitSURFR Pro ISDN terminal adapter ..... H60879
ModemSURFR V.34 28.8 internal ..... H60881
ModemSURFR V.34 28.8 external ..... H60883
OnlineSURFR V.34 28.8 internal ..... H60885
OnlineSURFR V.34 28.8 external ..... H60887
VoiceSURFR V.34 28.8 internal ..... H60889

14.4 internal w/fax ..... H60891
14.4 Mini-tower w/fax ..... H60893
V.34 28.8 internal w/fax ..... H60895
V.34 28.8 Mini-tower w/fax ..... H60897

**Sportster Series**
14.4 internal w/fax ..... H60899
14.4 external w/fax ..... H60901
V.34 28.8 internal w/fax ..... H60903
V.34 28.8 external w/fax ..... H60905
Voice V.34 28.8 internal w/fax ..... H60907
Voice V.34 28.8 external w/fax ..... H60909
Winmodem V.34 28.8 internal w/fax ..... H60911
ISDN 128K terminal adapter ..... H60913

**Courier Series**
V.34 28.8 internal w/fax ..... H60915
V.34 28.8 external w/fax ..... H60917
I-modem ISDN V.34 faxmodem internal ..... H60919
I-modem ISDN V.34 faxmodem external ..... H60921

V.34 28.8 faxmodem external ..... H60923
V.34 28.8 Voice Speakerphone internal ..... H60925
V.34i Plus 28 33.6 internal ..... H60927
V.34x Plus 33.6 external ..... H60929

## BATTERY BACKUP AND UPS

Back-UPS Office ..... H60931
Back-UPS Pro 280 PNP ..... H60933
Back-UPS Pro 420 PNP ..... H60935
Back-UPS Pro 650 PNP ..... H60937
Smart-UPS 700 ..... H60939
Smart-UPS 1000 ..... H60941
Smart-UPS 1400 ..... H60943
SurgeArrest Personal ..... H60945
SurgeArrest Professional ..... H60947
SurgeArrest Network ..... H60949

BC250 ..... H60951
BC PERS 420 ..... H60953
BC PERS 500 ..... H60955
BC PRO 550 ..... H60957
BC PRO 675 ..... H60959
BC PRO 850 ..... H60961
BC PRO 1050 ..... H60963
Isobar 4 outlet ..... H60965
Isobar 6 outlet ..... H60967
OmniStart 280 PNP ..... H60969
OmniSmart 450 PNP ..... H60971
OmniSmart 675 PNP ..... H60973


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

# HARDWARE & SOFTWARE






## Wireless Keyboard

DESCRIPTION PART #





## USRobotics 33.6 Sportster Faxmodem

**Features:**


- Transmit data more than twice as fat as with a 14.4 Kbps modem. Save phone and online time charges.
- Send faxes directly from your computer. Send and receive faxes while running other applications send group and delayed faxes, create personalized phonebooks for quicker dialing.
- Supports 33.6 Kbps, true ITU-T V.34 data transmission at 28.8 Kbps, V.32 bis at 14.4 Kbps.
- Universally compatible with all ITU-T standard V.34, V.32 bis, V.32, V.22 bis, Bell 212A/V.22, V.23, V.25 and Bell 103/V.21 modems.
- Built-in 16550 UART for improved performance.
- Ensures data integrity and fast transmission with hardware-based V.42/MNP 2-4 error control and V.42 bis/MNP 5 data compression for throughput up to 115,200 bps.
- Supports V.17 14.4 bps, V.29 9600 bps and V.27 ter 4800 bps Group III fax machines and fax modems.
- Displays help screens on your computer. Easy to follow installation guide included.
- On board speaker with software volume control.
- Permanently stores preferred modem default settings and four most-used phone numbers in memory.
- Compatible with most popular fax and communications software packages.
- Supports the industry-standard AT command set.

DESCRIPTION PART #




## Software- PC Anywhere

DESCRIPTION PART #




## Sound Blaster

DESCRIPTION PART #

## iomega Zip 100mb 6-pack

**Use Zip disks to:**

- Expand your hard drive without limits
- Move your work easily to different locations and computers
- Backup fast and easy
- Collect large scanned or downloaded files
- Take work home or on the road with you
- Give your kids disks for school work and other stuff



**Comes with a free Zip Caddy**

- Holds six Zip disks
- Can be positioned horizontally or vertically
- Coordinates with your Zip drive
- Stores your Zip disk with or without cases

DESCRIPTION PART #

## Microsoft FrontPage 97




DESCRIPTION PART #

*Phone (973) 325-3151 Fax (973) 325-2690*
*Email ncisales@trynci.com Hours Mon–Fri 9-4 EST*

# Structured Cabling Systems

**NCI** carries a full line of racks, enclosures and all the accessories you need and can custom assemble your Rack or Enclosure for you .We also carry a full line of loaded and unloaded patch panels.

We are dedicated to being your full service *structured* cabling systems supplier. As always, if you dont see what you are looking for, call us and we will be happy to assist you in your order.

23" Solid Cantilevered Shelf





19" Vented SemiCenter Mt Shelf



19" Ventilated Cantilevered Shelf



Cable Mgt Bracket 8 Ring w/Clips

Cable Mgt Bracket 5 Ring






Cable Mgt Bracket 2 Ring w/Clips



19" Mounting Bars



24" to 19" Adapter Brackets 1.7"

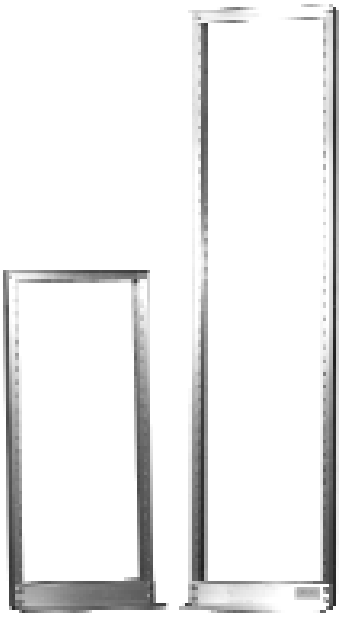

19"x47" Rack  19"x84" Rack

These aluminum racks are designed with drilled holes on both sides of the rails. Easy to put together model comes in 84" or 47" Height and 19" or 23" width. The finish is standard aluminum or black enamel.

***UPS SHIPPABLE.***

| Description | Aluminum # | Black # |
|---|---|---|
| 19"x84" Rack | 611005 | 611005B |
| 23"x84" Rack | 611008 | 611008B |
| 19"x47" Rack | 611006 | 311006B |
| 23"x47" Rack | 611009 | 311009B |

| Description | Part # |
|---|---|
| 19" Solid Cantilevered Shelf | 611037 |
| 19" Ventilated Cantilevered Shelf | 611038 |
| 19" Solid Center Mt. Shelf | 611039 |
| 19" Vented SemiCenter Mt Shelf | 611060 |
| 23" Solid Cantilevered Shelf | 611040 |
| 23" Ventilated Shelf | 611041 |
| 23" Solid Center Mt Shelf | 611042 |
| 19" Sliding Shelf | 611043 |
| 23" Sliding Shelf | 611044 |
| 19" Mounting Bars | 611045 |
| 23" Mounting Bars | 611046 |
| 24" to 19" Adapter Brackets 1.7" | 611047 |

| Description | Part # |
|---|---|
| 24" to 19" Adapter Brackets 3.5" | 611048 |
| 24" to 19" Adapter Brackets 5" | 611049 |
| 24" to 19" Adapter Brackets 7" | 611050 |
| 24" to 19" Adapter Brackets 8.7" | 611051 |
| 23" to 19" Adapter Brackets 1.7" | 611052 |
| 23" to 19" Adapter Brackets 3.5" | 611053 |
| 23" to 19" Adapter Brackets 5" | 611054 |
| 23" to 19" Adapter Brackets 7" | 611055 |
| 23" to 19" Adapter Brackets 8.7" | 611056 |
| Cable Mgt Bracket 5 Ring | 611057 |
| Cable Mgt Bracket 2 Ring w/Clips | 611058 |
| Cable Mgt Bracket 8 Ring w/Clips | 611059 |
| 84" Vertical Cable Mgt Bracket | 320719 |

# Structured Cabling Systems

## Custom Cabinets & Enclosures














| Closed Sided Cabinet* | Open Sided Cabinet* | Internal Dimensions | | | External Dimensions | | | Side Panels for Open Side cabinet (Price Side)* | Plexi Door with Lock | Solid Vented with Lock* | Vented Top* (Required for Fan Options) | Solid Top* | Rear Set of Mounting Angles | Solid Shelf* | Vented Shelf* | Sliding Shelf* |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Part# | Part# | H | W | D | H | W | D | Part# | Part# | Part# | Part# | Part# | Part# | Part# | Part# | Part# |
| 315798 | 315796 | 36 | 19 | 24 | 43 | 23 | 24 | 315756 | 542103 | 542105 | 315703 | 542101 | 315734 | 315716 | 315713 | 315721 |
| 315779 | 315794 | 36 | 19 | 30 | 43 | 23 | 30 | 315754 | | | 315744 | 315791 | | 315732 | 315775 | 315724 |
| 315781 | 315792 | 49 | 19 | 24 | 56 | 23 | 24 | 315752 | 315748 | 315787 | 315703 | 542101 | 315785 | 315716 | 315713 | 315721 |
| 315790 | 315788 | 49 | 19 | 30 | 56 | 23 | 24 | 315750 | | | 315744 | 315791 | | 315732 | 315775 | 315724 |
| 315786 | 315701 | 70 | 19 | 24 | 77 | 23 | 24 | 315711 | 315707 | 315705 | 315703 | 542101 | | 315716 | 315713 | 315721 |
| 315784 | 315755 | 70 | 19 | 30 | 77 | 23 | 30 | 315757 | | | 315744 | 315791 | 315709 | 315732 | 315775 | 315724 |
| 315782 | 315780 | 70 | 24 | 24 | 77 | 28 | 24 | 315711 | 315746 | 315720 | 315742 | 315738 | | 315730 | 315739 | 315722 |
| 315768 | 315766 | 70 | 24 | 30 | 77 | 28 | 30 | 315757 | | | 315740 | 315736 | | 315728 | 315726 | 315793 |
| 315777 | 315751 | 77 | 19 | 24 | 84 | 23 | 24 | 315741 | 315745 | 315747 | 315703 | 542101 | | 315716 | 315713 | 315721 |
| 315761 | 315768 | 77 | 19 | 30 | 84 | 23 | 30 | 315799 | | | 315744 | 315791 | 315733 | 315732 | 315775 | 315724 |
| 315762 | 315727 | 77 | 24 | 24 | 84 | 28 | 24 | 315741 | 315735 | 315718 | 315742 | 315738 | | 315730 | 315739 | 315722 |
| 315760 | 315758 | 77 | 24 | 30 | 84 | 28 | 30 | 315799 | | | 315740 | 315736 | | 315728 | 315726 | 315793 |


* For Colors Add Suffix: -Blue, -Beige, -IBMWhite, -Black

This is an example of a typical cabinet enclosure with a top mount fan, rack mount power strip, 6 shelves and a plexi door



## Cabinets & Enclosures Accessories















| Description | Part # |
|---|---|
| 10" Top Mount Fan (A) | 315715 |
| 6 Outlet 15 Amp Power Strip | 315714 |
| 10 Outlet 15 Amp Power Strip | 315753 |
| 10 Outlet 20 Amp Power Strip (B) | 315769 |
| Twistlock 20 Amp Power Strip | 315737 |
| Rack Mount Power Strip (C) | 318101 |
| Mounting Bars (D) | 611045 |
| Cabinet Light | 315706 |
| Grounding Lug Assembly | 315708 |
| Gang Kit for Enclosure | 315710 |
| Leveler Kit | 315763 |
| 10-32 Truss Head Screw (E) | 870115 |
| Locking Caster (F) | 315767 |


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

12.25" Hinged Mini Wall Rack



32 Port 3.5" BNC 1/2" Feed Thru



12 Port 1.75" Keystone IDC Panel




8.75" Hinged Mini Wall Rack



1.5" Hinged Mini Wall Rack




5.375" Hinged MIni Wall Rack

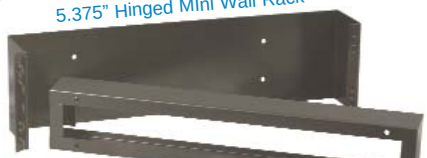

3.5" Hinged Ring Adapter

DB25 16 Port 3.5"





5.25x19" Filler Panel

## MINI WALL RACKS

| DESCRIPTION | PART # |
|---|---|
| RACK FOR MAU | 998220 |
| 1.75" HINGED RACK | 998222 |
| 3.5" HINGED RACK | 998224 |
| 5.375" HINGED RACK | 998226 |
| 7" HINGED RACK | 998228 |
| 8.75" HINGED RACK | 998230 |
| 10.5" HINGED RACK | 998232 |

## RING ADAPTERS

| DESCRIPTION | PART # |
|---|---|
| 3.5" HINGED RING | 998236 |
| 5.375" HINGED RING | 998238 |
| 7" HINGED RING | 998240 |
| 8.75" NOT HINGED RING | 998250 |

## BNC 1/2" FEED THRU

| DESCRIPTION | UNLOADED # | LOADED # |
|---|---|---|
| 16 PORT 1.75" | 998026 | 998062 |
| 16 PORT 3.5" | 998028 | 998064 |
| 24 PORT 3.5" | 998030 | 998066 |
| 32 PORT 3.5" | 998032 | 998068 |
| 48 PORT 5.25" | 998034 | 998070 |
| 64 PORT 7.0" | 998036 | 998072 |
| 96 PORT 8.75" | 998038 | 998074 |

## TWINAX FEEDTHRU

| DESCRIPTION | UNLOADED # | LOADED # |
|---|---|---|
| 16 PORT 3.5" | 998042 | 998078 |
| 24 PORT 3.5" | 998044 | 998080 |
| 32 PORT 7.0" | 998046 | 998082 |

## IBM DATA

| DESCRIPTION | UNLOADED # | LOADED # |
|---|---|---|
| 12 PORT 3.5" | 998084 | 998092 |
| 16 PORT 5.25" | 998086 | 998094 |
| 32 PORT 8.75" | 998088 | 998096 |

## KEYSTONE IDC PANEL

USE SUFFIX= -1 FOR *RJ11*, -2 FOR *RJ12*, -3 FOR *RJ45*

| DESCRIPTION | UNLOADED # | LOADED # |
|---|---|---|
| 12 PORT 1.75" | 998011 | 998047 |
| 16 PORT 1.75" | 998012 | 998048 |
| 16 PORT 3.5" | 998014 | 998050 |
| 24 PORT 3.5" | 998016 | 998052 |
| 32 PORT 3.5" | 998018 | 998054 |
| 48 PORT 5.25" | 998020 | 998056 |
| 64 PORT 7.0" | 998022 | 998058 |

## FILLER PANELS

| RACKS | PART # |
|---|---|
| x 19" | 998002 |
| 3.5 x 19" | 998004 |
| x 19" | 998006 |
| 7 x 19" | 998008 |
| x 19" | 998010 |

## D-SUB 9, 15, 25, 37 AND 50

| DESCRIPTION | UNLOADED # | LOADED # |
|---|---|---|
| DB9 16 PORT 3.5" | 998100 | 998124 |
| DB9 32 PORT 5.25" | 998102 | 998126 |
| DB15 16 PORT 3.5" | 998104 | 998128 |
| DB15 32 PORT 5.25" | 998106 | 998130 |
| DB25 16 PORT 3.5" | 998108 | 998132 |
| DB25 24 PORT 5.25" | 998110 | 998134 |
| DB25 32 PORT 7.0" | 998112 | 998136 |
| DB25 48 PORT 8.75" | 998114 | 998138 |
| DB25 64 PORT 10.50" | 998116 | 998140 |
| DB25 96 PORT 12.25" | 998118 | 998142 |
| DB37 16 PORT 3.5" | 998120 | 998144 |



LVO - #317303



Keystone - #998184



Coax 3/8"-2 - #998175

## LOW VOLTAGE OUTLET MOUNTING PLATE

| DESCRIPTION | PART # |
|---|---|
| SINGLE GANG | 317303 |
| DOUBLE GANG | 317305 |

## STAINLESS STEEL WALLPLATES - DOUBLE GANG


| DESCRIPTION | PART # |
|---|---|
| BLANK | 998194 |
| DB15-1 | 998196 |
| DB25-2 | 998198 |
| DB25-4 | 998200 |
| DB25-1 AND KEYSTONE-2 | 998202 |
| COAX 1/2"-2 | 998204 |
| KEYSTONE-4 | 998206 |

## STAINLESS STEEL WALLPLATES - SINGLE GANG


| DESCRIPTION | PART # |
|---|---|
| BLANK | 998148 |
| BLANK WATER PROOF | 998149 |
| DB9-1 | 998150 |
| DB9-2 | 998152 |
| DB15-1 | 998154 |
| DB15-2 | 998156 |
| DB25-1 | 998158 |
| DB25-2 | 998160 |
| DB25-1 AND TWINAX-1 | 998162 |
| DB25-1 AND COAX 1/2"-1 | 998164 |
| DB25-1 AND KEYSTONE-1 | 998166 |
| CENTRONICS-1 | 998168 |
| COAX 1/2"-1 | 998170 |
| COAX 3/8"-1 | 998172 |
| COAX 1/2"-2 | 998174 |
| COAX 3/8"-2 | 998176 |
| COAX 1/2"-1 & KEYSTONE-1 | 998178 |
| IBM DATA-1 | 998180 |
| IBM DATA-1 & KEYSTONE-1 | 998182 |
| KEYSTONE-1 | 998184 |
| KEYSTONE-2 | 998186 |
| KEYSTONE-3 | 998185 |

# Structured Cabling Systems

## Patch Panel Front

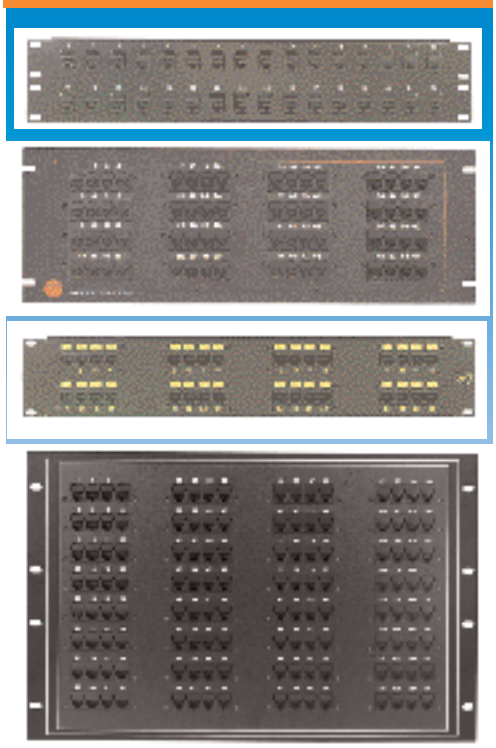

## Patch Panel Back

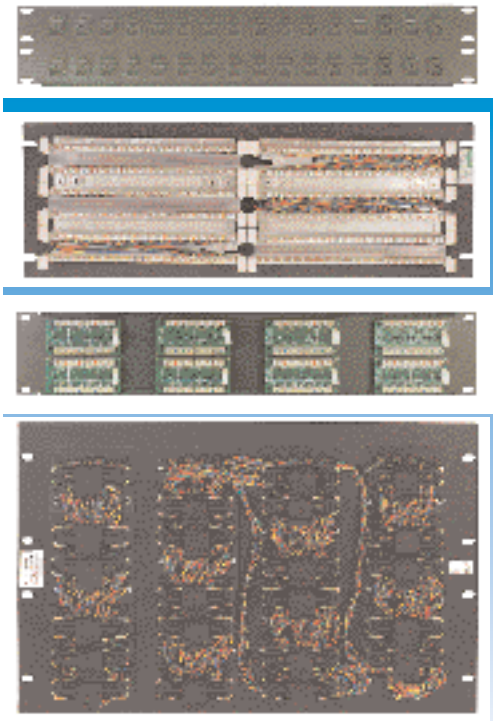

### 12 Port

| Panel Type | Part # | to Telco | Part # | to 110 Level 3 | Part # | to 110 Level 5 | Part # | Feed Thru |
|---|---|---|---|---|---|---|---|---|
| 2 COND(RJ11) | 860100 | | 860178 | | --- | --- | --- | --- |
| 2 COND(RJ11) Fem | 860100F | | --- | --- | --- | --- | --- | --- |
| 4 COND (RJ11) | 860102 | | 860180 | | --- | --- | --- | --- |
| 6 COND (RJ12) | 860104 | | 860182 | | --- | --- | 860402 | |
| 6 COND (MMJ) | 860106 | | 860184 | | --- | --- | --- | --- |
| 8 COND (RJ45) | 860108 | | 860186 | | --- | --- | 860406 | |
| 10 COND (RJ69) | 860109 | | 860187 | | --- | --- | 860407 | |
| M66 Eliminator | --- | --- | --- | --- | 860403 | | --- | --- |

### 16 Port

| Panel Type | Part # | to Telco | Part # | to 110 Level 3 | Part # | to 110 Level 5 | Part # | Feed Thru |
|---|---|---|---|---|---|---|---|---|
| 2 COND (RJ11) | 860110 | | 860188 | | --- | --- | --- | --- |
| 4 COND (RJ11) | 860112 | | 860190 | | --- | --- | --- | --- |
| 6 COND (RJ12) | 860114 | | 860192 | | --- | --- | --- | --- |
| 6 COND (MMJ) | 860116 | | 860194 | | --- | --- | --- | --- |
| 8 COND (RJ45) | 860118 | | 860196 | | 860117 | | 860416 | |
| 10 COND (RJ69) | 860119 | | 860197 | | --- | --- | 860417 | |

### 24 Port

| Panel Type | Part # | to Telco | Part # | to 110 Level 3 | Part # | to 110 Level 5 | Part # | Feed Thru |
|---|---|---|---|---|---|---|---|---|
| 2 COND (RJ11) | 860120 | | 860198 | | --- | --- | --- | --- |
| 2 COND (RJ11) Fem | 860120F | | --- | --- | --- | --- | --- | --- |
| 4 COND (RJ11) | 860122 | | 860200 | | --- | --- | --- | --- |
| 4 COND (RJ45) 10BT | 860127 | | --- | --- | --- | --- | --- | --- |
| 6 COND (RJ12) | 860124 | | 860202 | | --- | --- | 860422 | |
| 6 COND (MMJ) | 860126 | | 860204 | | --- | --- | --- | --- |
| 8 COND (RJ45) | 860128 | | 860206 | | 860266 | | 860426 | |
| 8 COND (RJ45) Fem | 860128F | | --- | --- | --- | --- | --- | --- |
| 10 COND (RJ69) | 860129 | | 860207 | | --- | --- | 860427 | |

### 25 Port

| Panel Type | Part # | to Telco |
|---|---|---|
| 2 COND (RJ11) | 860123F | |

### 32 Port

| Panel Type | Part # | to Telco | Part # | to 110 Level 3 | Part # | to 110 Level 5 | Part # | Feed Thru |
|---|---|---|---|---|---|---|---|---|
| 2 COND (RJ11) | 860130 | | 860208 | | --- | --- | --- | --- |
| 4 COND (RJ11) | 860132 | | 860210 | | --- | --- | --- | --- |
| 6 COND (RJ12) | 860134 | | 860212 | | --- | --- | 860432 | |
| 6 COND (MMJ) | 860136 | | 860214 | | --- | --- | --- | --- |
| 8 COND (RJ45) | 860138 | | 860216 | | 860276 | | 860436 | |
| 10 COND (RJ 69) | 860139 | | 860217 | | --- | --- | 860437 | |

### 48 Port

| Panel Type | Part # | to Telco | Part # | to 110 Level 3 | Part # | to 110 Level 5 | Part # | Feed Thru |
|---|---|---|---|---|---|---|---|---|
| 2 COND (RJ11) | 860140 | | 860218 | | --- | --- | --- | --- |
| 2 COND (RJ11) Fem | 860140F | | --- | --- | --- | --- | --- | --- |
| 4 COND (RJ11) | 860142 | | 860220 | | --- | --- | --- | --- |
| 6 COND (RJ12) | 860144 | | 860222 | | --- | --- | 860442 | |
| 6 COND (MMJ) | 860146 | | 860224 | | --- | --- | --- | --- |
| 8 COND (RJ45) | 860147 | | 860226 | | 860286 | | 860446 | |
| 10 COND (RJ69) | 860145 | | 860227 | | --- | --- | 860447 | |

### 64 Port

| Panel Type | Part # | to Telco | Part # | to 110 Level 3 | Part # | to 110 Level 5 | Part # | Feed Thru |
|---|---|---|---|---|---|---|---|---|
| 2 COND (RJ11) | 860148 | | 860228 | | --- | --- | --- | --- |
| 4 COND (RJ11) | 860150 | | 860230 | | --- | --- | --- | --- |
| 6 COND (RJ12) | 860152 | | 860232 | | --- | --- | 860452 | |
| 6 COND (MMJ) | 860154 | | 860234 | | --- | --- | --- | --- |
| 8 COND (RJ45) | 860156 | | 860236 | | 860296 | | 860456 | |
| 10 COND (RJ69) | 860157 | | 860237 | | --- | --- | 860457 | |

### 96 Port

| Panel Type | Part # | to Telco | Part # | to 110 Level 3 | Part # | to 110 Level 5 | Part # | Feed Thru |
|---|---|---|---|---|---|---|---|---|
| 2 COND (RJ11) | 860158 | | 860238 | | --- | --- | --- | --- |
| 4 COND (RJ11) | 860160 | | 860240 | | --- | --- | --- | --- |
| 6 COND (RJ12) | 860162 | | 860242 | | --- | --- | 860462 | |
| 6 COND (MMJ) | 860164 | | 860244 | | --- | --- | --- | --- |
| 8 COND (RJ45) | 860166 | | 860246 | | 860306 | | 860466 | |
| 10 COND (RJ69) | 860167 | | 860247 | | --- | --- | 860467 | |


### 128 Port

| Panel Type | Part # | to Telco | Part # | to 110 Level 3 | Part # | to 110 Level 5 | Part # | Feed Thru |
|---|---|---|---|---|---|---|---|---|
| 2 COND (RJ11) | 860168 | | 860248 | | --- | --- | --- | --- |
| 4 COND (RJ11) | 860170 | | 860250 | | --- | --- | --- | --- |
| 6 COND (RJ12) | 860172 | | 860252 | | --- | --- | 860472 | |
| 6 COND (MMJ) | 860174 | | 860254 | | --- | --- | --- | --- |
| 8 COND (RJ45) | 860176 | | 860256 | | 860255 | | 860479 | |
| 10 COND (RJ69) | 860177 | | 860257 | | --- | --- | 860480 | |

**All Telco Panels Come Standard with Male Connectors (Female are Optional)**
**Standard Wiring for RJ11, RJ12 is USOC ; for RJ45 568.B Wiring**
**Other Wiring Available: ATT568A, 10 BASE T, DEC, NEVADA WEST.**
**Call Now For More Info.**



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

## 128 Port Panel

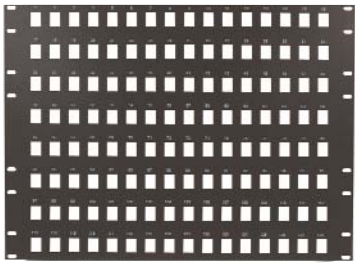

| DESCRIPTION | PART# |
|---|---|
| UNLOADED 128 PORT 14" (RJ45) PATCH PANEL | 998023 |
| LOADED | 998029 |

## 96 Port Panel

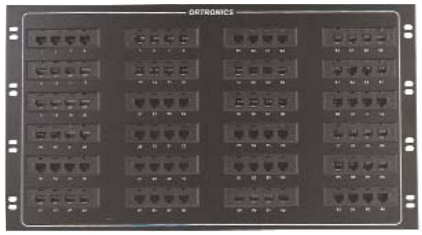

| DESCRIPTION | PART# |
|---|---|
| 4 COND RJ45 10BT TO TELCO 96 PORT PATCH PANEL | 311989 |

*Phone (973) 325-3151 Fax (973) 325-2690*
*Email ncisales@trynci.com Hours Mon–Fri 9-4 EST*

Lightwave Communications, Inc.

# ServerSwitch

## ServerSwitch Controls Up to 25 Sun® Workstations from 1 Keyboard/Monitor

***Transport High Resolution Video and Keyboard Signals from Up to 25 Sun® Workstations/Servers to a single Video Display/Keyboard.***




A **ServerSwitch** is an active, microprocessor controlled switching device which allows a single keyboard, monitor and mouse to be switched among 5 different workstations. **ServerSwitch** can be daisy-chained to access up to 25 CPUs from 1 monitor and keyboard. Video, keyboard and mouse signals are all switched transparently to each CPU, eliminating interference with active CPU processes. Keyboard emulation is supplied at all times to all CPUs (regardless of switch position), thereby eliminating a processor re-boot which would occur if a processor detected a missing keyboard. All video channels are passed transparently along with their respective monitor sense lines, allowing correct CPU video setup. The LED display on the master will always show the selected channel. In the event of disconnection or interruption of any one of the inputs to the **ServerSwitch**, an error will be displayed on the front panel of the **ServerSwitch** when that channel is selected. With the optional **Remote Control Unit**, ServerSwitches can be controlled from a user location outside the computer installation. For long distances (up to 3.000') a **VDE/200 Video Display Extension System** can be used. CALL for more information.


Front


Back

**Features**
- Transparent to all Sun® monitor and keyboard types, uses standard Sun® cabling
- Pushbutton selection with Error and Channel display for ease of operation
- Error indicator flashes if signal is not present on a selected channel
- Two rack-units in height for up to 5 worksattions, may stand alone. Switches up to 25 workstation inputs in daisy-chain configuration.
- Remote Control Unit also available

**Specifications**

| | |
|---|---|
| Video Connections: | 13W3 female connectors |
| Keyboards Connections: | 8 pin mini-DIN female connectors |
| Power: | 115/230V 50/60 Hz W, switched, fused |
| Operating Temparature: | 0-45˚C |
| ***Indicators*** | |
| Channel Select: | LEDs |
| Error: | LEDs flash "E", then input number |
| Power indicator: | Channel LEDs will be lit when power is on |
| Switch Type: | Electronic touch |
| **Dimensions, Weight:** | 3-12" x 16-3/4 W19" (including rack mount ears) x 10" D; 10 pounds |

| Description | Part # | |
|---|---|---|
| ServerSwitch Model 5000 | 333201 | |
| Video Cable 6' Long | 333203 | |
| Din Keyboard 6' Long | 333205 | |
| Remote Cntrl Unit w/ 25' Serial Cable | 333207 | CALL |

# MasterConsole®

RCI®

Control 2 to 64 PC's with a single keyboard, mouse and monitor up to 150' away. Turn on AutoScan, and **Master Console** will display the activity of the connected computers at intervals between 1 and 16 seconds.



Front


Back

**Applications:**
- Control of multiple network servers, bridges and gateways.
- Software development/testing on multiple workstations/servers.
- Networking stress testing.
- System integration and burn-in testing.

| Description | Part # |
|---|---|
| 2 Channel | 331409 |
| 4 Channel | 331413 |
| 8 Channel | 331405 |
| 16 Channel | 331419 |
| **VGA Video Cable Kits (each cable kit connects 2 PC's** | |
| 3' VGA Cable Kit | 331401 |
| 7' VGA Cable Kit | 331403 |
| 10' VGA Cable Kit | 331411 |
| 20' VGA Cable Kit | 331415 |
| **Other Lengths Available. Please Call** | |
| **Accessories** | |
| Serial Port to PS/2 Mouse Port Converter | 331421 |
| 6' Daisy Chain Cable (for 6 channel P-Model) | 331423 |
| 19" Rack-Mount Brackets for 2 or 4 Ports Models | 331417 |
| 19" Rack-Mount for 8 or 16 Ports Models | 331407 |
| (2 Brakes Req. for Z0605-2) | |

**Features:**
- Reclaim valuable space instantly
- Eliminate clutter & cost of keyboards monitor & mice.
- Improve productivity with central control of PC's.
- 100% reliability with superb video quality.
- Hot-Key gives you to the option of directly selecting PC's from a single keyboard.

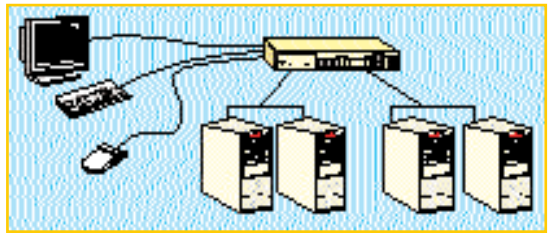

# SWITCHES



Share Up to 8 PCs with 1 printer using standard parallel printer cables. 1 Mb built-in buffering releases PCs from print jobs.
This deluxe High-Speed Buffered AutoSwitch ensures fast, error-free printing with no waiting. This Switch is designed for complex print jobs. Boost your productivity by sharing your parallel printer with 2,4, or 8 PCs. Also works flawlessly with complex Windows, Windows 95 and PostScript print jobs and graphics-generating software.

| | |
|---|---|
| Memory: | 1 MB |
| Interface: | Centronics and IBM® PC parallel compatible |
| Connectors: | Input: 2, 4 or 8 36-pin Centronics female<br>Output: 1 DB25 female |
| Indicators: | 1-segment display for Power-up, Ready and Port Activity Status |
| Dimensions: | 2 Port: 2.2" x 8.7" x 4.3"<br>4 Port: 3" x 8.7" x 4.3"<br>8 Port: 4.5" x 8.7" x 4.3" |
| Weight: | 2 Port: 4.2 lb. - 4 Port 4.8 lb. - 8 Port 6.2 lb. |


### DELUXE AUTO BUFFERSWITCHES

| DESCRIPTION | PART # |
|---|---|
| 2 PORT | 540517 |
| 4 PORT | 540519 |
| 8 PORT | 540521 |



### COMPACT PARALLEL AUTO BUFFERSWITCHES

- 2 computers share 1 parallel printer
- LEDs indicate channel-in-use & buffer status
- 10 or 60 sec. timeout & DB25F connectors
- 25-50KCps transfer rate & up to 80% data compresion, w/manual override switch
- Form feed enable/disable
- Recommended Cables:
  Computer: DB25M/M
  Printer: DB25M/Cen36M

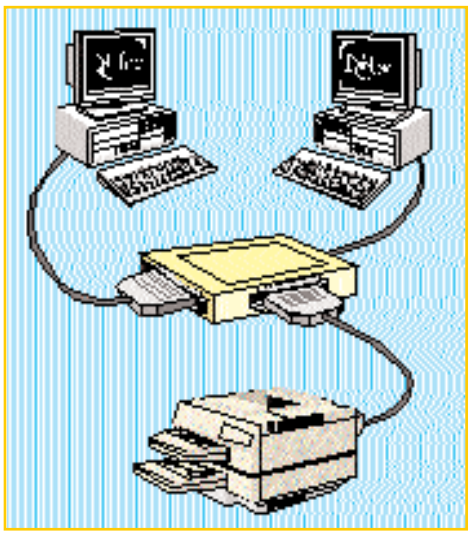



### CONSOLE PARALLEL AUTO BUFFERSWITCHES

***FOR 1 PARALLEL PRINTERS***

- Up to 8 computers share 1 parallel printer, DB25F connectors
- First-come, first-serve input selection w/manual override selector switch
- Expandable to 2 Meg, 20-40KCps transfer rate and up to 80% data compression
- LEDs indicate channel-in-use, ready, & manual override
- Settable 5-60 sec timeout & auto form feed enable/disable
- Recommended Cables
  Computer: DB25M/M
  Printer: DB25M/Cen36M

***FOR 2 PARALLEL PRINTERS***

- Up to 4 computers share 2 parallel printers & DB25F connectors
- LEDs indicate channel-in-use & buffer status
- 16KCps transfer rate & 3-200 sec timeout
- Form feed enable/disable, concurrent input arbitration, & 255 multicopy function
- First-come, first serve w/reset button
- Daisy chainable, up to 2 stages (16 x 6)
- Includes DOS/Windows printer software.
- Recommended Cables
  Computer: DB25M/M
  Printer: DB25M/Cen36M

### SERIAL AUTO BUFFERSWITCHES

- Up to 4 computers share 2 serial printers
- 255 multicopy function & 256K buffer expandable to 3.3 Meg.
- LEDs indicate channel-in-use, buffer ready & full
- Automatic input selection w/reset button & concurrent Input/Output arbitration
- DB25F (input-DCE), 2 DB25M (output-DTE) connectors
- Auto form feed enable/disable, hardware and/or Xon-Xoff handshake
- Settable 3-200 sec timeout, 300-38400bps buffer speed
- Reconfigurable to 3 to 1 or 5 to 1
- Includes DOS/Windows software for printer selection
- Recomended Cables
  Computer: DB25M/F
  Printer: depends on your printer

### AUTO BUFFERSWITCHES

**COMPACT PARALLEL AUTO BUFFERSWITCHES**

| DESCRIPTION | PART # |
|---|---|
| 2 TO 1, 256K | 403273 |
| 2 TO 1, 1 MEG | 403275 |
| 2 TO 1, 2 MEG | 403277 |

**CONSOLE PARALLEL AUTO BUFFERSWITCHES**

| DESCRIPTION | PART # |
|---|---|
| 4 TO 1, 256K EXPD. TO 2 MEG | 403279 |
| 4 TO 1, 1 MEG EXPD. TO 2 MEG | 403281 |
| 8 TO 1, 256K EXPD. TO 2 MEG | 403283 |
| 8 TO 1, 1 MEG EXPD. TO 2 MEG | 403285 |
| *2 TO 2, 256K EXPD. TO 3.3 MEG | 403287 |
| *4 TO 2, 256K EXPD. TO 3.3 MEG | 403289 |

**SERIAL AUTO BUFFERSWITCHES**

| DESCRIPTION | PART # |
|---|---|
| 2 TO 2, 256K EXPD. TO 3.3 MEG | 403291 |
| 4 TO 2, 256K EXPD. TO 3.3 MEG | 403293 |

***Styles may vary**



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

Now your parallel printer can be shared among 2, 4 or even 8 users, and you can use the same standard parallel printer cables you'd use for just a single PC.
With its 8-KB buffer, it's the economical answer to handling several smaller print jobs.

| Description | Part # |
|---|---|
| 2 Port | 540523 |
| 4 Port | 540525 |
| 8 Port | 540527 |

| | |
|---|---|
| Memory: | 8KB |
| Interface: | Centronics and IBM® PC parallel compatible |
| Connectors: | Input: 2, 4, 8 36-pin Centronics female<br>Output: 1 DB25 female |
| Indicators: | 7-segment display for Power-up, Ready, and Port Activity Status |
| Dimensions: | 2 Port: 2.2" x 8.7" x 4.3"<br>4 Port: 3" x 8.7" x 4.3"<br>8 Port: 4.5" x 8.7" x 4.3" |
| Weight: | 2 Port: 4.2 lb. - 4 Port 4.8 lb. - 8 Port 6.2 lb. |



ServerMaster allows a single user station to access up to 64 or 216 servers/PCs. Ideal for network administrators who need to update directories, control security, and monitor the status of multiple servers. Also great for remote operation of multiple PC and QC during PC burn in procedures. Saves the space needed for monitors, keyboards, and mice AND saves administrators time.

## 1 to 6 Servers


- Single Keyboard/VGA/ mouse access 6 servers
- Cascadable to expand access up to 216 computers
- 1 ready & 6 Port status LEDs, auto scan mode or manual
- Supports 486/Pentium/PS/2 & VGA/SVGA
- Features regular PC keyboard/mouse port
- Daisy chain option can expand access up to 216 PCs
- Din5/Mini6, HD15, DB9 connectors

| Description | Part # |
|---|---|
| 6 Servers | 403234 |

## 1 to 4 Servers

- Single keyboard/VGA/ mouse access 4 servers
- Cascadable to expand access up to 64 computers
- Port status LEDs, auto scan mode or manual
- Supports 486/Pentium/PS/2 & VGA/SVGA
- Features dual PC & PS/2 keyboard/mouse port
- One user station access 4 computers
- Switch by keyboard or selection button
- Built-in buzzer for switching confirmation
- Din5/Mini6, HD15, DB9/Mini6 connectors

| Description | Part # |
|---|---|
| 4 Servers | 403233 |

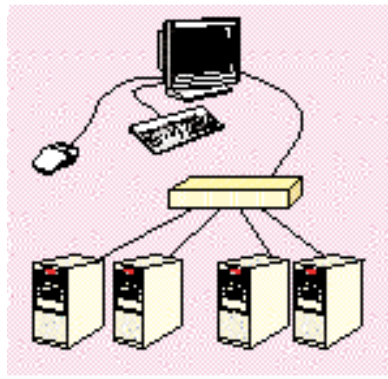


## *The Single Control Station*

- Control PC, Mac® and Sun® CPUs from 1 keyboard, monitor, and mouse or mix different platforms
- Keyboard emulation avoids lockups and allows you to use the mouse and keyboard of your choice
- Keyboard and Alphanumeric display enable users to define and display a name for each CPU
- Convenient switching options - keyboard, front-panel, or RS 232 serial port - provide greater control and flexibilty

**PC / MAC / SUN**

| Description | Part # |
|---|---|
| 4 to 1 | 540501 |
| 8 to 1 | 540503 |
| 12 to 1 | 540505 |
| 16 to 1 | 540507 |

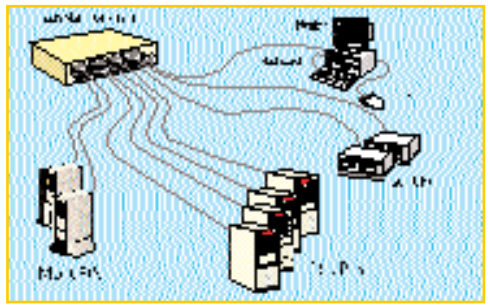

Connect all your IBM® PC,Mac® and Sun® servers or CPUs via a single keyboard, monitor, and mouse. You can monitor the CPU currently under control using the ServManager's alphanumeric display.





You can switch from the front-panel keypad, keyboard commands or the RS-232 serial port. Get the right configuration for your application. Call NCI for more information.

## *Save Space, Time and Money*

- Control Up to 256 Macintosh® or Sun® CPUs with 1 keyboard, monitor, and mouse.
- Switch from your keyboard, the Switch's front panel, or remotely
- Rackmount Kits are also available


**SUN**

| Description | Part # |
|---|---|
| 2 to1 | 540509 |
| 4 to 1 | 540511 |

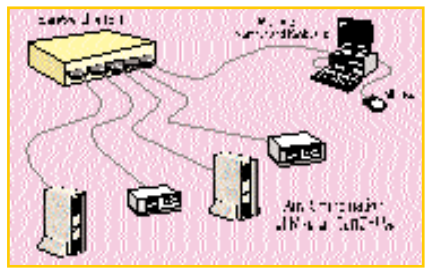

**MAC**

| Description | Part # |
|---|---|
| 2 to1 | 540513 |
| 4 to 1 | 540515 |

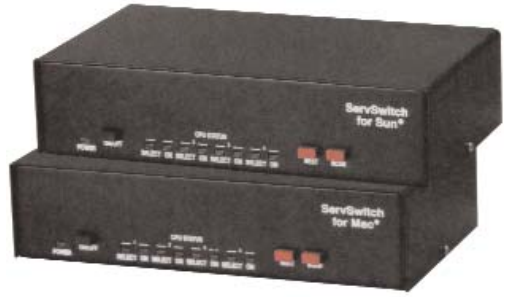

# SWITCHES

**Switching is one of the most common money-saving techniques in office computing. With a switch, users share the printer. We offer 2 types of switches: manual & auto. With manual switches, users control shared equipment by turning a knob or pressing a button**. Auto-switches follow preset instructions about time and circumstance, and allow greater flexibility. PBX switches let multiple users share a fixed number of ports. Fallback/Remote switches give you auto line or equip. backup. Activated switches give remote control over connections.











| Description | Type | Use | Part# | | |
|---|---|---|---|---|---|
| Mini Din 8 pin | AB | MAC+,II,IIc,SE Apple | 810562 | | |
| Mini Din 8 pin | ABC | MAC+,II,IIc,SE Apple | 810563 | | |
| Mini Din 8 pin | ABCD | MAC+,II,IIc,SE Apple | 810564 | | |
| Mini Din 8 pin | XOVER | MAC+,II,IIc,SE Apple | 810567 | | |
| Din 5 pin | AB | Keyboard | 810712 | | |
| Din 5 pin | ABC | Keyboard | 810713 | | |
| Din 5 pin | ABCDEFGHIJK | Keyboard | 810711 | | |
| DB9 | AB | Monitor/AT SerialPort | 810442 | | |
| DB9 | ABC | Monitor/AT SerialPort | 810443 | | |
| DB9 | ABCD | Monitor/AT SerialPort | 810444 | | |
| DB9 | ABCDEF | Monitor/AT SerialPort | 810446 | | |
| DB9 | ABCDEFGHIJK | Monitor/AT SerialPort | 8104411 | | |
| DB9 | XOVER | Monitor/AT SerialPort | 810447 | | |
| DB15 | AB | Ethernet, Joy Stick | 810452 | | |
| DB15 | ABC | Ethernet, Joy Stick | 810453 | | |
| DB15 | ABCD | Ethernet, Joy Stick | 810454 | | |
| DB15 | ABCDEF | Ethernet, Joy Stick | 810456 | | |
| HD15 | AB | VGA/PS2 Monitor | 810462 | | |
| HD15 | ABCD | VGA/PS2 Monitor | 810464 | | |
| HD15 | ABCDEF | VGA/PS2 Monitor | 810466 | | |
| DB25 | AB | Serial/Parallel Port | 810472 | | |
| DB25 | ABC | Serial/Parallel Port | 810473 | | |
| DB25 | ABCD | Serial/Parallel Port | 810474 | | |
| DB25 | ABCDE | Serial/Parallel Port | 810475 | | |
| DB25 | ABCDEF | Serial/Parallel Port | 810476 | | |
| DB25 | XOVER | Serial/Parallel Port | 810477 | | |
| DB25-DB25-C36 | AB | Parallel Printer | 810732 | | |
| DB25x4-C36 | ABCD | Parallel Printer | 810734 | | |
| DB37 | AB | Hard Drive | 810492 | | |
| DB37 | ABC | Hard Drive | 810493 | | |
| DB37 | ABCD | Hard Drive | 810494 | | |
| DB37 | XOVER | Hard Drive | 810497 | | |
| DB50 | AB | Hard Drive | 810502 | | |
| DB50 | ABCD | Hard Drive | 810504 | | |
| Centronics24 | AB | IEE488/HPLab Acc. | 810402 | | |
| Centronics24 | ABC | IEE488/HPLab Acc | 810403 | | |
| Centronics24 | ABCD | IEE488/HPLab Acc | 810404 | | |
| Centronics24 | ABCDE | IEE488/HPLab Acc | 810405 | | |
| Centronics24 | XOVER | IEE488/HPLab Acc | 810407 | | |
| Centronics36 | AB | Parallel Printer | 810412 | | |
| Centronics36 | ABC | Parallel Printer | 810413 | | |
| Centronics36 | ABCD | Parallel Printer | 810414 | | |
| Centronics36 | ABCDE | Parallel Printer | 810415 | | |
| Centronics36 | XOVER | Parallel Printer | 810417 | | |
| Cent36x2-DB25 | AB | Parallel Printer | 810742 | | |
| Cent36x4-DB25 | ABCD | Parallel Printer | 810744 | | |
| Centronics 50 | AB | SCSI,Telco | 810432 | | |
| RJ11 | AB | CommunicationLine/Data | 810542 | | |
| RJ11 | ABC | CommunicationLine/Data | 810543 | | |
| RJ11 | ABCD | CommunicationLine/Data | 810544 | | |
| RJ11 | XOVER | CommunicationLine/Data | 810547 | | |
| MMJ (RJ12) | AB | CommunicationLine/Data | 810692 | | |
| MMJ (RJ12) | ABC | CommunicationLine/Data | 810693 | | |
| MMJ (RJ12) | ABCD | CommunicationLine/Data | 810694 | | |
| RJ45 | AB | CommunicationLine/Data | 810552 | | |
| RJ45 | ABC | CommunicationLine/Data | 810553 | | |
| RJ45 | ABCD | CommunicationLine/Data | 810554 | | |
| RJ45 | XOVER | CommunicationLine/Data | 810557 | | |
| V.35 | AB | High Speed Data | 810682 | | |
| V.35 | ABC | High Speed Data | 810683 | | |
| V.35 | ABCD | High Speed Data | 810684 | | |
| Keyboard MiniDin4&DB15 | ABCD | MacKeyboard/Monitor | 810463 | --- | --- |
| KeyboardDin5&DB9 | AB | XT/AT Keybd Mon. | 810522 | | |
| KeyboardDin5&DB9 | ABCD | XT/AT Keybd Mon | 810524 | | |
| Keybrd Din5&HD15 | AB | XT/AT Keybd/VGAMonitor | 810752 | | |
| Keybrd Din5&HD15 | ABCD | XT/AT Keybd/VGAMonitor | 810754 | | |
| Keybrd Mini6&HD15 | AB | PS2 Keybd & VGAMonitor | 810532 | | |
| Keybrd Mini6&HD15 | ABCD | PS2 Keybd & VGAMonitor | 810534 | | |
| Twinaxial | AB | Network | 810572 | | |
| Twinaxial | ABC | Network | 810573 | | |
| Twinaxial | ABCD | Network | 810574 | | |
| Twinaxial | XOVER | Network | 810577 | | |
| Coaxial (BNC) | AB | Video | 810582 | | |
| Coaxial (BNC) | ABC | Video | 810583 | | |
| Coaxial (BNC) | ABCD | Video | 810584 | | |
| Coaxial (BNC) | XOVER | Video | 810587 | | |

Share your display with up to 8 other VGA monitors. Great for product presentations, classrooms, conferences or software demonstrations.

**Specifications**


Connectors VGA Splitters: HD-15 Male input. HD-15 Female 4 Ports; HD-15 Female 8 Ports output.

**Dimensions:**

4 Port; 2' x 51/8 w x 6'

8 Port; 3' x 7' w x 10'

| Description | Part # |
|---|---|
| 4 Port | 316401 |
| 8 port | 316402 |

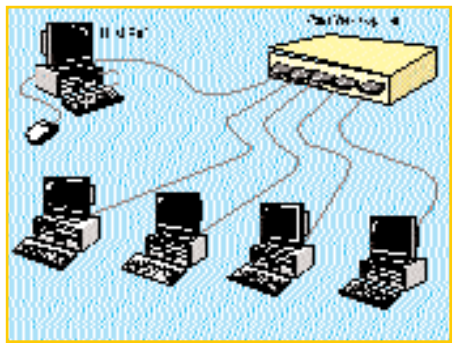








PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.



# TV Converter

DESCRIPTION PART#







# Auto Switches

These Belkin Bitronic AutoSwitches allow 2 or 4 (depending on the model) computers to share one IEEE 1284 compatible printer. They fully take advantage of the bi-directional features and capabilities of any bi-directional printer. New IEEE 1284 compatible printers can now send printer information such as paper jams, printing status, printer off-line, out of paper and other messages to all the computers at the same time. Also functions with non-bi-directional printers. For All Bi-Directional Printers

- Compatible with HP, Canon, Epson and other Bi-Directional Printers
- IEEE 1284 Compatible

| DESCRIPTION | PART# |
|---|---|
| BELKIN BITRONICS 2PORT AUTOSWITCH | 541901 |

# Presenter TVIEW Gold

**Connect Your Mac or PC to any TV or VCR**

With this small, lightweight computer interface and Apple MacIntosh, DOS, Windows or OS/2-based software, you can create high impact presentations to view on any television. This allows you to make group presentations from your desktop, Apple Powerbook or PC compatible laptop.

The Presenter TVIEW™ Gold is an external plug & play hook up that will not slow down your computer, even while displaying on a large 50" screen or projection TV. The Presenter TVIEW Gold uses revolutionary circuitry that far surpasses the quality of anything previously introduced to the market. It offers such features as Sharp View™ and Clear Image™, which produce unparalleled quality screen displays. The Video Stabilizer™ eliminates screen flicker.

## Features:

- Built-in Fit-TV™ - Insure you audience will see the whole picture on the TV...no missing menu bars. Fit-TV™ is guaranteed to show an entire computer screen up to 800 x 600 on any standard TV.
- New Video Stabilizer™ - The Presenter TVIEW Gold introduces revolutionary circuitry design with its new video stabilizer. Because TV and computer scan lines produce images differently, screen flicker results when converting a computer-generated image for TV display. Traditional methods for filtering flicker still leave residual flicker that diminishes display quality or reduces resolution. The Presenter TVIEW Gold uses pioneering line averaging technology with the video stabilizer to virtually eliminate screen flicker.
- Sharp View™ - Sharp View advanced circuitry cleans up any residual smearing that occurs when video lines are averaged, so text is sharper, colors truer and more vibrant, and image resolution is higher.
- High Res - Supports up to 1024 x 768 and 16.7 million colors with most computers.
- Plug & Play Anywhere - The Presenter TVIEW Gold works with televisions supporting NTSC and PAL. The Presenter TVVIEW Gold also supports the SCART (Euroconnector) input for clarity as good as a computer monitor. Travel the world with one box.
- Multiscan Passthrough Mode - This mode enables users to view presentations simultaneously on both their monitor and TV screen.
- Clear Image - Technology improves text using any standard TV with an RCA video input.



## Includes:

- The Presenter TVIEW Gold
- 1 Apple MacIntosh Video Cable
- 1 VGA Cable
- Power Cube
- Composite Video Cable
- S-Video Cable
- MacIntosh Software: Electronic Marker
- PC Software: Video Fonts, Electronic Marker

## Monitor Support:

- Apple™ RGB monitors
- Apple multiple scan monitors
- All VGA monitors

## System Requirements:

- MacIntosh with monitor port
- PC with VGA output

## Specifications:

- Input: MacIntosh RGB, VGA DB-15
- Output: Composite RCA, S-Video, Apple RGB, VGA

## Physical Features:

Main Unit - 8.25" x 3.8" x .94"

DESCRIPTION PART#

*Phone (973) 325-3151 Fax (973) 325-2690*
*Email ncisales@trynci.com Hours Mon–Fri 9-4 EST*

# Plotter Buffer PL-121

**Specifications**

Dram Memory - 64KB-4MB
I/O Channels - One serial Input/One serial Output
Front Pannel Indicators - RAM status, Plotter error, Buffer ready, Pause, Replot/Run
Power Comsumption - Max. 11 W
Operation Temperature - 5°C - 40°C (41°F - 104°F)
Stock Temperature - -20°C - 60°C (-4°F -140°F)
CPU - Z-80A
Power - DC9V, 1.2A
Humidity - 0-80%
Function Key - Reset, Pause, Run, Cancel
Replot, Slow-Down - Supported
Time Out Selection - 10 seconds or 30 seconds
Auto Form Feed - Supported (For Printer Only)
Protocol - Hardware, XON/XOFF, ENQ/ACK, No
Baud Rate - 150-19200 bps
Data Bits - 7 or 8
Stop Bits - 1 or 2
Parity Check - Disabled, Even, Odd
Dimensions - 184x127x61 mm

The Plotter Buffer PL-121 is designed to speed up the releasing file speed from a host computer to a plotter. It also provides the same ability for a printer with a RS-232C serial port.



BACK



| DESCRIPTION | PART# |
|---|---|

# VGA/ PS2/ PS2M



| DESCRIPTION | PART # | REF# |
|---|---|---|
| EAZY VGA/PS2/PS2M | 313507 | EHN051-0010 |

# VGA/ PS2/ PS2M



| DESCRIPTION | PART # | REF# |
|---|---|---|
| EAZY VGA/PS2/PS2M | 313505 | EHN054-0001 |


# CPU to Server Switch



| DESCRIPTION | PART # | REF# |
|---|---|---|
| EAZY CPU TO SERVER SWITCH | 313627 | EHN205-0010 |

# 8 to 1 Parallel

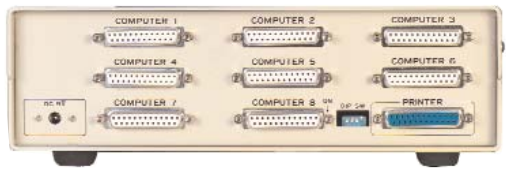


| DESCRIPTION | PART # |
|---|---|
| AUTO DATA SWITCH BOX 8 TO 1 PARALLEL | 810922 |


ISDN stands for Integrated Services Digital Network. The 2 basic types of ISDN are known as subscriber interfaces and consist of BRI and PRI.BRI stands for Basic Rate Interface and is 144,000 bits per second (bps). PRI stands for Primary Rate Interface and is 1,544,000 bps.BRI works with desktop applications while PRI works with telephone switches, computer telephony and voice processing systems. Basic Rate Interface is available from your local phone company. If you have any questions call our sales dept.

## IBM

High Speed digital & analog communications over a single line.

The IBM NT Extended lets you take advantage of high bandwidth and speed - up to 64 kilobits per second (Kbps) - via 2 ISDN B channels. Installing the ISDN NT Extended is easy. With minimal or no rewiring required in most cases. You simply connect it between your workstation's ISDN adapter and the modular telephone wall jack using the provided RJ11 cables. An A/C

IBM
**Network Terminator Extended**
Part# 316135



## US ROBOTICS

Sportster ISDN 128K is a PC-based terminal adapter that is designed specifically for telecommuting and Internet access.

It provides connectivity to an ISDN BRI and allows simultaneous voice and data communications. Equipped with an RJ-11 jack, the Sportster ISDN 128K can be used with a standard telephone or fax machine to communicate over the digital network.

UsRobotic
**Sportster ISDN 128K**
Part# 402203



## MOTOROLA

The Motorola BitSURFER Pro ISA for ISDN is a high speed Internal terminal adapter that gives you dial up access to ISDN for super-fast web browsing, sending or down-loading graphics, and much more. For more information on Motorola products call our sales department.

Motorola
**Network Terminaton-1 Device NTID**
Part# 331103
**Terminal N/Boilt-In NT-1**
Part# 331121
**Hibrid Modem/Terminal Adapter**
Part# 331123
**BitSurfer Pro ISA**
Part# 331125





## TEKTRONIX

The CrafTek CT-100 meets high standards for ruggedness, portability and reiliability.

In addition to traditional analog POTS service, the portable test set provides comprehensive ISDN and P-Phone measurements and indicators for rapid performance verification and fault diagnosis. New services can be provided more efficiently, customer downtime minimized and problems quickly resolved.
-Internet Access Testing -Personal Video Conferencing -Telecommuting

Tektronix
**CT-100 ISDN Tester**
Part# 535801



## CARDINAL

The Cardinal ISDN Adapter transmits up to four times faster than the fastest V.34 modem. High speed ISDN links to the Internet avoid long delays in finding data resources and accessing information on the Internet.

Cardinal
**Basic Rate ISA Adapter**
Part# 314809




## 3Com

The Arpeggio family of products combines ISDN services, bridging and TCP/IP and Novell® routing to deliver high-speed network communications over standard telephone lines.

3Com

| | | |
|---|---|---|
| **Arpegio Lite** | Part# 536959 | 1199 |
| **Arpegio Plus Basic Rate** | Part# 536961 | 2399 |
| **Arpegio Plus Office** | Part# 536963 | 2919 |



# Telecom Products

DDS stands for Dataphone Digital Service also known as Digital Data System. It is a private line digital service with data rates ranging from 2,400 to 56,000 bits per sec. AT&T offers DDS on a long distance basis and offered on a local basis by local phone compnaies.

## MULTITECH



Choose this versatile DSU/CSU if you're using DDS (Dedicated Digital Service up to 56Kbps). Its standard features include both V.35, RS232, and RJ48 connections. It operates synchronously at rates up to 56Kbps and asynchronously at rates up to 19.2Kbps. The MultiDSU56K complies with AT&T PUBS 41450 and 62310 requirements, and operates over point-to-point or multipoint circuits. Features include clocking options, elastic store for analog off-net extensions, antistreaming, and RTS and DSRsignal forced-on selection. MultiDSU56K works in DDS Multipoint, LADS (Local Area Data Set), Tail Circuit and Analog Off-Net applications.

**Multitech DSU MT56DSU**
Part# 334903

## MOTOROLA

Motorola has the widest selection of high-speed modems, digital transmission products, concentrators, routers, and custom network management systems available today. With Motorola you'll find a larger-than-ever choice of products to help you reduce your capital equipment and network line costs, achieve higher networking speeds, performance, and productivity, keep pace with new public and private transmission services as they become available and take advantage of break-through new mobile, teleconfer-encing, PC-based, and other communi-cations technologies.








**SW5611 4 wire SW56 w/V.35 Interface LCD**
Part# 331105

**SW5611 4 wire SW56 w/RS232 Interface LCD**
Part# 331107

**MR64 DSU/CSU 64K Sync & Async LCD Panel Standalone w/RS232 & V.35 Interface**
Part# 331109

**DU56 2 wire SW56 w/V.35 Interface V25BIS at Command DSU/CSU**
Part# 331139

**DU56 (RS232) DSU/CSU 2 wire RS232 Interface V25BIS at Command**
Part# 331113

**3512 NMS Single Port w/Internal 4 Wire SW56 Restoral**
Part# 331115 1532

**3512 NMS Single Port w/Internal Modem V32BIS 1 Line Restoral**
Part# 331117 1532

**3512 Single Port w/Internal 4 Wire SW56 Restoral**
Part# 331119 1166

**DU170 2 wire SW56 w/V.35 Interface LCD**
Part# 331111

## COMPATIBLE




**MicroRouter 900i Ethernet Router**
Part# 540201

**MicroRouter 1000R Ethernet Router**
Part# 540203

**4-Wire DDS For Microrouter 9001& 1000R 56K CSU/DSU**
Part# 540205

## CRAY

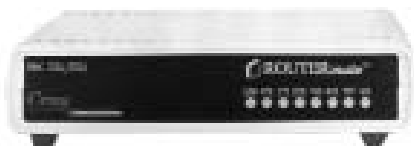

**CSU/DSU up to 56K Standalone w/RS449 Interface**
Part# 589901

**Routermate 56 56K CSU/DSU 1-V35 SNMP/Telnet or V100 Terminal**
Part# 539903



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# TELECOM PRODUCTS

T1 is a digital transmission link with a capacity of 1.544Megabits Per Sec. T1 uses 2 pairs of standard twisted pair cable. T1 has capacity ofof 24 voice concersations individually digitized at 64 Kbps. More voice channels can be used, however, higher grade equipment is needed.T1 is great for Wide Area Networks and when using Bridges and Routers.

FT1 is Fractional T1. That means that FT1 is just a portion of full T1, and that means it is not as fast as full T1. FT1 is cheaper than T1 and that is why it is popular. FT1 is used for video conferencing, high speed applications and computer imaging.
NCI can help you order all that you'll need to set up your T1. Just call our sales department.

## MOTOROLA

**Supports all T1/FT1 standards along with SNMP network management.**

-Your choice of two powerful models:
FT 100M with two data ports
FT 100M with one data port and one Add/Drop port
-Operates at all standard data rates up to Mbps
-SNMP-based, MIB-II compliant network management with range of alarms and ESF performance history
-Menu-driven local management acessible through VT100 terminal or

**T1 CSU/DSU Dual V.35 SNMP Mgmt DTE via DB25 ia V.35**
Part# 331127
**V.35 v/V.35 Interface to DTE via DB25**
Part# 331129



## AT&T PARADYNE

3150 ESF T1 Channel Service Unit is a full-featured standalone model which directly connects to mutiple formatting environments, including D4 and Extended Superframe Format (ESF) T1. Windows-based front panel emulation software and flash memory software downloading make it easy to operate and upgrade.

**T-1 Esf CSU Standalone**
Part# 400079

**Carrier T-1 Esf DSU/CSU 2 Port - FDL/EDL - Ext DBU Option**
Part# 400081

**T-1 DSU/CSU Standalone 1 Port**
Part# 400083



## CRAY COMMUNICATIONS

-Up to 24 synchronous channels
-Drop-and-insert DSX port
-SNMP management
-ESF performance monitoring
-T1 and fractional T1 compatible
-Frame relay compatible

**12S T-1 DSU/CSU w/Non Expandable Ni Cable**
Part# 539905

**Routermate T-1/FT-1 CSU/DSU 1 - V.35 SNMP**
Part# 539907



# Telecom Products

## Teltone Line Simulators

### ILS - 2000 ISDN Line Simulator - ISDN Demonstrator

The Teltone ILS-1000 is a portable, stand-alone, end-to-end, ISDN Basic Rate Interface (BRI) Central Office SImulator. It's also the most affordable and convenient way to develop and test ISDN-BRI products designed for either U or S/T interface, including network terminations, Type 1 terminating equipment, and terminal adapters. With the Teltone ILS-2000, you can avoid the trouble and expense of specifying ISDN services and buying protocol analyzers. You can demonstrate physical layer, data link layer, and network layer operations during multiple real-time voice or data calls- on your desktop!



***ILS-2000 Productivity Features:***

- **Two ISDN-BRI (2B+d) Lines for end-to-end simulation.**
- **U (2B1Q) and S/T (ASI Bipolar) interfaces at each line.**
- **Speech, 3.1 Khz audio, 7 khz audio, Curcuit Mode Data, and D Channel Packet Mode Data.**
- **Point-to-point and point-to-multipoint configurations**
- **In-band tones and primary line power to six terminating devices.**
- **Supports National ISDN-1, AT&T, DMS-100, and ETSI switch provisioning.**
- **Supports auto-Initializing terminals, including AT&T Management I Information Messages (MIM)**

**Teltone ILS-2000 ISDN Line Simulator**
**Part# 332615**

***ISDN Demostrator Productivity Features:***

**ILS-2000 Features, exept:**

- **Supports ISDN-1, only (AT&T 5ESS optional**
- **U 92B1Q) interface at each line**
- **Operates off 110 VAC only**

**Teltone ISDN Demonstrator**
**Part# 332657**






Back



### CommLYNX™

Teltone's CommLYNX PC software brings the power of sophisticated call center CTI systems to your desktop. Whether you are a salesperson, a telecommuter, or a small business owner, and if your business is telephone intensive, then you will immediately benefit from the "near predictive dialing" capabilities of CommLYNX. CommLYNX combines a feature-rich, Windows™-based user interface with Teltone's T-311 Telephone Access Unit to give you real productivity that other PC-based calling products can't touch. More than just a power dialer, it's a complete call management system at your fingertips.

***CommLYNX™ Productivity features:***

- **Complete more calls in less time.** Recognizes busy signals, reorder tones, no answers, SIT's, and autodials the next number in a group.
- **Built-in links to your applications.** Easily integrates with your existing contact management software such as ACT!, TeleMagic, Maximizer, Time & Chaos, and DOS applications.
- **Create call activity reports.** Captures call info such as phone numbers names, date, duration, and subject. Stores info for easy access and report generation.
- **Screen inbound calls.** The CommLYNX Caller ID feature alerts users to who is calling, displaying a "Call Announce" icon which flashes on screen until answered. Can also work transparently in the background.
- **Replaces your phone.** Your headset or handset plugs into the T-311, giving you the convenience of hands-free calling. You can use your standard phone by plugging it directly to the T-311.
- **Speed dial keys.** Programmable "soft keys" save time dialing frequently called numbers.
- **Telephone company service support.** Supports Caller ID, Visual Message Waiting, voice mail, Centrex services for call hold, forward, transfer, and single line conference calling.

**Teltone CommLYNX™** - Includes one T-311 computer access device with AC power adapter, 3.5" disk(s) containing CommLYNX software, one 6 foot cord with DB9 RS-232 connectors, and one 7 foot telephone line cord.
**Part #332609**

**Telecommuting: The Time is NOW!**
**You can immediately begin to realize the benefits of telecommuting: Increased productivity, reduced absenteeism, employee retention, and increased job satisfaction. Call NCI today to get your employees off the road and on to productivity!**



Back



### OfficeLink®

OfficeLink is a compact, single-user device which allows employees to make and receive phone calls from their homes or "telework" centers, *while appearing to callers as if they are in the office.* Your employees can work from any touchtone telephone and anyone calling them will assume they are calling from the office.

Telecommuters can use PBX features to transfer callers, set up a conference call, or leave voice mail messages. OfficeLink is the economical telecommuting solution: with minimal investment your company can begin, right away, to realize the benefits of the "virtual office".

Office Link Productivity Features:

- **Quick & Easy Installation.** As simple as plugging in an incoming and an outgoing analog telephone line to the unit. Installed at the company PBX or ACD location.
- **Ease of Use.** Once your employees learn a few short touchtone commands, they are ready to go to work.
- **A Connection for Your Application.** Office Link offers 2 types of network connections between the the telecommuter and the office phone system.
  **Continuous Connection:** Designed for businesses with intensive incoming call traffic, the continuous connection feature maintains a con stant network link with company's phone system. Incoming calls are announced with a tone in the headset.
  **Per-Call Connection:** This connection is maintained only for the duration of individual calls and is suited for intermittent calling. A distinctive headset tone announces business calls, so the telecommuter can answer with a business greeting.
- **Cost Effective.** Move employees off-site and reduce overhead. Replace off-premises extension (OPX) lines.Comply with commuter-trip reduction requirements.
- **Mobility.** Telecommuters' calls can follow them wherever they go. The telecommuter calls the OfficeLink whenever he changes location and enters the current number.
- **25 Telecommuters.** Multiple employees can share the benefits of OfficeLink, if they telecommute at different times.
- **Access to Phone System Features.** Employees can use all the features of the office telephone system, just as though they were on site.
- **Remote Administration.** Allows the system administrator to change passwords and otherwise remotely manage the system.
- **Rock Solid Security.** Designed with the security of your phone system in mind, OfficeLink's anti-hacker feature will frustrate any unauthorized caller.
  **Passwords:** Passwords of up to ten digits can be changed as often as necessary to ensure security.
  **Lock-Out:** OfficeLink blocks calls after multiple attempts to enter an unauthorized password.
  **Dial Back:** Only employees whose numbers have been preloaded into the OfficeLink are given access with this feature. Dial Back also enables toll reversal where the com pany is to be billed for long distance calls.

**Call Records:** OfficeLink provides a serial port for real-time recording of all call activity.

**Teltone OfficeLink®** **Part# 332611**



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# TELEPHONE SIMULATORS

## Telephone Line Simulators

Teltone's Telephone Line Simulators make it easy to test equipment such as phones, fax machines, or modems. You can also demonstrate products at customer sites or trade shows and provide telecom training. Everything you need in a compact AC-powered unit. Teltone Line Simulators provide true network simulation with accurate dial tone, audible ring, and busy signals to the telephones or other devices connected to them. Many functions of the TLS-3B, TLS-4, TLS-5 are easily programmed with a touch-tone phone or with Teltone's Cipher™ software on your PC. You can program unique primary and secondary phone numbers for each line. Simulate PBX features such as hunt groups, "9" outside line access, transferring, conferencing, etc. Set dial tone delays, network response delays, flash detect, and more. There's no limit to the ways you can use Teltone's Telephone Line Simulators.

## 2-Line Telephone Simulators

### TLS-3A Productivity Features:

- Two loop start lines with single talk path
- Precise call progress tones (dial tone, busy, reorder, ringback)
- Tone and Rotary Dialing
- Dial-up test tones
- Secondary dial tones
- Cost effective basic functions

**TLS-3A Telephone Simulator**

**PART# 332601**

### TLS-3B Productivity Features:

ALL THE FEATURES OF THE TLS-3A, PLUS:

- Programmable features include : Primary / secondary phone numbers (up to 16 digits) Off hook modes, Network response delays, Test to frequencies, Line attenuation
- Caller ID information generated in single and multiple message formats. Simulates privacy blockage, out-of-area calls, and transmission errors.
- Visual message waiting indicator
- Programmable dial-up test tones (dial, busy, reorder, ringback, silence)

**TLS-3B Telephone Simulator**

TLS-3A



## 4-Line Telephone Simulators

### TLS-4 Productivity Features:

- Four simulated phone lines with two talk paths. EAch line can have unique primary and secondary phone numbers, up to 16 digits long.
- Precise call progress tones (dial, busy, and ringback tones. Eight selectable wave forms. Programmable call processing delays. Selectable response to non-valid numbers.
- Simulate a PBX hunt group, "9" access to outside line. Calls can be transferred, put on hold, and conferenced.
- **Forced Disconnect** (Cut-off On Disconnect or Calling Party Control): Disconnects either the caller or called party after a programmable delay.
- **Hot Lines**: Automatically Ring another station(s) when the handset of a connected device is lifted.
- **Distinctive Ringing**:Preset standard ring cycle of 2 seconds on and 4 seconds off for each lines first number. Programmable ring cadences for each lines second number.
- **Auto Port**: Standard 5-pin DIN jack for recording or playing voices or tones.

Touchtone command string sets up all features. Settings for each line (Except phone number and caller name) can be cloned from one line to another.

- Programmable dial-up test tones (dial, busy, reorder, ringback silence)

**TLS-4 Telephone Simulator**

**Part# 332603**

### TLS-5A Productivity Features:

ALL THE FEATURES OF TLS-4 PLUS:

- Caller ID info generated in Bellcore-specified single and multiple data message formats. Information may include calling number, caller name, date, and time of call. Simulates privacy blockage, outof-area calls and transmission errors.
- U.S. (115 VAC) and International (230 VAC) power versions.

**TLS-5A Telephone Simulator**

**Part# 332605**

### TLS-5C Productivity Features:

ALL THE FEATURES OF TLS-4 and TLS-5A PLUS:

- Caller ID in Call Waiting (SCWID) • Call Forwarding • Speed Dialing
- Automatic Callback • Automatic Recall • Distintive Call Waiting
- Optional selection of stuttered dialtone type with Visual Message Waiting

**TLS-5C Telephone Simulator**

**Part# 332629**

TLS-4



TLS-5A



# LINE SHARING DEVICES

"CUT OUT YOUR DEDICATED PHONE LINES WHILE ADDING TO YOUR BOTTOM LINE."

### Experience the Benefits of Teltone Line Sharing:

- Share a single telephone line between four telecom devices. • Eliminate extra modem lines used for only brief periods. • Ensure correct call routing every time.
- Enhance employee safety by giving priority to telephone users. • Collect / transmit data from local or remote sites. • Simple installation and setup.

**...and it's affordably priced!**

## Line Sharing

Teltone's Line Sharing Switch and Polling Controller let you take advantage of the unused capacity of your phone lines by allowing up to four telecommunications devices (phone, modem, fax, etc.) to share a single line. Your inbound or outbound data collection and other online transactions will take place as with dedicated lines, but without the extra line cost.



Emergency override access to the phone line can be provided as needed for your application. The Line Sharing Switch operates alone or with the Polling Controller to give you a flexible ,cost- effective way to collect data without affecting critical telephone service.

The Lines Sharing Switch eliminates the cost of extra lines at your remote site regardless of whether you dial your call from your host or from your remote location. The Line Sharing Switch will allow you to share the outbound access of one line with two to four devices and prioritize how each device can interrupt the others to use the line.Any device that can be connected to a standard telephone line can receive or place calls through the Line Sharing Switch, including telephones, modems, point-of-sale terminals, credit / debit authorization terminals, fax machines, voice mail systems, answering machines and others. A Polling Controller is only required at your host site if you need to down load data or new software to the remote site. You get significant line cost savings and line access flexibility. When the Line Sharing Switch and the Polling Controller are connected in a dual unit architecture Polling System, they make the most cost-effective and functional outbound system of its type. In this configuration, the Polling Controller is located at the central polling location and a Line Sharing Switch is located at the remote location. These components communicate across the public switched network to set up and disconnect calls quickly and accurately.

**Line Sharing Switch** **Part# 332655**


**Polling Controller** **Part# 332663**


### System Components:

- Line Sharing Switch located at the remote location where lines are being consolidated. Versions available to support 2, 3, and 4 port applications.

# 66 BLOCKS

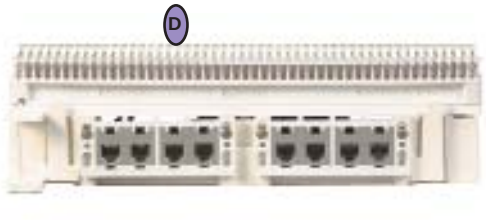


## UNWIRED BLOCKS
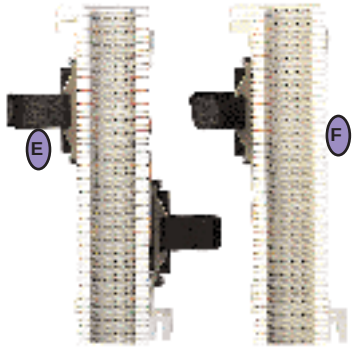
| DESCRIPTION | PART # |
|---|---|
| 66 M125 PUNCHDOWN BLOCK 25PR | 421005 |
| 66 M150 PUNCHDOWN BLOCK 50PR (B) | 421010 |
| 66 M STANDOFF BRACKET (89 D) (A) | 421020 |
| 66 M425 BLOCK AND BRACKET (C) | 421000 |
| 66 M BRACKET (89 E) FOR SMALL BLOCK | 421001 |
| 66 M BLOCK 12 PAIR SPLIT | 421003 |

## WIRED BLOCKS TO MOD JACKS

***Custom Wiring Available. Listing Below is Standard Wiring.***

| DESCRIPTION | PART # | | |
|---|---|---|---|
| WITH 16 4 COND (RJ11) | 421140 | | |
| WITH 12 4 COND (RJ11) | 421141 | | |
| WITH 8 4 COND (RJ11) | 421142 | | |
| WITH 16 6 COND (RJ12) (D) | 421145 | | |
| WITH 12 6 COND (RJ12) | 421143 | | |
| WITH 8 6 COND (RJ12) | 421146 | | |
| WITH 8 4 COND (RJ45) | 421147 | ------- | ------- |
| WITH 12 8 COND (RJ45) | 421150 | | |
| WITH 6 8 COND (RJ45) | 421151 | | |
| WITH 5 10 COND (RJ45) | 421156 | | |

## WIRED BLOCKS TO TELCO

| DESCRIPTION | PART # | | |
|---|---|---|---|
| 66 M125 W/1MALE TELCO BOTTOM ENTRY | 421110 | | |
| 66 M125 W/1MALE TELCO TOP ENTRY (F) | 421113 | | |
| 66 M125 W/1FEMALE TELCO BOTTOM ENTRY | 421111 | | |
| 66 M125 W/1FEMALE TELCO TOP ENTRY | 421112 | | |
| 66 M150 W/1MALE TELCO BOTTOM ENTRY | 421115 | | |
| 66 M150 W/1MALE TELCO TOP ENTRY | 421119 | | |
| 66 M150 W/1FEMALE TELCO BOTTOM ENTRY | 421117 | | |
| 66 M150 W/1FEMALE TELCO TOP ENTRY | 421118 | | |
| 66 M150 W/2MALE TELCO BOTTOM ENTRY (E) | 421120 | | |
| 66 M150 W/2MALE TELCO TOP ENTRY | 421128 | | |
| 66 M150 W/2FEMALE TELCO BOTTOM ENTRY | 421125 | | |
| 66 M150 W/2FEMALE TELCO TOP ENTRY | 421127 | | |
| 66 M150 W/4FEMALE TELCO BOTTOM ENTRY WIRW | 421129 | ------- | ------- |
| 66 M150 W/1MALE&1FEMALE TELCO BOTTOM ENTRY | 421130 | | |
| 66 M150 W/1MALE&1FEMALE TELCO TOP ENTRY | 421131 | | |
| 66 M150 W/1FEM TOP ENTRY&1FEM BOTTOM ENTRY | 421132 | ------- | ------- |
| 66 M150 W/1MALE BOTTOM ENTRY&1FEM TOP ENTRY | 421135 | ------- | ------- |



## Bridging Clips & Covers

| DESCRIPTION | PART# |
|---|---|
| 2 POSITION | 421050 |
| 3 POSITION | 421051 |
| 4 POSITION | 421052 |
| 1 PAIR COVER | 421062 |



## Multiple Bridging Clips - 2x2 position with Test Access

| DESCRIPTION | PART# | | |
|---|---|---|---|
| WHITE | 421059 | | |
| RED | 421053 | | |
| YELLOW | 421058 | | |
| BLUE | 421056 | | |
| GREEN | 421057 | | |
| VIOLET | 421053VL | | |
| TESTER | 311784 | ----- | ----- |



## 66 Block Clip Extender

| DESCRIPTION | PART# |
|---|---|
| 1 TWO PRONG CLIP | 421190 |
| 2 ONE PRONG CLIP | 421191 |
| 1 ONE PRONG CLIP | 421192 |
| TESTER - 66 TYPE RABBIT EARS | 421054 |




## 66 Block to Mod Adapter for testing

| DESCRIPTION | PART # | | |
|---|---|---|---|
| 2 COND (RJ11) | 421155 | | |
| 4 COND (RJ11) | 421160 | | |
| 6 COND (RJ12) | 421165 | | |
| 8 COND (RJ45) | 421169 | | |
| 50 COND (TELCO 50 MALE)* | 421180 | ------- | ------- |
| 50 COND (TELCO 50 FEMALE) | 421181 | ------- | ------- |



## 66 Block to Mod Adapter

Used for side-by-side connections.

| DESCRIPTION | PART # |
|---|---|
| 2 COND (RJ11) | 421158 |
| 4 COND (RJ11) | 421157 |
| 6 COND (RJ12) | 421159 |
| 8 COND (RJ45) | 421161 |




## Snap On Hinged Cover for 66 M1 Block

| DESCRIPTION | PART # |
|---|---|
| BLUE | 421070BL |
| GREEN | 421070GN |
| RED | 421070RE |
| YELLOW | 421070YE |
| ORANGE | 421070OR |
| WHITE | 421070IV |
| GRAY | 421070GR |



## Hook & Loop Holdowns for 25 Pair Connectors

| DESCRIPTION | PART # |
|---|---|
| HOLDOWNS-1 STRAP BLACK | 990200 |
| HOLDOWNS-2 STRAPS WHITE | 990202 |



## Designation strips

| DESCRIPTION | PART # |
|---|---|
| WHITE | 421086 |
| RED | 421087 |
| BLUE | 421088 |
| YELLOW | 421089 |
| GREEN | 421090 |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# 110 BLOCKS & ACCESSORIES

## 110 WIRING BLOCKS WITH ACCESSORIES



| DESCRIPTION | PART # |
|---|---|
| 100PR 110 BLOCK 4PR CLIPS COMPLETE W/ACCESSORIES | 421212 |
| 100PR 110 BLOCK 5PR CLIPS COMPLETE W/ACCESSORIES | 421214 |
| 300PR 110 BLOCK 4PR CLIPS COMPLETE WACCESSORIES | 421216 |
| 300PR 110 BLOCK 5PR CLIPS COMPLETE W/ACCESSORIES | 421218 |
| 50 PAIR 110 BLOCK WITH NO ACCESSORIES | 421220 |
| 100 PAIR 110 BLOCK WITH NO ACCESSORIES | 421222 |
| 300 PAIR 110 BLOCK WITH NO ACCESSORIES | 421224 |

## 110 Block- Additional Accessories



| DESCRIPTION | PART# |
|---|---|
| 3PR CONNECTING MODULE(CLIP) FOR 110 BLOCK | 421226 |
| 4PR CONNECTING MODULE(CLIP) FOR 110 BLOCK | 421228 |
| 5PR CONNECTING MODULE(CLIP) FOR 110 BLOCK | 421230 |
| LABELS FOR ABOVE 6 PER PACK | 421232 |
| LABEL HOLDER FOR ABOVE 6 PER PACK | 421234 |


## Prewired 110 Blocks



| DESCRIPTION | PART # |
|---|---|
| 100PR W/1FT LEV.5-25PR FEMALE TELCO EXTENSIONS | 421236 |
| 300PR W/1FT LEV.5-25PR FEMALE TELCO EXTENSIONS | 421238 |

ALL FOR OTHER CUSTOM CONFIGURATIONS

## Test Modules For 110 System



| DESCRIPTION | PART# |
|---|---|
| 110 TO 6 COND. (RJ11) | 400075 |
| 110 TO 8 COND. (CAT 5) | 400077 |
| 110 TO 8 COND.(RJ45) ADAPTER | 421240 |
| 110 TO 8X8 COND.(RJ45) ADAPTER SHOE | 421242 |
| 110 TO 50 PIN (TELCO) MALE ADAPTER SHOE | 421244 |

## Modular Preterminated 110 Blocks




| DESCRIPTION | PART# |
|---|---|
| 110 TO 12 PORT 2 WIRE (RJ11) STANDARD | 421246 |
| 110 TO 12 PORT 4 WIRE (RJ11) STANDARD | 421248 |
| 110 TO 12 PORT 6 WIRE (RJ12) STANDARD | 421250 |
| 110 TO 12 PORT 4 WIRE (RJ45) 10 BASE T | 421252 |
| 110 TO 12 PORT 8 WIRE (RJ45) STANDARD | 421254 |
| 110 TO 36 PORT 6 WIRE (RJ12) STANDARD | 421256 |
| 110 TO 36 PORT 8 WIRE (RJ45) STANDARD | 421258 |
| 110 TO 48 PORT 2 WIRE (RJ11) STANDARD | 421260 |
| 110 TO 48 PORT 4 WIRE (RJ11) STANDARD | 421262 |

# BIX BLOCKS ACCESSORIES



| DESCRIPTION | PART # | REF # |
|---|---|---|
| DISTRIBUTION BLOCK 25PR | 423003 | QCBIX1A |
| BRIDGING CONNECTOR 12-2PR CLIPS | 423005 | QCBIX2A |
| MULTIPLYING CONNECTOR 5- 5 PAIR | 423008 | QCBIX5A |
| KEY APPARATUS CONNECTOR | 423010 | QCBIX7A |
| DIODE CONNECTOR- 24 DIODES | 423012 | QCBIX9A |
| MODULAR CONNECTOR | 423060 | QCBIX36DA |
| 10 CONNECTOR MOUNT | 423020 | QBIX10A |
| 40 CONNECTOR MOUNT | 423021 | QMBIX10B |
| 2 CONNECTOR MOUNT | 424186 | QMBIX10C |
| PUNCH DOWN TOOL | 423026 | QTBIX16A |
| TEST PROBE | 423029 | QTBIX17A |
| DISTRIBUTION RING | 423040 | QRBIX19A |
| DESIGNATION STRIP | 423055 | QSBIX20A |
| TEST PROBE 25 PAIR | 423030 | QTBIX22A |
| TEST SHOE 25 PAIR | 423031 | QTBIX21A |
| PLASTIC GUARD | 423057 | QTBIX23A |
| MODULAR CONNECTOR | 424188 | QCBIX36A |
| BLANK RED LABEL | 423065 | P0588402 |

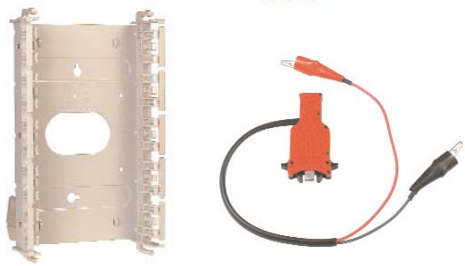

# MODULAR JACKS

## Flush Mount Wall Plates - Screw Type



### SINGLE JACK


| DESCRIPTION | PART # |
|---|---|
| 4 COND (RJ22) HANDSET TYPE | 424186 |
| 4 COND (RJ11) STANDARD | 346330 |
| 6 COND (RJ12) STANDARD | 346345 |
| 6 COND MMJ STYLE | 346331 |
| 8 COND (RJ45) STANDARD | 346332 |
| 8 COND (RJ45) KEYED | 346333 |



### DUPLEX JACK

| DESCRIPTION | PART # |
|---|---|
| 4 COND (RJ22) HANDSET TYPE | 424191 |
| 4 COND (RJ11) STANDARD | 424190 |
| 6 COND (RJ12) STANDARD | 424192 |
| 6 COND MMJ TYPE | 424194 |
| 8 COND (RJ45) STANDARD | 424196 |
| 8 COND (RJ45) KEYED | 424198 |

## Surface Mount Jacks w/Sticky Back- *66 Punch Down Type*



### SINGLE JACK

| DESCRIPTION | PART # |
|---|---|
| 4 COND (RJ11) STANDARD | 424015 |
| 6 COND (RJ12) STANDARD | 424016 |
| 8 COND (RJ45) STANDARD | 424017 |
| 8 COND (RJ45) KEYED | 424134 |
| 8 COND (RJ45) SHORTING 31X | 424136 |

### DUPLEX JACK

| DESCRIPTION | PART # |
|---|---|
| 4 COND (RJ11) STANDARD | 424138 |
| 6 COND (RJ12) STANDARD | 424140 |
| 8 COND (RJ45) STANDARD | 424142 |
| 8 COND (RJ45) KEYED | 424144 |
| 8 COND (RJ45) SHORTING31X | 424146 |

## Surface Mount Jacks - *110 Style*



### SINGLE JACK

| DESCRIPTION | PART # |
|---|---|
| 6 COND (RJ12) 103A TYPE | 424002 |
| 8 COND (RJ45) 103A TYPE | 424003 |
| 8 COND (RJ45) 103D KEYED TYPE | 424148 |



### DUPLEX JACK

| DESCRIPTION | PART # |
|---|---|
| 6 COND (RJ12) 104A TYPE L1&L2 | 424004 |
| 8 COND (RJ45) 104A TYPE L1&L2 | 424005 |
| 6 COND (RJ12) 104B TYPE VOICE & DATA | 424008 |
| 8 COND (RJ45) 104B TYPE VOICE & DATA | 424009 |
| 1-6 COND (RJ12) & 1-8 COND (RJ45) 108B TYPE VOICE&DATA | 424006 |

## Face Plates For All Receptical Jacks



| DESCRIPTION | PART # |
|---|---|
| SINGLE PLATE PLASTIC - 105 TYPE | 424240 |
| SINGLE PLATE METAL - 105 TYPE | 424242 |
| DUPLEX PLATE PLASTIC - 106 TYPE | 334801 |
| DUPLEX PLATE STAIN. STEEL 106 TYPE | 424246 |
| QUAD PLATE PLASTIC - 106 TYPE | 424248 |

Flush Mount Jack 4 Cond



Surface Mount Jack 6 Cond



## Waterproof Outdoor Jacks

| DESCRIPTION | PART # |
|---|---|
| FLUSH MOUNT JACK 4 COND(RJ11) | 424250 |
| FLUSH MOUNT JACK 6 COND(RJ12) | 424252 |
| SURFACE MOUNT JACK 4 COND(RJ11) | 424254 |
| SURFACE MOUNT JACK 6 COND(RJ12) | 424256 |

## Flush Mount "Wallphone" Plate - with Two





Plate comes with two nipples for hooking on to phone.




| DESCRIPTION | PART # |
|---|---|
| 4 COND (RJ22) HANDSET TYPE | 424122 |
| 4 COND (RJ11) PLASTIC STANDARD | 346335 |
| 4 COND (RJ11) METAL STANDARD | 346336 |
| 4 COND (RJ11) PLASTIC W/2 SIDEJACKS | 424200 |
| 4 COND (RJ11) METAL W/1BOTTOMJACK | 424202 |
| 6 COND (RJ12) PLASTIC STANDARD | 346338 |
| 6 COND (RJ12) METAL STANDARD | 346337 |
| 6 COND (RJ12) METAL STANDARD | 346342 |
| 6 COND (RJ12) STNLS STEEL W/KEYSTONE | 346350 |

## Surface Mount Jacks w/Sticky Back - *Screw Type 42A

Single Jack 8 cond (RJ45) Standard





### SINGLE JACK

| DESCRIPTION | PART # |
|---|---|
| 4 COND (RJ22) HANDSET TYPE | 424122 |
| 4 COND (RJ11) STANDARD | 424040 |
| 6 COND (RJ12) STANDARD | 424041 |
| 6 COND MMJ STYLE | 424124 |
| 8 COND (RJ45) STANDARD | 424042 |
| 8 COND (RJ45) KEYED | 424126 |
| 8 COND (RJ45) SHORTING 31X | 424128 |
| 10 COND (RJ69) STANDARD | 424043 |

### DUPLEX JACK

| DESCRIPTION | PART # |
|---|---|
| 4 COND (RJ22) HANDSET TYPE | 424130 |
| 4 COND (RJ11) STANDARD | 424050 |
| 6 COND (RJ12) STANDARD | 424051 |
| 8 COND (RJ45) STANDARD | 424052 |
| 8 COND (RJ45) KEYED | 424132 |

OLD FASHIONED 4 PRONG SURFACE JACK.....424129

## Recepticle Jacks - Screw Type



### SINGLE JACK

| DESCRIPTION | PART # |
|---|---|
| 4 COND (RJ22) HANDSET TYPE | 424204 |
| 4 COND (RJ11) STANDARD | 424206 |
| 6 COND (RJ12) STANDARD | 424208 |

## 110 Type



### SINGLE JACK

| DESCRIPTION | PART # |
|---|---|
| 8 COND (RJ45) 102A TYPE | 424220 |
| 8 COND (RJ45) KEYED 102B TYPE | 424222 |

### SINGLE JACK SIZE JACKS



| DESCRIPTION | PART # |
|---|---|
| 4 COND (RJ11) 105 TYPE | 424224 |
| 6 COND (RJ12) 105 TYPE | 424226 |
| 8 COND (RJ45) 105 AF TYPE | 424228 |
| 8 COND (RJ45) KEYED DATA 105 BF | 424230 |

### DUPLEX JACK



| DESCRIPTION | PART # |
|---|---|
| 8 COND (RJ45) 102A TYPE | 424220 |
| 6 COND (RJ12) STANDARD L1 & L2 | 424232 |
| 8 COND (RJ45) STANDARD L1 & L2 | 424234 |
| 8 COND (RJ45) STANDARD 106 BFD TYPE VOICE & DATA | 424236 |
| 1-6 COND (RJ12) & 1-8 COND (RJ45) 107BFD TYPE VOICE & DATA | 424238 |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# HARMONICAS




| DESCRIPTION | PART # |
|---|---|
| TELCO (50PIN) MALE TO 12-4 COND (RJ11) JACKS | 424150 |
| TELCO (50PIN) MALE TO 8-6 COND (RJ12) JACKS | 424152 |
| TELCO (50PIN) MALE TO 8-6 COND MMJ JACKS | 424154 |
| TELCO (50PIN) MALE TO 6-8 COND (RJ45) JACKS | 424156 |
| TELCO (50PIN) MALE TO 5-10 COND (RJ69) JACKS | 424158 |
| TELCO (50PIN) FEMALE TO 12-4 COND (RJ11) JACKS | 424160 |
| TELCO (50PIN) FEMALE TO 8-6 COND (RJ12) JACKS | 424162 |
| TELCO (50PIN) FEMALE TO 8-6 COND MMJ JACKS | 424164 |
| TELCO (50PIN) FEMALE TO 6-8 COND (RJ45) JACKS | 424166 |
| TELCO (50PIN) TO 5-10 COND (RJ69) JACKS | 424168 |
| TELCO (10BASE-T) FEMALE TO 12-4 COND RJ45 PINS 1,2,3,6 | 441099 |
| TELCO (10BASE-T) MALE TO 12-4 COND RJ45 PINS 1,2,3,6 | 441100 |

# BREAKOUT BOXES


| DESCRIPTION | PART # |
|---|---|
| 25PORT 2COND(RJ11) TO 2-TELCO BRIDGED(1M&1F) | 441110 |
| 24PORT 4COND(RJ11) TO 2-TELCO FEMALE | 424170 |
| 16PORT 6COND(RJ12) TO 2-TELCO FEMALE | 424172 |
| 12PORT 2COND(RJ11) TO 1-TELCO FEMALE | 424174 |
| 12PORT 4COND(RJ11) TO 1-TELCO FEMALE | 441108 |
| 12PORT 4COND(RJ11) TO 2-TELCO BRIDGED(1M&1F) | 424176 |
| 12PORT 8COND(RJ45) TO 2-TELCO FEMALE | 424178 |
| 8PORT 6COND(RJ12) TO 1-TELCO FEMALE | 441106 |
| 8PORT 6COND(RJ12) TO 2-TELCO BRIDGED(1M&1F) | 424180 |
| 6PORT 8COND(RJ45) TO 2-TELCO BRIDGED(1M&1F) | 424182 |
| 5PORT 10COND(RJ69) TO 1-TELCO FEMALE | 424184 |

# MODULAR ADAPTERS COUPLERS & SPLITTERS





## Modular Inline Coupler

| DESCRIPTION | PART # |
|---|---|
| 4 COND (RJ11) HANDSET TYPE | 414060E |
| 4 COND (RJ11) STANDARD | 414060 |
| 6 COND (RJ12) STANDARD (C) | 414060A |
| 6 COND MMJ TYPE (A) | 414060B |
| 8 COND (RJ45) STANDARD (B) | 414060C |
| 10 COND (RJ69) STANDARD | 414060D |
| RJ11 TYPE HAND PLUG - REVOLVING | 414080 |

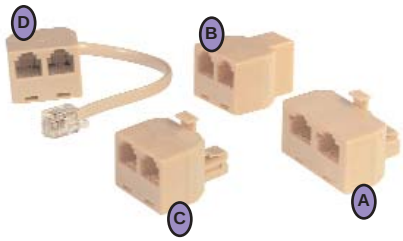


## Modular "T" Type Adapters - 2 Way Splitter

| DESCRIPTION | PART # |
|---|---|
| M-F-F 4 COND (RJ11) | 414066 |
| M-F-F 6 COND (RJ12) (C) | 414068 |
| M-F-F 8 COND (RJ45) (A) | 414078 |
| MALE W/ 1FT EXT.-F-F 4 COND (RJ11) (D) | 414066C1 |
| MALE W/25FT EXT.-F-F 4 COND (RJ11) | 414066C25 |
| F- F- F 4 COND (RJ11) | 414065 |
| F- F- F 6 COND (RJ12) (B) | 414067 |
| F- F- F 8 COND (RJ45) | 414077 |

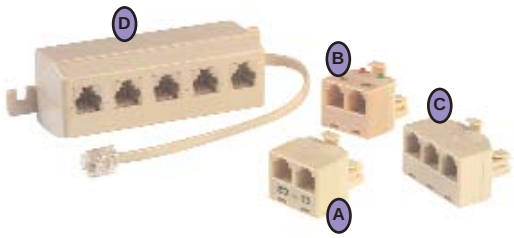


## Special "T" Type Adapters

| DESCRIPTION | PART # |
|---|---|
| DUPLEX 4 COND (RJ11) "T" - M-F-F LINE 1 & LINE 2 SPLITTER (A) | 424258 |
| DUPLEX PRIORITY HOT LINE ADAPTER M-F-F STOPS ANSWERING MACHINE (B) | 424260 |
| TRIPLEX ADAPTER 6 COND (RJ12) M-F-F-F LINE1, LINE 2 & LINE 3 SPLITTER | 424262 |
| TRIPLEX SPLITTER 4 COND (RJ11) M-F-F-F EVENLY SPLITS TO 3 JACKS | 424264 |
| TRIPLEX SPLITTER 6 COND (RJ12) M-F-F-F EVENLY SPLITS TO 3 JACKS (C) | 424266 |
| TRIPLEX ADAPTER 4 COND (RJ11) M-F-F-F LINE 1, LINE 2 & L1&L2 SPLITTER | 424268 |
| 5 TO 1 SPLITTER 4 COND (RJ11) M1FT.-F-F-F-F-F (D) | 424270 |
| TELCO (50 PIN FEMALE) TO 4 COND (RJ11) | 424272 |
| TELCO (50 PIN FEMALE) TO 6 COND (RJ12) | 424274 |
| TELCO (50 PIN FEMALE) TO 6 COND MMJ | 424276 |
| TELCO (50 PIN FEMALE) TO 8 COND (RJ45) | 424278 |
| TELCO (50 PIN MALE) TO 4 COND (RJ11) | 424280 |
| TELCO (50 PIN MALE) TO 6 COND (RJ12) | 424282 |
| TELCO (50 PIN MALE) TO 6 COND MMJ | 424284 |
| TELCO (50 PIN MALE) TO 8 COND (RJ45) | 424286 |

# Telecom Products

## Telephone Accessories



### Fax Switches

A fax switch will answer the call & decipher whether its a voice call or fax message and send it to your fax or phone automatically. A 3-Port or 4-Port fax switch, for single or multi-lines, will connect fax, phone, & answering machine.

| Description | Part # | 1- 4 | 5- 14 |
|---|---|---|---|
| 3 Port single/multi-lines* | 461300 | | |
| 3 Port with Security Codes | 461305 | | |
| 4 Port | 461307 | | |

### Music On Hold Adapter

Compatible with phones that have a hold button.

| Description | Part # |
|---|---|
| Music-On-Hold Adapter | 461311 |

### Telephone Recording Device

Automatically turns tape recorder on & off when handset is lifted & hung up.

| Description | Part # |
|---|---|
| Recording Device | 461313 |



| Description | Part # |
|---|---|
| 95 Display Battery Powered | 403701 |
| 95 Display AC Adapter Included | 536301 |

| Description | Part # |
|---|---|
| 30 Minute Prepaid | 541560 |
| 90 Minute Prepaid | 541562 |




### Privacy Adapter

Automatically lets you know if conversation is being listened to on another extension. LED indicator & Override switch

| Description | Part # |
|---|---|
| Adapter | 461315 |

### "HOT" Number Dialer




As soon as the handset that is attached to the dialer goes off the hook, it will automatically dial a pre-programmed phone number.

| Description | Part # |
|---|---|
| Number Dialer | 461317 |

### Shoulder





| Length | Part# |
|---|---|
| Half Moon Shoulder Rest | 464117-? |
| Large | 464115-? |
| Small | 464116-? |

**?= 0=Black, 1=Brown, 3=Beige, 4=Ash, 5=White, 6=Grey, 7=Red, 9=Ivory.**

## Coil Cords

### Data Coil Cords

| Description | Part # |
|---|---|
| 6 Cond. 7ft. | 47500-?-! |
| 6 Cond. 14ft. | 47510-?-! |
| 6 Cond. 25ft. | 47520-?-! |
| 8 Cond. 7ft. | 47600-?-! |
| 8 Cond 14ft. | 47610-?-! |
| 8 Cond 25ft. | 47620-?-! |

**?=Color: 0=Black, 1=Brown, 3=Biege, 4=Ash, 5=White, 6=Gray, 7=Red, 9=Ivory**

**!=Wiring Type: 1=Data(Straight Thru), 2=Telco(Reversed) 3=Mod to Spade+ 4=Spade to Spade+**



?= 0=Black, 1=Brown, 2=Mauve, 3=Beige, 4=Ash, 5=White, 6=Grey, 7=Red, 8=Blue, 9=Ivory.

### Handset Coil Cords Mod-Mod (4 Cond.)

Modular handset cord available in different lengths and colors. Certain colors not available in certain lengths

| Length | Part# |
|---|---|
| 7ft. | 47100-? |
| 12ft. | 47110-? |
| 25ft. | 47120-? |
| 50ft. | 47130-? |



?= 0=Black, 1=Brown, 2=Mauve, 3=Beige, 4=Ash, 5=White, 6=Grey, 7=Red, 8=Blue, 9=Ivory.

### Handset Coil Cord Accessories Mod-Spade (4 Cond.)

| Length | Part# |
|---|---|
| 7' | 47200-? |
| 12' | 47210-? |
| 25' | 47220-? |

### Handset Coil Cords - Spade-Spade (4 Cond.)

| Length | Part# |
|---|---|
| 7' Flat | 47300-? |
| 12' Flat | 47310-? |
| 25' Flat | 47320-? |
| 7' Round | 47400-? |
| 12' Round | 47410-? |

?= 0=Black, 1=Brown, 2=Mauve, 3=Beige, 4=Ash, 5=White, 6=Grey, 7=Red, 8=Blue, 9=Ivory.

### Handset Coil Cord Accessories - Mod-Mod (4 Cond.)





| Description | Part # | | | |
|---|---|---|---|---|
| Cord Untwister | 473204 | | | |
| Cord Retractor - 8ft | 473205 | ------ | ------ | ------ |
| Cord Retractor - 16ft | 473206 | ------ | ------ | ------ |

### Silver Satin Cords



| Description | Part # |
|---|---|
| 4 cond (RJ11) - 4 cond (RJ11) 7ft. | Q14011- 007- 1- ! |
| 4 cond (RJ11) - 4 cond (RJ11) 14ft. | Q14011- 014- 1- ! |
| 4 cond (RJ11) - 4 cond (RJ11) 25ft. | Q14011- 025- 1- ! |
| Custom Configurations - 4 cond. | Q14011✶✶✶-?-! |
| 6 cond (RJ12) - 6 cond (RJ12) 7ft. | Q14211- 007- 1- ! |
| 6 cond (RJ12) - 6 cond (RJ12) 14ft. | Q14211- 014- 1- ! |
| 6 cond (RJ12) - 6 cond (RJ12) 25ft. | Q14211- 025- 1- ! |
| Custom Configurations - 6 cond. | Q14211✶✶✶-?-! |
| 8 cond (RJ45) - 8 cond (RJ45) 7ft. | Q14411- 007- 1- ! |
| 8 cond (RJ45) - 8 cond (RJ45) 14ft. | Q14411- 014- 1- ! |
| 8 cond (RJ45) - 8 cond (RJ45) 25ft. | Q14411- 025- 1- ! |
| Custom Configurations - 8 cond. | Q14411✶✶✶-?-! |
| cond(RJ69) - cond(RJ69) 7ft. | Q14611- 007- 1- ! |
| 10 cond(RJ69) - 10 cond(RJ69) 14ft. | Q14611- 014- 1- ! |
| 10 cond(RJ 69) - 10 cond(RJ69) 25ft. | Q14611- 025- 1- ! |
| Custom Configurations - 10 cond | Q14611✶✶✶-?-! |

**✶✶✶= Amount in Feet ?= Color : 1=Grey, 2=Black**

**!= Wiring Type: 1=Data (Straight Thru) 2=Telco (Reversed) 3=Mod to Spade+ 4=Spade to Spade+**

**Shielded Cables Available. Call Now For Immediate Delivery!**



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# TELECOM PRODUCTS

**3ComImpact IQ**
External ISDN Modem

## 3ComImpact IQ External ISDN Modem

- Eliminates bottlenecks typical of other digital modems by providing highest available throughput-230,400 bits per second
- Transfers up to 4 times more information for the price using standard Stacker® LZS compression
- Delivers "power" user performance by running 128,000 bps data sessions
- Point-and-click interface with on-line help for Windows 95, Windows NT, and Windows 3.x
- No additional equipment required with built-in NT-1
- Compatible with any web browser, on-line service, or other communications software that supports AT commands
- No special set-up with automatic QuickSelect™ protocol selection (PPP, V.120) and Async-Sync PPP™
- Automatic on-line product registration
- Automatic adjustment of data session speed to place or receive a voice or fax call
- Easy connection of multiple analog devices (telephone/fax/modem) with Ringer Equivalency Number (REN) of 3 per port
- Simultaneous use of 2 analog devices




Back



| DESCRIPTION | PART# | REF# |
|---|---|---|
| 3COMIMPACT IQ EXTERNAL ISDN MODEM | 337758 | 882 |

## ISDN Router




The Prestige is the first to integrate a Router, Bridge, ISDN terminal adapter and V.34 modem into a single device. In a modem-sized box, the Prestige offers inexpensive yet complete telecommunications and internetworking solutions for your home or branch office. It's ideal for everything from cruising the Internet to receiving calls from remote users to making LAN-to-LAN connections to remote nodes.
Some distinguishing features include support for a full range of networking protocols such as TCP/IP, Novell IPX, Appletalk routing, and Transparent Bridging. The complete solution also includes remote user support, and Internet Single User Account, POTS line support, extensive Network Management, and solid security features.

| DESCRIPTION | PART# |
|---|---|

## ISDN Modem




| DESCRIPTION | PART# |
|---|---|

## CSU/ DSU



| DESCRIPTION | PART # |
|---|---|
| EAZY MT100A-449-R2 T1 CSU/DSU | 313589 |

**What is ISDN?**
ISDN is essentially three high-speed digital phone lines rolled into one standard phone line. It allows you to transmit voice, data, and even images at the same time through a single existing line-all at extremely high speeds and at relatively low costs.

**How Does It Work?**
The basic ISDN line contains three separate channels. Two of these-the B channels-carry user transmissions from a telephone, computer, fax or almost any other device. The third or D channel carries call setup information for the network, but can also transmit user data. That means you can conduct three separate transactions-say a voice call, a computer transmission and a credit card authorization-at the same time through the same ISDN line.

The M-106E Remote Access Unit enables off-premises users to dial in to a PBX, key telephone, or CO Centrex system in order to access WATS, FX, and tie lines, or other specialized services. The unit is microprocessor controlled, and provides a number of optional features which you can configure through software using a DTMF telephone.

## Remote Access Unit




Back




**Features:**

- Dial Back
- Programmable Control Codes
- Call Duration Timing
- Reseize
- Idle Detect
- Busy/Reorder Disconnect
- Rings Before Answer
- Milliwatt Detect
- Voice Verification of Program Options
- Voice Switched Amplifier
- Passwords
- Answer Tone
- Switchhook Flash
- Manual Disconnect
- Dial Tone Detect
- Detect Standard Ring Only
- Prevent
- Non-volatile Memory
- Remote Programming

| DESCRIPTION | PART# |
|---|---|
| TELTONE M-106E REMOTE ACCESS UNIT | 332633 |

INTERNET
http://www.trynci.com
e-mail: ncisales@trynci.com

CONTACT
National Communications Inc.
Email ncisales@trynci.com
Hours Mon–Fri 9-4 EST

PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

# Telecom Products

## Paradyne T1/F1



| Description | Part # |
|---|---|
| Paradyne 7110 SNMP DSU/CSU | 544601 |

## Punch Block



| Description | Part# | Ref# |
|---|---|---|
| Siemon Punch Block | 311753 | S66B850-3-849 |

## Datacom - TiNA



**Digital Answerer**
- Answering machine provides 25 minutes of digital recording
- Date and time stamp
- Messages are fully accessible by remote access
- 6 different outgoing messages can be programmed to play at a specific date & time
- Visual & audio message alert

**Voice Mailboxes**
- Provides 9 individual mailboxes and 1 group mailbox
- Ideal for the home office or small office

**Caller-ID**
- 220 name & number storage capacity
- 3-line display identifies caller's name and number and date/time of call
- Automatic dial back

**Call Blocking**
- Block undesirable incoming calls by specific number or list of numbers
- Restrict access to outgoing long distance or specific numbers

**Voice Message Pad**
- Records message reminders to be played back at a specific date & time

**Call Management Lists**
- Program VIP calls, Quiet calls, Incoming and Outgoing blocked calls
- Over 2500 number storage capacity

**Call Forwarding**
- Forward calls to another number, pager or a cellular phone
- Calls are rerouted to the voice mail box if not answered
- Specific numbers or all numbers can be forwarded

**Other Features**
- Permanent memory requires no battery backup
- Programmable in English & French

| Description | Part# |
|---|---|
| TiNA by Datacom - A Call Management System | 410827 |

## Music-on-Hold Digital Announcer




**Features:**
- Automatic downloading, with prewview function, from a standard cassette tape
- Automatic reload after power outage

* High reliability - no tape wear or maintenance problems
- Choice of 600-ohm or 1-watt (8-ohm) output
- Built-in monitor speaker with on/off switch
- Volume control (for monitor speaker and outputs)
- One time play capability (external contact trigger)
- Status (LED) indicators

| Description | Part# |
|---|---|
| Bogen ProHold Music-on-Hold Digital Announcer | 402803 |

# Telecom Products



| Description | Part # |
|---|---|
| Backboard Blue M183B-1 | 311759-BLUE |



| Description | Part # |
|---|---|
| Backboard Blue M183A-1 | 311761-BLUE |



| Description | Part # |
|---|---|
| Distspool M187-B-1 | 311763-WHITE |

## Data Mate



- Communicates messages silently and unobtrusively
- Single touch message transmission
- Executive units feature a built-in clock, calendar, and calculator
- Executive units can output hard copies on printer accessories
- Technical Specifications:
  - Dimensions - L 217mm, W 182mm, H 65mm
  - Electrical - Input 115/120 220/240 VAC 50/60Hz
  - Output - 12V at 3.6VA AC

| Description | Part # |
|---|---|
| Data Mate Executive Message Unit | 544201 |

## AT&T Adapter



| Description | Part # |
|---|---|
| AT&T 104152558 adapter-400B2 | 400059 |

## Punch Block



| Description | Part # |
|---|---|
| Siemon S66B3-50 Punch Block | 311795 |

## Adapters




| Description | Part # | Ref# |
|---|---|---|
| Siemon Green Adapter | 311792 | DT-RJ48X-7 |

*TECHNOLOGY DESIGNED TO ENHANCE THE QUALITY OF LIFE.*

This is the concept of "Human Electronics", the guiding principle of the Panasonic company. Creating technology to communicate, educate and entertain, they continually strive to connect pure science to the real needs and desires of consumers all over the world.

Panasonic
just slightly ahead of our time.

## Panasonic Single Line Telephones

Single Line

| Description | Part # | Ref # |
|---|---|---|
| 28# Memory, LNR, Feature Phone | 451105 | KX- T2310 |
| 28# Memory, Speaker Phone, LNR | 451106 | KX- T2315 |
| 28# Memory,Pause & Timed Flash | 451107 | KX- T2335 |
| 28# Mem,Auto Busy, Redial Spkph | 451110 | KX- T2355 |
| 28# LCD Display Spkph | 490111 | KX-2365 |
| 30# Caller I.D.M. LCD 26# Speed Dial | 330444 | KX- T2380 |
| Spkph w/ Intercom | 330446 | KX- T3180 |



## Panasonic Multi-Line Telephones

Multi Line

| Description | Part # | Ref # |
|---|---|---|
| 28# Mem,Conf,Elect, Hold | 451114 | KX- T3120 |
| 24# Mem, Elect, Vol, Auto Redial | 990106 | KX- T3165 |
| 24# Mem, LCD, Cof Spkph | 990108 | KX- T3175 |
| Intercom Individual Page | 990110 | KX- T3280 |
| 3 Line 24# Mem, LCD Spkph | 990112 | KX- T3185 |
| 4 Line 24# Mem, No-KSU, Auto Dial | 330448 | KX- TS400 |



## Panasonic Cordless Telephones

Cordless

| Description | Part # | Ref # |
|---|---|---|
| 25 Channel 2-Way Paging w/Intercom | 330443 | KX- TC180 |
| 25 Channel Handset Locator | 330450 | KX- TC100 |
| 2 Line Wait 3 way Conference | 330452 | KX- TC280 |
| 30 Channel 900 Mhz Phone | 330454 | KX- TC900 |
| 900 Mhz w/Handsfree Headset | 330456 | KX- TC905W |
| 2 Line Unit 900 Mhz 3 Way Conference | 330458 | KX- TC930 |
| 900 Mhz 7 Day Battery Standby | 330460 | KX- T952OB |
| 900 Mhz All Digital Ans. system | 330462 | KX- T955OB |
| Caller ID Name+# 30# Caller ID Mem | 330464 | KX- T4108 |
| 10 Channel w/Answer Machine | 330466 | KX- T4310 |
| 10 Channel Base Spkph w/Answer Machine | 330468 | KX- T4410 |
| Ultra Quick Charge w/Answer Machine | 330470 | KX- T4360 |
| LCD on Cordless Handset w/Answer Machine | 330472 | KX- T4400 |
| Dual Stance Cordless, All Digital w/Answer Machine | 330474 | KX- T4365 |
| Sound Charger Plus w/Digital 23 Min | 330476 | KX- T4550 |
| Reversible Cordless w/Digital 30 Min w/Ans. Mach. | 330478 | KX- T4600 |







## Panasonic Telephone Answer Machine

Answering Machine

| Description | Part # | Ref # |
|---|---|---|
| Dual Standard Cassette | 990132 | KX- T1451 |
| Dual MicroCassette 2 Line Answ. Mach | 990144 | KX- T5300 |
| All Digital | 330441 | KX- T8100 |
| 20 Min All Digital Combo Answ. Mach | 330480 | KX- T2850 |
| 30 Min All Digital Combo Answ. Mach | 330482 | KX- T2880 |
| Dual MicroCassette Combo Answ. Mach. | 990154 | KX- T2720 |
| 2 Line Combo-Dual MicroCassette | 451428 | KX- T2740 |
| All Digital TAD | 330484 | KX- TM80 |



TELEPHONES

# TELEPHONES

## HEADSETS TOPS



### MIRAGE

- MINIATURE ON THE EAR RECEIVER
- ULTRA LIGHTWEIGHT
- QUICK DISCONNECT
- RECEIVER VOLUME CONTROL

**FOR NORMAL ENVIRONMENTS**
Part#330340 Ref# H41

**FOR USE IN NOISY AREAS**
Part#330323 Ref# H41N



### STARSET II

- CLIP ON IN-EAR DESIGN
- LIGHTWEIGHT CAPSULE
- QUICK DISCONNECT
- RECEIVER VOLUME CONTROL

**FOR NORMAL ENVIRONMENTS**
Part#330344 Ref# H31

**FOR USE IN NOISY AREAS**
Part#330345 Ref# H31N



### SUPRA

- ADJUSTABLE HEADBAND
- QUICK DISCONNECT
- RECEIVER VOLUME CONTROL

**FOR NORMAL ENVIRONMENTS**
Part#330341 Ref# H51

**FOR USE IN NOISY AREAS**
Part#330309 Ref# H51N



### SUPRA BINAURAL

- BINAURAL DESIGN FOR NOISY AREAS
- QUICK DISCONNECT
- HEADBAND STYLE

**FOR NORMAL ENVIRONMENTS**
Part#330346 Ref# H61

**FOR USE IN NOISY AREAS**
Part#330313 Ref# H61N



### TRISTAR

- INNOVATIVE 3-POINT DESIGN FOR EXTRA COMFORT
- 4 USER SELECTABLE EARBUDS
- EXCEPTIONALLY LIGHTWEIGHT

**FOR NORMAL ENVIRONMENTS**
Part#330342 Ref# H81

**FOR USE IN NOISY AREAS**
Part#330343 Ref# H81N

### ENCORE

• SES SOUND ENHANCEMENT TONE CONTROL •
• EXTREMELY LIGHTWEIGHT •

**FOR NORMAL ENVIRONMENTS (BINAURAL)**
Part#330347 Ref# H101

**FOR USE IN NOISY AREAS (BINAURAL)**
Part#330348 Ref# H101N



**FOR NORMAL ENVIRONMENTS (MONAURAL)**
Part#330349 Ref# H91

**FOR USE IN NOISY AREAS (MONAURAL)**
Part#330350 Ref# H91N



## HEADSETS BOTTOMS



### UNIVERSAL MODULAR ADAPTER

Specify this adapter when using a NCI headset with most ordinary phones (except dial-in-handset).
With volume control dial, headset/handset switch and mute.

**STANDARD**
Part#330317 Ref# M10

**WITH SLEEP FEATURE OFF**
Part#330351 Ref# M10S



### PLUG PRONG ADAPTER

Use this adapter with operator consoles, PBX and most ACD's. With volume control dial.

**STANDARD**
Part#330352
Ref# P10

**HIGH-GAIN**
Part#330353
Ref# P10H

## HEADSETS ACCESSORIES

| DESCRIPTION | PART # | REF # |
|---|---|---|
| FOAM EAR CUSHIONS (BLACK) SET OF 2 | 330305 | 15729-05 |
| LEATHERETTE EAR CUSHIONS SET OF 2 | 330353 | 19025-01 |
| VERSATIP EARTIP (ONE SIZE FITE ALL) | 330354 | 25640-01 |
| TIP KITS (SIZE 1-4) | 330355 | 09288-SIZE |
| VOICE TUBES (MOST MODELS) | 330356 | 17593-01 |
| VOICE TUBES (TRISTAR AND ENCORE) | 330357 | 29960-01 |
| SHORT WIRE FROM MICROPHONE TO PHONE | 330358 | 26718-01 |
| QD LOCK | 330359 | 26304-01 |
| BACKGROUND NOISE SUPPRESSOR | 330301 | 10757 |
| CLOTHING CLIP | 330330 | 06439-20 |
| EYEGLASS CLIP | 330361 | 07169-20 |
| AC/DC CONVERTER | 330329 | 26503-01 |
| MODULAR TO PLUG PRONG ADAPTOR | 330362 | 18709-01 |
| MUTE SWITCH (NEW MODELS) | 330307 | 27708-01 |
| MUTE SWITCH (OLD MODELS) | 330363 | 27717-01 |
| TRAINING Y-CONNECTOR | 330364 | 27019-01 |
| 10" EXTENSION CORD | 330365 | 26144-01 |
| FOAM WINDSCREEN | 330366 | 26316-01 |
| MODULAR TO QUICK DISCONNECT CABLE | 330315 | 26716-01 |
| JACKETS | 330368 | JSB-200-1 |
| WINDSCREEN REPLACEMENT | 330370 | 24316-01 |

## HEADSET-ECONOMICAL

**FOR SMALL BUSINESSES**



| DESCRIPTION | PART # | REF # |
|---|---|---|
| HANDS FREE HEADSET W/SINGLE LINE TELEPHONE, HAS DIAL PAD FOR MAKING CALLS, TONE PULSE SWITCHABLE, MUTE BUTTON, USE ON LEFT OR RIGHT EAR WITH VOLUME CONTROL. | 990196 | SP- 04 |
| HANDS FREE HEADSET FOR USE ON CARBON OR ELECTRONIC PHONES. HAS VOLUME CONTROL, MUTE BUTTON. FULLY MODULAR. | 990198 | SP- 05 |
| HEADSET ECONOMICAL | 330311 | SP- 06 |
| SPIRIT HEADSET | 330321 | SP- 02 |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

## AT&T TELEPHONES



| DESCRIPTION | PART # | REF # |
|---|---|---|
| 2 LINE SPEAKER PHONE | 451310 | 822 |
| 1 LINE SPEAKER PHONE | 451311 | 825 |

## STANDARD TELEPHONES

### RUGGED TELEPHONES



Fully modular with push buttons and 7ft. coil cord. Excellent for home, office, or 1A 2 Equipment.

| DESCRIPTION | LINES | PART # | 1- 4 | 5- 14 | 15- |
|---|---|---|---|---|---|
| WALL PRINCES TYPE 2354 | 1 | 451087-? | | | |
| DESKTOP STANDARD PAIR 2500 | 1 | 451095-? | | | |
| WALL STANDARD PHONE 2554 | 1 | 451060-? | | | |
| STANDARD PHONE 2564 | 5 | 451050-? | | | |
| STANDARD PHONE 2830 | 10 | 451010-? | | | |
| STANDARD PHONE 2831 | 20 | 451020-? | | | |
| STANDARD PHONE 2861 | 30 | 451030-? | | | |

**?= 0=Black, 1=Brown, 3=Beige, 4=Ash, 5=White, 6=Gray, 7=Red, 9=Ivory**

**"A" Lead Available - Please Consult Salesperson**

## STANDARD TELEPHONES ACCESSORIES

### CONFIDENCORS



Noise cancelling microphone. Used in 2500 type handsets with removable carbon mic. Used by all major financial markets, banks, and noisy areas.

| DESCRIPTION | PART# |
|---|---|
| CONFIDENCER - DROP IN | 461005-? |
| CONFIDENCER - SCREW IN | 461006-? |

**?= 0=BLACK, 1=BROWN, 3=BEIGE, 4=ASH, 5=WHITE, 7=RED, 9=IVORY**

### G STYLE HANDSETS



For common 2500 style phones, modular, no cord. Also available in non-modular, hard-wired configurations.

| DESCRIPTION | STANDARD | PUSH TO MUTE | PUSH TO TALK | SPECIAL AMPLIFY TRANSMIT | AMPLIFY RECEIVE | PUSH TO MUTE W/ AMP REC | PUSH TO TALK W/ AMP REC. & TALK |
|---|---|---|---|---|---|---|---|
| MODULAR NO CORD CARBON MIC PART# | 451505-? | 451510-? | 451517-? | 451525-? | 451520-? | 451530-? | 451532-? |
| ELECTRET-CARBON COMPATIBLE MIC PART# | 451507-? | 451508-? | 451515-? | 451518-? | 451519-? | 451522-? | 451523-? |

**?= 0=BLACK, 1=BROWN, 3=BEIGE, 4=ASH, 5=WHITE, 7=RED, 9=IVORY**

### HANDSET HOOK



| DESCRIPTION | PART# |
|---|---|
| HANDSET HOOK-CHROME (NO HOLES, HAS BACKPLATE) | 451599-Chrome |
| HANDSET HOOK-METAL | 451599 |

## K STYLE HANDSETS



**Call our Sales Department with Make and Model #**
**For Exact Replacement Handsets**
**(AT&T, Panasonic, ITT, etc.)**

## UNIVERSAL AMPLIFIED K STYLE HANDSET



NOW AVAILABLE!

| DESCRIPTION | PART# |
|---|---|
| K STYLE HANDSET | 451527-? |

**?= 0=Black, 4=Ash, 5=White, 6=Pearl Grey**

## UNIVERSAL HANDSET AMPLIFIER



Provides amplification and works with almost any telephone

| DESCRIPTION | PART# |
|---|---|
| POWERED HANDSET AMPLIFIER (W/AC ADAPTER) | 461225-? |
| POWERED HANDSET AMPLIFER (BATTERY OPERATED) | 461224-? |

**?= 0=Black, 4=Ash, 9=Ivory**

# TELEPHONES

## PAY TELEPHONES



### LOCAL ONLY
### QUARTER ONLY

- ATTRACTIVE GRAY COLOR
- FREE OR CHARGE FOR NUMBERS, i.e. 911, 800, 0, 411, 555-1212, etc.
- RESTRICT: 976, 900, 950, OVERSEAS AND 10 DIGITS
- CHOOSE IN AND OUT TIME SETTINGS: 1 - 16 MINUTES
- OWNER'S KEY WILL ALLOW USE WITHOUT A COIN
- TARGET'S INVENTORY IS PROGRAMMED TO ALLOW 10 DIGIT LOCAL DIALING FOR THE D.C. METRO AREA

Part# 330485 Ref# Telco707




### LONG DISTANCE

- ATTRACTIVE GRAY COLOR
- FREE OR CHARGE FOR NUMBERS, i.e. 911, 800, 0, 411, 555-1212, etc.
- RESTRICT: 976, 900, 950, OVERSEAS AND 10 DIGITS
- CHARGE UP TO 6 QUARTERS FOR ANY COMBINATION OF EXCHANGES AND AREA CODES
- BOTH INCOMING AND OUTGOING CALLS CAN BE TIMED
- BLOCK HOOK SWITCH AND TONE DIALERS
- COPYRIGHTED PROGRAMMING CAPABILITIES
- OWNER'S KEY WILL ALLOW USE WITHOUT A COIN

Part# 330486 Ref# Telco757

## HOT LINE TELEPHONES



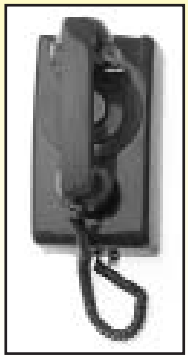

### TONE/PULSE SWITCHABLE SINGLE NUMBER DIALERS

- REPLACES LEASED RING-DOWN CIRCUITS USING STANDARD LOOP START CO LINES.
- PROGRAMMABLE PAUSE FOR USE BEHIND CENTREX OR BEHIND A PABX

***DESK PHONE***
Part# 330487 Ref# K-1900D-2

***WALL PHONE***
Part# 330488 Ref# K-1900W-2

NEW
NON-VOLATILE MEMORY

## NO-DIAL PHONES





### RED NO-DIAL PHONES

***WALL PHONE W/RINGER***
Part# 330489 Ref# K-1500P-W

***DESK PHONE W/RINGER***
Part# 330490 Ref# K-1500P-D

## ELEVATORS PHONES




- PHONE LINE POWERED • INSTALLS IN STANDARD ELEVATOR PHONE BOX
- VANDAL RESISTANT

***HANDSFREE***
Part# 330491 Ref# K-1500-EHF

***HANDSFREE W/HANDSET***
Part# 330492 Ref# K-1500-E

***HANDSFREE W/HANDSET & RINGER***
Part# 330493 Ref# K-1500-ER

***HANDSFREE, BRAILLE LABELLED, REMOTELY PROGRAMMABLE, ADA COMPLIANT WITH NON-VOLATILE MEMORY***
Part# 330494 Ref# K-1600-EHF


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

# Lucent ISDN Telephones (AT&T)



Model 8520T

**Features:**

- Large Display Screen-at seven lines deep by 24 characters wide, the screen is easy to read and use.
- Personal Directory-this easy-to-use and easy-to-revise directory holds 144 numbers • Call Log-there's storage for 60 entries, each of the most recent 20 calls answered and 20 calls unanswered are stamped with the time, date, and calling party's name and number • Security Lock-you can lock up your directory and call logs with a password of your choosing.
- 20 Multi-function Buttons-these buttons can represent line status for up to 20 lines or give access to switch-based call management features.
- Dedicated Feature Buttons-these buttons simplify use of features such as Conference Call, Mute, Speakerphone, Transfer, Redial, and Hold.
- Message Waiting Light-you always know when someone's called.
- Easy Data Connections-you can link this terminal and your PC with a standard modem cable. No additional hardware or wiring is required to enable the two systems to work together effectively.

**Physical Dimensions and Weight:**

- The desktop terminal measures 11 1/2 inches (29.1 cm) wide by 10 1/4 inches (26 cm) long by 5 3/8 inches (13.66 cm) high.
- Weight is 4 3/4 lbs. (2.17 Kg).

| Description | Part # | Ref # |
|---|---|---|
| Lucent ISDN Phone Voice & Data (Black) | 542209 | 106906415 |
| Lucent ISDN Phone Voice & Data (White) | 542211 | 106906423 |



Model 8510T

**Features:**

- Ten call appearance or feature buttons with associated visual indicators which provide access to capabilities provided by the switch.
- Fixed feature buttons for Hold, Conference, Drop, Transfer, Redial, Mute, Speaker, Volume and Exit.
- Interactive softkeys which are used with the display to allow individual users to create, access and control their own personal directories and call logs and to program a variety of set features.
- "Lock" feature to protect user privacy.
- Liquid crystal display containing two lines by 24 characters, which can easily be seen from a wide range of viewing angles.
- Adjustable height that permits the user to change the set angle based on personal preference.
- Adaptive speakerphone that can be adjusted for optimal performance in both noisy and quiet environments.

**Physical Dimensions and Weight:**

- The desktop terminal measures 7.8 inches (19.8 cm) wide by 9.5 inches (24.1cm) long by 5.3 inches (13.4 cm) high.
- Weight is 3.2 lbs. (1.45 kg).

| Description | Part # | Ref # |
|---|---|---|
| Lucent ISDN Phone Voice & Data | 542207 | 106604408 |

## Some more ISDN Phones:

| Description | Part # | Ref # |
|---|---|---|
| Lucent ISDN Phone WO/NT1 | 542201 | 407438423 |
| Lucent ISDN Phone W/NT1 | 542203 | 407438738 |
| Lucent ISDN Phone Voice Only | 542205 | 107538464 |

# Panasonic 900Mhz Cordless Phone



- 900Mhz Operation for Extended Range
- All Digital Answering System
- Hands-Free Digital Speakerphone
- Spare Battery Charger
- Flash Memory Message Backup
- 14-Day Standby Battery Life
- Voice Menu/Time Day Stamp
- 30-Channel Auto Scan
- Sound Charger™ Technology
- 2-Digit LCD Readout on Base Unit
- Electronic Volume Control
- Automatic Intercom with 2-Way Paging
- Digital Security Code
- Lighted Keypad

| Description | Part # | Ref # |
|---|---|---|
| Panasonic 900Mhz Cordless | 330459 | KX-TCM940 |



# 2 Line Cordless VTech Phone

**Features:**

- Caller ID with Alpha-Numeric LCD Readout on Base. Automatically displays Time/Date Stamp and stores last 32 incoming calls.
- Caller ID with Alpha-Numeric LCD Readout on Handset. Displays incoming and outbound telephone numbers, functions and line usage.
- Digital 900 MHz Clarity and Range. Superb audio without interference from other electronic devices.
- 100% digital Security. 65,000 encrypted security codes with Automatic Channel Scan.
- Mute, Flash, Hold and 4-Way Conferencing.
- Wall-Mountable Base Unit with Intercom Features.
- Digital Volume Control, hearing aid compatible.
- 20-number Speed Dial Memory.
- High-Capacity NiCad Battery, 5.5 hours of talk time or 120 hours of standby.
- Out-of-Range and Low Battery Indicator.
- 4 Programmable Rings for Each Line, tone or pulse dialing compatibility.

| Description | Part # | Ref# |
|---|---|---|
| VTech 2-Line Digital Cordless | 400805 | 922CID |

***Phone (973) 325-3151 Fax (973) 325-2690***
***Email ncisales@trynci.com Hours Mon–Fri 9-4 EST***

# TELEPHONES

## Headset & Base



| DESCRIPTION | PART # |
|---|---|
| PLANTRONIC CT460 HEADSET & BASE | 330319 |

## BELL Phones-Favorite



Trim Style Phone
- Lighted Key Pad
- Last Number Redial
- Cancel Button
- On/Off Ringer Switch
- Desk/Wall Mountable
- Tone/Pulse Switchable

| DESCRIPTION | PART # | REF # |
|---|---|---|
| BELL PHONES-FAVORITE | 317105 | 51810 |

## BELL Phones-Classic Favorite



Trim Style Phone
- 13 Number Memory
- 3 Emergency One-Touch
- Mute Button
- Illuminated Keypad
- Last Number Redial
- Flash Button
- Tone/Pulse Dialing
- Ringer On/Off Switch
- Desk/Wall Use
- Hearing Aid Compatible

| DESCRIPTION | PART # | REF # |
|---|---|---|
| BELL PHONES-CLASSIC FAVORITE | 317107 | 52890 |

## AT&T Trimline 210



- Fully Illuminated Dial
- Receiver Volume Control
- Redial Button
- Flash Feature
- Ringer Control
- Mute Button
- Selectable Dialing
- Table or Wall Convertible
- Hearing Aid Compatible

| DESCRIPTION | PART # |
|---|---|
| AT&T TRIMLINE 210 | 400073 |

## AT&T Two-Line



- 2-Line Telephone
- 12 Number Memory
- Hold Button
- Lighted Dial
- Receiver Volume Control
- Redial Button
- Line-In-Use Indicators
- Distinctive Ringing Feature
- Separate Ringer Controls
- Mute Button
- Flash Feature
- Selectable Dialing
- Table or Wall Convertible

| DESCRIPTION | PART # | REF # |
|---|---|---|
| AT&T TWO-LINE | 400072 | 262 |

## BELL Phones-Classic Favorite 2 Line Trimstyle



- 13 Number Memory
- 3 Emergency One-Touch
- 3 Way Call Conferencing
- Line Status Indicators
- Distinctive Ringer for Each Line
- Hold with Indicator
- Last Number Redial
- Flash Button
- Pause Button
- Tone/Pulse Dialing
- Ringer On/Off Switch
- Desk/Wall Use
- Hearing Aid Compatible

| DESCRIPTION | PART # | REF # |
|---|---|---|
| BELL PHONES CLASSIC FAVORITE 2-LINE TRIMSTYLE | 542901 | 52900 |

# Uniden Cordless Phone



| DESCRIPTION | PART # |
|---|---|
| UNIDEN 9200 2-LINE CORDLESS | 338801 |

# Uniden - Extend•A•Phone



The all new 25 Clear Channel AutoScan Cordless Extend•A•Phone gives you improved "clear channel" performance like never before. Loaded with exceptional features and built with quality that really goes the distance, Uniden cordless phones are the best value in cordless technology today.

**Features:**

- 25 Channel Autoscan
- True Compander Circuitry
- 10 Memory Dialing
- Trim Style Design
- 14 Day Battery Life
- Page/Find Feature
- Autotalk™ & Autostandby™
- Wall or Desk Mountable
- Linden Decorator Color

| DESCRIPTION | PART # | REF # |
|---|---|---|
| UNIDEN - EXTEND•A•PHONE | 338809 | XC610 |

# Polycom - Sound Station

The Sound Solution
Polycom's SoundStation(r) and SoundStation EX offer a sound alternative to speakerphones. Breakthrough, full-duplex Acoustic Clarity Technology(r) lets you engage in natural, free-flowing conversation and enables even the most soft-spoken participants to be heard clearly. So conference calls are more productive—and more enjoyable!

The three unidirectional microphones and powerful, digitally tuned speaker provide full coverage, whether used in a conference room or an office. In fact, SoundStation EX can accommodate up to 25 participants in rooms as large as 15 by 30 feet. There's even a wireless lavaliere microphone for formal presentations.

Simple
If you can dial a phone, you can use SoundStation. The built-in keypad looks and works just like the touch-tone* telephone pad you've been using forever (right down to the handy mute button and flash key). It even has a jack to plug in a tape recorder. And it's just as simple to install. A single cord connects the compact console unit to a wall module that contains both power and telephone interfaces. Just plug it in, insert it into a standard analog phone jack or AAO, and dial.

SoundStation
- Elegantly styled, exceptional full-duplex clarity
- Easy to install
- Integrated keypad
- Ideal for small- to medium-size conference rooms

SoundStation EX
- Delivers all features and functions of SoundStation
- Includes two microphone ports for future expendability
- External microphones available separately
- Wireless lavaliere microphone system available separately

SoundStation EX with External Microphones
- Bundled with SoundStation EX, two 6 ft. cables and two external microphones
- Ideal for medium- to large-size conference rooms
- Each external microphone features a mute button and a dual-color status LED
- Wireless lavaliere microphone system available separately

SoundStation EX with External Microphones
and the Wireless Microphone System
- Versatile SoundStation EX system package for large rooms
- Wireless lavaliere microphone system provides exceptional performance for stand-up presenters
- Two different frequencies available to avoid interference between conference rooms



| DESCRIPTION | PART # |
|---|---|
| POLYCOM - SOUND STATION | 339807 |

# TELEPHONES

## Doorphone



When you connect the Doorphone (KX-T30865) to the EMSS (KX-T30810, KX-T61610, etc.) the Doorphone adapter (KX-T30860D) is required.

| DESCRIPTION | PART# | REF# |
|---|---|---|
| PANASONIC DOORPHONE | 330428 | KX-T30865 |

## Doorphone Adapter



This KX-T30860D is required when you connect the Doorphone (KX-T30865) to the EMSS (KX-T30810, KX-T61610, etc.).

| DESCRIPTION | PART# | REF# |
|---|---|---|
| PANASONIC DOORPHONE ADAPTER | 330429 | KX-T30860D |

## 10 Button Strip



| DESCRIPTION | PART # | REF# |
|---|---|---|
| COMDIAL 10 BUTTON STRIP | 451376-G | KBA9-G |

## Sony 2-Line



- 2-Line Operation
- Distinct Rings for Each Line
- Three-Way Conference Capability
- HOLD Button
- 10 Speed-Dial Presets
- FLASH Button
- Programmable Pause
- Last-Number Redial
- Ringer Volume Control
- Wall Mountable

| DESCRIPTION | PART # |
|---|---|
| SONY IT-M10 2-LINE PHONE | 316010 |



| DESCRIPTION | PART # | REF # |
|---|---|---|
| VIKING W-1000 DORR BOX | 402103 | LM24M |



| DESCRIPTION | PART # | REF # |
|---|---|---|
| VIKING W-3000 DOOR BOX | 402105 | LM24D |

## Fax Switch




Fax switches allow your fax or modem to share your existing phone line. The FAXJ-300 answers first, monitors for CNG, Touch Tone or quiet, then routes the call to the proper port. Compatible with virtually all fax machines.

| DESCRIPTION | PART# | REF# |
|---|---|---|

# TOKEN RING BULK CABLE

FOR THE FOLLOWING ITEMS SEE OUR BULK CABLE SECTION ON PAGE 11

***TOKEN RING-TYPE 1A / 1AP***

***TOKEN RING-TYPE 2A / 2AP***

***TOKEN RING-SIAMESE TYPE 2A / 2AP***

***TOKEN RING TYPE 6A - TOKEN RING TYPE 8A***

***TOKEN RING TYPE 9A / 9AP***

***TOKEN RING-TYPE 3 (SEE BULK TELEPHONE CABLE)***



## TOKEN RING CONNECTORS

We stock the latest type connectors for all your Token Ring connector needs. So If you are running Type 1, Type 2, or Type 3 UTP for your 4/16 mbps Token Ring Network, you can rely on NCI for all of your connector needs.

| DESCRIPTION | PART # | REF.# |
|---|---|---|
| TYPE A DATA CONN.-ORIGINAL | 311491 | 8310574 |
| TYPE B DATA CONN.-ATTACH. LOCKING CLIP* | 311490 | 6091000 |
| 4 PAIR KEYSTONE-POST TYPE | 311471 | 6091030 |
| 3 PAIR KEYSTONE-POST TYPE | 311470 | 8310575 |

# TOKEN RING CABLE ASSEMBLIES

We assemble Token Ring cables using the finest quality IBM specified connectors and cable types. These cables are designed for the high speed and reliability you expect out of your network. Trust us to assemble special lengths or configurations. We make LIC, BUS & TAG, & Bay Networks Token Ring cables, to name a few. If you need more help choosing the right cable, consult your sales engineer.



## PATCH CABLES

These multi-purpose cables have a data connector on each end. We use Type 6 cable for its performance and flexibility. If you require Type 1 cable consult your salesperson, and we will be glad to make them for you.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8 FT. PATCH CABLE TYPE 6 | Q80121-006 | 8642551 |
| 30 FT. PATCH CABLE TYPE 6 | Q80121-030 | 8642552 |
| 75 FT. PATCH CABLE TYPE 6 | Q80121-075 | 6339134 |
| 150 FT. PATCH CABLE TYPE 6 | Q80121-150 | 6339135 |
| CUSTOM LENGTH TYPE 6 - PVC | Q80121-*** | |
| TYPE 1 - PVC | Q80221-*** | |
| TYPE 1 - PLENUM | Q80220-*** | |

***= LENGTH IN FEET

## PC ADAPTER CABLE

Used to connect a PC to your network. They have one DB9 male connector on one end, and a data connector on the other end. Standard cables are made with Type 6 cable, however, Type 1 cable can be used if you prefer.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8FT. PC ADAPTER CABLE | Q80321-008 | 6339098 |
| 15FT. PC ADAPTER CABLE | Q80321-015 | |
| CUSTOM LENGTH TYPE 6 | Q80321-*** | + |

***= LENGTH IN FEET

## TYPE 3 MEDIA FILTER

This unit connects a workstation to a Token Ring Network over UTP (Unshielded Twisted Pair) lobe wiring. Consists of a DB9 male to an 8ft. UTP cable terminated with a RJ11 or RJ45. It operates at both 4 & 16 mbps and we can make a longer leg if needed. Other types avail.: SEE BALUN SECTION.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8FT. RJ11- 4/16 MBPS | 360120 | 6466941 |
| 8FT. RJ45 - 4/16 MBPS | 360122 | 6466941-8 |

## DATA TO RJ11/45 ADAPTERS

This adapter converts a shielded twisted pair Type 1 data connector to a modular RJ11 or RJ45.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| DATA TO RJ11 PINS 2,3,4,5 | 311472 | ICSIIC |
| DATA TO RJ45 PINS 3,4,5,6 | 311473 | ICS45CN |
| DATA TO RJ45 PINS 1,2,4,5 | 311492 | ICS45C |

## IMPEDANCE MATCHING DEVICE

This device converts the impedance of IBM Type 1 shielded cable (150 ohm) to Type 3 unshielded twisted pair cable (105 ohm).

| DESCRIPTION | PART # | REF # |
|---|---|---|
| DATA TO RJ11- 3270 +AS400-PINS 2,3,4,5 | 311493 | 112534C |
| DATA TO RJ45- 3270 +AS400-PINS 1,2,4,5 | 311494 | 451245C |
| DATA TO RJ45- ETHERNET- PINS 1,2,3,6 | 319301 | 556904-1 |
| DATA TO RJ45- ETHERNET- PINS 1,2,3,6 | 319301 | LIE3382 |

## CROSS-OVER PATCH CABLES

Used with IBM 8218 and 8219 to provide repeating capability for a back up path. It is made up with special yellow cable and data connector on each end.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8 FT. YELLOW CROSS-OVER | Q80721-008 | 6339137 |
| CUSTOM LENGTHS | Q80721-*** | + |

***= LENGTH IN FEET

## TWINAX "Y" CABLE

This cable is used to connect display stations, printers and series local communication controllers to the cabling system, with a cable-through feature.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8T. TWINAX "Y" CABLE | Q80921-008 | 8642550 |
| CUSTOM LENGTH - PVC | Q80921-*** | |

***=LENTH IN FEET

## TWINAX DIRECT CABLE

Attaches the last terminal in a Twinax daisy chain to the cabling system. It features a data connector on one end and a Twinax connector on the other end.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8 FT. DIRECT CONNECT CABLE | Q81121008 | 6091075 |
| CUSTOM LENGTH - PVC | Q81121-*** | + / FT. |

***=LENGHT IN FEET

## TWINAX GREEN BALUN CABLE

This cable is intended to attach system 3x, as 400, 5250, 5260, and 5520 devices to twisted pair type wiring. It matches 100 ohm twinax to that of 150 ohm Type 1 cable.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8FT. TWINAX GREEN BALUN | 771070 | 6091070 |

**SEE OUR WIDE SELECTION OF BALUNS IN BALUN SECTION.**

## RED BALUN CABLE

Used to connect 3278 terminals to the cabling sytem. Red identifies 3278 device. Coax connector to data connector 8 ft. cable.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8FT. RED BALUN CABLE | 771074 | 8642546 |
| CABLELESS RED BALUN | 771073 | 6339802 |
| DUAL CABLELESS RED BALUN | 771072 | 6339083 |

**SEE OUR WIDE SELECTION OF BALUNS IN BALUN SECTION.**



## YELLOW BALUN CABLE

This cable connects 3277 terminals to the cabling system. Yellow identifies 3277 devices. Coax connector to data connector 8 ft. cable.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8 FT. YELLOW BALUN CABLE | Q90111-008 | 8642544 |

**SEE OUR WIDE SELECTION OF BALUNS IN BALUN SECTION.**

## 3270 COAXIAL TO TWISTED PAIR ADAPTER (CTPA)

THIS 3270 CTPA CONNECTS 3270 TYPE A DEVICES TO CLUSTER CONTROL UNITS USING TYPE 3 CABLING.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8 FT. 3270 CTPA ADAPTER | Q90211-008 | 61X4584 |

## 3270 DUAL PURPOSE CONN. TO TWISTED PAIR ADAPTER (DPC-T3)

This allows direct connection from 3174 subsystem control units or 3299 Terminal Multiplexers to 3270 devices. VIA Type 3 Cable.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8 FT. 3270 DPC-T3 ADAPTER | Q90311-008 | 83X9758 |

## DUAL PURPOSE CONNECTOR ATTACHMENT CABLE (DPC)

Dual Purpose Connector (DPC) cables are used to attach 3299 multiplexers (Model 1, 2, or 3) to a face plate recepticle. DPC replaces the Red Coaxial Balun at the 3299 Model 2. Offered with a single or double DP Connector.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8FT. SINGLE DPC CABLE | Q90411-008 | 6339073 |
| 30FT. SINGLE DPC CABLE | Q90411-030 | 6339074 |
| 8FT. DOUBLE DPC CABLE | Q90511-008 | 6339075 |

## PLUG & JACK ASSEMBLY

Used to connect IBM 3600 or 4700 workstations to cabling system. It has one data connector on one end, and one male and female 1/4" connector terminated on the other end. Standard length is 15".

| DESCRIPTION | PART # | REF # |
|---|---|---|
| P&J ASSEMBLY | Q90611-0008 | 8310552 |

## LOOP CABLE ASSEMBLY

Connect your IBM 3600 or 4700 terminal to a port box, controller, or another terminal. The cable is 8 ft. long with male and female 1/4" connector.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8FT. LOOP CABLE | Q90711-008 | 1563155 |

## MFA/422 ATTACHMENT CABLE

The MFA/422 cable is used to connect IBM 3101 or 4975 devices to the network. An 8 ft. Data Connector to RS 232 DB25 male is standard.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8 MFA/422 CABLE | Q90811-008 | 8310553 |

## GENERAL PURPOSE ATTACHMENT CABLE

This cable connects a modem to a receptacle. It is an 8 ft. cable with a data connector on one end to spade leads for screw downs.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8FT. E CABLE | Q90911-008 | 8310554 |

## "Y" ASSEMBLY

Used for creating a financial workstation loop or a Twinax daisy chain at the distribution panel. It can also attach two 3278 or 3277 Coax terminals to the same wall outlet when used in conjunction with the appropriate balun. Standard length is 4 ft.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 4FT. Y ASSEMBLY | Q91011-004 | 8642549 |



## SHIELDED TWISTED PAIR ADAPTER CABLE

Consists of a data connector to a shielded RJ45 plug using a modified Type 6 Cable. Equal to synoptics 950 type cables used with synoptic hubs.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| NCI STP CONC.PATCH CABLE (TOKENRING)- 6FT. | Q93511-006 | 950-06 |
| NCI STP CONC.PATCH CABLE(TOKEN RING)- 8FT. | Q93511-008 | 950-08 |
| NCI STP CONC.PATCH CABLE(TOKEN RING)-10FT. | Q93511-010 | 950-10 |
| NCI STP CONC.PATCH CABLE(TOKEN RING)-15FT. | Q93511-015 | 950-15 |
| NCI STP CONC.PATCH CABLE(TOKEN RING)-20FT. | Q93511-020 | 950-20 |
| NCI STP CONC.PATCH CABLE(TOKEN RING)-25FT. | Q93511-025 | 950-25 |
| NCI STP CONC.PATCH CABLE(TOKEN RING)-30FT. | Q93511-030 | 950-30 |

**CALL FOR ALL TOKEN RING CABLES & CUSTOM LENGTHS. WE HAVE THE BEST DELIVERY!**

## DUAL STATION ACCESS MODULE

Used to connect two workstations directly to each other. It is made up of two SAM Cables connected together with a yellow crossover cable.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8 FT. DUAL SAM CABLE | Q91111-008 | SW-SAM2 |

## SINGLE STATION ACCESS MODULE

A cost, effective, & flexible design to create or expand aToken Ring Network. Circuitry in the module connects a workstation when the right signal is received. Offered in three styles: Data to Data, Data to DB9 Male, & RJ11 to RJ45 plugs.

| DESCRIPTION | PART # | REF # |
|---|---|---|
| 8 FT. SAM- DC/DC | Q91211-008 | SAM-DC |
| 8 SAM-DC/DB9 | Q91311-008 | SAM-DB9 |
| 8 FT. SAM-RJ11/RJ45 | Q91411-008 | CAM-TP3 |

TOKEN RING

# Token Rings

## Expander "Y" Cable

Used with a SAM, to add a work station to an existing MAU port.

| Description | Part # | Ref # |
|---|---|---|
| Expander "Y" Cable | Q91511-008 | EX-Y |

## FDDI Copper Adapter Cable

Used to connect a workstation to your IBM FDDI Copper Adapter / A.

| Description | Part # | Ref # |
|---|---|---|
| 8ft. FDDI Copper Adapter Cable | 999658 | 33G2761 |

## FDDI Copper Reversing Cable

This cable will enable you to attach a dual-attached workstation IBM Extender card to the network.

| Description | Part # | Ref # |
|---|---|---|
| 8 ft. FDDI Copper Reversing Cable | 999660 | 33G2762 |

## FDDI Copper Wrap Plug

This allows you to run diagnostics on IBM FDDI Copper adapter.

| Description | Part # | Ref # |
|---|---|---|
| Copper Wrap Plug | 999662 | 33G2759 |

## Copper Concentrator Port Cable

Used to attach an IBM cabling system lobe to the master(m) port of a Copper Device Attachment Module installed in an IBM8240 FDDI Concentrator.

| Description | Part # | Ref # |
|---|---|---|
| 8 ft. Copper Concentrator Port cable | 999033 | 33G2760 |

# Token Ring Cards / Hardware

## Network Interface Cards

We feature the best NIC cards from manufacturers such as Proteon,Xircom, and Asante for MAC Environments. It is available for 4/16 Mbps networks with ISA, EISA, MCA, and MACINTOSH SE, SE/30, IIsi, and LC/LCII.

| Description | Part # | Ref # |
|---|---|---|
| Proteon 4/16 Bus Master ISA 16 Bit | 725555 | P1392 |
| Proteon 4/16 Bus Master EISA 32 Bit | 725557 | P1990 |
| Proteon 4/16 Bus Master MCA 16 Bit | 725559 | P1892 |
| Proteon 4/16 Bus Master ISA 8 Bit | 725561 | P1391 |
| Pronet-10 Interface Card 16 bit | 725562 | P1308 |
| Pronet-10 Interface Card 8 bit | 725564 | P1303 |
| Xircom Ext. Token Ring 8 Bit | 725566 | ET16BU |
| Xircom 16/4 Token Ring DB9 16 Bit | 725568 | PT2-16B3 |
| Xircom 16/4 Token Ring RJ11 16 Bit | 725570 | PT2-16BT |
| Asante MAC Ring 4wbps SE 16 Bit | 725572 | 09-00420-01 |
| Asante MAC Ring 4/16 wbps 32 Bit | 725574 | 09-00410-01 |
| Asante MAC Ring IIsi 32 Bit | 725576 | 99-00024-01 |
| Asante MAC Ring LC 16 Bit | 725578 | 99-00025-01 |
| Smart 16/4 AT Plus Ring Node | 725579 | -------- -------- |



## Multistation Access Units (MSAU)

Our MSAU units come loaded with features and options. If you have a small network, that doesn't need much management, then go with our standard units. For larger, more sophisticated networks, we feature Fiber RI/RO ports, monitoring LED's and active intelligent MSAU's Let our sales staff help you choose the right one for your needs. All IEEE 802.5 compatible.

| Description | Part # | Ref # | |
|---|---|---|---|
| 8 port IBM Standard | 771078 | 6091014 | |
| 8 port UTP Lobes, Data &UTP RI/RO | 725582 | BM330-10 | |
| 12 port UTP Lobes & RI/RO, LED LANTACH & Bypass | 725586 | TR9228A-121XX | |
| 8 port UTP Lobes & RI/RO, lligent Active MSAU | 725588 | LAT3214 | |
| 12 port UTP Lobes & RI/RO, Optional Fiber RI/RO | 725590 | TR-9228A-12-3XX | Call For Current Pricing |

## Coaxial Power MAU™

This MAU provides the interconnection between workstations and a Token Ring network on existing 3270 coaxial cable. Offers great savings when the cost of rewiring is considered. You must use a coax adapter at each station.

| Description | Part # | Ref # |
|---|---|---|
| Coaxial Power MAU™ 93 | 725592 | LAT3247 |
| Coaxial Workstation Adapter | 725594 | LAT3248 |

## Controlled Access Unit (CAU)

This is an intelligent wiring concentrator with a built-in copper repeater or optional Fiber concentrators allowing you to add workstations to a Token Ring LAN at speeds of 4/16 Mbps.

| Description | Part # | Ref # |
|---|---|---|
| Controlled Access Unit | 725596 | CAU8230 |

## Set-Up Tools

You must initialize a new passive MSAU in order to install it. To do so simply plug a Relay Set-Up Tool into each lobe port for a few seconds and then each ring port. 9 Volt battery included.

***WARNING: Not for use on a MSAU connected to an operating network.***

| Description | Part # | Ref # |
|---|---|---|
| Set-Up Tool for UTP MSAU | 310194 | 31906L |
| Set-Up Tool for Type-1 MSAU | 310195 | 31907L |

## Fiber Optic Converter

This unit is fully compatible with the IBM 8220. It can link two token ring networks up to 3.3km apart. Features loopback capabilitites, 4/16 mbps networks and reclocks signal.

| Description | Part # | Ref # |
|---|---|---|
| Fiber Optic Converter | 771079 | 96X5810 |

## Copper Repeaters

This repeater is fully compatible with the IBM-8218 4Mbps unit.

| Description | Part # | Ref # |
|---|---|---|
| Copper Repeater 4 Mbps | 999001 | 6339532 |

## Fiber Optic Repeaters

This unit is fully compatible to the IBM 8219 repeater. The unit features LED's to show status of low signal, low light and loopback. If you need to mount this unit or the copper repeater, we have a 19" rack housing and a surface mount bracket.

| Description | Part # | Ref # |
|---|---|---|
| Fiber Optic Repeater | 771083 | 6339535 |
| 19" rack mount housing | 612450 | 6339139 |
| Surface Mount bracket | 612452 | |

## Token Ring Fiber Optic Tranceivers

Extending you Token Ring lobe and ring distance is now easy and affordable. Just get a pair of our Fiber Optic Token Ring Transceivers.

> To connect the transceiver to a MSAU ring-out or lobe port use a cross-pinned cable.

> To connect the transceiver to a MSAU ring-in port or to a NIC (network interface card) with a RJ45 jack use a straight pinned cable.

NOTE: If you have a Type-1 NIC the DB-9 transceiver plugs directly in.

| Description | Part # |
|---|---|
| DB-9 STMM Fiber Transceiver | 310196 |
| RJ-45 STMM | 310197 |
| DB9-ST SM | 310198 |
| RJ-45ST SM | 310199 |



## Loop Wire Concentrator

Used in creating an MCL loop configuration, this concentrator has an I/O port and 8 lobe ports. Units available in a 19" rack mountable panel and an optional fully enclosed stand-alone unit. The LWC-R is a unit that connects Radial Loop Stations to the 8100 loop.

| Description | Part # | Ref# |
|---|---|---|
| LWC 19" rack mount | 999003 | 6091077 |
| LWC 19" stand alone | 999005 | 6091077 |
| LWC-R 8100 Loop Station Conc.- 9 port | 999007 | 1657330 |
| LWC-R 8100 Loop Station Conc.-18 port | 999009 | |
| Loop Station concentrator | 999011 | 4760511 |
| Radial Loop Station Connector | 999013 | 1657310 |
| Wrap Loop station connector | 999015 | 1657320 |
| Cable bracket | 999017 | 6091042 |

# Token Ring Bridge / Router





The Local Token Ring Bridge is a stand-alone unit that can be used in conjuntiun with SynOptics Lattis-Ring workgroup hubs as well as other IEEE 802.5 and IBM compatible MAUs.

The TokenMaster 1000 allows you to connect even the smallest remote Token Ring networks. It supports IPX, TCP/IP routing and source routing bridging

| Description | Part # | Ref # | |
|---|---|---|---|
| Local Token Ring Bridge | 310200 | 2722 | Call For Pricing |
| TokenMaster 1000 Remote Bridg/Rout | 310201 | TM100-2 | |
| Additional V.35 WAN cable | 310202 | CBL-235 | |
| Additional RS232 Wan cable | 310203 | CBL-232 | |

# IBM Faceplates and Surface Mount & Boxes



These faceplates and surface mount boxes are used with IBM cables and connectors. The face plates mount directly on NEMP type electrical boxes. The surface boxes can be mounted with screws or incl. magnetic backing.

## Faceplates

| Description | Part # | Ref # |
|---|---|---|
| Type 1 - 1 Data Connector | 346000 | 8310572 |
| Type 2 - 1 Data Conn., 1 voice Jack | 346002 | 6091025 |
| Type 3 - 1 Data Conn., 2 RJ11 Jacks | 346004 | T3FP |
| Type 4 - 1 Data Conn., 2 RJ45 Jacks | 346005 | T4FP |

## Surface Mount Boxes

| Description | Part # | Ref # |
|---|---|---|
| Surface Mount Box Only | 346001 | |
| Type 1 SM with Type 1 Plate. | 346106 | 4760486 |
| Type 2 SM with Type 2 Plate | 346108 | 6091029 |
| Type 3 SM with Type 3 plate | 346107 | T3SM |
| Type 4 SM with Type 4 plate | 346109 | T4SM |

## Distribution Panel

We offer distribution panels in various port sizes and cable mounting arrangements. These are 19" rack mountable, complete with rack ground kit, grounding tower and cable routing guides. If you wish to have a special unit made, our in-house manufacturing division can accommodate your needs.

| Description | Part # | Ref # |
|---|---|---|
| 64 Port Panel | 771080 | 8642520 |
| 32 Port Panel-1/2 Size | 771081 | |
| 32 Port Wall mount version | 999019 | DP32WM |
| 32 Port Data & 64 Port Voice-Full Size | 999021 | DP3264 |
| 80 Port Panel for CAU/LAM Systems | 999023 | DP80 |

## Distribution Patch Panels

These panels are 19" rack mountable and are used only for patching. They are not intended for grounding of type 1 and 2 cable runs. Available in many different port counts and configurations. Listed below are the most popular models.


| Description | Part # |
|---|---|
| 12 Port 3.50"x19" panel | 999025 |
| 16 port 5.25x19" panel | 999027 |
| 32 port 8.75x19" panel | 999029 |
| 64 port 15.75x19" pane | 999031 |




PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

## Distribution Panels




| DESCRIPTION | PART # |
|---|---|
| 8 PORT DISTRIBUTION PANEL | 999024 |

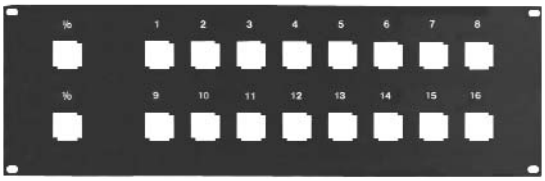


| DESCRIPTION | PART # |
|---|---|
| 16 PORT DISTRIBUTION PANEL | 999027 |

## Coax Token Ring



| DESCRIPTION | PART # |
|---|---|
| CMAU 8 PORT COAX MAU W/COAX RING IN RING OUT | 725598 |

*Phone (973) 325-3151 Fax (973) 325-2690*
*Email ncisales@trynci.com Hours Mon–Fri 9-4 EST*

# POWER TOOLS

NCI carries an assort
ment of the power too
you need to make your
lation go smooth and t
We offer 9.6 volt and
& Driver kits ranging
1/2". We also carry
batteries and a univer



| Description | Ref# | Part# |
|---|---|---|
| 3/8" VSR 9.6V Drill / Driver Kit | 6201DWHE | 405101 |
| 3/8" VSR 9.6V Socket Driver Kit | 6702DW | 405111 |
| 3/8" VSR 12V Drill / Driver Kit | 6211DWHE | 405113 |
| 1/2" VSR 12V Drill / Driver Kit | 6311DWHE | 405103 |
| 3/8" VSR 12V Hammer Drill Kit | 8411DWH | 405107 |
| Spare Battery for 9.6V Tools | | 405109 |
| Spare Battery for 12V Tools | | 405115 |
| Universal Charger / 9.6V & 12V Packs | | 405117 |
| Drill - Tree Step Drills 1/8" - 1/2" | | 537801 |
| Drill - Tree Step Drills 1/4" - 3/4" | | 537803 |

| Description | Part # |
|---|---|
| Standard | 537901 |
| Heavy Duty (Princess) | 537903 |




UNGAR



High quality shrink tubing made of polyolfin material. Shrinks to half size. Standard color is black with other colors available. Sold in continuous lengths of up to 100 feet.


| Description | Part # |
|---|---|
| Heat Shrink Tubing 3/64" | 873102 |
| Heat Shrink Tubing 1/16" | 873104 |
| Heat Shrink Tubing 3/32" | 873106 |
| Heat Shrink Tubing 1/8" | 873110 |
| Heat Shrink Tubing 3/16" | 873111 |
| Heat Shrink Tubing 1/4" | 873120 |
| Heat Shrink Tubing 3/8" | 873113 |
| Heat Shrink Tubing 1/2" | 873130 |
| Heat Shrink Tubing 3/4" | 873140 |
| Heat Shrink Tubing 1" | 873116 |
| Heat Shrink Tubing 1.5" | 873117 |
| Heat Shrink Tubing 2" | 873118 |
| Heat Shrink Tubing 3" | 873119 |
| Heat Shrink Tubing 4" | 873115 |



## Soldering Station

| Description | Part # |
|---|---|
| WCC 100 Soldering Station | 538101 |

| Description | Part # |
|---|---|
| 60/40 Solder .025 | 871201 |
| 60/40 Solder .031 | 871200 |
| 60/40 Solder .040 | 871203 |
| 60/40 Solder .062 | 871205 |



| Description | Part # |
|---|---|
| Solder Aid Kit (6 piece kit) | 538201 |



Fastblow SlowBlow Grasshopper FLAT

| Description | Fastblow | Slowblow |
|---|---|---|
| AGC.25AMP | 870006 | -------- |
| AGC.5AMP | 870007 | -------- |
| AGC.75AMP | 870008 | -------- |
| AGC 1AMP | 870015 | 870000 |
| AGC 1.5AMP | 870009 | 870001 |
| AGC 2AMP | 870016 | 870010 |
| AGC 2.5AMP | 870014 | 870002 |
| AGC 3AMP | 870017 | 870003 |
| AGC 3.5AMP | 870018 | -------- |
| AGC 4AMP | 870019 | 870004 |
| AGC 5AMP | 870020 | 870005 |
| AGC 6AMP | 870022 | -------- |
| AGC 7AMP | 870024 | -------- |
| AGC 7.5AMP | 870025 | -------- |
| AGC 8AMP | 870027 | -------- |
| AGC 10AMP | 870030 | -------- |
| AGC 15AMP | 870032 | -------- |
| AGC 20AMP | 870035 | -------- |

| AGC | Fastblow | Slowblow |
|---|---|---|
| | | |

For All Your Data and Telecom Needs. We have ALL FUSES. **Call NCI NOW for any fuse you need!**

| Description | Regular |
|---|---|
| FLAT .5 AMP | 870050 |
| FLAT 2 AMP | 870060 |
| FLAT 5 AMP | 870065 |
| FLAT 1.3 AMP | 870052 |
| Grasshopper .2AMP | 870062 |
| Grasshopper .25AMP | 870070 |
| Grasshopper .5AMP | 870071 |
| Grasshopper .75AMP | 870073 |
| Grasshopper 1AMP | 870075 |
| Grasshopper 1.3AMP | 870076 |
| Grasshopper 1.5AMP | 870067 |
| Grasshopper 2AMP | 870072 |
| Grasshopper 2.5AMP | 870079 |
| Grasshopper 3AMP | 870074 |
| Grasshopper 4AMP | 870061 |
| Grasshopper 5AMP | 870077 |
| Grasshopper 7.5AMP | 870078 |
| Grasshopper 10AMP | 870063 |
| Grasshopper 12AMP | 870064 |
| Grasshopper 15AMP | 870066 |

| | Flat | Grasshopper |
|---|---|---|
| Price | | |

## Deluxe Screwdrivers



| Description | Point/Tip Size | Shank Length | Overall Length | Part # |
|---|---|---|---|---|
| Phillips | #1 | 3" | 6 3/4" | 317005 |
| Phillips | #2 | 4" | 6 3/4" | 520015 |
| Phillips | #2 | 11 1/2" | 3 7/16" | 317027 |
| Phillips | #3 | 6" | 11" | 317007 |
| Slotted | 3/16 | 3" | 6 3/4" | 317001 |
| Slotted | 3/16 | 4" | 7 3/4" | 317013 |
| Slotted | 3/16 | 6" | 9 3/4" | 317003 |

## NCI Screwdrivers



6 Inches

| Description | Part# |
|---|---|
| NCI Screw Driver-Flat& Philips Tips | 519050 |



## Nut Drivers

| Description | Point/Tip Size | Shank Length | Overall Length | Part # |
|---|---|---|---|---|
| HEX | 11/32 | 3" | 6 5/8" | 317039 |
| HEX | 1/2 | 3" | 7" | 317037 |

## Standard Screwdrivers



| Description | Point/Tip Size | Shank Length | Overall Length | Part # |
|---|---|---|---|---|
| Phillips | #0 | 2 1/2" | 4 15/16" | 317033 |
| Phillips | 1 | 3" | 6 1/2" | 317045 |
| Phillips | 2 | 4" | 7 5/8" | 317047 |
| Phillips | #0 | 2 1/2" | 5 1/4" | 317031 |
| Slotted | 1/8 | 3" | 6" | 520020 |
| Slotted | 3/16 | 3" | 6 5/8" | 520024 |
| Slotted | 1/4 | 6" | 9 5/8" | 520026 |
| Slotted | 1/8 | 10" | 13" | 520022 |
| Slotted | 1/8 | 3" | 4 7/8" | 317029 |
| Slotted | 5/16 | 1 3/4" | 4" | 317025 |

TOOLS

# TOOLS

NCI carries a wide assortment of Strippers and Cutters at great prices. As always, if you can't find what you need, call us today and we'll help you find it.



Part # 516505



25 Pair Telco Cable Cutter
Part # 516504



Coax Cable Cutter
Part # 317061



Wire Cutter
Part # 317063



Toggle™ RG59 / 62
Part # 516514

Toggle™ Ethernet Thick Wire
Part # 516516

Toggle™ RG58
Part # 516509

Toggle™ RG58 Plenum
Part # 516512



Cable T&B 4pr Stripper
Part # 516011



Cable Slitter
Part # 516010



Coaxial Stripper 2 Blade
Part # 516025

Replacement Blade
Part # 516008



Coaxial Stripper 3 Blade
Part # 516035

Replacement Blade
Part # 516009



Self-Adjusting Wire Stripax
Part # 516507



MiniStripax
Part # 516508



T-Stripper
16- 26 awg Stranded
Part # 516506



Strip Master Conductor Cable
Part # 516131



Phone Stripmaster
Part # 319703



Adjustable Wire Strippers
Part # 516101
With Spring
Part # 516102



Tongue & Grove Pliers

4½" .....Part # 541601
6½" .....Part # 541603
10" .....Part # 541605
12" .....Part # 541607



Linemans Deluxe 9" Pliers
Part # 519013



8" High Leverage Diagonal Cutter
Part # 317049



7 1/4" Ne Type Side Cutters
Part # 317051



Diagonal Cutters 6" Bell Type
Part # 519020



6" Diagonal Cutter
With Skinning hole
Part # 317053



5" Diagonal Cutter
With V&W Notches
Part # 317055



6" Connector Crimping Pliers
w/ Side Cutters
Part # 317057



6" Longnose Insulation Skinner
22 or 24 ang.
Part # 317059



Longnose 6"
Part # 519022



6" Longnose
With Side Cutters
Part # 317041



Diagonal Flush Cutters 4"
Part # 519024



6" Tapered Needle Nose Pliers
Part # 317017



5 1/2" Extra Slim Needle Nose Pliers
Part # 317015



4" Midget Diagonal Cutters
With Spring
Part # 317019



4" Midget Slimnose
With Spring
Part # 317023



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST


Prices Change Frequently.
Please Call for Most Current Pricing.

# Crimp Tools

The IDEAL Crimpmaster ™ Crimp Tool Series is designed for plant maintenance, field service, LAN installers, prototype shops and small production runs. There is not a better low-cost ratcheted crimper made. Our Crimpmaster™ Crimp Tools are full-cycle, compound leverage and triple ratcheted to give exact precision to every crimp connection. The frames are made of a high grade stamped-hardened steel.
A built-in safety release is included for removal of partially crimped connectors placed in the incorrect die cavity.

The crimp dies are dual-nest, precision-die cast and hardened to deliver the proper crimp specifications for oval-ized barrel crimps, insulation support to gauge requirements and hex crimps for MS39012 type connectors, non-insulated open barrel crimp style connectors and non-insulated terminals and splices. Many dies offer multiple size coax usage to increase tool versatility.

each

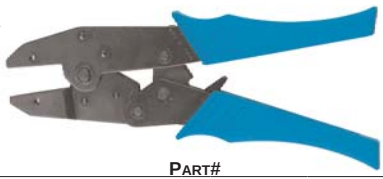




| Description | Part# |
|---|---|
| Crimpmaster ™ Crimp Tools | 319719 |

each



Die sold sep.

## Interchangeable Die Sets for Coaxial Connectors

| Application | Crimp size | Connector | Part # |
|---|---|---|---|
| RG58, 59 and 62AU, BNC and TNC 3 piece connectors |  |  | 318227 |
| Cambridge Products BNC's RG58, 59, 62AU CP-88-1 & 2, CP-89-1 & 2 series Connectors and others |  |  | 318225 |
| N-series Coax Connectors. MS39012 type N-series plugs and jacks for RGB, RG11, RG213 and RG126 Cable |  |  | 318229 |
| CATV"F" connectors RG59 and RG6 |  |  | 318231 |
| AMP BNC/TNC RG58 |  |  | 842027 |
| AMP BNC/TNC RG59/62AU |  |  | 318233 |
| RG58 and RG174 cable groups for both 50 and 75 ohm center pins (Thinnet) |  |  | 318235 |
| RG58 and Belden B281 cable groups for both 50 and 75 ohm center pins. |  |  | 318237 |
| RG8 BNC/TNC |  |  | 318239 |
| RG174 and small cable connectors |  |  | 318241 |
| RG58, RG59, 62 Teflon BNC, TNC (plenum) and AIM |  |  | 318243 |
| RG6, RG58, BNC, (amphenol, KIngs, AIM) |  |  | 318245 |
| Belden 1694A |  |  | 318247 |

## Interchangeable Die Sets for Modular Plugs

| Application | Connector | Part # |
|---|---|---|
| RJ45 modular Plugs (WE) 8 position |  | 318253 |
| RJ11, 2 ,4 and 6 position (WE) |  | 318255 |
| Handset plugs (WE) |  | 318257 |
| RJ45 modular plugs (AMP) Keyed and non-Keyed, 8 position |  | 318259 |
| RJ11, 2, 4 and 6 position (AMP) |  | 318261 |
| RJ11 DEC-MMJ |  | 318263 |
| RJ69 10 position |  | 318265 |

## Interchangeable Die Sets for Closed Barrel Terminals Non-Insulated Terminals

| Application | Terminal | Part # |
|---|---|---|
| 22-8 AWG. Non-Insulated terminals and splices. |  | 318267 |

## Interchangeable Die Sets for Fiber Optics

| Application | Connector | Part # |
|---|---|---|
| Universal fiber optic die crimps most SMA type fiber optic con-nectors HEX |  | 318249 |

## Interchangeable Die Sets for Open Barrel Terminals

| Application | Terminal | Part # |
|---|---|---|
| 22-12 AWG. Non-Insulated, open barrels contacts |  | 318269 |


## Interchangeable Die Sets for Closed Barrel Terminals Insulated Terminals

| Application | Terminal | Part # |
|---|---|---|
| 22-12 AWG. Insulated terminals and splices. Dies are color coded to AWG specifications |  | 318271 |
| 22-12 AWG. Insulated terminals and splices. Maximum crimp for smaller wire barrels. Dies are color coded to AWG specifications | | 318273 |
| 26-14 AWG. Insulated terminals and splices. Dies are color coded to AWG specifications | | 318275 |

# TOOLS



**DB Crim**
Part # 514(

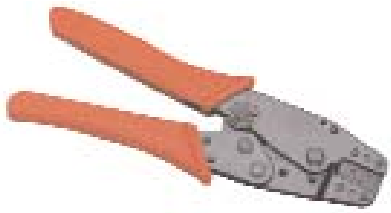

**DB Crimp Tool Low Volume**
Part # 514015 .....



**V.35 (**
**High '**
Part # 514020 .....




**Insertion/Extraction Tool STD. D-Sub**
Part # 514055 .....



**Extraction Tool V.35**
Part # 514053 .....



**Amp Insertion / Extraction Tool D-Sub**
Part # 315045 .....

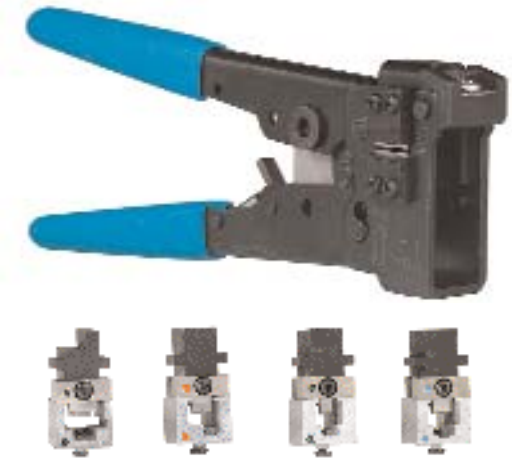

NCI sells these crimp tools with or without dies. The dies can be purchased separately or purchased installed.

| Description | Part # |
|---|---|
| ***AMP HV TOOL WITH "NO DIE"*** | 513000 |
| ***TOOLS WITH DIE*** | |
| 4 Cond. Handset & Tool | 513005 |
| RJ11/12 4&6 Cond. Tool | 513010 |
| DEC MMJ Tool | 513012 |
| RJ45 8 Cond. Tool | 513015 |
| ***DIE ONLY*** | |
| 4 Cond. "Die Only" | 513020 |
| RJ11/12 4&6 Cond. "Die Only" | 513018 |
| DEC MMJ 6 Cond. "Die Only" | 513019 |
| RJ45 8 Cond. "Die Only" | 513030 |
| Blade for AMP Tool (Top & Bottom) | 314965 |



**4 Cond. Handset Tool LV**
Part # 513070



**RJ11/12, 4&6 Cond. LV**
Part # 513071



**DEC MMJ 6 Cond. LV**
Part # 513072



**RJ45 8 Cond. LV**
Part # 513073



**RJ69 10 Cond. LV**
Part # 513074


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.



**Probe Pick**
Part # 512064



**Spudgers-Wired Ends**
Part # 512066



**Punchdown Tool Krone**
Part # 512031



**D814 Tool w/66 Blade "Impact"**
Part # 512035

**D814 Tool w/No Die**
Part # 512037

**D814 Tool w/110 Blade**
Part # 512036

**Ideal Punch Down Tool w/66 BLade**
Part # 319707



**Standard Blade Kit-2-66, 2-110, 2-Punches**
Part # ?



**Deluxe DBK-6 Blade Kit**
Part # 512038



**Manual Wire Wrap / Unwrap Tool**
Part # 511060



**Manual Wire Wrap Gun for 24 AWG**
Part # 511040



**AT&T 5 pr. 110 Punch Down Tool**
Part # 512043

**Siemon 5 pr. Punch Down Tool**
Part # 311751

**D814 66 Blade for**
Part # 512050



**D814 110 Blade for**
Part # 512044



**D814 Krone Blade for**
Part # 512039



**D814 Bix Blade for**
Part # 512041



These "Butt-In" test sets feature: DTMF Pulse, Last# Redial, Built-In Ringer, Amplified Speaker, Recall Memories, HI-Z monitor and speaker phone. STD=Standard cord ABN.

***TS19 Models***



***TS21 Models***



***TS22 Models***



***WTS Models***



| Description | Part# | Ref # | DTMF | Last# Redial | Ringer | Amplified Speaker | Recall Memories | Hi-Z Monitor | Speaker Phone |
|---|---|---|---|---|---|---|---|---|---|
| TS19 Mean Green "Cord Set A" | 852018 | TS19A | ‡ | ‡ | ‡ | | | ‡ | |
| TS19 Mean Green "Cord Set B" | 851546 | TS19B | ‡ | ‡ | ‡ | | | ‡ | |
| TS21 Standard Cord 5" | 852020 | TS21STD | ‡ | Pulse | | | | | |
| TS21 Angled Nails Cord 5" | 851548 | TS21ABN | ‡ | Pulse | | | | | |
| TS21 Weather Resistant | 851550 | TS21WR | ‡ | Pulse | | | | | |
| TS21 Ground Start System Cord | 851552 | TS21GND | ‡ | Pulse | | | | | |
| TS21 Central Office Cord w/346A Plus | 851554 | TS21CO | ‡ | Pulse | | | | | |
| TS22 Amp. Speaker, Ringer, 9# Memory STD Cord | 852022 | TS22STD | ‡ | ‡ | ‡ | ‡ | ‡ | | |
| TS22 Amp. Speaker, Ringer, 9# Memory Nail Cord | 851556 | TS22ABN | ‡ | ‡ | ‡ | ‡ | ‡ | | |
| TS22 Amp. Speaker, Ringer, 9# Ground Start | 851558 | TS22GND | ‡ | ‡ | ‡ | ‡ | ‡ | | |
| TS22 Amp. Speaker, Ringer, 9# Central Office | 851560 | TS22CO | ‡ | ‡ | ‡ | ‡ | ‡ | | |
| TS22 Amp. Speaker, Phone +Hi- Z, STD Cord | 851562 | TS22ASTD | ‡ | ‡ | ‡ | ‡ | ‡ | ‡ | ‡ |
| TS22 Amp. Speaker, Phone +Hi- Z, Nail Cord | 851564 | TS22ABN | ‡ | ‡ | ‡ | ‡ | ‡ | ‡ | ‡ |
| TS22 Amp. Speaker, Phone +Hi- Z, Ground Start | 851566 | TS22AGND | ‡ | ‡ | ‡ | ‡ | ‡ | ‡ | ‡ |
| TS22 Amp. Speaker, Phone +Hi- Z, Central Office | 851568 | TS22ACO | ‡ | ‡ | ‡ | ‡ | ‡ | ‡ | ‡ |
| WTS- 301 Weatherproof | 851570 | WTS301 | ‡ | ‡ | ‡ | | | ‡ | |
| WTS- 201 Weatherproof | 852025 | WTS201 | ‡ | ‡ | ‡ | | | ‡ | |

## IDEAL

The IDEAL PathFinder™ Tester is specifically designed for professional installers and maintenance technicians. It maps, tests and troubleshoots installed data communications, phone wiring and coaxial cable runs in a new construction and in existing facilities. Quickly and easily map, test and verify both common and modified wiring configurations from one location.

**Kit Contains:**
- PathFinder Tester
- Four Remote Modules
- Storage Case



### 33-812 PathFinder Tester Kit
Part # 319721

**Kit Contains:**
- PathFinder Tester
- Four Remote Modules
- RJ-45 Crimpmaster Crimp Tool
- Punchmaster Punch Down Tool
- Blade for Punch Down Tool
- Amplifier Probe
- Twisted Pair Stripper & Cutter
- Storage Case



### 33-813 PathFinder Tester Kit
Part # 319723

**Kit Contains:**
- PathFinder Tester
- Four Remote Modules
- Wiring Verifier-Patch Cable Tester
- Smart6™ Modular Tester
- Data8™ Modular Tester Adapter
- Amplifier Probe
- Storage Case



### 33-814 PathFinder Tester Kit
Part # 319725



### MT-5000 Siemon Multitester
Part # 311747



### PC Cable check
Part # 318201



### SLT 3 Tester
Part # 314101



### STM-8- Test Usoc, At&t, Dec, 10-Base-T
Part # 851544




### Fox & Hound Holster
Part # 534303

### Fox & Hound Tracer
Part # 534301



### Inductive Amplifier 200B
Part # 852030




### Inductive Amplifier 200EP
Part # 851536



### Inductive Amplifier Holster
Part # 852031



### Inductive Amplifier
Part # 320001




### Patch Check Plus-8 Wire Tester
Part # 851542



### Tone Generator Superior Alligator
Part # 852017



### RS232 Breakout Box
Part # 851112

### V.35 Breakout Box
Part # 313661



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

## MICROTEST®

Microtest invented hand-held LAN cable testers and is the leader in cable certification and diagnostic technology. They've pioneered innovative solutions to real world networking problems and those innovations led the industry in making life easier for LAN managers, service providers and cable installers.

### MT-350 Scanner Kit

***The Network Cable Expert In A Box!***

It saves you time installing, troubleshooting, and maintaining your network cable systems.

The **MT350 Scanner** supports Ethernet, Token Ring, 10 BASE-T and other standard network types: The Autotest complies to industry specs to accurately measure crosstalk, attenuation, length, resistance, noise, signal-to-crosstalk ratio and more, on all wire pairs. Using **Flash ROM Technology** you can quickly upgrade your **MT350** capabilities by downloading ROM updates into your scanner - instantly & in the field. The **MT350** keeps you going with a replaceable, rechargeable battery that has 8 hours of operation (4 hours in continuous Autotest mode).

### MT-310 Scanner Kit

***The Convenient, Easy-to-Use Network Fault Finder for On-the-Go Network Troubleshooting and Certification.***

The **MT310 Scanner** solves many challenges associated with troubleshooting and managing both unshielded twisted pair (UTP) and coax networks. It is designed for the LAN administrator, LAN technician or cable installer.

The menu-driven user interface is designed to be especially easy to learn and use in the field.

Plus, if the cable fails you don't have to guess why. The **MT310 Scanner** identifies out-of-spec results. The latest Autotest result can be printed to any 9600 baud serial printer or simply download to any database as a comma-separated file.With the optional Cable Tracer-II you can even trace cables located in floors, walls and ceiling.

### PentaScanner

***Pentascanner is the fastest, hand-held cable certification and diagnostic solution for category 5 cable systems.***

PentaScanner's easy-to-read, backlit, graphical displays shows you right where wiring errors are, so you can go directly to the source and make the necessary corrections. PentaScanner also monitors and graphs network traffic, to help solve intermittent cable problems. PentaScanner's Autotest performs a full suite of tests, compares the results to EIA 568A & Network standards, grades cable category and gives you a pass/fail result. Then you can print your complete easy-to-read certification report or store up to 500 Autotest results. PentaScanner's Autotest meets industry specifications to accurately measure crosstalk, attenuation, length, signal-to-attenuation ratio, capacitance, impedance and more, on all 4 wire pairs and the shield.

PentaScanner supports all network and cable types.With a 10 hour replaceable, rechargeable battery PentaScanner keeps you going for the entire job.

MICROTEST



**MT-350 Scanner Kit**
Part. # 851594




**MT-310 Scanner Kit**
Part. # 851590




**Penta Scanner w/ 2 Way Injector**
Part. #318911

**Penta Scanner w/ Super Injector**
Part. # 851996

**2 Way Injector for Old Penta Scanner**
Part. #318909

## Scanner Accessories

| Description | Part # | |
|---|---|---|
| Cable Management System Software | 318913 | |
| CMS F/ Windows | 318915 | Call |
| Cable Tracer | 318917 | |
| RJ45 F-F, Shielded | 318919 | Call |
| Telco Adapter Kit MT-350 | 851602 | |
| Token Ring Adapter | 318921 | |
| Coax Adapter Kit | 851606 | |
| Large Canvas Case | 318923 | Call |

Telco Adapter Kit MT-350



Telco Adapter Kit MT-350





Cable Tracer



**LANTEK PRO XL**
Part. # 540601 **4441.00**

**FIBERKIT for LANTEK PRO XL**
Part. # 540603 —

## WAVETEK

### LANTEK™ PRO Series... *Certify with Confidence.*

Confidence and speed! The two qualities you need most to certify and troubleshoot your LAN installation. Confidence to know your LAN meets TIA and ISO standards.

And speed to do your job efficiently and economically. In less than 30 seconds, the Autotest completes line map, DC loop resistance, length, capacitance, Dual Next™, attenuation and Attenuation-to-Crosstalk Ratios (ACR) measurements.

The LANTEK™ PRO gives you tremendous speed advantage, without compromising performance. Our advanced design guarantees TSB-67 Level II accuracy for basic and channel links.

The LANTEK™ PRO stores up to 500 Autotests. You can easily print each test or download all the tests into a PC for later use. You can even sort test results! Users can select TIA or ISO Autotest suites to automatically perform all the tests required by the respective standard. Cable types and test suites can be customized by the user to adapt to specific needs.

The LANTEK™ PRO also comes with built-in troubleshooting using Cable Expert™. If Autotest fails, a simple press of the button enables Cable Expert™ to highlight the suspected problem and display troubleshooting advice describing both the problem and the possible causes.

And with a typical battery life of more than 8 hours, the LANTEK PRO™ is ready for a full day's work. The dual bay battery charger comes standard with the tester. Recharging takes less than 3 hours.

Now announcing new Fiber Optic Cable power loss measurements capability for the LANTEK™ PRO! . With the new FIBERKIT, the LANTEK™ PRO directly displays optical power loss through fiber cable, splices and connectors. With this powerful but simple fiber conversion, you can verify proper connection of fiber cabling with the same LANTEK™ PRO you use for copper cable. Save big dollars with the convenience of adding FIBERKIT capability to your LANTEK™ PRO - now the only LAN cable tester capable of testing ALL your cable.

# FLUKE

*The First digital Cat 5 tester with unique diagnostic capabilities*



## DPS - 100 Cat 5 Tester
Part. #334305

## DPS - 100 w/ Smart Remote
(for 2 way Testing)
Part. #334307

## Smart Remote for Standard DSP-100)
Part. #334309

## Spare Battery
Part. #334311

## External Battery Carger
Part. #334313

## Standard Remote

Certify your category 5 UTP cabling installation with confidence. The Fluke DSP-100 is a rugged, handheld field tester that uses a revolutionary digital technology to give you a powerful combination of capabilities. • Laboratory-level accuracy in a handheld field tester • Meets or exceeds the stringent TIA TBS-67 Level II accuracy requirements • Record test time: Complete test of a four pair Cat 5 cable in less than 17 seconds • Automatically test NEXT from ends • Unmatched diagnostics: Precisely locate the source of crosstalk problems • Connects directly to 8-pin modular jacks (RJ45) without external adapter • Test a wide variety of LAN cabling systems: UTP, FTP, STP (IBM Type 1,2,6,9), Coax • Saves up to 500 test results • Free Windows® based DSP-LINK software delivers sophisticated test results data management • Fast test execution, accurate answers, and diagnostics save you time and money • NiCD rechargeable battery (10-12 hrs) rechargeable time 2.5 hrs - May be recharged while using - Memory backup Lithium battery - Remote uses 9 Volt good for 6 mos.

*Comprehensive LAN cable performance tester*



## 652 Cable Meter
Part. #334317

The Fluke 652 CableMeter provides a complete suite of tests; from wire mapping to noise and traffic measurements; from Near-End Crosstalk (NEXT) to identifying split pairs and conformance testing to EIA/TIA568 cable specification.
• Test and troubleshoots Coax, UTP, and STP • Capability to add two user-defined cable types • Verify end-to-end connectivity per EIA/TIA 568 wiring standard • Detect wiring problems: opens, shorts, miswires, (crossed,reversed,split pair) • Measure length as well as distance to fault using TDR • Measure termination impedance and characteristic impedance • Measure attenuation and NEXT up to 20 MHz and report worst case • Issue pass/fail result based on IEEE 802 link segment specification • Verify conformance to EIA/TIA cable specifications • Time-stamped noise monitoring • Print LAN cable results (memory capacity of 500 tests) • Monitor Ethernet traffic: utilization and collisions • Bright four-line display with backlight • 6AA alkaline battery, 650R remote Unit, 1 9Volt alkaline battery, 8 hrs continuous operation • **Comes with 650R Remote Unit, C650 soft case, AC Adapter, Users manual, Warranty registration, N6520 cable kit contains:2 RJ45 Patch Cables, 2 RJ45 8 Clip Lead Cables, 2 RJ45 Remote Couplers, 1 50W BNC Coaxial Cable, 1 Printer Cable, DB9 to DB25.**

*The Easy to Use & Multifuntional LAN Cable tester*



## 650 Cable Meter
Part. 334319

The Fluke 650 LAN CableMeter offers the right combination of performance, features and ease of use for rapid problem diagnosis and certification of LAN cables. It is ideal for use by cable installers, LAN maintainers and managers who work with both unshielded twisted pair (UTP) or coaxial cables.
• Test and troubleshoots Coax, UTP • Capability to add two user-defined cable types • Verify end-to-end connectivity per EIA/TIA 568 wiring standard • Detect wiring problems: opens, shorts, miswires, (crossed-,reversed-,split pair) • Measure length as well as distance to fault using TDR • Measure termination impedance and characteristic impedance • Measure attenuation and NEXT up to 10 MHz and report worst case • Issue pass/fail result based on IEEE 802 link segment specification • Verify conformance to EIA/TIA cable specifications • Time-stamped noise monitoring • Print LAN cable results (memory capacity of 50 tests) • Monitor Ethernet traffic: utilization and collisions • Replaceable 9 Volt alkaline batteries or 120 Volt ac line adapter • **Comes with Remote unit, 2 RJ45 patch, RJ45 clip lead cable, 50W BNC Coaxial Cable ac line adapter, 2 spare 9 Volt batteries, soft carrying case, manual.**

*The one-person LAN cable verification tool*




## 620 Cable Meter
Part. 334321

## Cable Identifiers #2-4
Part. 334323

## Cable Identifiers #5-8
Part. 334325

The new Fluke 620 CableMeter verifies the correct termination, connection and routing of LAN cabling. Utilizing a new technology, the 620 is the only instrument that can test whether a connection has been properly implemented without using a remote unit at the other end of the cable. This allows the installers to "test the connection as they go".
• One person verifies each connection as he goes - Does not require a remote unit at the end of the cable - "Certifying" tested cables saves time and money • Test all LAN cable types • UTP, STP, FTP, Coax • 2, 3, 4, wire pairs in twisted pair cables • Tests (all category) UTP cables and hardware • Verify end-to-end connectivity per EIA/TIA 569 wiring standard • Detect wiring problems: opens, shorts, miswires, (crossed-,reversed-,split pair) • Locates wiring/connection errors (distance to the open or short) • Measure cable length • Easy to use - Single rotary knob to select the test • Two line LCD display with backlight • Handheld, 1.5 Volt Alkaline Size AA batteries (2) long battery life (50 hours continuous), cable identifier: none • **Comes with, Carrying case, 1 UTP category 5 patch cable, RJ45-RJ45 straight through, 4 ft/1.25m in length (EIA/TIA 4 pair Cat 5), 1 RJ45-RJ45 In-line Coupler (Barrel connector),1 cable identifier for the verification of wire map and cable routing, Quick reference card, Operator manual • Warranty card.**

*The one-button answer to wire mapping*




## 610 Cable Mapper
Part. #334327

## Cable Identifiers #2-4
Part. #334329

## Cable Identifiers #5-8
Part. #334331

The new Fluke 610 Cable Mapper is designed to find all UTP termination faults at the touch of a button and detect split pairs - something no other wiremapper can do.

• Verify end-to-end UTP connectivity per EIA/TIA 569 wiring standard • Detect wiring problems: opens, shorts, miswires, (crossed-,reversed-,split pair) • Lowest cost product to detect "Split Pair" - Measures Near End Cross Talk (NEXT) at 10 MHz • Bright LEDs indicated pass (green) or fail (red) for each wire pair • Failure code is displayed with each wiring detect • Always requires a "Cable Identifier" at the remote end of the cable • Test cables up to 122m (400ft) in length • Lightweight, handheld design in protective holster • 1 9Volt Alkaline battery (battery life 1500 tests), Cable identifier: none, Low power indication on the display • **Comes with 1 Cable identifier (#1), Soft carrying case, User manual, warranty registration card, N6103 Cable Kit: 1 24" RJ45-to-RJ45 straight through patch cable, 2 RJ45-to-RJ45 female couplers.**

## STM-8 Modular Test Set

*The economical and versatile hand tester.*



The STM-8 is capable of testing up to 900m (2,950ft) of 1, 2, 3 or 4 pair UTP cable for opens, shorts, reversals, miswires and split pairs. Easy-to-read LCD display, and multiple remotes allow one person to quickly test and identify up to four different cable runs from one location. Tests T568A/B, USOC, 10Base-T, Token Ring and TP-PMD wiring configurations. Low battery and line voltage indicators standard. Kit consists of master unit with a remote plug along with an in-line coupler, a modular cord, Sieman's Wiring Reference Guide, instructions, and a 9V alkaline battery all packed into a handy carrying case. Three additional remote plugs can be purchased for multiple channel testing. Each of the four remotes can be identified by the master unit.

**STM-8 Hand Held Tester**
Part # 851544 –

**Remote Plugs B, C & D**
Part.# 311749 –

## SLT-3 Modular Cable Tester

*The ergonomically designed hand-held tester.*




**SLT-3 Modular Cable Set**
Part. # 314101 –

The MOD-TAP SLT3's innovative 3-in-1 design features modular jacks for testing USOC, 568A/B and RS423 (MMJ) cabling systems providing instant identification of most common voice and data cabling problems including shorts, opens, reversals, and miswires. The master and remote units separate for end-to-end testing of installed cabling & results are shown on LED display.
Both pieces snap together when not in use making it easy to carry and store.
This ergonomically designed hand-held unit is lightweight, rugged, and impact-resistant. Kit includes a 9V alkaline battery.

## Patch-Check Plus Cable Tester

*For remote continuity testing of voice and data media using RJ11 and RJ45 jacks.*




**Patch Check Plus**
Part. # 851542 –

Patch Check Plus verifies continuity of each wire of RJ11 or RJ45 cable installations up to 1200ft in length from one end. Patch Check Plus identifies open, shorted and cross connected wires with clear L.E.D. display and audible signal. Each touch of the test button compares the relationship of one pin on the transmit side with the corresponding pin at the far end receiver. Transmitter and receiver are shipped with 9 Volt batteries installed and system interconnects for RJ11, RJ45 and MMJ (DEC)


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.



## IDEAL Premier T-Master™ Twisted Pair Kit

Part # 851580

Ref #

**Kit Includes:**
1 IDEAL PremierMaster™ TelCom Crimp Frame, 1 RJ45 keyed & non-keyed die set, 1 RJ11 die set, 1RJ11 DEC MMJ die set, 1 AMP RJ45 die set, 1 IDEAL Cyclops® twisted pair cable stripper, 1 round cable cutter, 50 each RJ11 DEC MMJ round modular plugs, RJ11 six-position round modular plugs, RJ11 four-position round modular plugs, Blow molded case with foam cut-out interior.



## Universal Lan Kit w/ Connectors

Part # 851574

Ref #

**Kit Includes:**
1 Coax Stripper, 1 Coax cassette, 1 Ethernet Thickwire Toggle stripper, 1 DEC Thinnet Toggle RG58 stripper, 1 Ideal Crimpmaster™ Crimp Tool frame, 1 Coax Cable Cutter, 1 Coax Center Conductor Trimmer, 1 Round Cable Slitter, 1 AMP Thinnet RG58 round coax die set, 1 RG58 & RG59/62 coax die set,1 RG8/11 Thickwire Ethernet Die Set, 1 RG58 & RG59 Plenum Die Set, RG58/59 terminators, RG8/11 terminators, RG8/11 connectors, RG58/59 male-female female tees, RG59 BNC connectors, RG58 Thinnet BNC connectors, RG58/59 coupler BNC connectors, RG8/11 TNC couplers, Blow molded case with foam cut-out interior.



## RJ45/11 2,4,6 & 8 Position Combination TelCom Termination Kit

Part # 851582

Ref #

**Kit Includes:**
1 RJ45/11 Combination TelCom Crimp Tool for keyed & non-keyed RJ45 plugs with built-in cut strip blades, 15 each of 4 & 6 position RJ11 modular plugs, 15 each 8 position RJ45 modular plugs, Blow molded case with foam cut-out interior.



## Crimpmaster Ethernet Kit

Part # 851581

Ref #

**Kit Includes:**
1 IDEAL Crimpmaster™ Crimp Tool, 1 RG58 & RG59/62 hex coax die set, 1 Thickwire Ethernet die set, 1 RG58 toggle coax stripper, 1 Ethernet Thickwire Toggle stripper, Blow molded case with foam cut-out interior.



## Economy 10Base-T Kit

Part # 851578

Ref #

**Kit Includes:**
1 RJ11/45 IDEAL Telemaster™ TelCom crimper, 1 IDEAL Cyclops® twisted pair cable stripper, 50 each RJ45 eight-position modular plugs, Blow molded case with foam cut-out interior.



## IDEAL Crimpmaster™ RG58/RG59 BNC Combination Crimping Tool

Part # 851584

Ref #

**Kit Includes:**
1 RG58/59 Crimp Tool, 1 three step Coax Stripper, 10 each RG58 male BNC connectors, 10 each RG59 male BNC Connectors, 5 each RG58 blue strain relief boots, 5 each RG58 black strain relief boots, 5 each RG59 blue strain relief boots, 5 each RG59 black strain relief boots, Blow molded case with foam cut-out interior.

## Twisted Pair Installer Kit

Part # 319711

Ref #

**Kit Includes:**
1 602-100 Tone Generator & 62-104 Amplifier Probe for identifying cable pairs, 1 Cable cutter, 1 Wire stripper for removing twisted pair outer jackets, 1 eight position modular plug crimp tool, 1 RJ11 modular plug die set, Heavy-duty plastic case with foam inserts to store and protect tools from job site conditions.

## Voice and Data Termination Kit

Part # 319717

Ref #

**Kit Includes:**
1 Punch down tool with 110 blade, 66 blade IDEAL Crimpmaster™ RJ45 Tool, RJ11 die set, Round cable cutter, Line cord stripper, Amplifier probe and tone generator.

## Deluxe IDEAL Crimpmaster™ Coaxial Crimping Kit

Part # 851572

Ref #

**Kit Includes:**
1 IDEAL Crimpmaster™ tool frame, 1 Coax Stripper, 1 Replacement Coax Cassette, 1 RG58 & RG59/62 Die Set, 1 RG58 & RG8281 Die Set, 1 RG58 & RG174 Die Set, 1 RG8/11 Ethernet Die Set, 1 RG58 & RG59 Plenum Die Set, 1 RG58 round AMP Thinnet/Die set, Blow molded case with foam cut-out interior.

## Twisted Pair Coax Termination Kit

Part # 319715

Ref #

**Kit Includes:**
1 Punch down tool with 66 blade, 110 blade, IDEAL Crimpmaster™ frame only, RJ11 die set, RJ11 DEC die set, RG45 die set, N-Series die set, RJ45 AMP die set, RG58-RG59 & RG62 BNC die set, round thinwire die set, round cable cutter, line cord stripper, UTP stripper, 2 coax stripper, replacement cassette.

## Cable Service Termination Kit

Part # 319713

Ref #

**Kit Includes:**
1 IDEAL Crimpmaster™ full cycle ratchet crimping tool, die sets for RJ45 & RJ11 modular plugs, 1 die set for BNC/TNC connectors for RG58 - RG62 & RG58 cables, round cable cutter & coaxial center conductor trimmer, tone generator, amplifier probe, IDEAL wiring verifier cable tester.

## Twin-Ax Termination Kit

Part # 851576

Ref #

**Kit Includes:**
1 Twin-Ax Cable Stripper, 1 IDEAL Super T®-Stripper Static Dissipative, 1 Center Conductor Trimmer, 1 4-Way Indent Center Pin Crimper, Blow molded case with foam cut-out interior.

# TOOL KITS



Computer Service Kit 12 pieces

Part # 517720

Computer Service Kit 21 pieces

Part # 517721

Computer Service Kit 24 pieces

Part # 517722

## 3-Sided Tool Kit

Designed for those electronic technicians who service/repair a broad range of systems. Cordura plus case measures 18 x 12 1/2 x 9 1/2 outside and weighs 6 lbs, empty. Easily transported by web-strap handles or included shoulder strap. Tool compartment measures 17 1/2 x 12 x 1 1/2" inside, the computer/paper file side measures 17 1/2 x 12 x 3 1/2" inside and middle equipment section measures 17 1/2 x 12 x 4" inside. Tool kit weighs 15 lbs.

**Kit Includes:**
75 tools in all:
Cover, soldering iron • Desolder Tool • Extension blade, 4" • Handle, T-style • Hex blades, (9): - 3/15" • Hey key set, (6): 1.5-5mm • Mirror/magnet retriever • Nutdriver blades, (9): 3 1/16 -1/2" • Penlight, AAA • Pliers (6): 6" long nose with cutter; 7" groove joint; 4 3/4" long nose; 5" locking • Scissors, electrician's • Screwdriver 2-in-1 • Screwdriver blades (4): slotted4 and 3/16, Phillips: #1 and #2 • Screwdriver, offset; Phillips/slotted • Screwdriver (7): slotted 1/4 x4, 1/8 x8, 3/32 x2, 3/16 x6" Phillips: #0 x 2, #1 x 6", #2 x 4" • Screwdriver set, jewelers; 3 Phillips, 3 slotted • Screwstarter, double end • Socket set, 13 pc.: 1/4" drive • Soldering iron, 25 watt • Tweezers, Boley • Wire stripper/cutter • Wrench, adjustable, 6" Zipper case










3 Sided Tool Kit

Part # 334009

Tool Kit Refill

Part # 334011


3 Sided Case Only

Part # 334023

**For Fiber Optic Tools & Kits see our FIBER OPTICS Section**

# TOOLS

# INSTALLER Accessories

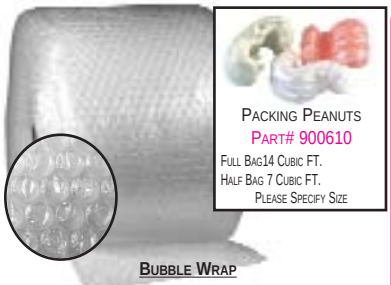

Packing Peanuts
Part# 900610
Full Bag14 Cubic Ft.
Half Bag 7 Cubic Ft.
Please Specify Size

**Bubble Wrap**
Full Reel - 250' x 2' x 1/2" # 900625
Half Reel - 125' x 2' x 1/2" # 900625



TOOL POUCH
Part# 500105

TOOL BAG
Part# 500100
Klein 5102-20"



| Description | Part # |
|---|---|
| Black Electrical Tape | 900162BK |
| Blue Electrical Tape | 900162BL |
| Brown Electrical Tape | 900162BR |
| Green Electrical Tape | 900162GR |
| Gray Electrical Tape | 900162GY |
| Orange Electrical Tape | 900162OR |
| Red Electrical Tape | 900162RE |
| Yellow Electrical Tape | 900162YE |
| White Electrical Tape | 900162WH |



| Description | Part # |
|---|---|
| Fish Tape - SNAKE - 50" x 1/8" Steel* | 874205 |
| Fish Tape - SNAKE - 50" x 3/16" Steel | 874207 |
| Fish Tape - SNAKE - 50" x 1/4" Steel | 874209 |
| Fish Tape - SNAKE - 100" x 1/4" Steel | 874220 |
| Fish Tape - SNAKE - 100" x 1/8" Steel | 874208 |
| Pull String | 874105 |



| Description | Part # | Repl. Lamp# |
|---|---|---|
| AAA (2 bat) Type | 870878 | 870888 2 pk |
| AA (2 bat) Type | 870879 | 870889 2 pk |
| Belt Holster for Above 2 | 870999 | ----- ------ |
| C (2 Bat) Type | 870880 | 870890 ea |
| C (3 Bat) Type | 870881 | 870891 ea |
| C (4 Bat) Type | 870882 | 870892 ea |
| D (2 Bat) Type | 870883 | 870890 ea |
| D (3 Bat) Type | 870884 | 870891 ea |
| D (4 Bat) Type | 870885 | 870892 ea |
| D (5 Bat) Type | 870880 | 870893 ea |
| D (6 Bat) Type | 870887 | 870894 ea |



Computer ac cleans inside of computer or keyboard surface attachments bags.

**Computer Vac .....# 851608**
**Replacement Bags .....# 851611**



Panavise Head #534000
Panavise Base #534001



| Description | Part # |
|---|---|
| Air Freshener - Mint 12 oz | 889122 |
| Air Freshener - Spice 12 oz | 889122-spice |
| Duster Spray (Compressed Air) 10oz | 889115 |
| Anti Static Spray 16 oz | 889118 |
| Chamois Tips - 50 Swabs 6.5" s/s | 889102 |
| Chamois Tips - 50 Swabs 3.5" d/s | 889103 |
| Contact Cleaner 16 oz | 889110 |
| Contact Cleaner Plus (w/ Lube) 16 oz | 889101 |
| Contact Restorer 16 oz | 889114 |
| Control Wipes 6" x 6" 300 qty | 889108 |
| Control Wipes 9" x 9" 300 qty | 889109 |
| Cotton Tips - 100 qty | 889104 |
| Electro Cleaner 12 oz | 889124 |
| Gold Guard 8 oz. can | 889106 |
| Lithum Spray grease | 889126 |
| Lubricant (Pulling) - Quart | 889128 |
| Lubricant (Pulling) - Gallon | 889130 |
| Oil - Drilling, Tapping & Cut (Thick) | 889127 |
| Magnetic Head Cleaner 8 oz | 889117 |
| Penetrating Oil 12 oz | 889121 |
| Plastic & Glass Anti-Static Cleaner 16 oz | 889116 |
| Silicone 8 oz | 889119 |
| Sink and Porcelan Cleaner 12 oz | 889123 |
| Super Glue | 889120 |
| Super Bonder 1 oz | 8891250 |



Standard Roll is 108 feet.

| Description | Part # |
|---|---|
| Double Sided Foam Tape 1/2" | 900145 |
| Double Sided Foam Tape 1" | 900148 |
| Double Sided Foam Tape 2" | 900150 |

| Description | Part # |
|---|---|
| Double Sided Foam Squares 2" x 2" | 424075 |




Standard Roll is 75 feet.

| Description | Part # |
|---|---|
| Hook 1" White | 900180 |
| Loop 1" White | 900182 |
| Hook 2" White | 900185 |
| Loop 2" White | 900186 |
| Hook 4" White | 900190 |
| Loop 4" White | 900191 |




| Description | Part # |
|---|---|
| AAA....1.5 Volt | 870815 |
| AA....1.5 Volt | 870810 |
| C .....1.5 Volt | 870818 |
| D .....1.5 Volt | 870820 |
| N .....1.5 Volt | 870821 |
| 9 Volt | 870825 |

## Power Strips



| Description | Part # |
|---|---|
| TRIPP LITE Super 7 - Filters EMI/RFI, Suppression, Checks line | 335001 |
| 6 Outlet w/Spike & Surge | 817150 |
| 6 Outlet | 817125 |




| Description | Part # |
|---|---|
| PC Power Cord (A,B) | 817101 |
| PC Monitor Cord (C,D) | 817102 |
| PC Monitor Ext. (B,C) | 817111 |

Grounding Wrist Strap
Part # 314627

Tape Measures 30' x 1"
Part # 332109



| Description | Part # |
|---|---|
| Extension Cards 6 ft | 817115 |
| Extension Cards 10 ft | 817117 |
| Extension Cards 15 ft | 817105 |
| Extension Cards 25 ft | 817119 |
| Extension Cards 50 ft | 817104 |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

# Staple Guns & Staples



| Description | Part # |
|---|---|
| T18 Staple Gun (34/16 Crown) | 517504 |
| T18 3/8" Staples - Box 1000 | 870602 |
| T18 7/16" Staples - Box 1000 | 870603 |
| T25 Staple Gun (1/4" Crown) | 517505 |
| T25 9/32" Staples - Box 1000 | 815526 |
| T25 3/8" Staples - Box 1000 | 870600 |
| T25 7/16" Staples - Box 1000 | 870605 |
| T25 9/16" Staples - Box 1000 | 870607 |
| T50 Staple Gun | 517506 |
| T50 3/8" Staple 1250 | 870611 |
| T50 5/16" Staple 1250 | 517507 |
| T50 1/2" Staple 1250 | 517508 |
| T50 9/16" Staple 1250 | 517509 |
| T75 Staple Gun (1/2 Crown) | 517510 |
| T75 9/16" Staples - Box 1000 | 870609 |
| T75 5/8" Staples - Box 1000 | 815532 |
| T75 7/8" Staples - Box 1000 | 815534 |
| T59 Staple Gun (Up to 5/16") | 870619 |
| T59 Staple 1/4" Clr. 300 | 870613 |
| T59 Staple 5/6" Clr. 300 | 870615 |
| T59 Staple 5/6" Bl 300 | 870617 |




# Cable Duct



| Description | Part # |
|---|---|
| Ivory .75" x .5" x 6'* | 320401 |
| Ivory 1.25" x .75" x 6' | 320407 |



| Description | Part # |
|---|---|
| Gray 2" x 2" x 6' w/Cover | 521723 |
| Gray 3" x 3" x 6' w/Cover | 521724 |



| Description | Part # |
|---|---|
| Gray 2" x 2" x 6' w/Cover | 521720 |
| Gray 3" x 3" x 6' w/Cover | 521721 |
| Gray 4" x 4" x 6' w/Cover* | 521722 |



| Description | Part # |
|---|---|
| Flexi Floor Duct Cord Guard 3" wide (Ivory) | 817175 |

# Cable Ties



**Cable Tie Gun**
Part #517550



Part #320421



| Description | Part # |
|---|---|
| 4" Nylon White STD | 522110W |
| 6" Nylon White STD | 522113W |
| 8" Nylon White STD | 522129W |
| 12" Nylon White STD | 522130W |

Colors: B=Black, Y=Yellow, G=Green, O=Orange, R=Red, N=Brown, U=Blue
W= White Standard Cable - Add 25% to



| Description | Part # |
|---|---|
| 4" I.D. Nylon Cross Type | 522220W |



| Description | Part # |
|---|---|
| 6" Nylon | 522313W |
| 8" Nylon | 522325W |



| Description | Part # |
|---|---|
| Open Loop Ties 1" x 7" | 522115☆ |
| Open Loop Ties 1" x 12" | 522117☆ |
| Open Loop Ties 1.5" x 18" | 522118☆ |



| Description | Part # |
|---|---|
| Hook & Loop Cable Tie | 338201-B |
| Hook & Loop Cable Tie 8" w/Grommet | 522116-BR |



| Description | Part # |
|---|---|
| Cable Clamp 1/2" Screw Type | 521100 |
| 3/4 Square Adhesive Base | 521505 |
| 1 1/8 Square Adhesive Base | 521508 |
| 1 1/2 Square Adhesive Base | 521511 |

# "D" Rings

## Plastic




| Description | Part # |
|---|---|
| 3" x 3" Closed | 421572 |
| 5" x 3" Closed | 421572 |
| 6" x 4" Closed | 421573 |
| 8" x 4" Closed | 421574 |

## Metal Closed "D" Rings



| Description | Part # |
|---|---|
| 2" x 2" Closed | 421550 |
| 3" x 3" Closed | 421555 |
| 5" x 3" Closed | 421560 |

## Plastic Open "D" Rings

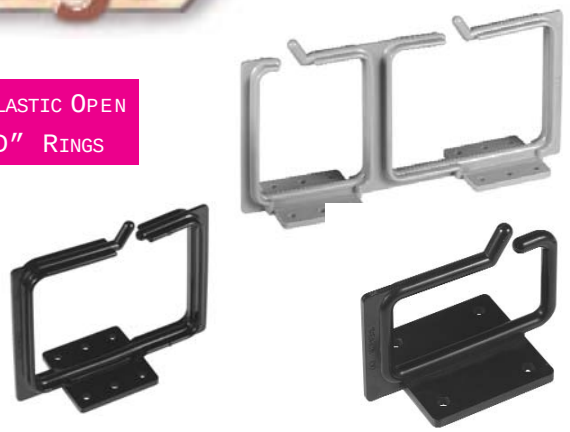

| Description | Part # |
|---|---|
| S143 "D" Ring 1.7 "x 1.7" x 3.5" | 421567 |
| S144 "D" Ring 3.95" x 2.5" 3" Open | 421568 |
| S145 "D" Ring 4" x 2.5" x 4.8" Open | 421565 |
| S146 "D" Ring 6" x 2.5" x 5.2" Open | 421566 |
| S147 "Double" Ring 10" x 2.5" x 5.2" | 421570 |

# Mounting Hardware







| Description | Part # |
|---|---|
| "B" Connerctors | 421055 |
| UR - 2/3 Wire Butt Conn | 424625 |
| UG 2 Wire Trap | 421630 |
| UY - 2 Wire Butt Conn | 421060 |




| Description | Part # |
|---|---|
| Clips- 6mm CATV Type RG58, 59, & 62 | 421610 |
| Clips- 7mm RG6, RG59 Dual Sheild | 421611 |



| Description | Part # |
|---|---|
| W/O Screw | 421621 |
| W/ Screw | 421620 |

| Description | Part # |
|---|---|
| .187" x 3" | 870100 |
| .25" x 4" | 870103 |





| Description | Part # |
|---|---|
| 1" | 870325 |
| 1 1/4" | 870327 |
| 1 5/8" | 870330 |
| 2" | 870333 |

# Accessories

**PT-340 P-Touch Labeler**
Part #313715
**PT-540 P-Touch Labeler**
Part #313723
**TZ-221 BK on WH Crtrdg 3/8"**
Part #313717
**TZ-231 BK on WH Crtrdg 1/2"**
Part #313719




**Standard Point Permanent Marker**
Part # 522140

**Extra Fine Point Permanent Marker**
Part # 522411



* Colors: B=Black, L=Blue, R=Red, G=Green

## Pocket Wire Marker



**90 Pack Write - On Labels 3/4" x 3"**
Part # 522520

## Computer Printable



**1" x 2.25"**
Part # 522525

| 8-200 | 208-992 | 1000&UP |
|---|---|---|

Priced Label Sold In Rows of 8




450 ID Markers per Book

| Description | Part # |
|---|---|
| Handi Book | 522507 |
| Handi Book A-Z, 0-15, +,-,/ | 522509 |
| Handi Book | 522511 |
| Handi Book | 522528 |
| Handi Book 1"x2 1/2" Write-On Label | 522532 |



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

## B/O Wire Wrapping Gun



| Description | Part# | Ref# |
|---|---|---|
| OK Battery Operated Wire Wrapping Gun | 511062 | BW-928BF |

## Hammer



| Description | Part# | Ref# |
|---|---|---|

## Batteries




| Description | Part# | |
|---|---|---|
| Eveready Rechargable C Batteries | 534502 | (2 per pack) |

## 66 Blade



| Description | Part# | Ref# |
|---|---|---|

## Work Light



| Description | Part# | Ref# |
|---|---|---|

## Battery Charger



| Description | Part# |
|---|---|

## Electric Wire Wrapping Gun



Wraps 18-30 Awg (1.0 to .25mm) wire

| Description | Part# | Ref# |
|---|---|---|
| OK Electric Wire Wrapping Gun | 318801 | 21-BF-U |

## Wire Wrapping Sleeve




| Description | Part# | Ref# |
|---|---|---|
| OK 22-24 Awg Wire Wrapping Sleeve | 318807 | P2224 |

## Wire Wrapping Bit



| Description | Part# | Ref# |
|---|---|---|

## MicroScanner




Microscanner-The Essential Cable Checker
Simple Twisted Pair Cable Testing:


- Displays cable lenghts and pinouts
- Pinpoints opens, shorts and mis-wired pairs
- Generates tone for locating hidden cables
- Matches cables to offices during adds, moves and changes

Microscanner is the fastest tool to verify cable integrity and wire configuration for:

- 10 Base T
- Token Ring
- Fast Ethernet
- ATM 155
- Category 3
- Category 4
- Category 5

| Description | Part# | Ref# |
|---|---|---|
| Microscanner for Twisted Pair (9 Volt Alkaline Battery Included) | 318912 | 8200-00 |

## AT&T Product Labels



| Description | Part# |
|---|---|
| AT&T 110 Product Configurator Insert Labels | 421232 |

# TOOLS

## Bix Punch Down Tool



| Description | Part# | Ref# |
|---|---|---|

## Ideal Replacement Blade

For 45-162, 45-163, 45-165



| Description | Part# | Ref# |
|---|---|---|
| Ideal Replacement Blade (3 pack)..... | 410458 | L-9225 |

## Modular Die



| Description | Part# | Ref# |
|---|---|---|

## Mounting Bracket



| Description | Part# | Ref# |
|---|---|---|
| Siemon Mounting Bracket..... | 311755 | SB8-10 |

## D714 Impact Tool



- Automatically Provides Uniform Termination on 66 and 110 Blocks
- Automatically Triggered
- Selectable Impact Force

| Description | Part# | Ref# |
|---|---|---|

## Mounting Bracket



| Description | Part# | Ref# |
|---|---|---|




- 270 Joule Energy Rating
- Full 3 Line AC Protection
- UL 1449 Rating of 330 Volts
- UL 1283 Approved EMI/RFI Noise Filtration

| Description | Part# | Ref# |
|---|---|---|

## Fluke Meter Tester



**Features:**

- MIN MAX AVERAGE recording mode with Min Max Alert.
- PEAK MIN MAX recording mode.
- Frequency and Duty Cycle measurement.
- Capacitance measurement.
- Touch Hold and Relative modes.
- Input Alert detects wrong input jack connections.
- Splash and dust proof case
- Digital display is or 4.5 digits
- Fast! 3.75-digit display updates 4 times/second.
- Analog display is a high resolution pointer.
- Back-lit display.
- 1000V protection in all functions.

| Description | Part# |
|---|---|

## In-Line Modular Adapter



| Description | Part# | Ref# |
|---|---|---|
| Harris 4wire In-Line Modular Adapter | 331809 | 10210-100 |

## SPC-395 Tool Kit



| Description | Part# |
|---|---|

## Klein SPC-33 Tool Kit



| Description | Part# |
|---|---|

## Makita Screwdriver Pack



| Description | Part# |
|---|---|

**Leather Belt Sheath Included**

- Needlenose Pliers
- Regular Pliers
- Wire Cutters
- Hard Wire Cutters
- Clip Point Knife
- Metal/Wood File
- 8 Inch/20cm Ruler
- Can/Bottle Opener
- Small Screwdriver
- Medium Screwdriver
- Large Screwdriver
- Phillips Screwdriver (#1/#2)
- Awl/Punch

## Pocket Tool



| Description | Part# |
|---|---|

## Ratchet Set



| Description | Part# | Ref# |
|---|---|---|

## Ratchet Set



| Description | Part# |
|---|---|

# TOOLS



## Crimp Tool

DESCRIPTION PART#



## Standoff Cable Tie Mount

DESCRIPTION PART# REF#



## WireScope 155

The WireScope 155 is the first level II cable analyzer to provide test coverage beyond 100 MHz. Featuring laboratory grade accuracy and a wide dynamic range, the WireScoop 155 is a powerful tool for certifying even the highest quality cabling, exceeding the category 5 requirements.

**With the WireScope 155, you can:**

- Certify premises wiring for TIA-568 Category 3, 4 or 5 compliance
- Certify premises wiring for ISO 11801 Class B, C or D compliance
- Determine whether the installation will support 155 Mb/s ATM networking
- Analyze measured cable parameters against the requirements of 20 standard LANs
- Measure the length of each pair in the cable or distance to cable fault
- Identify and locate split pairs, shorts, opens and miswires
- Certify fiber optic cable installations by attaching an optional Fiber SmartProbe
- Print or upload test results to a PC
- Customize cable and network parameters

### Basic Operation

The WireScope 155 works in concert with the Dual Remote 155 to perform a complete set of bi-directional measurements. The Dual Remote 155 is connected at the far end of the cable under test and assists the WireScope during the test by providing the needed cable terminations and by generating a swept signal for the attenuation measurement.

Since Near End Crosstalk (NEXT) is often different at each end of the cable, it must be measured at both ends to find the worst case pair combination. The WireScope measures NEXT at the near end while Dual Remote measures NEXT at the far end of the cable under test. The measurements performed at both ends of the cable can be accessed on the WireScope.

DESCRIPTION PART#




## 10 Base-T MultiTester

### TS130-R2

**Specifications:**

Indicators - (21) LEDs: (16) for cable testing, (2) for Link Pulse Detection, (1) for Data, (1) for Tip/Ring or Hub/DTE, (1) for Power.

Connectors - (2) RJ45 female

Power - (1) 9V Battery

Size - 4.5"H x 2.8"W x 1"D (11.4 x 7.1 x 2.5 cm)

Weight - 0.5 lb. (0.23 kg)

DESCRIPTION PART#



## 8" Wrench

Adjustable wrench with cushion grip

DESCRIPTION PART#

## JTK-36GC Toolkit



DESCRIPTION PART#

## Time Motion



DESCRIPTION PART#

## Fuse Puller



DESCRIPTION PART#

## Tile Puller



DESCRIPTION PART#

## BNC Removal Tool




DESCRIPTION PART#

## Crimp Tool



DESCRIPTION PART#

## Crimp Tool



DESCRIPTION PART#

## Crimp Tool



DESCRIPTION PART#

## Crimp Tool



DESCRIPTION PART#

# TOOLS

## Walkie Talkie



DESCRIPTION _____ PART# _____

## JTK45 Toolkit



DESCRIPTION _____ PART# _____

## Crimp Tool



DESCRIPTION _____ PART# _____

## Cutter & Blades



DESCRIPTION _____ PART# _____

## Light Stick




DESCRIPTION _____ PART# _____

## Surge Protector



DESCRIPTION _____ PART# _____

## D-Blade Cases



DESCRIPTION _____ PART# _____

# Reference Books

**NCI** offers a wide and varied selection of reference books for the computer professional, the computer illiterate, and everyone in between. We do our best to offer all the books you might need, however, due to the fast pace of the industry, new books are always coming out. If you need something you don't see here, give us a call and we'll do our best to get it for *you*.

## 1001 Computer Telephony Tips, Secrets and Shortcuts





*by Edwin Margulies 516 pgs, May 1996*

Finally! A book crammed with the best advice from the top experts in telephones, computers and communications. This is a "must read" for both newcomers and industry veterans. It contains a treasure trove of pointers from the most knowledgeable pioneers in computer telephony. Written in short, no-nonsense "sound bite" style, this book delivers over 1000 dollar & sanity-saving tips. You'll save the price of the book with 1 useful tip.

NCI# 815589

## 236 Killer Voice Processing Applications





*by Edwin Margulies 504 pgs, Sept. 1995*

Your telephone is the 1st line to your customers. You can give them information easily with voice processing systems But which is best for your company? This book is crammed with real-world examples of voice processing.
It gives you an overview of all the systems you could choose. Once you know the field, you can pick the ones that make the most sense for your company - ease of use, speed, price, customer impact, etc. With the right apps, your customers will appreciate you more, and your company is more productive and more profitable in the process.

NCI# 815573

## Client Server Computer Telephony





*by Edwin Margulies 549 pgs, Aug. 1994*

Almost every phone system (PBX and ACD) can now be attached to and controlled by a server on a local area network. This is a major revolution in telecom and offers major advantages to users. This is the 1st book on computer telephony. It spells out the benefits and a detailed description of how to achieve them. Over 20 experts have contributed chapters. They came from **DEC, Dialogic, Enterprise Integration Group, GammaLink, Microsoft, Novell, Opus Research, Sunsoft, Tern Systems** and **TRT**. Includes specifications and descriptions of the major client-server technologies - **SCSA, Novell's Telephony Services,** and **Microsoft's Windows Telephony.**

NCI# 815585

## SCSA: The Definitive Reference Manual to Using Signal Computing System Architecture in Computer Telephony





*By E. Margulies 450pgs, 2nd ed. Feb. 1996*

SCSA is a standard adopted by over 250+ companies, incl. **IBM, NEC, Northern Telecom, TI, Panasonic, Dialogic** and **Tandem.** Written by one of the architects of the standard, this guide is crammed with never-before published details of the fastest growing standard in PC-based call processing. Packed with over 100 drawings, graphs and tables, this easy-to-read book is a great primer for professionals in computer telephony. It shows how to build SCSA apps. incl. IVR, fax-on-demand, audiotex, predictive dialers, CTI links to PBXs and ACDs wireless, cellular and paging, international callback devices, help desks, telephony servers, multi-PC IVR solutions and other customized telecom solutions.

2nd EDITION

NCI# 815593

## ISDN: A Practical, Simple, Easy-To-Use Guide to Getting Up and Running on ISDN





*by William Flanagan, 180 pgs, Oct. 1995*

ISDN is an overnight success in the US--after 15 years in development and decade of deployment in Europe. Equipment vendors are rushing to support it. Telephone companies are selling it for every size application. Pricing is very appealing. Even residential customers are targeted for telecommuting and Internet access. If you want to understand how this digital technology will affect you, your network, or how your company does business, read this book. You don't have time for the 5-foot pile of standards documents that describe ISDN, and only equipment engineers and designers need that much detail. Here's the one book that gives you, the network operator or communications manager, just what you need (and maybe a bit more) to evaluate ISDN for your own business and talk with confidence to carriers and other vendors.

NCI# 815605

## The Guide to T-1 Networking





*by William Flanagan 222 pgs, 1990*

This perennial best seller is a thorough guide to buying, installing and using T-1 circuits and the often complex equipment that you need to hook into T-1 lines.
There are four reasons to buy T-1: • Major dollar savings on long distance calls, international calls, voice, data and video calls. • Substantially better communications quality. T-1 is all digital. • Flexibility to reconfigure connections --- voice one minute, data the next, video the next. • Improve network reliability. Achieving these four benefits can be painful and expensive (T-1 expertise is short among telephone companies). That's where this book comes in. It will save you and your company a fortune in mistakes you'll be able to avoid.

NCI# 815518

## ATM: Asynchronous Transfer Mode The Complete Guide





*By William Flanagan, 230 pgs, 1994*

ATM is here and working. It is new and complex. It delivers major cost savings, major speed improvements, major flexibility gains in the design and operation of consolidated networks of voice, data, video and imaging. This book defines and explains, in simple, concise terms, how ATM Adaptation Layers put information into cells without changing the nature of the service seen by the user. The steps of dividing long files into segments, frames, and cell payloads is fully illustrated.

NCI# 815611

## Frames, Packets, & Cells for Broadband Networking





*by William Flanagan, 242 pgs, 1991*

This book takes you into the basic concepts of frames, packets, and cells. Clear, simple language cuts through the buzzwords to the facts you need, regardless of your vendor. Comparisons and contrasts among technologies give you the insight to choose the one that's best for your applications. This is a big book: more than 250 8 1/2" x 11" pages. It has to be large because it holds the essential information from an entire library of source documents ---over 30 feet of shelves worth.

NCI# 815520

REFERENCE

# TOOLS - REFERENCE





## NEWTON'S TELECOM DICTIONARY 11TH ED.

**THE OFFICIAL DICTIONARY OF TELECOMMUNICATIONS, COMPUTER TELEPHONY, INTERNET TELEPHONY, DATA COMMUNICATIONS, VOICE PROCESSING, WINDOWS 95 & NT COMMUNICATIONS AND LAN, WAN & WIRELESS NETWORKING.**

*BY HARRY NEWTON, 1450 PGE, JUNE 1996, 11TH UPDATED ED.*

If you're in this great industry, you simply must have this book. ***Why?*** There's been a major explosion in telecom terms. No one can keep up - no matter how long you've been in telecom. We have many new telecom standards TAPI, TSAPI, Tmap, MAPI, MVIP, SCSA, ATM, ADSL. We have many new telecom technologies - from fiber to the Internet, from computer telephony to voice processing, from serial bus to speech recognition. And then there are the vendor-specific terms -- like the million ways to say "Centrex". Everyone's making up new telecom terms. That's why this dictionary was made -- to throw a virtual lifeline. **We used to publish a new edition of this dictionary every 2 years, but now we publish a new edition every 6 months. It has become that hectic. Our guarantee: We keep this dictionary up to date.** This dictionary covers telecommunications switching, transmission and intelligence adding (as in computer telephony). We cover the equipment in your office through to the underwater cable that takes your calls to Japan. We cover satellites and fiber. Every "new" telecom company from **Intel** to **Microsoft** to **Novell** to **Apple** to **National Semiconductor** to **IBM** to **Motorola** to **Dialogic** uses this dictionary for training. All the traditional telecom companies including **AT&T**, **MCI, Sprint, Northern Telecom, Nynex, Rockwell, PacBell, BellSouth, Ericsson** and **GTE** have contributed their company's definitions. As a result, Newton's Telecom Dictionary has truly become an industry-standard dictionary. The Dictionary has been very favorably reviewed in the magazines -- PC magazine called it an "essential resource". Business Week says "mystified by terms such as pink noise, pure aloha, Gorizont?...Newton can help." Newton's Telecom Dictionary is unlike any other technical reference you've ever read. 1st, it assumes that you, the reader, are not technical. 2nd, it assumes you want to fully understand the term. So it not only defines terms, but also tells you how it works, how you use it, what its benefits are and how it fits into the greater scheme of things.

NCI# 815512




## THE CALL CENTER DICTIONARY

*BY MADELINE BODIN & KEITH DAWSON, 350 PGS, FEB. 1996*

Over 1,200 comprehensive and easy-to-read entries covering Help Desk, Telemarketing, Customer Service, Voice Processing, Switches, Software, Training, and Call Center Management. This book is the key to understand how call centers work. The language of the call center comes from many fields. It includes technical terms such as telecommunications, engineering, & computer programming. B marking, customer service and quality assurance terms loom large. The Call Center Dictionary explains them all in a way that is simple enough for a newcomer to grasp, but with enough depth to give insight to an old pro. It not only tells you what a particular technology is, it tells you how using that technology can improve your relationship with your customer and it warns you about bad techniques that can alienate customers. The Call Center Dictionary is your lifeline to the bewildering array of products and services used in the modern call center. It's a dictionary you can use to explain things to your customers. A dictionary you can consult after a meeting with the MIS guy, use it to get a leg up on the jargon of your new job or to explore what a call center can do to improve your business.

NCI# 815503




## PC TELEPHONY -


**THE COMPLETE GUIDE TO DESIGNING, BUILDING & PROGRAMMING SYSTEMS USING DIALOGIC AND RELATED HARDWARE**

(1st & 2nd ed. titled "PC-Based Voice Processing.")

*BY BOB EDGAR, 771 PGS, 3RD UPDATED ED., 1995*

This book covers Call, Voice, and Fax Processing, Voice Recognition, Speech Synthesis, Switching, Conferencing and Telecommunications on PCs. Thousands of people have bought this book and built powerful computer telephony systems. By reading this book you will learn how to build PC Telephony Systems that are also called Voice Mail, Audiotext, Automated Attendants, Automatic Call Distributors, Interactive Voice Response systems, Predictive Dialers, PBXs, Voice Servers, Voice Clients. This book is aimed at the developer of PC-based Computer Telephony systems who wants to design, build and sell a complete system (a system integrator, a VAR, a reseller, etc.) or who builds part of a system (voice processing component board, fax-board, voice recognition subsystem, a text-to-speech speaker, etc.).

NCI# 815516





## VISUAL BASIC TELEPHONY

**USING OFF-THE-SHELF COMPONENTS TO BUILD WINDOWS-BASED COMPUTER TELEPHONY APPLICATIONS**

*BY K. HOLLY & C. BROOKINS, 151 PGS, 1995*

Until recently, integrating the power of the desktop PC with the accessibility of the telephone - to build applications such as voice mail, fax-on-demand, and touch-tone data retrieval - has been reserved for a select few. But in 1991, a revolution occurred in software development: Microsoft unveiled Visual Basic which turned the development tools industry upside down with its remarkable features. • Easy-to-use graphical environment. • Industry standard BASIC language. • Completely open architecture for third-party add-on components. • Unparalleled data access. • No runtime fees.

NCI# 815567




## UNDERSTANDING COMPUTER TELEPHONY

**HOW TO VOICE ENABLE DATABASES FROM PCS TO LANS TO MAINFRAMES**

*BY C. CARDEN, 350 PGS, FEB. 1996*

Finally! A book that explains Computer Telephony technology in simple terms. Gain a better understanding of the way CT works and how to use it. From basic phone connections to speaking & faxing online data, various CT technologies are described through a sample interactive voice/fax response application. Recent market studies indicate that 58% of US businesses will invest in CT solutions by 1997! This book introduces VARs and system integrators to the exploding CT market and uncovers profitable opportunities. The market opportunities and technologies are reviewed in five easily referenced sections: • Market Opportunities - CT integration with current solutions, new applications development, and vertical market leverage. • Telephone Connections - Analog, T-1, E-1, and ISDN. • Caller Input - Caller ID, touchtone, dial pulse detection, and speech recognition. • CT Output - Digitized and synthesized speech, fax processing, call transfer, and outdialing. • Data Access - IBM mainframe & midrange, RS-232, LAN Xbase, and SQL/ODBC.

NCI# 815563





## COMPUTER TELEPHONY ON THE SUN PLATFORM

*BY PATRICK KANE, 350 PGS, FEB. 1996*

In many respects, SUN is the perfect platform for delivering value added computer telephony services. Go into telephone company central offices, and you'll find Sun computers running the most critical part of today's phone network - signaling system 7. Go into the Internet and over 50% of all the servers are Suns. Now Sun is focusing on computer telephony. It has created "Customer Management Solutions" which combines computer technology with telephone access to dramatically improve communications between a company and its customers. Tasks it handles includes buying goods, reporting problems, getting help, tracking shipments, telemarketing, collections. The book covers computer telephony from the basics through applications design and solutions, to interaction with the Internet, to integrated use of all the CT tools - interactive voice response, fax-on-demand, outbound dialing ANI, DNIS, ISDN, etc. This easy-to-read, comprehensive book includes chapters such as: • What is computer telephony? • Understanding the telephone system • Why computer telephony on Sun? • Customer Management Solutions • The Internet, Intranet, Netra, HotJava • Communications Networks • The components • Configurations • Computer telephony standards • The SunXTL Teleservices platform • Assistive technologies for CT applications • Sun solutions for computer telephony • Sun in the telephone companies • Complete CT solutions, applications generators and C tool kits for telephony • Java • The future of computer telephony • Where to go for help • Glossary.

NCI# 815595





## TELEPHONY FOR COMPUTER PROFESSIONALS

*BY JANE LAINO, 279 PGS, 1994*

This book teaches computer professionals everything they need to know about telecommunications. Though computers and telecom appear to use the same technology, they are very different in every aspect - from the way services are priced and bought to the nature of the telecom vendor, especially the telephone company. This book is based on the author's many years in telecom consulting, replete with war stories, screw-ups and lessons learned. Excellent education for computer professionals.

NCI# 815601




## TESTING COMPUTER TELEPHONY SYSTEMS & NETWORKS 2NDED.

*BY S. GLADSTONE, 350 PGS, FEB. 1996*

The book is structured to systematically help you:

**1. Understand Computer Telephony testing.** Chapters devoted to understanding CT testing identify key components, issues, and likely CT problems to familiarize you with quality impacting CT issues.

**2. Address service objectives.** Developing your service objectives. Key to any system or network is understanding how you want the system to work.

**3. Develop the test plan.** The test plan is the document that will guide the actual testing methods and the actual test which will encompass your test plan.

**4. Select test tools.** Understand what tools are needed and provide guidelines for test automation tools.

**5. Test and analyze.** Provides concrete examples on how to perform high-leverage CT tests.


NCI# 815559



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

Prices Change Frequently.
Please Call for Most Current Pricing.

## HANDBOOK OF TELECOMMUNICATIONS



*BY J. HARRY GREEN, 715 PGS, 1993*

This book belongs on the bookshelf of every telecom professional - user or vendor. This is a book every professional can use every day. Want a quick update on satellites? Signaling systems? Cellular radio? Testing? Network design concepts? Microwave radio? It's in there!!!

NCI# 815505

## HANDBOOK OF TELECOMMUNICATIONS MANAGEMENT



*BY JAMES HARRY, 669 PGS*

Without a doubt, the best book ever written on telecom management. If you're involved, you must have this book: Partial Contents: Strategic Telecom Planning; Feasibility Analysis; Forecasting Telecom Services; Developing Requirements and Specifications; Writing Requests for Proposals.

NCI# 815507

## THE GUIDE TO LOCAL AND LONG DISTANCE COMPANY BILLING PRACTICE AND PROCEDURES




**HOW TO AUDIT YOUR BILLS, SECURE REFUNDS AND SELECT THE MOST COST EFFICIENT SERVICE**


*BY M. BROSNAN, J. BUTTERWORTH & J. MESSINA, 192PGS,1993*

**90% of all business phone bills are wrong!**
**90% are wrong in the phone company's favor!**

This is NOT because phone companies are crooked. Just that most of them have awful billing systems and most of their customers have awful checking systems. Most customers don't check their bills and don't secure the huge refunds for overbilling they're entitled to. This book shows you in step by step, easy to understand terms how you can audit your own local and log distance telephone bills. By examining case examples, you will be able to understand complicated, arcane and confusing telephone company billing terms, procedure and records. You will learn how to get sizeable refunds from your telephone companies -- local and log distance. And you will obtain those refunds.

NCI# 815561

## THE INTERNATIONAL CALLBACK BOOK





**HOW TO SAVE 65%+ ON YOUR INTERNATIONAL TELEPHONE CALLS AND SET UP AN INTERNATIONAL CALLBACK COMPANY**

*BY G. RETSKE, 340 PGS, 1995*

Want to save 65% on your international calls? Want to get rich by opening an international callback company? This is the first book on this brand new industry. Using Callback, Barriers to Callback (with suggestions on getting around them), Designing a Marketing Plan, Selecting the Right Equipment, Financing a Callback Company, Selecting a Callback Company, US Carrier Involvement, PTT Response, FCC Actions and the Future of Callback. The author of this book has been involved on all sides of Callback, designing and selling equipment, marketing callback, using callback and has set up his own company. This book contains all his experiences.

NCI# 815599

## THE MVIP BOOK




**THE DEFINITIVE REFERENCE MANUAL FOR THE MULTI-VENDOR INTEGRATION PROTOCOL- THE WORLDWIDE COMPUTER TELEPHONY STANDARD**

*BY GO-MVIP, 400 PGS, OCT. 1995*

**The** only book for multi-vendor integration protocol developers. Available application technologies include voice processing, multiline facsimile, speech recognition, text-to-speech, telephone call switching and call processing, video and audio conferencing, video codecs, data communications, inverse multiplexing, MVIP-to-LAN interfaces (IsoEthernet,FDDI-II) and numerous telephony interfaces (DID, E&M, T-1, E-1, ISDN PRI and BRI, and proprietary PBX interfaces). Prepared by GO-MVIP, the international MVIP assoc.

NCI# 815509

## CUSTOMER SERVICE OVER THE PHONE




*BY S. COSCIA, 96 PGS, 1995*

Call Centers are growing at the rate of more than 30% a year. The influx of entry level CSRs demands proven customer service strategies that work. You get scores of scripts that enable you to avoid problems by not creating them in the first place. You get the most effective, helpful and innovate customer service book available.

**Effective** -"Our staff agrees that Customer Service Over the Phone has improved our communication skills."
***- Joanne Wysokowki, Chemical Bank.***

**Helpful** -"*Customer Service Over the Phone* has been a helpful tool in training, not only for our guest relations staff, but employees who serve internal customers."
***- Sherri L. Nelson, Olive Garden Restaurants.***

NCI# 815603

## HOW TO CABLE THE HOME OFFICE / SMALL OFFICE




*BY E. BROSCH, 200 PGS, 1995*

Many businesses now encourage employees to establish an office in the home, and magazines and books provide a ton of information on how to organize and start up a business. It is estimated that there will be over 20 million home offices before the year 2000. This book shows the importance of telecommun-ications to the home/small office, the existing home telephone arrangement and its problems, and how the standard may be used to design, plan, install, and test a system that will carry the home office into the future.

NCI# 815511

## COMPUTER BASED FAX PROCESSING




**THE COMPLETE GUIDE TO DESIGNING AND BUILDING FAX APPLICATIONS**


*BY M. KAUFFMAN, 212 PGS, DEC. 1994*

This book will teach you how to build the most popular PC-based fax applications, including: LAN Fax Server, Fax Broadcasting and Fax-On-Demand using industry standard hardware from **GammaLink** and **Brooktrout.** Start by learning the basics of fax processing and telephony and what is enhanced fax. Then, move on to compression, standards, application generators, boards and buses. End by seeing step-by-step instructions to building your own applications.

**Partial Contents:** CBF processing • basic telephony • call routing • facsimile technology • standards • LAN fax • APIs • MAPI • TAPI•- CAS.

NCI# 815557

## PREDICTIVE DIALING FUNDAMENTALS





*BY ALEKSANDER SZLAM & KEN THATCHER, 150PGS, FEB. 1996*

This is is a must read if you're a newcomer to predictive dialers and responsible for analyzing, recommending and deploying outbound call center solutions, or if you're familiar with current technologies, but want to know more about how leading edge technologies play a role in the productivity of the call center. Did you know that predictive dialers help companies to: Increase agent productivity by 150% to 400% • Experience a ROI within 9 to 12 months • Talk to a least two people in the same time it takes to manually dial and reach one • Boost agent morale by removing the remedial tasks of manual dialing. Learn fundamental info about predictive dialers: what they are, how they work, how they benefit business that are conducting telemarketing, customer service and collection calls, as well as what the future holds for call centers.

NCI# 815569

## VIDEOCONFERENCING: THE WHOLE PICTURE





*BY TOBY TROW-BAYARD, 469 PGS, 1994*

This book is a videoconferencing system and network buyers guide. It helps you understand all aspects of videoconferencing, incl:

• Videoconferencing systems from boardroom to desktop, hardware and software, the players and their positions • Applications • Building a credible business case for videoconferencing • Coding, compression and standards-based and propriety algorithms • Selecting and accessing various videoconferencing networks (both WAN and LAN) including inverse multiplexing • How to develop a videoconferencing RFP, including hundreds of questions that should not be overlooked during the procurement process • How to buy multipoint scheduling and on-going operational issues relative to videoconferencing • Videoconferencing as it relates to The Information Superhighway and a glimpse in to the future of videoconferencing.

NCI# 815597

## THE GUIDE TO FRAME RELAY NETWORKING




**HOW TO EVALUATE, IMPLEMENT, AND MAINTAIN A FRAME RELAY NETWORK**

*BY C. A. HECHART, 410 PGS, 1995*

Frame relay can relieve many headaches of bandwidth-hungry apps. This book is a guide to evaluating, designing, implementing and maintaining your own frame relay network. ***Why Choose Frame Relay?***

**Savings • Reliability** • Automatic routing around network failures and virtual connectivity • Value added features • Your carrier takes responsibility for spare capacity and network diversity. **Flexibility**. • The virtual connectivity provided by frame relay allows the network to be quickly modified. Capacity on individual connections can change in real-time. **Simplicity**. Frame relay allows you to simplify your network infrastructure, reduce the number of vendors you manage, and cut admin:costs.

NCI# 815513





## HYBRID FIBER OPTIC/COAXIAL (HFC) NETWORKS

*BY E. TUNMANN, 320 PGS, 1995*

This book covers the planning, design and implementation of Hybrid Fiber-optic/Coaxial (HFC) broadband networks as they apply to schools, universities, hospitals, factories, and offices, whether they are in a single building or in multiple campuses. Within the next few years, the need for multichannel, bi-directional video transmissions will multiply within every enterprise because of the coming integration of video into the conduct of business and the process of learning. (HFC) has become the platform of choice for both cable TV and telephone companies for distribution of video, voice and data in the outside world. HFCs are economical and practical and provide the highest bi-directional capacity at the lowest capital investment. HFC has become a favored broadband access platform because it is a moderate-cost, flexible transmission medium, capable of delivering heterogeneous traffic of varying bandwidth, modulation formats and latency characteristics in circuit, channel or packet-based formats. **Contents:** Video Network Architectures • Spectrum utilization • Analog and Digital Video Transmission • The Gateway and Operations Center • The HFC Broadband Network Components and Performance • Planing the HFC Network • The Design Information Checklist • The HFC Networks components • The HFC Broadband Network Design Process (Inside Plant Design) • The HFC Broadband Network Design Process (Outside Plant Design) • HFC Installation Considerations • Acceptance • Testing and Documentation • HFC Proposal Specifications.

NCI# 815515





## UNDERSTANDING FIBER OPTICS

*BY JEFF HECHT, 477 PGS, 1993*

**1**. Fundamentals of Fiber Optics **2**. Types of Fibers **3**. Cabling **4**. Light Sources **5**. Transmission **6**. Receivers **7**. Repeaters, Regenerators and Optical Amplifiers **8**. Connectors **9**. Splicing **10**. Couplers and Switchers **11**.Tools and Accessories **12**. Measurements **13**. LANs **14**. Long Distance Fiber.

NCI# 815525





## UNDERSTANDING DATA COMMUNICATIONS

*BY G. HELD, 434 PGS, 4TH ED. 1994*

**1**. An Overview of Data Communications **2**. Terminal Devices **3**. Messages and Transmissions Channels **4**. Asynchronous Modems **5**. Synchronous Modems, Digital Transmission, and Service Units **6**. Multiplexing Techniques **7**. Fiber-Optics and Satellite **8**. Protocols and Error Control **9**. Personal Computer Communications Software **10**. Alternatives in Local Area Networks **11**. Architectures and Packet Network **12**. Network Design and Management **13**. ISDN

NCI# 815521




## UNDERSTANDING TELEPHONE ELECTRONICS

*BY S. BIGELOW, 368 PGS, 1993*

**1**. The Telephone System **2**. The Conventional Telephone Set **3**. Electronic Speech Circuits **4**. Electronic Dialing & Ringing Circuits **5**. A Microcomputer in the Telephone **6**. Digital Transmission Techniques **7**. Electronic in the Central Office **8**. Network Transmission **9**. Modems.

NCI# 815517

# The DUMMIES Books




## ISDN FOR DUMMIES

*BY D. ANGELL, 332 PGS, 1995*

This book makes your conversion from the bucolic world of analog communications to digital communications via ISDN a smooth one. You'll find that this guide serves two distinct purposes. The 1st is to make you an educated consumer of ISDN services. The 2nd is to give you hands-on experience working with ISDN to perform a variety of real-world applications. ISDN for Dummies boils down the essentials you need to master ISDN's powerful capabilities. Partial Contents: Getting Started with ISDN • The Zen of ISDN • Making the ISDN Connection • Developing Your CPE Game Plan • NT1s, NT1 plus Devices, and ISDN Telephones • Going the NT1 Route • Going the NT1 Plus Route • Using IBM 7845 Extended • Remote Access via ISDN • ISDN Remote Access Options • Using the Combinet EVERYWARE 1000 • Going the Easy Internet Access Route • I Want My Desktop Video Conferencing • Video Conferencing with Proshare.

NCI# 815501

## INTERNET FOR DUMMIES 3RD ED.

*BY J. R. LEVINE, C. BAROUDI, M. L. YOUNG, 400 PGS, 1995*

For novice users unsure of how to take advantage of the Mother of all Networks, this completely updated edition leads you through the trials of getting on the Net, and provides a vital reference that helps you get where you want to go on the World Wide Web and swap
e-mail, software, news, and more across the globe. • Find information for hooking up with local internet providers as well as larger services like Compuserve, America Online, Microsoft Network, and more • Surf the Web in a snap with all new coverage of Netscape • Download megabytes of free software • Get completely revised information that reflects the latest changes due to the Net's explosive growth • Join electronic mailing lists • Ten ways to become and accomplished Net user.

NCI# 815545

## NETWORKING FOR DUMMIES

*BY DOUG LOWE, 349 PGS, 1994*

Here's the friendly, easy-to-follow networking guide for those who have three or more computers at the office and know you should network them, but aren't sure what a network is let alone how to set one up! Networking for dummies explains everything you need to know to select, set up, use, and manage a small computer network, presented in a plain English style that doesn't require a degree in computer science to understand.
• Covers Novell's Netware, plus NetWare Lite, Lantastic, and Windows for Workgroups • Learn the critical task of networking a printer • Learn to solve common but annoying network problems yourself • Includes coverage if Macintosh networking basics • Includes a network User's Guide for innocent bystanders forced to use a network against their will.

NCI# 815546

## CLIENT/SERVER COMPUTING FOR DUMMIES

*BY DOUG LOWE, 396 PGS, 1995*

What is client/server computing and why is everyone talking about it? Get answers to this and many other questions with Client/Server Computing for Dummies. You'll find friendly explanations of this new technology and what it can do for your company in plain English - no computer science degree required. • Discover how client/server systems are created with fundamental components like client computers, graphical user interfaces, server computers, and local area networks • Find a complete manager's guide to maintaining client/server systems • Get descriptions of 20 client/server vendors and their products in a bonus trade show section • Save money by learning about hidden costs of client/server computing.

NCI# 815547

## PCS FOR DUMMIES 3RD EDITION

*BY DAN GOOKIN, 402 PGS, 1995*

This bestseller completely updated to bring novice PC users the latest information on PC hardware and software from how to select and set up your computer system to troubleshooting common PC problems. Its filled with fun and easy to follow advice that will help you get your computer up and purring in no time - Set up your computer, printer, and modem • What's inside your PC, including the Pentium and OverDrive chips, PCMCIA cards and accelerated video cards • New information on MS-DOS 6.22, Windows 3.1, OS/2, Novell DOS, and UNIX • Do-it-yourself troubleshooting.

NCI# 815548

## UPGRADING & FIXING PCS FOR DUMMIES

*BY A. RATHBONE, 341PGS, 1995*

Revive and recharge your old PC in a jiffy the cheap and painless way with Upgrading & Fixing PCs for Dummies. This hands-on guide will help you install the hardware you need and fix nagging problems in your PC with clear, easy-to-follow instructions. Do-it-yourself troubleshooting so you can spend your money on upgrades instead of costly repairs. • Turn a 386 into a 486 with Intel's Overdrive chips • Add a new video card or hard disk with ease • Install new types of memory chips • Figure out what's broken and learn how to fix it • Upgrade your computer to run Windows 95.

NCI# 815549

## CUSTOMER SERVICE FOR DUMMIES

*BY K. LELAND & K. BAILEY, 346 PGS, 1995*

Whether you're a business owner, corporate executive, manager, service provider, or customer, you know that quality customer service is the key to begin successful in business in the 90's. Uncover the mystery surrounding customer service and provides you with an outline for how to provide the best service possible.


NCI# 815550



PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

# The BASICS Books

## The Basics Book of ISDN




*by Motorola, 64 pgs, 1992*

ISDN is about to happen bigtime in North America. Most telcos are now offering under BRI lines. Terminal CPE equipment has dropped dramatically in price. Telecommuting is becoming popular. ISDN offers major advantages in speed, reliability and cleanliness of voice, data, video and imagining transmission. This little book is a simple, fast introduction to ISDN. You'll learn ISDN terminology and the nuts and bolts of how it allows voice, data, video, facsimile, e-mail, etc to travel simultaneously over the same wires.

NCI# 815552

## The Basics Book of Information Networking

*by Motorola, 176 pgs, 1992*

You'll learn topics such as key acronyms, understanding digital services, multiplexing, protocols, modems, T-1 and Fractional T-1,etc.

NCI# 815554

## The Basics Book of OSI and Network Management

*by Motorola, 96 pgs, 1992*

This book is designed for MIS people who want a quick but accurate summary of what telecom network management is, who should worry about it, and why.

NCI# 815556

## The Basics Book of Frame Relay

*by Motorola, 96 pgs, 1992*

The book offers information on the benefits of the technology and where it fits with other communications standards.

NCI# 815558

## The Basics Book of X.25 Packet Switching


*by Motorola, 80 pgs, 1992*

A short, easy-to-read book on how packet switching technology differs from traditional circuit switching, and in what environments each excels.

NCI# 815560

# abc's TeleTraining Manuals

## Vol. 1: Telephone Theory Principles and Practices




*by F.E. Lee, Rev. 2nd ed., 160 pgs, 1985*

**Contents:** • Introduction to telephony • Electricity in a circuit • The telephone receiver • The induction coil • Capacitance vs. selfinductance • Impedance • Equivalent circuit development • Analog tone circuits • The generator principle • Principles of polarized based ringers • Principles of relays • Special purpose relays • Fundamentals of switching • Line lamp and supervisory circuits • Line protection • Methods of line protection • Subscriber signaling-rotary and touch dialing • Step-by-step switching • Crossbar • Electronic switching.

NCI# 815562

## Vol. 2: Station Installation and Maintenance (Revised)

*by F.E. Lee, Revised ed., 91 pgs, 1986*

**Contents:** • Planning a drop-wire installation • Installing a drop line • Installing coaxial drop wire • Installation at camps and trailer courts • Installation of protectors • Protector maintenance • Grounding • Prewiring • Station wire installation • Exposed wiring • Concealed wiring • Job specifications • Troubleshooting • Locating faults in subscriber line circuits • Fault locating procedures • Locating faults in instrument circuits • Multiple line key equipment.

NCI# 815564

## Vol. 5: Cable, Inside and Out

*by Frank W. Horn, 88 pgs, 1978*

**Contents:** • Introduction to cable • Transmission • Paper and pulp insulated cable-design and manufacture • Paper and pulp insulated cable: lay-ups and color schemes • Plastic insulated conductor cable • Even count color code P/C core lay-ups • Special constructions • Cable Sheaths • Cable armors and protections • Central office wire and cable station and cable out-side wire • Interface cables • Factory testing • Filled cable • Aluminum conductor joining • Closures • Cable terminals • Installation • Maintenance • Special options • Choosing the right cable • Cable dictionary.

NCI# 815568

## Vol. 9: Design Background for Telephone Switching

*by L.F. Goeller, 80 pgs, 1978*

**Contents:** • System organization • Interfacing station lines • Interfacing trunks • User-oriented features • Data processing functions • Positions systems for operators and attendants • Maintenance, reliability and response to abnormal conditions • Physical design.

NCI# 815576

## Vol. 10: Principles of Switching

*by Paul Fleming, 121 pgs, 1979*

**Contents:** • Control switching • The matrix • Control • Electronic switching • Simples • Duplex • Half-duplex • Analog vs Digital • Two-wire vs four-wire transmission • Signalization • Tabulation of alternatives • Multiple stations • Types of switches • Circuit, message, space division • Single • Two stage grading • Link systems Blocking and non-blocking matrices • TDM matrices • Register systems • Classes of service • Automatic billing • AIOD; routing plans • Memories • PAM and more.

NCI# 815578

## Vol. 11: Data Communications Practice

*by Bruce L. Meyer, 55 pgs, 1979*

**Contents:** • Common carriers • Networks • Transmission facilities • Data communication equipment • Message formats • Communication control procedures • Codes • Signaling rates • Functional interfaces • Channel characteristics • System design.

NCI# 815580

## Vol. 12: Practical Grounding and Protection

*by Mike Brewer, 179 pgs, 1987*

A manual providing a basic, yet comprehensive examination of grounding principles and techniques with an emphasis on practical applications to telecom systems. **Contents:** Central Office • Outside Plant from both protection and noise standpoints • Radio Systems • Private Telephone Systems and Large PABX Systems.

NCI# 815581

## Vol. 14: Power Line Interference Problems & Solutions

*by Russ Gundrum, 50 pgs, 1982*

**Contents:** • Nature of the problem: Power influence parameters • Susceptibility parameters • Multipair induction neutralizing transformers (INTs) • Single circuit noise chokes • Inductive interference trends • Investigative considerations • Electromagnetic power line interference.

NCI# 815583

## Vol. 15: Basic Guide to 1A2 Key Telephone Installation

*by Nicholas Arkon, 84 pgs, 1986*

**Contents:** • The 1A2 key telephone system • The key service unit • The 1A2 key telephone • Installing the feature block • Intercoms • Cross connections • Wiring diagrams • Review questions and answers • 1A2 trouble analysis tables.

NCI# 815584

## ABC Teletraining Supplemental Series




## Anatomy of Telecommunications

*by Tom Smith, 160 pgs, 1987*

**Contents:** • Common Carriers • Regulation • Return of competition • Breakup of the Bell System • Access Charges • U.S. Telecommunications Operations • Basic Electricity for Telecommunications • The Telephone terminal • Special purpose CPE: Transmission principles • Transmission systems • Transmission media • Switching systems • Non-switching equipment in the central office: The national network.

NCI# 815586

## Fiber Optics Cable - A Lightguide

*by James J. Refi, 208 pgs, 1991*

**Contents:** • Optical Fibers: what they are • Optical loss • Bandwidth I • Bandwidth II • Mechanical properties of fibers • Fiber Manufacturing • Inside and Outside plant cables • Factory Testing Installation • Fiber Joining I • Fiber Joining II • Splice closures and interconnect cabinets • Field Testing • Reliability and maintenance • Hostile environments • Specialty Fibers.

NCI# 815588

## Management in Action

*by Robert E. Stoffels, 44 pgs, 1981*

**Contents:** • What's it all about? • the natural leader • mission • unit objectives • scheduling • controls • your management style • delegating • decision-making • discussing performance • selection people • motivation • analyzing performance verbal communication.

NCI# 815590

## Tables for Traffic Management & Design

*by Theodore Frankel;, 70 pgs, 1977*

**Contents:** • Traffic formulae • Application examples • Selected bibliography • Tables-Erlang B, poisson, Erlang C, Crommelin-Pollaczak, Engset, Binomial and Delay • Conversion Chart-Erlangs • CCs • Call minutes.

NCI# 815592

## Basic Telephone Installation

*50 pgs, 1984*


A step-by-step, non technical guide for the residential or small business installer. Basic Telephone Installation procedures, with into on wiring to jacks, plug and adapters. Extensive illustrations.

NCI# 815594


# TOOLS





**Developing SAP's R/3 Applications with ABAP/4**
Includes Reusable Source Code, ABAP/4 Documentation, and an Overview of SAP R/3 System Architecture
**NCI# 815613**





**Implementing SAP R/3**
How to introduce a large system into a large organization
Based on a study of 20 companies
**NCI# 815615**




**Using SAP R/3** Special Edition
Understand, implement, and install your own SAP system
Master the structure of the SAP environment and discover the power of the integrated SAP modules application
**NCI# 815617**





**CORBA Fundamentals and Programming**
-Explains OMG's CORBA and Object Management Architecture
-Describes how to select and evalute your Object Request Broker and CORBA services package
-Features a working example in C, C++, and Smalltalk
**NCI# 815621**





**Technician's Guide to Fiber Optics** - Second Edition

**NCI# 315028**





**Unix for Dummies** - Quick Reference
-The Quick & Easy Way to Remember UNIX Functions & Commands
-Covers the Internet and All Major Versions of UNIX, Including System V, System V Release 4, & BSD UNIX
-New Lay-Flat Binding for Easy Access!
**NCI# 815623**

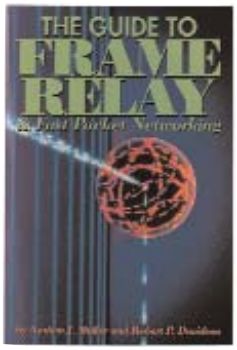


**The Guide To Frame Relay & Fast Packet Networking**


**NCI# 815524**




**TELE-Stress**
Relief for Call Center Stress Syndrome
by Steve Coscia, 96 pgs, July 1996

Stress in call centers is a big problem. A new exclusive survey reveals that 98% of call center professionals experience at least one stressful call daily. Calls from irate customers are the leading cause of TeleStress. This problem demands common sense strategies that work. This book has them. You get a practical explanation of what stress is, how it affects your body and how to overcome it. You get easy to read short stories along with relevant cartoons. You get the most extensive and comprehensive survey ever conducted on call center stress. You get the experience of one of the leaders in the customer service and call center industry. Every call center agent should read this book.


**NCI# 815555**

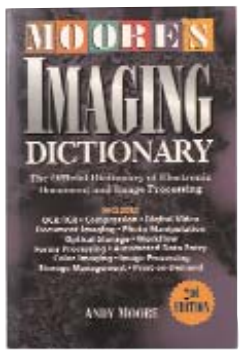


**Moore's Imaging Dictionary** - Second Edition
The Official Dictionary of Electronic Document and Image Processing
by Andy Moore, 290 pgs, 1995

Includes: OCR/ICR - Compression - Digital Video
- Document Imaging - Photo Manipulation - Optical Storage
- Workflow - Forms Processing - Automated Data Entry
- Color Imaging - Image Processing - Storage Management
- Print on Demand


**NCI# 815522**




**Mantelman' Imaging Buyers Guide**
by Lee Mantelman, 576 pgs, 1995

Everything You Need to Know to Design and Select the Right Document Imaging System

**NCI# 815553**




**Imaging Success Stories**
by Kim Ann Zimmermann, 209 pgs, 1995

Real-life examples of imaging at work in:
- government - law - insurance - banking
- medical - publishing - education
- manufacturing - engineering - advertising
- transportation - architecture

**NCI# 815551**




**Fault Resilient PCs**
by Richard Grigonis, 320 pgs, July 1996

In a highly competitive, 24-hour a day global economy, businesses with "mission critical" applications find that any computer "downtime" at all has become unacceptable, PCs have become so integrated with so many business functions that any computer system problem whatsoever often grinds a company's operations to a halt,l resulting in an immediate, tangible loss in dollars and cents. An amazing number of companies rely upon out-of-date, conventional desktop computers lacking "fault resilient" capabilities, which means that when such systems fail, they not only stay down for a considerable period of time, but in many cases data is lost - and data is a company's most precious non-human resource. This book will help you choose a computer system that can "take a licking" and keep on providing service, even if one or more of its components fail. It should be read by anyone installing or overhauling a computer system that runs revenue-generating applications.

**NCI# 815579**




**Customers -** Arriving with a History Leaving with an Experience.
by Andrew Waite, 380 pgs, March 1996


This book has a 74-page sample Request for Proposal to buy an ACD - automatic call distributor, the central piece of technology in any call center. If you hired a consultant, this RFP would cost you a minimum of This book is based on the premise that life for call center and help desk managers has become far more complex than just an ACD - equipment decision. That's what the rest of the book is about. Phone calls from customers are not just "events," but are significant milestones in customer relationships. They include correspondence by m ail, by fax, by e-mail, by Internet and "touching" by interactive voice response and computer telephony links. The author has over 20 years intimate experience with call centers.

**NCI# 815577**




**The Guide To Sonet -** Planning, Installing & Maintaining Broadband Networks
by Robert P. Davidson and Nathan J. Miller, 215 pgs, 1991


**NCI# 815587**

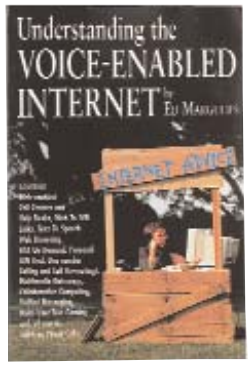


**Understanding the Voice-Enabled Internet**
by Edwin Margulies, 720 pgs, August 1996

Computer telephony is supercharging the Internet. There are three major developments. The biggest is the confluence of the World Wide Web with computer telephony, platform hooks and links. It's a new way to get voice to the customer visiting you on the Internet. Then there's Internet technology on internal company computer telephony groupware apps, through "Intranets" and "Intrawebs". Internet Telephony is also making nearly free long-distance "voice" and "video" calls on the Net a reality.

**NCI# 815591**

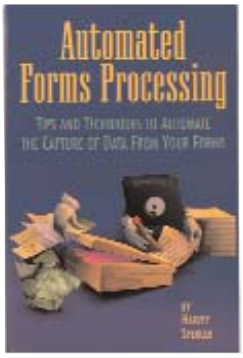


**Automated Forms Processing**
- Tips and Techniques to Automate the Capture of Data from your Forms
by Harvey Spencer, 247 pgs, 1996

**NCI# 815571**

# INDEX


## #

10 BASE T CABLE ....9
110 BLOCKS ....85,101
110 PATCH PANELS ....90
110 PUNCH DOWN TOOLS ....115
31X BLOCKS ....87,101
3270 TWISTED PAIR ADAPTER ....8
3COM ETHERLINK ....85
3M DORRAN FIBER SPLICE ....51
42A BLOCKS ....102
5 PR 110 PUNCH DOWN TOOL ....115
66 BLOCK COVERS ....100
66 BLOCK TO MOD ADAPTER ....100
66 BLOCKS ....100
66 CLIP EXTENDERS ....100
66 PUNCH DOWN TOOLS ....101,115
100 BASE T CARDS ....42
100 BASE T HUBS ....43
100 VGA ANYLAN ....48

## A

ADAPTER BRACKETS ....87
ADAPTERS- F TYPE ....25
ADAPTERS-3M BARE FIBER ....66
ADAPTERS-CUSTOM FIBER HYBRIDS ....66
ADAPTERS-ETHERNET BNC ....40
ADAPTERS-FIBER HYBRID ....66
ADAPTERS-INTERSERIES ....29
ADAPTERS-N SERIES ....29
ADAPTERS-TNC ....29
AERIAL CABLE PE22 ....13
AIR FRESHNER ....120
AIR SPRAY ....120
ALCOHOL ....77
ANSWERING MACHINES ....105
ANTI STATIC SPARY ....120
APPLE ....3
APPLE SPLICE ....3
APPLE TERMINATOR ....3
APPLETALK ....3
APPLETALK 2PR UTP ....3
APPLETALK 78 OHM CABLE ....3
ARCNET CABLE ....4
ARCTNET-CONNECTORS ....4
ARCTNET-RG62 CABLE ....4
AS400/3X ....5
ASANTE HUB ....42,43,45
ATEX CABLE ....15
ATTENUATORS-3M BICONIC BULKHEAD ....65
ATTENUATORS-3M FC/PC BULKHEAD ....65
ATTENUATORS-D4 BULKHEAD ....65
ATTENUATORS-FDDI ....65
ATTENUATORS-SMA ....65
ATTENUATORS-ST ....65
AUTO SWITCH BOXES ....92,93

## B

B CONNECTORS ....122
BACKUP DRIVES ....35
BALUNS ....8
BALUNS-3270 COAX ....8
BALUNS-ARCNET ....4
BALUNS-ETHERNET COAX ....8
BALUNS-GREEN BALUN ....109
BALUNS-SELF TERMINATING DB15 ....5
BALUNS-SELF TERMINATING TWINAX ....5
BALUNS-SLIMLINE COAX ....8
BALUNS-TWINAX ....5
BANNANAS ....116
BATTERIES ....120
BICONIC CABLE ASSEMBLY ....63
BICONIC MATING SLEEVES ....64
BIX BLOCKS ....101
BIX TOOL ....101
BLOOMSBERG CABLE ....15
BNC MATING SLEEVES ....64
BNC PATCH PANELS ....89
BOOKS ....123
BRACKETS ....87,89
BREAKOUT BOXES ....103
BREAKOUT FIBER CABLE ....56
BRIDGES ....52
BRIDGING CLIPS ....100
BROADCAST CABLE ....11
BULK CABLE ....9-15
BUS AND TAG CABLES ....5
BUTT SET ....115

## C

CABLE ASSEMBLIES ....17
CABLE CUTTERS ....112
CABLE DUCT ....121
CABLE MANAGEMENT ....87,121,122
CABLE MANAGEMENT BRACKET ....87
CABLE SLITTER ....112
CABLE TIE GUN ....121
CABLE TIES ....121
CABLE-OFFICE TRANSCEIVER ....38
CABLE-THICKNET ....38
CABLE-THINNET ....38
CABLE-TRANSCEIVER ....38
CABLES- 5 BNC/ 5 BNC ....22
CABLES-10 BASE T ....17
CABLES-APPLE II ....3
CABLES-ARCNET ....4
CABLES-AT-MODEM ....21
CABLES-AUI OFFICE TYPE ....41
CABLES-AUI THICK TYPE ....41
CABLES-CENT 50M/DB25M ....20
CABLES-CENT 50M/DB50M ....20
CABLES-CENT 50M/F ....20
CABLES-CENT 50M/M ....20
CABLES-CENTRONIC 36 PIN ....18
CABLES-CENTRONICS 50 ....20
CABLES-DB13W3 ....22
CABLES-DB15 ....17
CABLES-DB25 ....18
CABLES-DB37 ....18
CABLES-DB50 ....18
CABLES-DB9 ....17
CABLES-DEC HARD DRIVE ....22
CABLES-DEC SCSI ....20
CABLES-DIN ....22
CABLES-ETHERNET TRUNK ....41
CABLES-FLOPPY DRIVE ....22
CABLES-HALF PITCH ....20
CABLES-HARD DRIVE 34/20 PIN ....22
CABLES-HAYES MODEM ....18,21
CABLES-HD26 ....18
CABLES-HD44 ....18
CABLES-HD62 ....18
CABLES-HITACHI MONITOR ....22
CABLES-HP BUS IEEE 488 ....19
CABLES-HP LASERJET AT TYPE ....21
CABLES-HP LASERJET XT TYPE ....21
CABLES-HYDRA FLAT SATIN ....19
CABLES-IBM BUS AND TAG ....5
CABLES-IBM SCSI RISC ....20
CABLES-IDE DRIVE ....22
CABLES-IMAGEWRITER I,II ....3
CABLES-LASER 128 ....3
CABLES-LIC 3725 ....5
CABLES-MAC 128K/512K ....3
CABLES-MAC PLUS ....3
CABLES-MINI DIN ....22
CABLES-MITSUBISHI MONITOR ....22
CABLES-NEC MONITOR ....22
CABLES-NULL MODEM DB25M/M,M/F,F/F ....21
CABLES-NULL MODEM DB9F/DB25M ....21
CABLES-NULL MODEM DB9F/F ....21
CABLES-OCTOPUS L5 ....17
CABLES-PARALLEL PRINTER ....21
CABLES-PATCH UTP STRANDED LEV 5 32- ....17
CABLES-RGB MONITOR ....22
CABLES-RGBS MONITOR ....22
CABLES-RISC 6000 ....5
CABLES-SAMSUNG MONITOR ....22
CABLES-SCSI 1 CEN50M/DB25M ....20
CABLES-SCSI 1 EXTENSION ....20
CABLES-SCSI 1 EXTERNSION CEN50M/DB50M ....20
CABLES-SCSI 1 EXTERNSION CEN50M/F ....20
CABLES-SCSI 1 PERIPHERAL ....20
CABLES-SCSI 1 PERIPHERAL CEN50M/M ....20
CABLES-SCSI 1 SYSTEM ....20
CABLES-SCSI 1 TERMINATORS ....20
CABLES-SCSI 1-SCSI 2 HPD50M/CEN50M ....20
CABLES-SCSI 100 DOCKING CABLE ....20
CABLES-SCSI 100 HPD M/M ....20
CABLES-SCSI 2 ....20
CABLES-SCSI 2 CEN26/DB25M ....20
CABLES-SCSI 2 HDCEN50M/DB50M ....20
CABLES-SCSI 2 HDCEN50M/M ....20
CABLES-SCSI 2 HPD50M/F ....20
CABLES-SCSI 2 HPD50M/M ....20
CABLES-SCSI 2 TO SCSI 1 ....20
CABLES-SCSI 3 TO SCSI 1 ....20
CABLES-SCSI APPLE POWERBOOK ....20
CABLES-SCSI APPLE POWERBOOK ....20
CABLES-SCSI FLAT DRIVE EXT. ....20
CABLES-SCSI FLAT DRIVE INT. ....20
CABLES-SELF-TERMINATING "T" ....5
CABLES-SERIAL PRINTER ....21
CABLES-SONY MONITOR ....22
CABLES-SPECIAL SCSI ....20
CABLES-SUPER SERIAL CARD ....3
CABLES-SWICH BOX APPLE ....94
CABLES-TATUNG MONITOR ....22
CABLES-TAXAN MONITOR ....22
CABLES-TELCO 100PR ....9
CABLES-TELCO 12PR ....9
CABLES-TELCO 25PR ....9
CABLES-TELCO 50PR ....9
CABLES-TELCO 75PR ....9
CABLES-THINNET ....10
CABLES-THINNET TAP ....40
CABLES-THOMSON MONITOR ....22
CABLES-TWINAX 100 OHM ....11
CABLES-V.35 ....21
CABLES-V.50 ....21
CABLES-VGA "Y" ....22
CABLES-VGA MONITOR HD15 ....17
CABLES RED BALUN ....109
CANNED AIR ....120
CANTILEVER SHELF ....87
CAT 5 PATCH PANELS ....54,90
CATAGORY 5 CABLE ....9
CATAGORY 5 PRODUCTS ....54
CATV ACCESSORIES ....29
CAU ....110
CD-ROM DRIVE ....85
CHAMOIS TIPS ....120
CHEMICALS ....120
CLEANERS ....120
CLOSURES ....79
COAX 50 OHM CABLE ....10,11
COAX 75 OHM CABLE ....11
COAX 93 OHM CABLE ....11
COAX CLIPS ....122
COAX INTERFACE KIT ....117
COAX STRIPPER ....112
COAXIAL CRIMP TOOLS ....113
COAXIAL POWER MAU ....110
COIL CORDS ....4,10
CONFIDENCORS ....107
CONNECTOR BOOTS ....4,24
CONNECTOR KITS-D SUB ....26
CONNECTORS ....23-32
CONNECTORS-3M HOT MELT ST ....61
CONNECTORS-3M PUSH-PULL ST ....61
CONNECTORS-BAIL KITS ....25
CONNECTORS-BICONIC ....60
CONNECTORS-BNC 2PCS ....28
CONNECTORS-BNC 3PCS ....28
CONNECTORS-BNC 3PCS SOLDER ....28
CONNECTORS-BNC T TYPES ....28
CONNECTORS-BNC TWIN LEAD ....28
CONNECTORS-BNC TWIST ON FEMALE ....28
CONNECTORS-BNC TWIST TYPE ....28
CONNECTORS-D SUB CRIMP TYPE ....27
CONNECTORS-D SUB HIGH DENSITY CRIMP ....27
CONNECTORS-D SUB HIGH DENSITY SOLDER ....27
CONNECTORS-D SUB SOLDER TYPE ....27
CONNECTORS-D4 ....60
CONNECTORS-DIN ....31
CONNECTORS-ETHERNET ....40
CONNECTORS-F TYPE ....29
CONNECTORS-FC ....59
CONNECTORS-FDDI ....60
CONNECTORS-IDC D SUB METAL ....30
CONNECTORS-IDC D SUB PLASTIC ....30
CONNECTORS-MINI BNC ....60
CONNECTORS-MINI DIN ....31
CONNECTORS-MODULAR ....24,25
CONNECTORS-MODULAR ROUND ....24,25
CONNECTORS-MODULAR SHIELDED ....24,25
CONNECTORS-N TYPE ....29
CONNECTORS-NO EPOXY ST ....61
CONNECTORS-RIBBON CENTRONICS PLASTIC ....30
CONNECTORS-RIBBON D SUB METAL ....30
CONNECTORS-RIBBON D SUB PLASTIC ....30
CONNECTORS-RIBBON IDC CARD EDGE ....30
CONNECTORS-RIBBON IDC SOCKET ....30
CONNECTORS-RT. ANGLE BNC ....28
CONNECTORS-SC ....59
CONNECTORS-SMA TYPE ....60
CONNECTORS-ST TYPE ....59
CONNECTORS-TELCO ....25
CONNECTORS-TELCO 24 POS ....25
CONNECTORS-TELCO 50 POS ....25
CONNECTORS-TRW IDC D SUB METAL ....27
CONNECTORS-TRW IDC D SUB PLASTIC ....27
CONNECTORS-TWINAX ....30
CONNECTORS-XLR TYPE ....31
CONTROL WIPES ....120
CONTROLLED ACCESS UNIT (CAU) ....110
COPPER CONCENTRATOR PORT CABLE ....110
COPPER REPEATERS ....110
CORD RETRACTOR ....104
CORD UNTWISTER ....104
CORDLESS TELEPHONES ....105
COTTON SWABS ....120
COTTON WIPES ....120
COVERS 66 BLOCK ....100
CQBLE STRIPPERS ....112
CRIMP TOOLS ....44,113
CROSS CONNECT CABLE ....12
CROSS CONNECT LEV 5 ....12
CROSS OVER PATCH CABLES ....17,109
CSU/DSU'S ....96,97
CUSHION REST ....104
CUTTERS ....112

## D

D RING PANEL ....87
D RINGS ....122
D SUB CRIMP PINS ....27
D SUB HARDWARE ....26
D SUB PIN CRIMPER TOOL ....27
D4 CABLE ASSEMBLY ....63
D4 CONNECTORS ....60
D4 MATING SLEEVES ....64
D814 TOOL ....115
DATA COIL CORDS ....104
DATA CONNECTORS ....109
DATA SWITCHES ....91-94
DATA TO RJ11/45 ADAPTERS ....24
DATACONNECTOR PATCH PANELS ....89,110
DDS CSU/DSU ....96
DESIGNATION STRIPS ....100
DESK PHONES ....105,107
DIAGNAL CUTTERS ....112
DIRECT BURIAL ALUM SHIELDED PE39 ....13
DIRECT BURIAL CABLE PE89 ....13
DISTRIBUTION PANELS ....89,110
DISTRIBUTION SPOOLS ....122
DOT MATRIX PRINTERS ....86
DOUBLE SIDED TAPE ....120
DPC ATTACHMENT CABLE ....109
DROP CABLE ....41
DRY WALL SCREWS ....122
DUAL MOD ADAPTER ....24
DUAL PURPOSE ATTACHMENT CABLE ....109
DUAL RG-59 WANG ....11
DUAL STATION ACCESS MODULE ....109
DUPLEX FIBER CABLE ....57
DUST COVER TELCO ....25
DUSTER SPRAY ....120

## E

ELECTRICAL TAPE ....120
ELECTRO CLEANER ....120
ENCLOSURES ....88
EPOXY ....77
EQUIPMENT RACKS ....87
ETHERNET ....33-54
ETHERNET HUBS ....43,44
ETHERNET REPEATERS ....50
ETHERNET SWITCHES ....45
ETHERNET TRANSCEIVER ....48
EXPANDER "Y" CABLE ....110
EXTENDED DISTANCE CABLE ....13

## F

FACEPLATES ....23,89
FANOUTS ....49
FAX SWITCHES ....104
FC CABLE ASSEMBLY ....63
FC MATING SLEEVES ....64
FDDI CABLE ASSEMBLY ....63
FDDI COPPER ADAPTER CABLE ....110
FDDI COPPER REVERSING CABLE ....110
FDDI COPPER WRAP PLUG ....110
FDDI MATING SLEEVES ....64
FEED THROUGH PATCH PANELS ....89,90
FIBER CONSUMABLES ....77
FIBER MATING SLEEVES ....64
FIBER METER ....82,83
FIBER OPTIC BREAKOUT KITS ....63
FIBER OPTIC CABLE ....65
FIBER OPTIC CABLE ASSEMBLIES ....66
FIBER OPTIC CONNECTORS ....64
FIBER OPTIC CONVERTER ....96
FIBER OPTIC HEAT OVEN ....64
FIBER OPTIC PATCH PANELS ....61
FIBER OPTIC REPEATERS ....96
FIBER OPTIC SPLICE CASE ....60
FIBER OPTIC SPLICES ....62
FIBER OPTIC TALK SET ....67
FIBER OPTIC TEST EQUIPMENT ....67
FIBER POLISHING DISCS ....52
FIBER SPLICE KIT ....51
FIBRLOK SPLICE ....51
FIGURE 8 CABLE PE38 ....13
FILLER PANELS ....89
FINGER BOOTS ....25
FISHTAPE ....120
FLASHLIGHTS ....120
FLAT COLOR RIBBON CABLE ....14
FLAT CORDS ....104
FLAT GRAY RIBBON CABLE ....14
FLAT HEAD SCREWDRIVERS ....111
FLAT TWISTED CABLE ....14
FLOOR DUCT ....121
FLUKE ....118
FLUSH MOUNT WALL JACKS ....23,102
FOAM TAPE ....120
FOX & HOUND ....116
FUSES ....111
FUSION SPLICE TRAY ....67
FUSION SPLICERS ....67

## G

G STYLE HANDSETS ....107
GEMERAL PURPOSE ATTACHMENT CABLE ....109
GENDER MENDER CENTRONIC ....32
GLASS POLISH PLATE ....63
GLUE ....120
GOLD GUARD ....120
GOOD & PLENTY CONNECTORS ....122
GREEN BALUN ....109

## H

HANDSET CORDS ....104
HANDSET REST ....104
HANDSETS ....107
HARMONICAS ....103
HEADSETS ....106
HEAT OVEN ....72
HEX NUTS ....26
HOODS- D SUB ....26
HOODS-ETHERNET AUI TYPE ....CALL
HOODS-TRW BLACK D SUB ....27
HOODS-TRW GRAY D SUB ....27
HOODS-V.35 ....25
HOOK & LOOP HOLDOWNS ....100
HOOK & LOOP TAPE ....120
HOOK-UP CABLE ....15
HOT NUMBER DIALER ....104
HYSOL EPOXY ....76





Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

# INDEX


## I

IBM TOKEN RING CABLE ....11
IBM TYPE 1A CABLE ....11
IBM TYPE FACEPLATES ....110
IMAGEWRITER II CABLES ....3
INDUCTIVE AMPLIFIERS ....116
INNERDUCT ....57
INSERTION EXTRACTION TOOL ....114
INTEL ETHEREXPRESS ....42
ISDN ....95
ISDN LINE SIMULATORS ....98

## K

K STYLE HANDSETS ....107
KEYSTONE CONNECTORS ....43
KEYSTONE PANELS ....89
KRONE TOOL ....115

## L

LABELS ....122
LAN CABLE 21- ....10
LAPPING FILM ....75
LASERJET PRINTERS ....86
LATTIS LINK ....44
LEVEL 5 PATCH PANELS ....90
LEVITON ....54
LIGHT SOURCE ....83
LINEMANS TEST SET ....115
LINE SHARING ....99
LINE SIMULATORS ....98
LITHIUM SPRAY GREASE ....120
LOCAL INJECTION ....82
LOCAL INJECTION DETECTION SYSTEM ....82
LONGNOSE PLIERS ....112
LOOP CABLE ASSEMBLY ....109
LOOP WIRE CONCENTRATOR ....100
LOW CAP CABLE ....13
LUBRICANT ....120
LWC ....110

## M

MAC NETWORKING ....3
MAGLIGHTS ....120
MARKERS ....122
MATCHING GEL ....77
MATCHING TRANSFORMERS ....29
MAU ....110
MECHANICAL SPLICES ....67
MEDIA CONVERTERS ....51
MEDIA FILTERS ....8
MFA/422 ATTACHMENT CABLE ....109
MICROPHONE CABLE ....15
MICROTEST TESTERS ....117
MICROTRANSCEIVERS 100 BASE-T ....48
MICROTRANSCEIVERS 10 BASE-T ....48
MINI COAX RG62A/U ....15
MMJ PATCH PANELS ....90
MOD ADAPTERS ....24
MODEMS ....86
MODULAR ADAPTERS ....103
MODULAR CORDS ....104
MODULAR COUPLERS ....103
MODULAR CRIMP TOOLS ....113,114
MODULAR INLINE COUPLERS ....103
MODULAR JACKS ....23,102
MODULAR PATCH PANELS ....90
MODULAR SPLITTERS ....103
MODULAR T ADAPTERS ....103
MODULES CAT 5 JACKS ....23,54
MONITORS ....85
MOOUNTING BARS ....87,88
MOUNTING HARDWARE ....88
MSAU ....110
MULTI CONDUCTOR CABLE ....13
MULTISTATION ACCESS UNITS ....110
MUSIC ON HOLD ADAPTER ....104

## N

NETWORK INTERFACE CARDS ....42
NETWORK INTERFACE CARDS-ETHERNET ....42,46
NOISE CANCELLING MIC ....107
NT-1 ....95
NT-1 PLUS ....95

## O

OFFICE DROP CABLE ....41
OIL ....120
OPTICAL DRIVES ....85
ORTRONICS ....54
OTDR ....83
OUTDOOR JACKS ....102

## P

PARALLEL PRINTER BUFFERS ....92
PASSIVE HUB ....4
PATCH CABLES ....17
PATCH CORD TESTER ....116
PATCH PANELS ....90,91
PC ADAPTER CABLES ....100
PCMCIA CARDS ....46
PE 22 CABLE ....13
PENETRATING OIL ....120
PHILIPS HEAD SCREW DRIVERS ....111
PIANO WIRE ....77
PLASTIC & GLASS CLEANER ....120
PLIERS ....112
POLISH DISCS ....74
POLISH PAD ....74
POLISHING MACHINE ....74
POSTS ....26
POWER CABLE 300-600 VOLT ....15
POWER METERS ....83
POWER STRIP ....120
POWER TOOLS ....111
PRINT SERVERS ....49
PRINTERS ....86
PRIVACY ADAPTER ....104
PROBE PICK ....115
PROTOCOL ANALYSERS ....117,118
PULLING COMPOUND ....120
PULLING LUBRICANT ....120
PUNCH DOWN TOOLS ....115
PUNCHDOWN BLOCKS ....100,101

## Q

QUOTRON CABLE ....15

## R

RACK MOUNT POWER STRIP ....88
RACK TERMINATION CABINETS ....88
RADIAL LOOP STATION CONCENTRATOR ....110
RECEPTICLE JACKS ....102
RED BALUN ....109
REFERENCE MANUALS ....123
RELAY RACKS ....87
REMOVABLE TAPE DRIVES ....85
RETIX ETHERNET BRIDGE ....53
RETIX TOKEN RING BRIDGE ....53
RG-11 ....11
RG-58A/U ....11
RG-6 ....11
RG-62A/U ....11
RGB COAX CABLE ....15
RIBBON CABLE ....14
RIBBON CABLE CONNECTORS ....30
RISC 6000 ....5
PATCH PANELS - RJ11, RJ12, RJ45, RJ69 ....90
RS 232 CABLE BULK ....13
RS 232 CRIMP TOOL ....114

## S

SC CABLE ASSEMBLY ....63
SC MATING SLEEVES ....64
SCANNERS ....86
SCREWDRIVERS ....112
SCREWS ....88,122
SERIAL PRINT BUFFERS ....92
SERVERSWITCHES ....91
SHELVES ....87,88
SHIELDED TELEPHONE CABLE ....10
SHIELDED TWISTED PAIR CABLE ....12
SHRINK TUBING ....111
SIGNAL BOOSTER CATV ....29
SILICONE ....120
SILVER SATIN CORDS ....104
SIMPLEX CABLE ....57
SINGLE STATION ACCESS MODULE ....109
SLIDE LATCH ....26
SMA 905 CABLE ASSEMBLY ....63
SMA 906 CABLE ASSEMBLY ....63
SMA MATING SLEEVES ....64
SMC ETHERCARD ....42
SNAKE ....120
SOFTWARE ....85,86
SPEAKER CABLE ....15
SPEAKER PHONES ....105
SPECIAL APPLICATION CABLE ....15
SPLICES ....67
SPLITTERS F TYPE ....29
SPUDGERS ....115
ST CABLE ASSEMBLY ....63
ST MATING SLEEVES ....64
STAINLESS STEEL WALLPLATES ....89
STANDOFF BRACKETS ....100
STAPLE GUN ....121
STAPLES ....121
STP CABLE ....10,109
STRANDED BULK PATCH CABLE LEV 5 ....10
STRANDED SHIELDED BULK STP LEV 5 ....10
STRIP MASTER ....112
SUPER GLUE ....120
SURFACE MOUNT JACKS ....23,102
SURGE PROTECTOR-F TYPE ....29
SWITCHED 56 DSU/CSU ....96
SWITCHES ....91
SWITCHES, ETHERNET ....45
SWITCHES-VIDEO CATV AB/ABC ....29
SYNOPTICS HUBS ....43,44,45
SYNOPTICS MODULES ....49
SYRINGE ....76
SYRINGE COUPLANT ....77

## T

T STRIPPERS ....112
T-1 CABLE ....14
T-1 CSU/DSU ....97
T-1 HIGHSPEED ....14
TAPE ....120
TAPE BACKUP ....85
TAPE DRIVES ....85
TELCO ADAPTERS ....25,100
TELCO CONNECTOR ....25
TELCO PATCH PANELS ....90
TELECOM DICTIONARY ....124
TELEPHONE ANSWERING MACHINES ....105
TELEPHONE CABLE UTP LEV 2 ....9
TELEPHONE CABLE UTP LEV 5 ....9
TELEPHONE HEADSETS ....106
TELEPHONE RECORDING DEVICE ....104
TELEPHONE SHIELDED CABLE ....10,12
TELEPHONE SWITCHBOARD CABLE ....12
TELEPHONES ....105
TELNET ....3
TELNET CONNECTORS ....3
TERMINAL ADAPTER ....95
TERMINATION PANELS ....80
TERMINATOR-93 OHM BNC ....4
TERMINATOR-SCSI ....31
TERMINATORS- N TYPE ....40
TERMINATORS- TWINAX M&F ....30
TERMINATORS-HALF PITCH DB50 ....31
TEST EQUIPMENT ....116,119
THICKNET CABLE ....10
THINNET CABLE ....10
THINNET DROP CABLES ....10
THINNET EXPANSION BOX ....40
THUMB SCREWS ....26
TIE WRAPS ....121
TINNED TELEPHONE CABLE ....12
TOGGLE ....112
TOGGLE BOLTS ....122
TOKEN RING ....109,110
TONE GENERATORS ....116
TOOL KITS ....119
TOOL POUCH ....120
TOOLS- BUTTERFLY TELCO ....25
TOOLS- T HANDLE TELCO ....25
TOOLS-AUGAT FIBER STRIPPER ....71
TOOLS-BICONIC GAUGE ....73
TOOLS-BUEHLER FIBRSKOPE ....73
TOOLS-ETHERNET COAX ....38,39
TOOLS-ETHERNET TERMINATION KIT ....119
TOOLS-FIBER BUFFER TUBE STRIPPER ....70
TOOLS-FIBER CRIMPERS ....70
TOOLS-FIBER DIAMOND SCRIBE ....71
TOOLS-FIBER INSPECTION MICROSCOPE ....73
TOOLS-FIBER MILLER STRIPPERS ....70
TOOLS-FIBER SLITTER ....71
TOOLS-FIBER T STRIPPERS ....71
TOOLS-FIBER TERMINATION KIT ....68
TOOLS-FIBER TOOL KIT ....68
TOOLS-FITEL CLEAVER ....72
TOOLS-KEVLAR CUTTER ....71
TOOLS-NO-NIK ....70
TOOLS-POCKET CLEAVER ....72
TOOLS-T&B CLEAVER ....72
TOOLS-THICKNET STRIPPER ....112
TOOLS-THINNET STRIPPER ....112
TOOLS-V.35 CONTACT CRIMPER ....114
TRANSCEIVER DROP CABLE ....38
TS19 ....115
TS21 ....115
TS22 ....115
TUBING ....111
TWINAX "Y" CABLE ....109
TWINAX OHM CABLE ....11
TWINAX 78 OHM CABLE ....11
TWINAX CONN PINS ....30
TWINAX CONNECTORS ....30
TWINAX DIREECT CABLE ....109
TWINAX PATCH PANEL ....89
TYPE 1 CABLE ....11
TYPE 1 FACEPLATE ....110
TYPE 1A CABLE ....11
TYPE 2 CABLE ....11
TYPE 2 FACEPLATE ....110
TYPE 2A CABLE ....11
TYPE 3 ....11
TYPE 3 MEDIA FILTER ....8
TYPE 3 MEDIA JUMPER ....109
TYPE 6A ....11
TYPE 8A ....11
TYPE 9A ....11

## U

UG CONNECTORS ....122
UNINTERRUPTIBLE POWER SUPPLIES ....86
UNIVERSAL CLOSURE ....79
UNIVERSAL SPLICE TRAY ....67
UPS ....86
UR CONNECTORS ....122
UY CONNECTORS ....122

## V

V.35 CONNECTORS ....25
V.35 CONTACTS ....25
V.35 CRIMP TOOL ....25
V.35 EXTRACTION TOOL ....25
VACUUM CLEANER ....120
VGA MONITORS ....85
VGA MULTIPLIER ....94
VISUAL FAULT DETECTOR ....82
VSR DRILL DRIVER ....111

## W

WALL TERMINATION CABINETS ....80
WALLPHONE WALLPLATES ....102
WALLPHONES ....105,107
WALLPLATES ....23,89,102
WALLPLATES- CATEGORY 5 ....23,54
WALLPLATES-TWINAX ....5,89
WATERPROOF JACKS ....102
WIPES ....120
WIRE WRAP GUN ....115
WIRED BLOCKS ....100,101
WRITE-ON LABELS ....122

## X

## Y

Y ASSEMBLY ....109,110
YELLOW BALUN ....109



IF YOU CANT FIND WHAT YOU ARE LOOKING FOR, CALL OUR SALES DEPARTMENT AT

**Phone (973) 325-3151**

NCI INC.

THEY WILL BE HAPPY TO HELP YOU FIND EXACTLY WHAT YOU NEED.

# How To Order

## By Telephone: (973) 325-3151

Our friendly sales representatives are ready to serve you Mon–Fri 9-4 EST, closed Saturday.
For most efficient
service, please have a list of quantities and part numbers available. If paying by credit card, have your MasterCard, Visa, or American Express card handy.

## By FAX: (973) 325-2690

Our FAX line is open 24 hours a day, 7 days a week, 365 days a year. Faxed orders received after closing are promptly handled the next business day. Please include your daytime phone number.

## BY EMAIL: SEND YOUR ORDER TO:

National Communications Inc.
Email ncisales@trynci.com
Hours Mon–Fri 9-4 EST

## Handling Charge:

A handling charge applies to all orders

## Payment:

Several convenient payment options are available. Check, money order, MasterCard, Visa, American Express and C.O.D., as well as credit terms to qualified companies and institutions.

A credit application can be obtained by calling (973) 325-3151 , and talking to a sales representative. When opening an account with us, please allow sufficient time to complete the approval process. To avoid delay of your initial order, you may want to include a check or authorize a C.O.D. shipment.

## Shipment:

National Communications ships all orders processed by 4:00 PM the same day with no additional charge. FOB point is our warehouse.

## Customer Service: (973) 325-3151

A friendly, competent staff of Customer Service Representatives are available Mon–Fri 9-4 EST (closed Saturday) to assist you. Please have your sales order or invoice number available when you call.

## Sales Tax:

Only New Jersey and New York residents need to remit sales tax. If you are tax exempt, simply FAX a copy of your Resale Certificate (ST- 3 Form) with your order.

## Return Policy:

National Communications will gladly accept merchandise returns when you follow this procedure:

1. Contact a Customer Service Rep to obtain a return authorization number.
2. Include your RMA# on all packages and packing lists.
3. All returns must be made within 30 days of the date of the invoice and be accompanied by the original invoice number and a brief explanation of the reason for the return.
4. Return freight charge must be prepaid. Sorry, no C.O.D. returns can be accepted.
5. Merchandise must be returned in original packaging and in resalable condition.
6. Parts returned due to customer error are subject to a 25% re-stocking fee. Custom products are not returnable.
7. Defective merchandise may be returned within 90 daysof date of invoice and need not be in original packaging.This return policy may be altered for specific circumstances.
8. Software is non-returnable.

## Foreign Orders:

In addition to the United States and its territories, National Communications Inc. also accepts order from other countries. All orders for foreign countries must be shipped to a forwarding agent of your choice in the U.S. An additional handling charge of will be included for processing and invoicing. All foreign shipments are handled by Cashier's check or Wire Transfer in U.S. Funds.

## Freight Damage:

If you receive merchandise that has been damaged in transit it is important to keep the shipping carton, packing material and parts intact. Always note carton damage at time of delivery with the carrier. Please contact National Communications Customer Service Department for assistance with your claim.

## Prices/Quantities:

Prices are subject to change without notice and quantities may be limited.

## Product Liability:

National Communication's sole obligation for products that prove to be defective will be replaced or refunded. This warranty does not apply to products which have been subject to misuse(including static discharge), neglect, accident, or modification, or which have been soldered or altered during assembly and are not capable of being tested. In no event shall National Communication's liability exceed the buyers purchase price nor will National Communications be liable for any indirect or consequential damages.

INTERNET
http://www.trynci.com
e-mail: ncisales@trynci.com
CONTACT
National Communications Inc.
Email ncisales@trynci.com
Hours Mon–Fri 9-4 EST
PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST



## PAYMENT METHOD

CHECK ENCL. BILL ME ☐ C.O.D. ☐ BILL MY: MC / VISA / AMEX (CIRCLE)
OTHER - NEW ACCOUNT # _____
REQUEST CREDIT LINE ☐ EXP. DATE _____
**MINIMUM ORDER .00** NAME ON CARD _____
SIGNATURE _____

**TERMS: NET 15 ALL PRODUCTS F.O.B. SHIPPING POINT PRICES SUBJECT TO CHANGE**

Date ____/____/____
P.O. # _____
Salesperson _____

**OFFICE USE ONLY**
MANAGER _____
AUTHORIZATION _____

NCI INC.

**BILL TO** ACCT. # _____ RETAIL / WHOLESALE
Full Co. Name _____
Addr. 1 _____
Addr. 2 _____
Addr. 3 _____
City _____ State _____ ZIP _____
Phone ( )_____ Fax ( )_____
Buyer/Contact _____
Ship: UPS(Ground, Blue,Orange, Red), Mess., Truck, FedEx, Other: _____

**OFFICE USE ONLY**
Taxable: New York, New Jersey, NONE
Terms: AMEX, M/C, VISA, NET 15, Other:_____

**SHIP TO** ACCT. # _____ RETAIL / WHOLESALE
Full Co. Name _____
Addr. 1 _____
Addr. 2 _____
Addr. 3 _____
City _____ State _____ ZIP _____
Phone ( )_____ Fax ( )_____
Buyer/Contact _____
Ship: UPS(Ground, Blue,Orange, Red), Mess., Truck, FedEx, Other: _____

**OFFICE USE ONLY**
Taxable: New York, New Jersey, NONE
Terms: AMEX, M/C, VISA, NET 15, Other:_____

| LINE# | QTY. | PART NUMBER | PAGE # | DESCRIPTION | UNIT P E | P E EXTND |
|---|---|---|---|---|---|---|
| 1 | | | | | | |
| 2 | | | | | | |
| 3 | | | | | | |
| 4 | | | | | | |
| 5 | | | | | | |
| 6 | | | | | | |
| 7 | | | | | | |
| 8 | | | | | | |
| 9 | | | | | | |
| 10 | | | | | | |

**CONDITIONS:** All products manufactured by National Communications Incorporated (NCI) carry a one (1) year warranty against defects in workmanship and labor. Our warranty is limited to repairing or replacing products which prove defective upon NCI inspection. Misuse, abuse, or alteration of any product will void all warranties. All products not manufactured by NCI are warranted by their respective manufacturers. Please consult our sales staff for more details. **No returns accepted without RMA#. All claims must be made within ten (10) days.**

**SEE FULL TERMS AND CONDITIONS ON FOLLOWING PAGE.**

| | |
|---|---|
| SUBTOTAL | |
| SHIPPING | |
| HANDLING | 5 |
| TAX [NJ-6% NY-8.25%] | |
| TOTAL | |

SEND CATALOG? CHECK HERE ☐ HOW MANY? ☐ FREE

*"A FULL SERVICE CABLING SYSTEMS SUPPLIER"*

# TERMS AND CONDITIONS OF SALE

1. Due to the high cost of processing and handling, we must have a minimum order of or a service charge will be added to the invoice.

2. All prices are subject to change without notice. Please call for most current pricing. NCI is not responsible for any typographical errors.

3. Your Order is accepted but acceptance is expressly conditioned upon acceptance by you of the terms and conditions contained herein. Seller is not bound by any terms on Buyer's order which attempt to impose any condition at variance with Seller's terms which are included herein. Seller's failure to object to provisions contained in any of the Buyer's forms shall not be deemed an acceptance of any of Buyer's terms or a waiver of the provisions of Seller's terms and conditions which shall constitute the entire, final, and exclusive statement of the Sales Contract between the parties.

4. The agreement between Seller and Buyer (the "Sales Contract") with respect to the products described in this acknowledgement(the "products") shall consist of the terms contained herein together with any additions or revisions of such terms mutually agreed to in writing by Seller and Buyer. Seller shall not be bound by any additional or different terms, whether printed or otherwise, in Buyer's purchase order or in any other communication from Buyer to Seller, unless specifically agreed to by Seller in writing.The Sales Contract shall be for the benefit of Seller and Buyer and not for the benefit of any other person. Prior courses of dealing and verbal agreements not reduced to a writing signed by Seller to the extent they modify, add to or detract from the Sales Contract, shall not be binding on Seller.

5. The Sales Contract may not be modified or rescinded except by a writing signed by Seller and Buyer. If all or part of the Sales Contract is terminated by such modification or recession, Buyer, in the absence of contrary written agreement between Seller and Buyer, shall pay termination charges based upon cost determined by accepted accounting principles, plus a reasonable profit on the entire quantity ordered. Cost shall include any amount Seller must pay to its suppliers due to any termination by Seller of a purchase order for products intended for Buyer.

6. Buyer shall pay purchase price within fifteen (15) days from date of shipment unless otherwise stated on the front side hereof.Price is F.O.B. first point of shipment unless otherwise stated on the front hereof. Title to and risk of loss of the products pass to Buyer upon delivery to carrier. In the event Buyer fails to pay the total purchase price within said 15 day period, Seller shall be entitled to collect an interest charge of the lesser of 1.5% of the unpaid purchase price per month or the maximum amount allowed by applicable laws. Seller shall also be entitled, in addition to all other remedies available at law or in equity to recover reasonable attorneys fees and/or other expenses in collecting the purchase price or otherwise enforcing or successfully defending itself in respect of this Sales Contract.

7. Any tax or other governmental charge upon the production, sale, shipment or use of the products which Seller is required to pay or collect from Buyer shall be paid by Buyer to Seller, unless buyer furnishes Seller with exemption certificates acceptable to taxing authorities. Such amount shall be due whether or not included on the invoice.

8. Shipping date is estimated on the basis of immediate receipt by Seller of Buyer's order and all information, drawings and approvals to be furnished by Buyer, and the absence of delays, direct or indirect, resulting from or contributed by the circumstances beyond Seller's reasonable control. Seller will in good faith endeavor to ship by estimated shipping date. Seller shall have the right to make partial shipments.

9. Seller will comply with minimum specifications for the method of transportation specified. If no method of transportation is specified on the front side hereof, shipment will be by a reasonable method of transportation.

10. Unless otherwise specified on the front side hereof, quantities are subject to normal manufacturers allowances. Such allowances in the case of wire and cable are plus10% and minus 5%. The purchase price will equal the unit price multiplied by the quantity shipped.

11. All orders are shipped F.O.B. shipping point via common carrier (usually UPS), unless otherwise specified. Orders placed before 1:30pm EST will ship out that day, on stock items. Seller warrants to Buyer that the products at the time of shipment will be commercially free from defects in material and workmanship and will be materially in accord with specifications referred to on the front hereof or otherwise specifically agreed to in writing by the parties hereto. Seller passes on and assigns to Buyer the warranties made to Seller by its suppliers and Seller's warranty in its entirety shall be deemed limited by and shall not extend beyond such warranties. The length of the warranty period will be the length established by the manufacturer of the products and shall in no event extend beyond one year from date of shipment. Buyer shall proceed exclusively and directly against such supplier at Seller's request. This Warranty shall be ineffective and shall not apply to goods that have been subjected to misuse or abuse, neglect, accident, damage, or improper installation or maintenance. All non-defective products returned are subject to 25% restocking fee. No returns on custom products.This includes products not shipped from stock.Buyer will inspect the goods upon delivery and will promptly notify Seller in writing of any defect in the products. Seller's sole obligation under these warranties will be limited to either, at Seller's option and expense, repairing or furnishing a replacement F.O.B. first point of shipment for the products or parts thereof which Seller reasonably determines do not conform with these warranties, and Buyer's exclusive remedy for breach of any such warranties will be enforcement of such obligation of Seller. All claims for shortages or defects shall be submitted in writing to Seller within ten (10) days from date material is received by Buyer; otherwise such claims shall be irrevocably waived. Seller is not responsible for damage incurred in transit. No agent, employee, or representative of the Seller has any authority to bind Seller to any representation, affirmation or warranty concerning the products and any such representation, affirmation or warranty shall not be deemed to have become a part of the basis of this Sales Contract and shall be unenforceable. THE FOREGOING WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES OF MERCHANTABILITY, FITNESS FOR PURPOSE AND OF ANY OTHER TYPE, WHETHER EXPRESS OR IMPLIED.

12. IN NO EVENT SHALL SELLER BE LIABLE FOR CONSEQUENTIAL DAMAGES, nor shall Seller's liability on any claims for damages arising out of or connected with the Sales Contract or the manufacture, sale, delivery or use of the products exceed the purchase price of the products. Seller shall not be liable for any failure to perform its obligations under the Sales Contract resulting directly or indirectly from or contributed to by acts of God; acts of Buyer; acts of civil or military authority; priorities; fires; strikes or other labor disputes; accidents; floods; epidemics; war; riot; delays in transportation; lack of inability to obtain raw materials, components, labor, fuel or supplies; or other circumstances beyond Seller's reasonable control, whether similar or dissimilar to the foregoing.

13.Installation shall be by the Buyer, unless other wise specifically stated in the specifications which are part of the Sales Contract. Final inspection of products prior to installation thereof will be the obligation of the Buyer.

14. Seller will hold Buyer harmless against any rightful claim of any third person by way of infringement of any United States Letters Patent by the products which are of Seller's own manufacture, but, if Buyer furnishes specifications to Seller. Buyer will hold Seller harmless against any such claim which arises out of compliance with the specification; provided that the party seeking to be held harmless notifies the other party and gives it right to defend. Except as in this paragraph provided, Seller makes no warranty that the equipment will be delivered free of the rightful claim of any third party by way of infringement or the like. Seller's obligation under this paragraph shall not apply to any infringement consisting of the use of the products as a part of goods manufactured by Buyers or others.

15. Any bounced check will have imposed a fee plus bank charge for NSF or UCF. A check returned for insufficient funds or stopped payment is a criminal offense, and at its discretion, Seller may proceed with charges against the issuer. If any check is returned, Buyer will automatically be placed on a prepay or certified COD basis.

16.This acknowledgement and Sales Contract shall be governed by the Uniform Commercial Code as adopted in the state of Seller's principal place of business as effective and in force on the contract date. Wherever a term defined by said Uniform Commercial Code is used in these Standard Provisions the definition contained in the Uniform Commercial Code is to control. Any action for breach of the sales contract or any covenant or warranty must be commenced within one year after the cause of action accrues.


PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST
Prices Change Frequently.
Please Call for Most Current Pricing.

NATIONAL COMMUNICATIONS INC.

# BUSINESS CREDIT APPLICATION

PLEASE PRINT OR TYPE

Date _____ Credit Line Requested _____ Tax Exempt# _____ Customer Number (NCI will assign) _____

Full Legal Name - _____ Business Tel. # _____ Fax # _____

Yes ☐ No ☐

1) Name _____ Acct. # _____ Contact _____

2) Name _____ Acct. # _____ Contact _____

3) Name _____ Acct. # _____ Contact _____


THE UNDERSIGNED, BY THE EXECUTION OF THIS CREDIT APPLICATION, AGREES THAT IT SHALL PAY FOR ALL OUTSTANDING BALANCES PER TERMS AS AGREED BETWEEN BOTH PARTIES. IN THE EVENT THIS ACCOUNT IS REFERRED TO ANY ATTORNEY FOR COLLECTION, THE PARTIES AGREE THAT AN

Auth. Signature _____ (Print Name)

I, _____ (NAME) RESIDING AT _____ (ADDRESS) FOR AND IN CONSIDERATION OF YOUR EXTENDING CREDIT AT MY REQUEST TO _____ (COMPANY) (HEREINAFTER REFERRED TO AS THE "COMPANY"), OF WHICH I AM _____ (TITLE), HEREBY PERSONALLY GUARANTEE TO YOU THE PAYMENT AT NATIONAL COMMUNICATIONS INC. IN THE STATE OF NEW JERSEY ANY OBLIGATION OF THE COMPANY AND I HEREBY AGREE TO BIND MYSELF TO PAY YOU ON DEMAND ANY SUM WHICH MAY BECOME DUE TO YOU BY THE COMPANY WHENEVER THE COMPANY SHALL FAIL TO PAY THE SAME. IT IS UNDERSTOOD THAT THIS GUARANTEE SHALL BE A CONTINUING AND IRREVOCABLE GUARANTEE AND INDEMNITY FOR SUCH INDEBTEDNESS OF THE COMPANY. I DO HEREBY WAIVE NOTICE DEFAULT, NON-PAYMENT AND NOTICE HEREOF AND CONSENT TO ANY MODIFICATION OR RENEWAL OF CREDIT AGREEMENT HEREBY GUARANTEE.

Auth. Signature _____ (Print Name)

# MODULAR JACK & PLUG PIN ASSIGMENTS

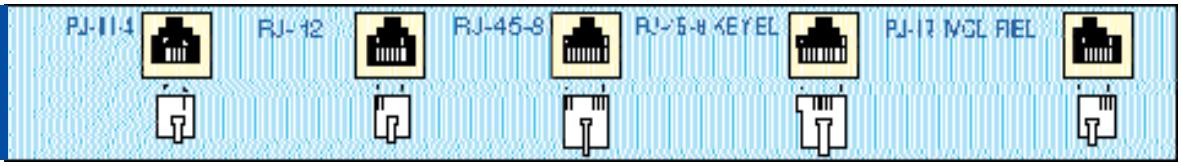


## WIRING SPECIFICATIONS



| 25 PAIR CABLE COLOR CODE | TELCO PIN # | 110 PIN # | USOC WIRING RJ11 6P2C | USOC WIRING RJ11 6P4C | USOC WIRING RJ12 6P6C | USOC WIRING RJ45 8P8C | 356A WIRING RJ45 8P6C | 10 BASE-T WIRING RJ45 8P4C | AT&T EIA 568B RJ45 8P8C | EIA 568B RJ45 8P8C | DEC WIRING MMJ 6P4C | DEC WIRING MMJ 6P6C |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| WHITE/BLUE | 26 | 1 | 4 | 4 | 4 | 5 | 5 | 1 | 5 | 5 | 2 | 2 |
| BLUE/WHITE | 1 | 2 | 3 | 3 | 3 | 4 | 4 | 2 | 4 | 4 | 3 | 3 |
| WHITE/ORANGE | 27 | 3 | 4 | 2 | 2 | 3 | 1 | 3 | 1 | 3 | 5 | 5 |
| ORANGE WHITE | 2 | 4 | 3 | 5 | 5 | 6 | 2 | 6 | 2 | 6 | 4 | 4 |
| WHITE/GREEN | 28 | 5 | 4 | 4 | 1 | 2 | 3 | 1 | 3 | 1 | 2 | 1 |
| GREEN/WHITE | 3 | 6 | 3 | 3 | 6 | 7 | 6 | 2 | 6 | 2 | 3 | 6 |
| WHITE/BROWN | 29 | 7 | 4 | 2 | 4 | 8 | 5 | 3 | 7 | 7 | 5 | 2 |
| BROWN/WHITE | 4 | 8 | 3 | 5 | 3 | 1 | 4 | 6 | 8 | 8 | 4 | 3 |
| WHITE/SLATE | 30 | 9 | 4 | 4 | 2 | 5 | 1 | 1 | 5 | 5 | 2 | 5 |
| SLATE/WHITE | 5 | 10 | 3 | 3 | 5 | 4 | 2 | 2 | 4 | 4 | 3 | 4 |
| RED/BLUE | 31 | 11 | 4 | 2 | 1 | 3 | 3 | 3 | 1 | 3 | 5 | 1 |
| BLUE/RED | 6 | 12 | 3 | 5 | 6 | 6 | 6 | 6 | 2 | 6 | 4 | 6 |
| RED/ORANGE | 32 | 13 | 4 | 4 | 4 | 2 | 5 | 1 | 3 | 1 | 2 | 2 |
| ORANGE RED | 7 | 14 | 3 | 3 | 3 | 7 | 4 | 2 | 6 | 2 | 3 | 3 |
| RED/GREEN | 33 | 15 | 4 | 2 | 2 | 8 | 1 | 3 | 7 | 7 | 5 | 5 |
| GREEN/RED | 8 | 16 | 3 | 5 | 5 | 1 | 2 | 6 | 8 | 8 | 4 | 4 |
| RED/BROWN | 34 | 17 | 4 | 4 | 1 | 5 | 3 | 1 | 5 | 5 | 2 | 1 |
| BROWN/RED | 9 | 18 | 3 | 3 | 6 | 4 | 6 | 2 | 4 | 4 | 3 | 6 |
| RED/SLATE | 35 | 19 | 4 | 2 | 4 | 3 | 5 | 3 | 1 | 3 | 5 | 2 |
| SLATE/RED | 10 | 20 | 3 | 5 | 3 | 6 | 4 | 6 | 2 | 6 | 4 | 3 |
| BLACK/BLUE | 36 | 21 | 4 | 4 | 2 | 2 | 1 | 1 | 3 | 1 | 2 | 5 |
| BLUE/BLACK | 11 | 22 | 3 | 3 | 5 | 7 | 2 | 2 | 6 | 2 | 3 | 4 |
| BLACK/ORANGE | 37 | 23 | 4 | 2 | 1 | 8 | 3 | 3 | 7 | 7 | 5 | 1 |
| ORANGE/BLACK | 12 | 24 | 3 | 5 | 6 | 1 | 6 | 6 | 8 | 8 | 4 | 6 |
| BLACK/GREEN | 38 | 25 | 4 | 4 | 4 | 5 | 5 | 1 | 5 | 5 | 2 | 2 |
| GREEN/BLACK | 13 | 26 | 3 | 3 | 3 | 4 | 4 | 2 | 4 | 4 | 3 | 3 |
| BLACK/BROWN | 39 | 27 | 4 | 2 | 2 | 3 | 1 | 3 | 1 | 3 | 5 | 5 |
| BROWN/BLACK | 14 | 28 | 3 | 5 | 5 | 6 | 2 | 6 | 2 | 6 | 4 | 4 |
| BLACK/SLATE | 40 | 29 | 4 | 4 | 1 | 2 | 3 | 1 | 3 | 1 | 2 | 1 |
| SLATE/BLACK | 15 | 30 | 3 | 3 | 6 | 7 | 6 | 2 | 6 | 2 | 3 | 6 |
| YELLOW/BLUE | 41 | 31 | 4 | 2 | 4 | 8 | 5 | 3 | 7 | 7 | 5 | 2 |
| BLUE/YELLOW | 16 | 32 | 3 | 5 | 3 | 1 | 4 | 6 | 8 | 8 | 4 | 3 |
| YELLOW/ORANGE | 42 | 33 | 4 | 4 | 2 | 5 | 1 | 1 | 5 | 5 | 2 | 5 |
| ORANGE/YELLOW | 17 | 34 | 3 | 3 | 5 | 4 | 2 | 2 | 4 | 4 | 3 | 4 |
| YELLOW/GREEN | 43 | 35 | 4 | 2 | 1 | 3 | 3 | 3 | 1 | 3 | 5 | 1 |
| GREEN/YELLOW | 18 | 36 | 3 | 5 | 6 | 6 | 6 | 6 | 2 | 6 | 4 | 6 |
| YELLOW/BROWN | 44 | 37 | 4 | 4 | 4 | 2 | 5 | 1 | 3 | 1 | 2 | 2 |
| BROWN/YELLOW | 19 | 38 | 3 | 3 | 3 | 7 | 4 | 2 | 6 | 2 | 3 | 3 |
| YELLOW/SLATE | 45 | 39 | 4 | 2 | 2 | 8 | 1 | 3 | 7 | 7 | 5 | 5 |
| SLATE/YELLOW | 20 | 40 | 3 | 5 | 5 | 1 | 2 | 6 | 8 | 8 | 4 | 4 |
| VIOLET/BLUE | 46 | 41 | 4 | 4 | 1 | 5 | 3 | 1 | 5 | 5 | 2 | 1 |
| BLUE/VIOLET | 21 | 42 | 3 | 3 | 6 | 4 | 6 | 2 | 4 | 4 | 3 | 6 |
| VIOLET/ORANGE | 47 | 43 | 4 | 2 | 4 | 3 | 5 | 3 | 1 | 3 | 5 | 2 |
| ORANGE/VIOLET | 22 | 44 | 3 | 5 | 3 | 6 | 4 | 6 | 2 | 6 | 4 | 3 |
| VIOLET/GREEN | 48 | 45 | 4 | 4 | 2 | 2 | 1 | 1 | 3 | 1 | 2 | 5 |
| GREEN/VIOLET | 23 | 46 | 3 | 3 | 5 | 7 | 2 | 2 | 6 | 2 | 3 | 4 |
| VIOLET/BROWN | 49 | 47 | 4 | 2 | 1 | 8 | 3 | 3 | 7 | 7 | 5 | 1 |
| BROWN/VIOLET | 24 | 48 | 3 | 5 | 6 | 1 | 6 | 6 | 8 | 8 | 4 | 6 |
| VIOLET/SLATE | 50 | 49 | - | - | - | - | - | - | - | - | - | - |
| SLATE/VIOLET | 25 | 50 | - | - | - | - | - | - | - | - | - | - |
| *#OF MODULAR JACKS PER TELCO CONNECTOR* | | | 24 | 12 | 8 | 6 | 8 | 12 | 6 | 6 | 12 | 8 |



PHONE / FAX
*Phone (973) 325-3151 Fax (973) 325-2690*
*Email ncisales@trynci.com Hours Mon–Fri 9-4 EST*

*Prices Change Frequently.*
*Please Call for Most Current Pricing.*

| 1st 3 digits of Destination Zip Code | ZONES Ground | 3 Day Select | 2nd Day Select Air | Next Day Air | Next Day Early AM |
|---|---|---|---|---|---|
| 004-005 | 2 | 302 | 202 | 102 | 142 |
| 006-007 | — | — | 225 | 125 | — |
| 008 | — | — | ** | ** | — |
| 009 | — | — | 225 | 125 | — |
| 010-013 | 2 | 302 | 202 | 102 | 142 |
| 014 | 3 | 303 | 203 | 103 | 143 |
| 015-016 | 2 | 302 | 202 | 102 | 142 |
| 017-042 | 3 | 303 | 203 | 103 | 143 |
| 043-044 | 4 | 304 | 204 | 104 | — |
| 045 | 3 | 303 | 203 | 103 | — |
| 046-049 | 4 | 304 | 204 | 104 | — |
| 050-051 | 3 | 303 | 203 | 103 | — |
| 052-053 | 2 | 302 | 202 | 102 | — |
| 054-059 | 3 | 303 | 203 | 103 | — |
| 060-089 | 2 | 302 | 202 | 102 | 142 |
| 090-099 | — | — | — | — | — |
| 100-127 | 2 | 302 | 202 | 102 | 142 |
| 128-136 | 3 | 303 | 203 | 103 | 143 |
| 137-139 | 2 | 302 | 202 | 102 | — |
| 140-147 | 3 | 303 | 203 | 103 | 143 |
| 148-149 | 2 | 302 | 202 | 102 | 142 |
| 150-153 | 4 | 304 | 204 | 104 | 144 |
| 154-163 | 3 | 303 | 203 | 103 | 143 |
| 164-165 | 4 | 304 | 204 | 104 | — |
| 166-169 | 3 | 303 | 203 | 103 | 143 |
| 170-199 | 2 | 302 | 202 | 102 | 142 |
| 200-209 | 3 | 303 | 203 | 103 | 143 |
| 210-213 | 2 | 302 | 202 | 102 | 142 |
| 214-218 | 3 | 303 | 203 | 103 | 143 |
| 219 | 2 | 302 | 202 | 102 | — |
| 220-238 | 3 | 303 | 203 | 103 | 143 |
| 239-243 | 4 | 304 | 204 | 104 | 144 |
| 244 | 3 | 303 | 203 | 103 | — |
| 245-253 | 4 | 304 | 204 | 104 | — |
| 254 | 3 | 303 | 203 | 103 | — |
| 255-264 | 4 | 304 | 204 | 104 | — |
| 265 | 3 | 303 | 203 | 103 | — |
| 266 | 4 | 304 | 204 | 104 | — |
| 267-268 | 3 | 303 | 203 | 103 | — |
| 270-288 | 4 | 304 | 204 | 104 | 144 |
| 289 | 5 | 305 | 205 | 105 | — |
| 290-293 | 4 | 304 | 204 | 104 | 144 |
| 294 | 5 | 305 | 205 | 105 | — |
| 295-297 | 4 | 304 | 204 | 104 | — |
| 298-299 | 5 | 305 | 205 | 105 | — |
| 300-324 | 5 | 305 | 205 | 105 | 145 |
| 325 | 6 | 306 | 206 | 106 | — |
| 326-329 | 5 | 305 | 205 | 105 | 145 |
| 330-334 | 6 | 306 | 206 | 106 | 146 |
| 335-338 | 5 | 305 | 205 | 105 | 145 |
| 339 | 6 | 306 | 206 | 106 | — |
| 340-341 | — | — | — | — | — |
| 342-347 | 5 | 305 | 205 | 105 | 145 |
| 349 | 6 | 306 | 206 | 106 | — |
| 350-364 | 5 | 305 | 205 | 105 | 145 |
| 365-366 | 6 | 306 | 206 | 106 | 146 |
| 367-375 | 5 | 305 | 205 | 105 | 145 |
| 376-379 | 4 | 304 | 204 | 104 | 144 |
| 380-386 | 5 | 305 | 205 | 105 | 145 |
| 387 | 6 | 306 | 206 | 106 | — |
| 388-389 | 5 | 305 | 205 | 105 | — |
| 390-392 | 6 | 306 | 206 | 106 | 146 |
| 393 | 5 | 305 | 205 | 105 | — |
| 394-396 | 6 | 306 | 206 | 106 | 146 |
| 397-399 | 5 | 305 | 205 | 105 | — |
| 400-402 | 5 | 305 | 205 | 105 | 145 |
| 403-418 | 4 | 304 | 204 | 104 | 144 |
| 420-424 | 5 | 305 | 205 | 105 | 145 |
| 425-426 | 4 | 304 | 204 | 104 | 144 |
| 427 | 5 | 305 | 205 | 105 | 145 |
| 430-459 | 4 | 304 | 204 | 104 | 144 |
| 460-466 | 5 | 305 | 205 | 105 | 145 |
| 467-468 | 4 | 304 | 204 | 104 | 144 |
| 469 | 5 | 305 | 205 | 105 | 145 |
| 470 | 4 | 304 | 204 | 104 | 144 |
| 471-472 | 5 | 305 | 205 | 105 | 145 |
| 473 | 4 | 304 | 204 | 104 | 144 |
| 474-479 | 5 | 305 | 205 | 105 | 145 |
| 480-496 | 4 | 304 | 204 | 104 | 144 |
| 497-499 | 5 | 305 | 205 | 105 | 145 |
| 500-504 | 5 | 305 | 205 | 105 | 145 |
| 505 | 6 | 306 | 206 | 106 | — |
| 506-507 | 5 | 305 | 205 | 105 | 145 |
| 508 | 6 | 306 | 206 | 106 | — |
| 509 | 5 | 305 | 205 | 105 | — |
| 510-516 | 6 | 306 | 206 | 106 | 146 |
| 520-559 | 5 | 305 | 205 | 105 | 145 |
| 560-576 | 6 | 306 | 206 | 106 | 146 |
| 577 | 7 | 307 | 207 | 107 | 147 |
| 580-585 | 6 | 306 | 206 | 106 | 146 |
| 586-593 | 7 | 307 | 207 | 107 | 147 |
| 594 | 8 | 308 | 208 | 108 | — |
| 595 | 7 | 307 | 207 | 107 | — |
| 596-599 | 8 | 308 | 208 | 108 | — |
| 600-639 | 5 | 305 | 205 | 105 | 145 |
| 640-649 | 6 | 306 | 206 | 106 | 146 |
| 650-652 | 5 | 305 | 205 | 105 | 145 |
| 653 | 6 | 306 | 206 | 106 | — |
| 654-655 | 5 | 305 | 205 | 105 | — |
| 656-676 | 6 | 306 | 206 | 106 | 146 |
| 677 | 7 | 307 | 207 | 107 | — |
| 678 | 6 | 306 | 206 | 106 | — |
| 679 | 7 | 307 | 207 | 107 | — |
| 680-692 | 6 | 306 | 206 | 106 | 146 |
| 693 | 7 | 307 | 207 | 107 | 147 |
| 700-722 | 6 | 306 | 206 | 106 | 146 |
| 723-725 | 5 | 305 | 205 | 105 | 145 |
| 726-732 | 6 | 306 | 206 | 106 | 146 |
| 733 | 7 | 307 | 207 | 107 | — |
| 734-738 | 6 | 306 | 206 | 106 | — |
| 739 | 7 | 307 | 207 | 107 | — |
| 740-764 | 6 | 306 | 206 | 106 | 146 |
| 765 | 7 | 307 | 207 | 107 | — |
| 766-767 | 6 | 306 | 206 | 106 | — |
| 768-769 | 7 | 307 | 207 | 107 | — |
| 770-778 | 6 | 306 | 206 | 106 | 146 |
| 779-797 | 7 | 307 | 207 | 107 | 147 |
| 798-799 | 8 | 308 | 208 | 108 | 147 |
| 800-814 | 7 | 307 | 207 | 107 | 147 |
| 815 | 8 | 308 | 208 | 108 | 148 |
| 816-820 | 7 | 307 | 207 | 107 | 147 |
| 821 | 8 | 308 | 208 | 108 | — |
| 822-830 | 7 | 307 | 207 | 107 | 147 |
| 831-865 | 8 | 308 | 208 | 108 | 148 |
| 870-872 | 7 | 307 | 207 | 107 | 147 |
| 873-874 | 8 | 308 | 208 | 108 | — |
| 875-877 | 7 | 307 | 207 | 107 | — |
| 878-880 | 8 | 308 | 208 | 108 | — |
| 881-884 | 7 | 307 | 207 | 107 | — |
| 885-898 | 8 | 308 | 208 | 108 | 148 |
| 900-961 | 8 | 308 | 208 | 108 | 148 |
| 962-966 | — | — | — | — | — |
| 967-968 | — | — | 224 | 124 | — |
| 969 | — | ** | ** | — | — |
| 970-994 | 8 | 308 | 208 | 108 | 148 |
| 995-999 | — | — | * | * | * |

PLEASE ADD HANDLING PER ORDER. CHARGES SUBJECT TO CHANGE.

ANY FRACTION OF A POUND OVER THE WEIGHT SHOWN TAKES THE NEXT HIGHER RATE.

PACKAGE WITH DECLARED VALUE OVER ADD FOR ADDTNL OR FRACTIO THEREOF. ADD FOR ANY AIR PACKAGE SHIPPED FROM NCI OR DELIVERED TO YOU ON A SATURDAY ADD FOR ANY C.O.D.

## UPS NEXT DAY AIR EARLY A.M.

1 to 70 pounds
UPS Letters & Packages

| POUNDS | WEIGHT 142 | 143 | 144 | 145 | 146 | 147 | 148 |
|---|---|---|---|---|---|---|---|
| LETTER | | | | | | | |
| 1 | | | | | | | |
| 2 | | | | | | | |
| 3 | | | | | | | |
| 4 | | | | | | | |
| 5 | | | | | | | |
| ADDL. | | | | | | | |

## UPS RED NEXT DAY AIR

UPS Letters & Packages

| POUNDS | WEIGHT 102 | 103 | 104 | 105 | 106 | 107 | 108 | 124 | 125 | 126 |
|---|---|---|---|---|---|---|---|---|---|---|
| LETTER | | | | | | | | | | |
| 1 | | | | | | | | | | |
| 2 | | | | | | | | | | |
| 3 | | | | | | | | | | |
| 4 | | | | | | | | | | |
| 5 | | | | | | | | | | |
| 6 | | | | | | | | | | |
| 7 | | | | | | | | | | |
| 8 | | | | | | | | | | |
| 9 | | | | | | | | | | |
| 10 | | | | | | | | | | |
| ADDL. | | | | | | | | | | |

## UPS BLUE 2ND DAY AIR

UPS Letters & Packages

| POUNDS | WEIGHT 202 | 203 | 204 | 205 | 206 | 207 | 208 | 224 | 225 | 226 |
|---|---|---|---|---|---|---|---|---|---|---|
| LETTER | | | | | | | | | | |
| 1 | | | | | | | | | | |
| 2 | | | | | | | | | | |
| 3 | | | | | | | | | | |
| 4 | | | | | | | | | | |
| 5 | | | | | | | | | | |
| 6 | | | | | | | | | | |
| 7 | | | | | | | | | | |
| 8 | | | | | | | | | | |
| 9 | | | | | | | | | | |
| 10 | | | | | | | | | | |
| EA.ADDL | | | | | | | | | | |

## UPS ORANGE 3RD DAY SELECT

1 to 70 pounds
UPS Packages

| POUNDS | WEIGHT 302 | 303 | 304 | 305 | 306 | 307 | 308 |
|---|---|---|---|---|---|---|---|
| 1 | | | | | | | |
| 2 | | | | | | | |
| 3 | | | | | | | |
| 4 | | | | | | | |
| 5 | | | | | | | |
| 6 | | | | | | | |
| 7 | | | | | | | |
| 8 | | | | | | | |
| 9 | | | | | | | |
| 10 | | | | | | | |
| EA.ADDL | | | | | | | |

## UPS GROUND

1 to 70 pounds
UPS Letters & Packages

| POUNDS | WEIGHT 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|---|---|---|---|---|---|---|---|
| 1 | | | | | | | |
| 2 | | | | | | | |
| 3 | | | | | | | |
| 4 | | | | | | | |
| 5 | | | | | | | |
| 6 | | | | | | | |
| 7 | | | | | | | |
| 8 | | | | | | | |
| 9 | | | | | | | |
| 10 | | | | | | | |
| EA.ADDL | | | | | | | |

FOR RESIDENTIAL GROUND ADD ADDITIONAL

## WEIGHTS AND MEASURES

**Cubic Measure**

| | |
|---|---|
| 1728 cubic inches | 1 cubic foot |
| 27 cubic feet | 1 cubic yard |
| 128 cubic feet | 1 cord (wood) |
| 2150.42 cubic inches | 1 standard bu. |
| 231 cubic inches | 1 U.S. standard gal. |

**Dry Measure**

| | |
|---|---|
| 2 pints | 1 quart |
| 8 quarts | 1 peck |
| 4 pecks | 1 bushel |

**Liquid Measure**

| | |
|---|---|
| 4 gills | 1 pint |
| 2 pints | 1 quart |
| 4 quarts | 1 gallon |
| 311/2 gallons | 1 barrel |

**Imperial Liquid Measure**

| | |
|---|---|
| 1 U.S. gallons | imperial gallon |
| 1 U.S. gallons | liters |
| 1 imperial gallon | U.S. gallons |
| 1 imperial gallon | liters |
| 1 liter | U.S. gallon |

**Long Measure**

| | |
|---|---|
| 12 inches | 1 foot |
| 3 feet | 1 yard |
| 51/2 yards | 1 rod |
| 40 rods | 1 furlong |
| 8 furlongs | 1 statute mile |
| 3 land miles | 1 league |

**Marines' Measure**

| | |
|---|---|
| 6 feet | 1 fathom |
| 120 fathoms | 1 cable length |
| 5,280 feet | 1 statute mile |
| feet | 1 nautical mile |

**Square Measure**

| | |
|---|---|
| 144 sq. inches | 1 sq. foot |
| 9 sq. feet | 1 sq. length |
| 301/4 sq. yards | 1 sq. rod |
| 640 acres | 1 sq. mile |

**Metric Equivalents**

Linear measure

| | |
|---|---|
| 1 centimeter | 0.3937 inch |
| 1 inch | centimeters |
| 1 foot | 0.3048 meter |
| 1 meter inches | 1.0936 yds. |
| 1 yard | 0.9144 meter |
| 1 rod | meters |
| 1 kilometer | mile |
| 1 mile | kilometers |

**Square Measure**

| | |
|---|---|
| 1 sq. cm | 0.1550 sq. inch |
| 1 sq. inch | sq. centimeters |
| 1 sq. foot | 0.0929 sq. meter |
| 1 sq. meter | sq. yards |
| 1 sq. yard | 0.8361 sq. meter |
| 1 hectare | acres |
| 1 acre | 0.4047 hectare |
| 1 sq. kilometer | sq.mile |
| 1 sq. mile | sq. kilometers |

| | |
|---|---|
| 1 gram | 0.03527 ounce |
| 1 ounce | grams |
| 1 kilogram | 2.2046 pounds |
| 1 pound | 0.4536 kilogram |
| 1 metric ton | 0.98421 English ton |
| 1 English ton | metric ton |

**Measure of Volume**

| | |
|---|---|
| 1 cubic cm. | cubic finch |
| 1 cubic inch | cubic centime- |
| ters | |
| 1 cubic foot | 0.0283 cubic meter |
| 1 cubic meter | cubic yards |
| 1 cubic yard | 0.7646 cubic meter |
| 1 liter | 1.0567 quarts liquid |
| 1 quart dry | liters |
| 1 quart liquid | 0.9463 liter |
| 1 liter | 1.0567 quarts |
| 1 gallon | 3.78541 liters |
| 1 peck | liters |
| 1 hectoliter | 2.8375 bushels |

***Temperature Conversions***

A Fahrenheit degree is smaller than a Celsius (Centigrade) degree, one Fahrenheit degree being 5 / 9 of a Celsius degree

To convert Fahrenheit degrees into Celsius, subtract 32 , multiply by 5, and divide by 9.

To convert Celsius into Fahrenheit, multiply by 9, divide by 5, and add 32.

The freezing point of water is 32 F., 0 C. the boiling point is 212 F., 100 C.




## 1999

### JANUARY

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | 1 | 2 | 3 | 4 |
| 5 | 6 | 7 | 8 | 9 | 10 | 11 |
| 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| 19 | 20 | 21 | 22 | 23 | 24 | 25 |
| 26 | 27 | 28 | 29 | 30 | 31 | |

1- New Year's Day
20- Martin Luther King Jr. Day (USA)

### FEBRUARY

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | | | | 1 |
| 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| 16 | 17 | 18 | 19 | 20 | 21 | 22 |
| 23 | 24 | 25 | 26 | 27 | 28 | |

12- Lincoln's Birthday (USA)
12- Ash Wed.- 14-Valentine's Day
17- President's Day (USA)
22- Washington's Birthday (USA)

### MARCH

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | | | | 1 |
| 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| 16 | 17 | 18 | 19 | 20 | 21 | 22 |
| 23 | 24 | 25 | 26 | 27 | 28 | 29 |
| 30 | 31 | | | | | |

17- St. Patrick's Day
23- Palm Sunday
28- Good Friday - 30- Easter

### APRIL

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | | | | |
| | | 1 | 2 | 3 | 4 | 5 |
| 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| 20 | 21 | 22 | 23 | 24 | 25 | 26 |
| 27 | 28 | 29 | 30 | | | |

6- Daylight Saving Time Begins
22- Passover
23- Secretaries Day

### MAY

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | | | | 1 |
| 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| 16 | 17 | 18 | 19 | 20 | 21 | 22 |
| 23 | 24 | 25 | 26 | 27 | 28 | 29 |
| 30 | 31 | | | | | |

5- May Day Holiday (UK)
11- Mother's Day - 18-Whitsunday (Pentecost)
19- Victoria Day (Canada)
26- Memorial Day (USA) - Spring Holiday (UK)

### JUNE

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | 1 | 2 | 3 | 4 | 5 |
| 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| 20 | 21 | 22 | 23 | 24 | 25 | 26 |
| 27 | 28 | 29 | 30 | | | |

14- Flag Day (USA)
15- Father's Day

### JULY

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | | 1 | 2 | 3 |
| 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| 11 | 12 | 13 | 14 | 15 | 16 | 17 |
| 18 | 19 | 20 | 21 | 22 | 23 | 24 |
| 25 | 26 | 27 | 28 | 29 | 30 | 31 |

1- Canada Day (Canada)
4- Independence Day (USA)

### AUGUST

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| 8 | 9 | 10 | 11 | 12 | 13 | 14 |
| 15 | 16 | 17 | 18 | 19 | 20 | 21 |
| 22 | 23 | 24 | 25 | 26 | 27 | 28 |
| 29 | 30 | 31 | | | | |

25- Late Summer Holiday (UK)

### SEPTEMBER

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | 1 | 2 | 3 | 4 |
| 5 | 6 | 7 | 8 | 9 | 10 | 11 |
| 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| 19 | 20 | 21 | 22 | 23 | 24 | 25 |
| 26 | 27 | 28 | 29 | 30 | | |

1- Labor Day

### OCTOBER

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | | | 1 | 2 |
| 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| 17 | 18 | 19 | 20 | 21 | 22 | 23 |
| 24 | 25 | 26 | 27 | 28 | 29 | 30 |
| 31 | | | | | | |

2- Rosh Hashana - 11- Yom Kippur
13- Columbus Day (USA)
13- Thanksgiving (Can) - 16- Natl. Boss Day
26- Daylight Saving Time Ends

### NOVEMBER

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | | | | 1 |
| 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| 16 | 17 | 18 | 19 | 20 | 21 | 22 |
| 23 | 24 | 25 | 26 | 27 | 28 | 29 |
| 30 | | | | | | |

11- Veterans Day (USA)
13- Remembrance Day (Can)
27- Thanksgiving Day (USA)

### DECEMBER

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | 1 | 2 | 3 | 4 | 5 |
| 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| 20 | 21 | 22 | 23 | 24 | 25 | 26 |
| 27 | 28 | 29 | 30 | 31 | | |

24- Hanukkah
25- Christmas
26- Boxing Day (Aust. Can. NZ. UK.)

## 1999

### JANUARY

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | | 1 | 2 | 3 |
| 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| 11 | 12 | 13 | 14 | 15 | 16 | 17 |
| 18 | 19 | 20 | 21 | 22 | 23 | 24 |
| 25 | 26 | 27 | 28 | 29 | 30 | 31 |

1- New Year's Day
19- Martin Luther King Jr. Day (USA)

### FEBRUARY

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| 8 | 9 | 10 | 11 | 12 | 13 | 14 |
| 15 | 16 | 17 | 18 | 19 | 20 | 21 |
| 22 | 23 | 24 | 25 | 26 | 27 | 28 |

12- Lincoln's Birthday (USA)
14-Valentine's Day
16- President's Day (USA)
22- Washington's Birthday (USA)
25- Ash Wed.

### MARCH

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| 8 | 9 | 10 | 11 | 12 | 13 | 14 |
| 15 | 16 | 17 | 18 | 19 | 20 | 21 |
| 22 | 23 | 24 | 25 | 26 | 27 | 28 |
| 29 | 30 | 31 | | | | |

17- St. Patrick's Day

### APRIL

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | | 1 | 2 | 3 |
| 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| 11 | 12 | 13 | 14 | 15 | 16 | 17 |
| 18 | 19 | 20 | 21 | 22 | 23 | 24 |
| 25 | 26 | 27 | 28 | 29 | 30 | |

5- Palm Sunday
5- Daylight Saving Time Begins
10- Good Friday - 11- Passover
12- Easter - 22- Secretaries Day

### MAY

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | | | | 1 |
| 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| 16 | 17 | 18 | 19 | 20 | 21 | 22 |
| 23 | 24 | 25 | 26 | 27 | 28 | 29 |
| 30 | 31 | | | | | |

4- May Day Holiday (UK)
10- Mother's Day - 18- Victoria Day (Can)
25- Memorial Day - 31-Whitsunday (Pentecost)

### JUNE

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | 1 | 2 | 3 | 4 | 5 |
| 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| 20 | 21 | 22 | 23 | 24 | 25 | 26 |
| 27 | 28 | 29 | 30 | | | |

14- Flag Day (USA)
21- Father's Day

### JULY

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | | 1 | 2 | 3 |
| 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| 11 | 12 | 13 | 14 | 15 | 16 | 17 |
| 18 | 19 | 20 | 21 | 22 | 23 | 24 |
| 25 | 26 | 27 | 28 | 29 | 30 | 31 |

1- Canada Day (Canada)
4- Independence Day (USA)

### AUGUST

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| 8 | 9 | 10 | 11 | 12 | 13 | 14 |
| 15 | 16 | 17 | 18 | 19 | 20 | 21 |
| 22 | 23 | 24 | 25 | 26 | 27 | 28 |
| 29 | 30 | 31 | | | | |

31- Late Summer Holiday (UK)

### SEPTEMBER

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | 1 | 2 | 3 | 4 |
| 5 | 6 | 7 | 8 | 9 | 10 | 11 |
| 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| 19 | 20 | 21 | 22 | 23 | 24 | 25 |
| 26 | 27 | 28 | 29 | 30 | | |

7- Labor Day
21- Rosh Hashana
30- Yom Kippur

### OCTOBER

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | | | 1 | 2 |
| 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| 17 | 18 | 19 | 20 | 21 | 22 | 23 |
| 24 | 25 | 26 | 27 | 28 | 29 | 30 |
| 31 | | | | | | |

12- Columbus Day (USA)
12- Thanksgiving (Can) -
16- Natl. Boss Day
25- Daylight Saving Time Ends

### NOVEMBER

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | | | | |
| | | 1 | 2 | 3 | 4 | 5 |
| 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| 20 | 21 | 22 | 23 | 24 | 25 | 26 |
| 27 | 28 | 29 | 30 | | | |

11- Veterans Day (USA)
11- Remembrance Day (Can)
26- Thanksgiving Day (USA)

### DECEMBER

| S | M | T | W | T | F | S |
|---|---|---|---|---|---|---|
| | | | | | | |
| | | 1 | 2 | 3 | 4 | 5 |
| 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| 20 | 21 | 22 | 23 | 24 | 25 | 26 |
| 27 | 28 | 29 | 30 | 31 | | |

14- Hanukkah
25- Christmas
26- Boxing Day (Aust. Can. NZ. UK.)

INTERNET
http://www.trynci.com
e-mail: ncisales@trynci.com

CONTACT
National Communications Inc.
Email ncisales@trynci.com
Hours Mon–Fri 9-4 EST

PHONE / FAX
Phone (973) 325-3151 Fax (973) 325-2690
Email ncisales@trynci.com Hours Mon–Fri 9-4 EST

- BALUNS
- BATTERIES
- CABLE
- CABINETS
- COAXIAL
- BULK PVC & PLENUM CABLE ASSEMBLIES
- COMPUTER ACCESSORIES
- CONNECTORS
- DATA SWITCHES
- FIBER OPTICS
- HARDWARE
- INSTALLATIONS
- LANS
- MEMORY
- PANELS
- CATEGORY 5
- TELEPHONES
- TEST EQUIPMENT
- TOKEN RING
- TOOLS




National Communications Inc.
**Phone (973) 325-3151 Fax (973) 325-269**
**Email ncisales@trynci.com**
**Hours Mon–Fri 9-4 EST**

**ATTENTION MAILROOM:**
If the person to whom this catalog is addressed is no longer with your company, please direct this to their replacement, or to another person in the same department. Thank you.

CURRENT OCCUPANT OR