




USB-C input & 3.3 V regulator

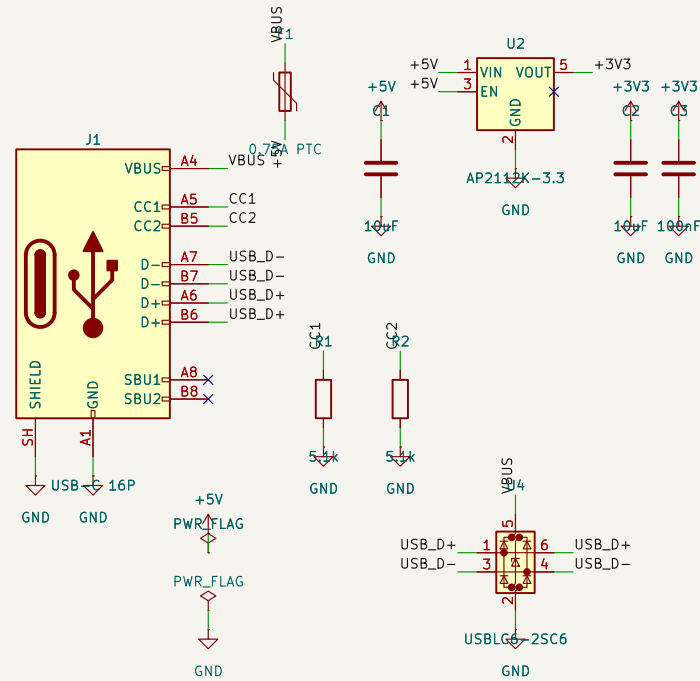

ESP32-S3-MINI-1 module, boot

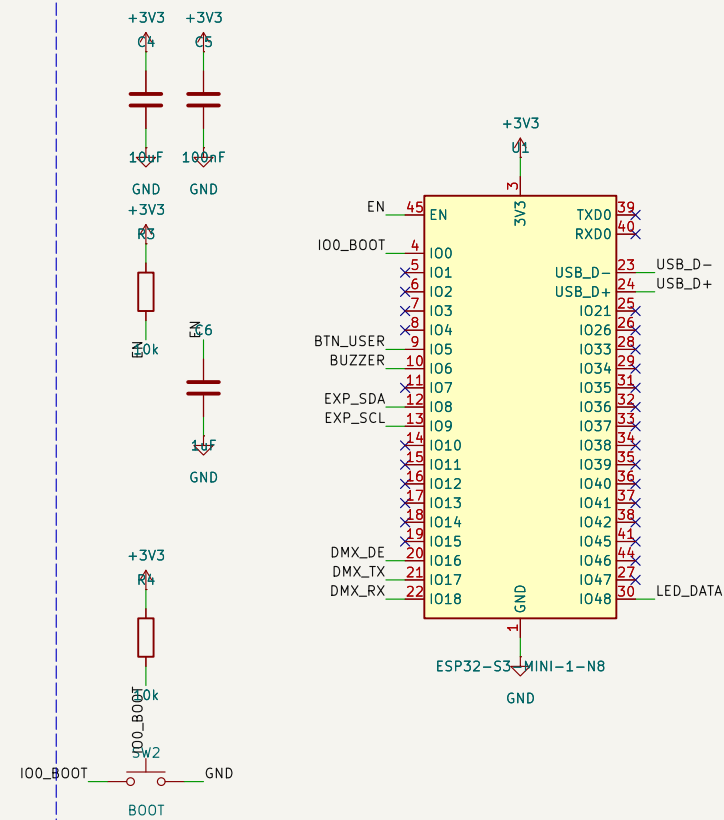


DMX512 output (RS-485, 3.3 V transceiver)

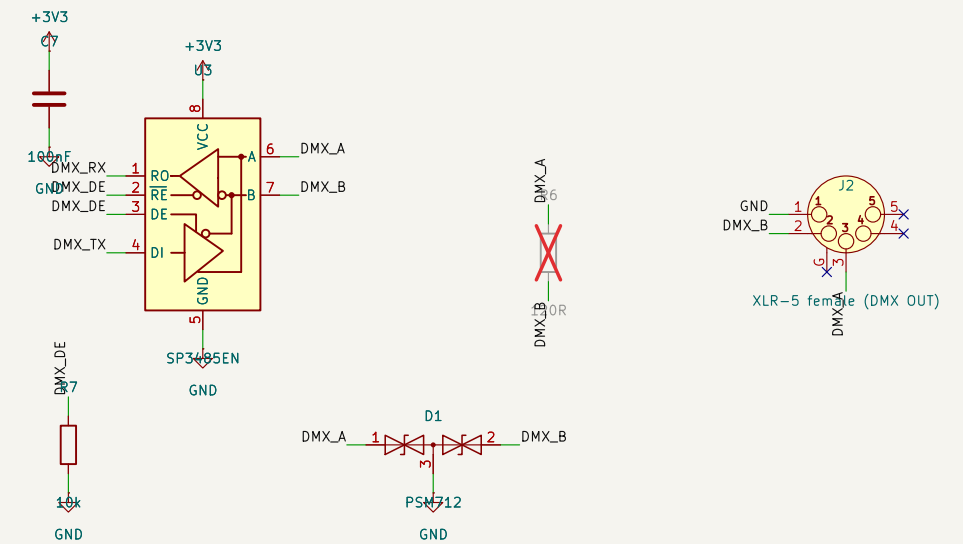

No mounting holes: the XLR flange (2x M3) mounts the board in its enclosure.

User interface: RGB status LED, user button, alarm buzzer

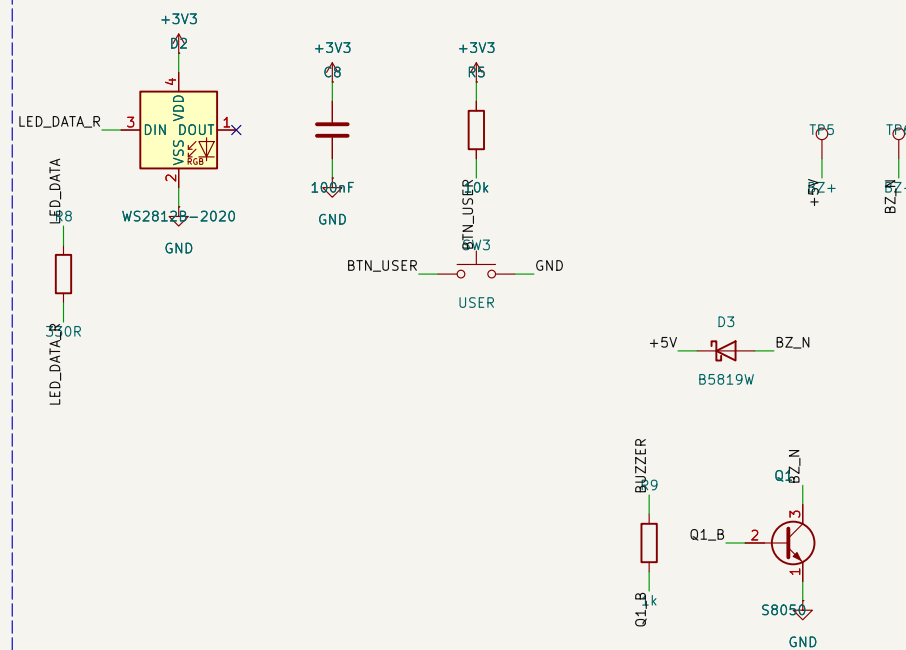

Test pads: I2C expansion (RTC / sensor)



amodo design

Sheet: /
File: pl60c_dmx_mini.kicad_sch

Title: PL60C DMX wake-up lamp controller – MINI

Size: A3

Date: 2026-09-02

Rev: A-mini

Size: A5	D
KiCad E.D.A. 10.0.4	

Id: 1/1

Buzzer is off-board on the mini: wire a passive magnetic buzzer between BZ+ and BZ- pads.