

主讲人: 聂兰顺

本讲主题

TCP性能分析



TCP throughput: 吞吐率

- ❖给定拥塞窗口大小和RTT,TCP的平均吞吐率是多少?
 - 忽略掉Slow start
- ❖假定发生超时时CongWin的大小为W,吞吐率是W/RTT
- ❖超时后,CongWin=W/2,吞吐率是W/2RTT
- ❖平均吞吐率为: 0.75W/RTT



未来的TCP

- ❖举例:每个Segment有1500个byte,RTT是100ms,希望获得 10Gbps的吞吐率
 - throughput = W*MSS*8/RTT, 则
 - W=throughput*RTT/(MSS*8)
 - throughput=10Gbps, 则W=83,333
- *窗口大小为83,333





未来的TCP

- ❖吞吐率与丢包率(loss rate, L)的关系
 - CongWin从W/2增加至W时出现第一个丢包,那么一共发送的分组数为 *W/2+(W/2+1)+(W/2+2)+....+W=3W²/8+3W/4*
 - W很大时,3W/8>>3W/4,因此L≈8/(3W²)

$$W = \sqrt{\frac{8}{3L}} \quad Throughput = \frac{0.75 \cdot MSS \cdot \sqrt{\frac{8}{3L}}}{RTT} \approx \frac{1.22 \cdot MSS}{RTT \sqrt{L}}$$


- $L = 2.10^{-10}$ Wow!!!
- ❖高速网络下需要设计新的TCP



TCP的公平性

※公平性?


如果K个TCP Session共享相同的瓶颈带宽R,那么每个Session的平均速率 为R/K

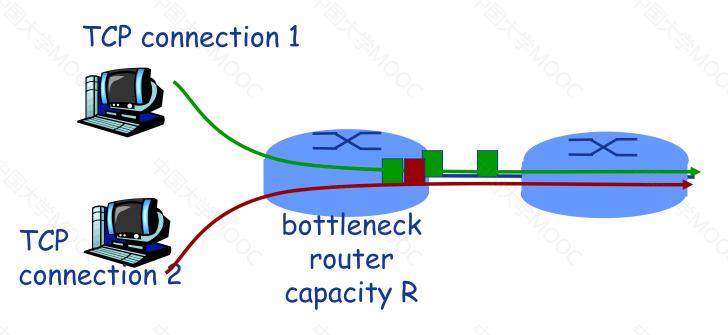



TCP具有公平性吗?

※ 是的

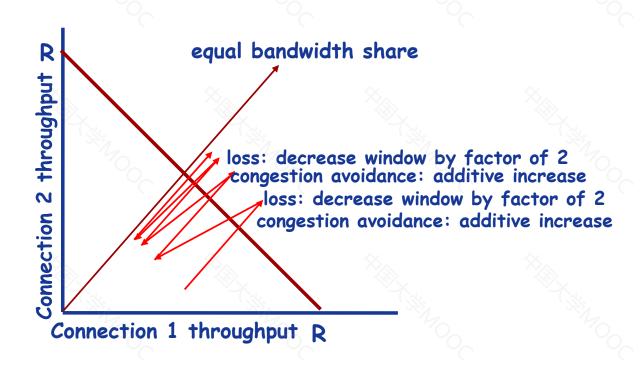



TCP的公平性

❖公平性与UDP

- 多媒体应用通常不使用TCP, 以免被拥塞控制机制限制速率
- 使用UDP: 以恒定速率发送, 能够容忍丢失
- 产生了不公平
- ❖研究: TCP friendly

❖公平性与并发TCP连接

- 某些应用会打开多个并发连接
- Web浏览器
- 产生公平性问题
- ※例子:链路速率为R,已有9个 连接
 - 新来的应用请求1个TCP,获得 R/10的速率
 - 新来的应用请求11个TCP,获得 R/2的速率



