


Figure 2. STM32F765xx, STM32F767xx, STM32F768Ax and STM32F769xx block diagram

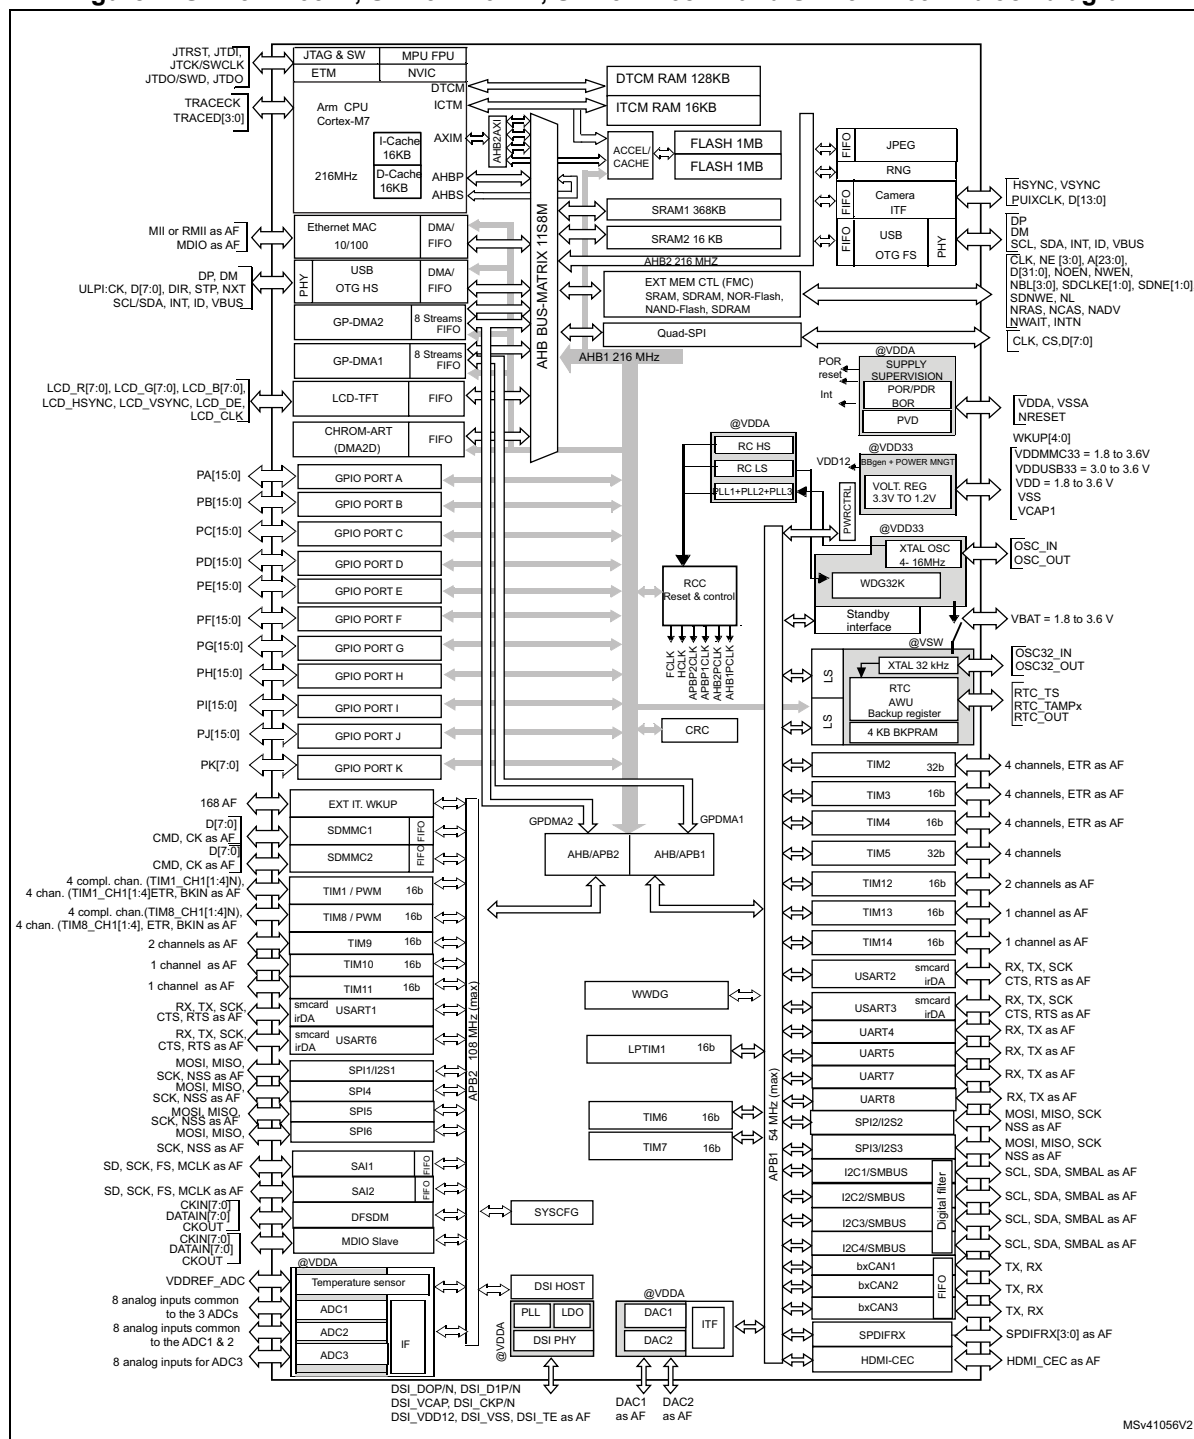

1. The timers connected to APB2 are clocked from TIMxCLK up to 216 MHz, while the timers connected to APB1 are clocked from TIMxCLK either up to 108 MHz or 216 MHz depending on TIMPRE bit configuration in the RCC_DCKCFGR register.

Figure 2: Memory map

The diagram illustrates the memory architecture, divided into several main regions:

- APB1 Region (Bottom):** Contains ITCM RAM, System memory, Reserved, Flash memory on ITCM interface, Reserved, Flash memory on AXIM interface, Reserved, Option Bytes, and Reserved.
- APB2 Region (Middle):** Includes Block 0 (512-Mbyte), Block 1 SRAM (512-Mbyte), Block 2 Peripherals (512-Mbyte), Block 3 FMC bank 1 to bank 2 (512-Mbyte), Block 4 Quad-SPI and FMC bank 3 (512-Mbyte), Block 5 FMC (512-Mbyte), and Block 6 FMC (512-Mbyte).
- AHB1 Region (Upper Middle):** Encompasses a large range of internal peripherals and reserved space.
- AHB2 Region (Upper):** Contains internal peripherals and reserved space.
- AHB3 Region (Top):** Reserved space at the highest addresses.

Key components and their address ranges include:

- Reserved: 0xE010 0000 - 0xFFFF FFFF
- Cortex-M7 internal peripherals: 0xE000 0000 - 0xE00F FFFF
- AHB3: 0x6000 0000 - 0xDFFF FFFF
- Reserved: 0x5006 0C00 - 0x5FFF FFFF, 0x5006 0BFF
- AHB2: 0x5000 0000, 0x4008 0000 - 0x4FFF FFFF, 0x4007 FFFF
- Reserved: 0x4002 0000, 0x4001 6C00 - 0x4001 FFFF, 0x4001 6BFF
- APB2: 0x4001 0000, 0x4000 8000 - 0x4000 FFFF, 0x4000 7FFF
- Reserved: 0x4001 0000
- APB1: 0x0000 0000 - 0x4000 0000