Camera Network System

AI Deployment Center

Table of contents

- **Introduction**
- **Materials and Methods**
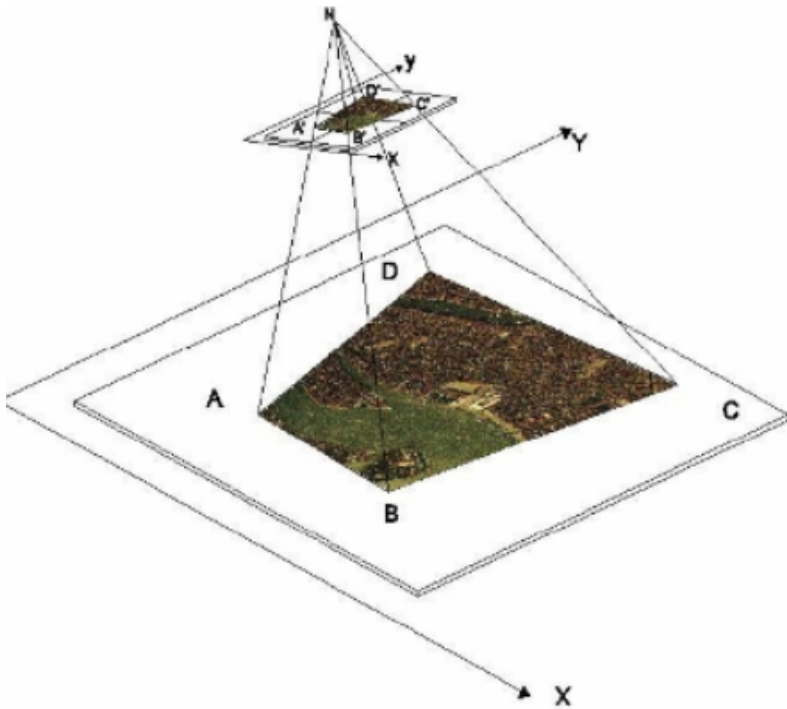- **Camnet System**
- **QA**

Introduction

Materials and Methods

- **Homography Transform**
- **Pinhole Camera Model**
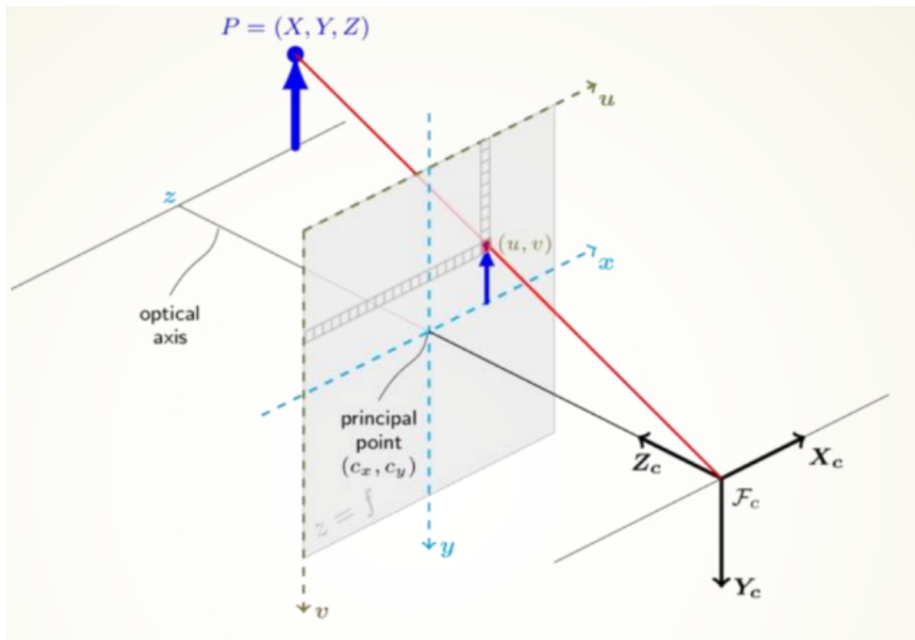- **3D localization**

Materials and Methods

- **Homography Transform**

$$\begin{bmatrix} x_1 \\ y_1 \\ 1 \end{bmatrix} = H \begin{bmatrix} x_2 \\ y_2 \\ 1 \end{bmatrix} = \begin{bmatrix} h_{00} & h_{01} & h_{02} \\ h_{10} & h_{11} & h_{12} \\ h_{20} & h_{21} & h_{22} \end{bmatrix} \begin{bmatrix} x_2 \\ y_2 \\ 1 \end{bmatrix}$$

Materials and Methods

- ## Pinhole Camera Model

$$s \begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \begin{bmatrix} fx & 0 & cx \\ 0 & fy & cy \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} r_{11} & r_{12} & r_{13} & t_1 \\ r_{21} & r_{22} & r_{23} & t_2 \\ r_{31} & r_{32} & r_{33} & t_3 \end{bmatrix} \begin{bmatrix} X \\ Y \\ Z \\ 1 \end{bmatrix}$$

s : scale factor
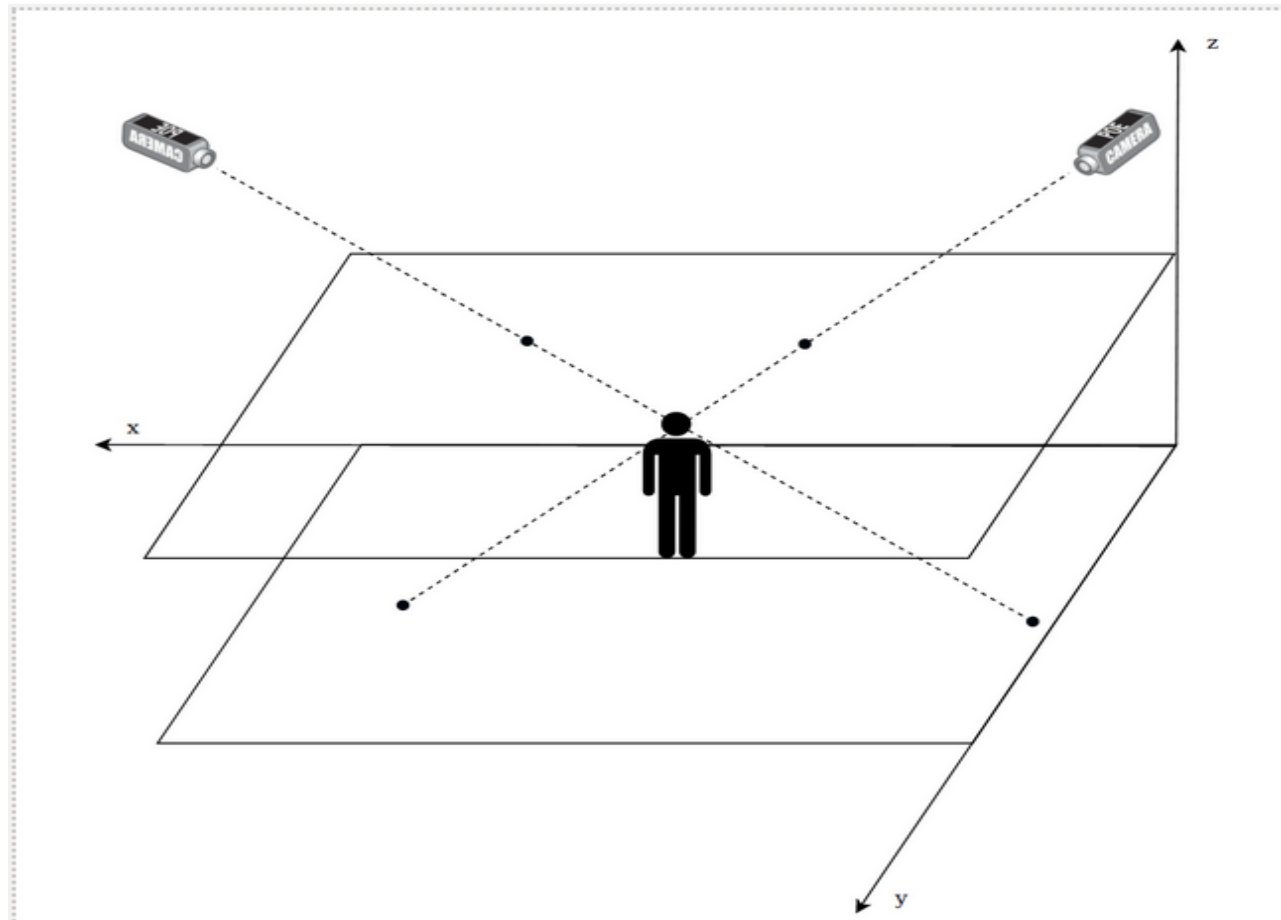Intrinsic matrix: internal attribute of camera
Extrinsic matrix: translation and rotation matrix
u, v: coordinate in image dimension
X, Y, Z: coordinate in world dimension

Materials and Methods

- **3D localization**

Camnet System

- ## Process Pipeline

QA