


Size the usable buffer.

Required total storage for each shortfall and event duration

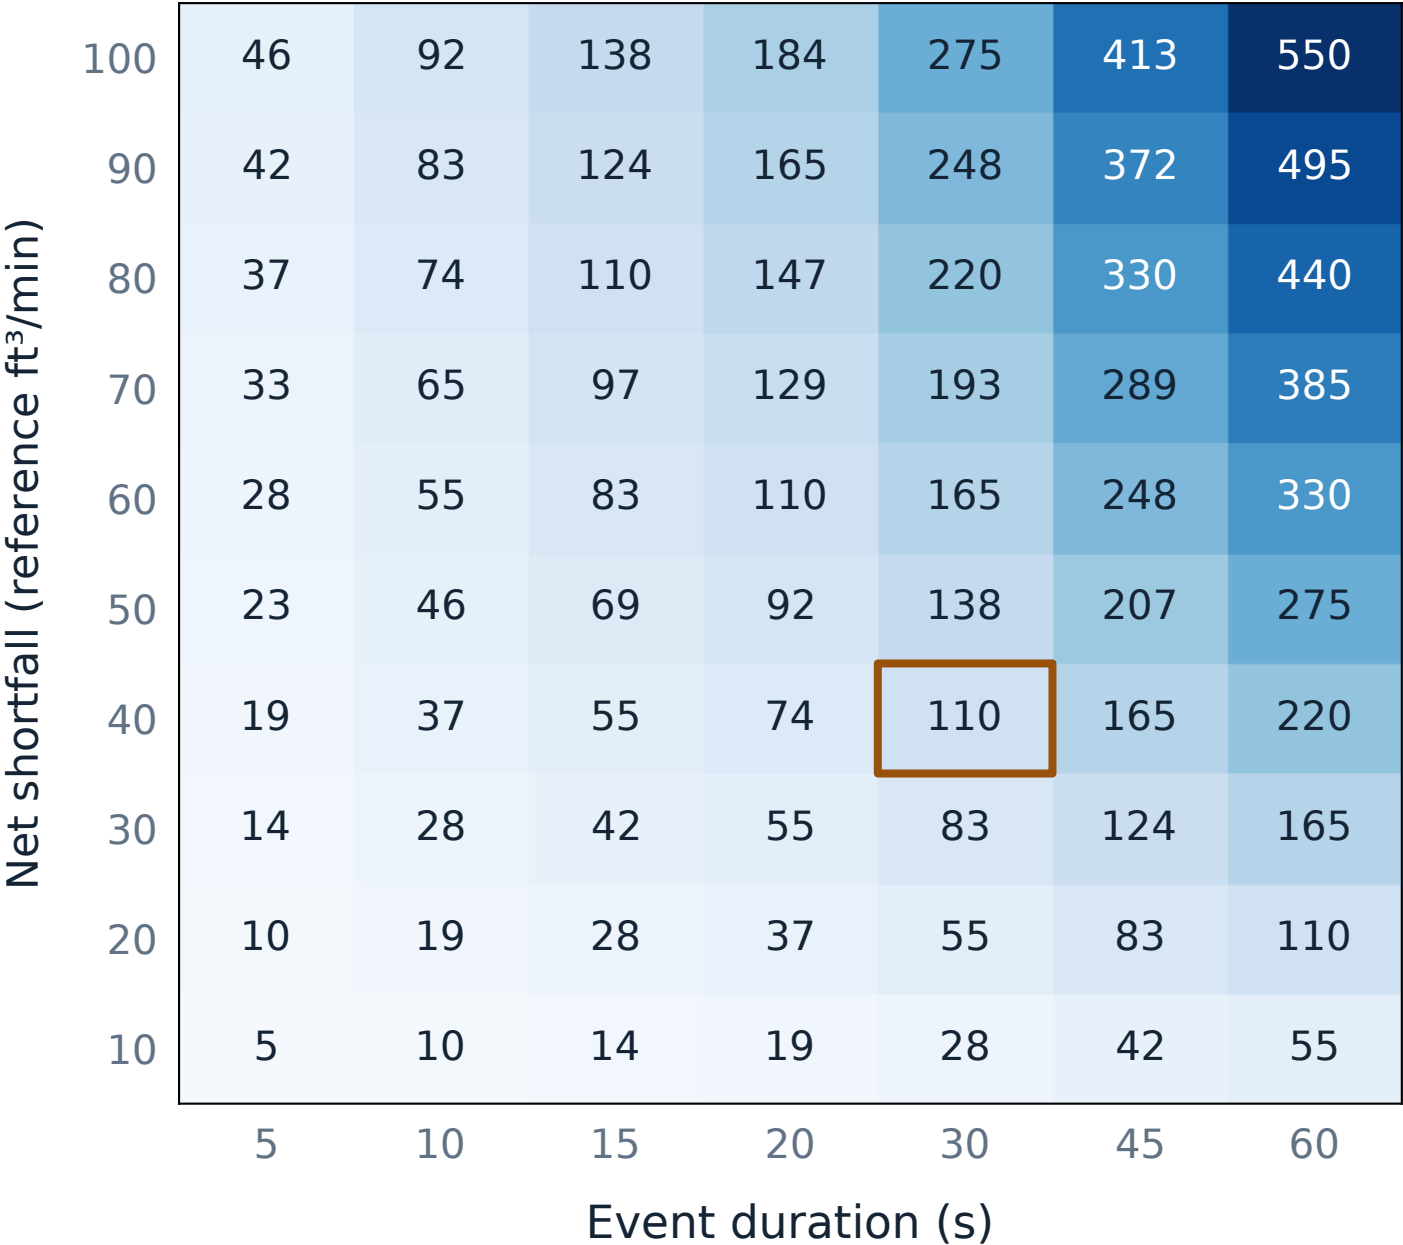

Each cell: US gallons, rounded up to a whole gallon.

Worked case: 40 cfm × 30 s requires 109.9 US gal.

This is the idealized inventory requirement before design margin.

Illustrative inputs · constant-temperature ideal-gas inventory
Flow reference: 1 atm, 20°C · tank: 20°C · pressure band: 20 psi
Method: DOE sourcebook, Fact Sheet 6, p. 43 · AI-assisted analysis