



TUDSaT Sensor Board


SW connector

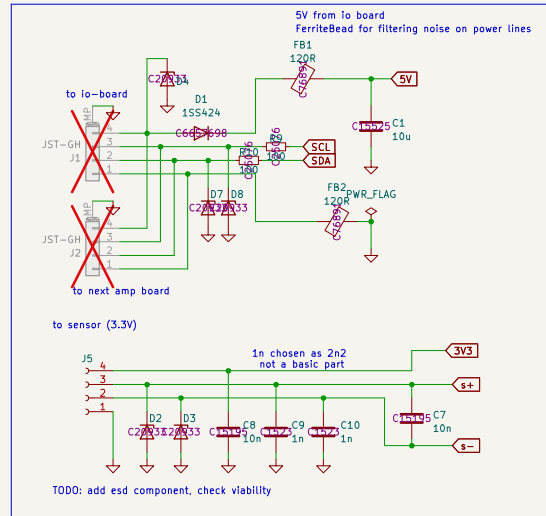


Amplifier

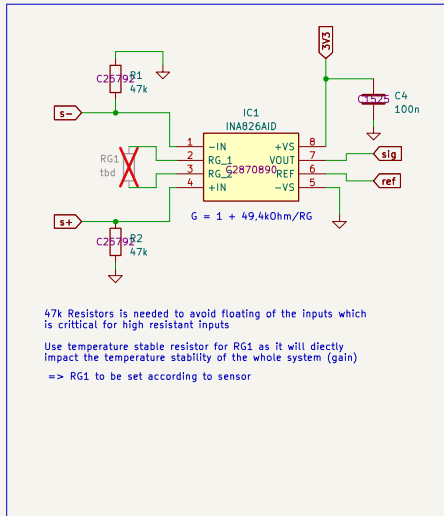

I2C

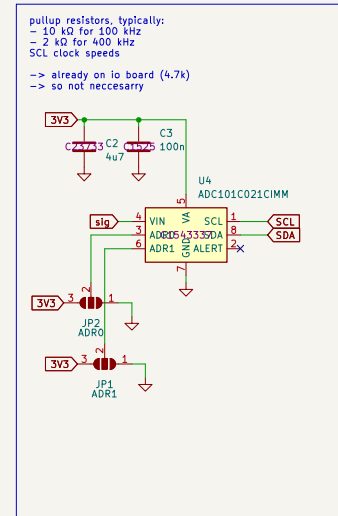


PT-sensor




The board is meant to be operated with one analogue sensor, as we primary use the WKA pressure sensors, the standard configuration is without the PT-x resistor bridge.
=> sollte das board mit PT-2 widerständen genutzt werden sollen, so muss die Widerstandsbrücke ergänzt werden.

Voltage Reference

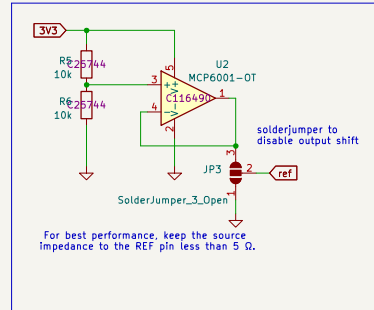

Voltage Regulator

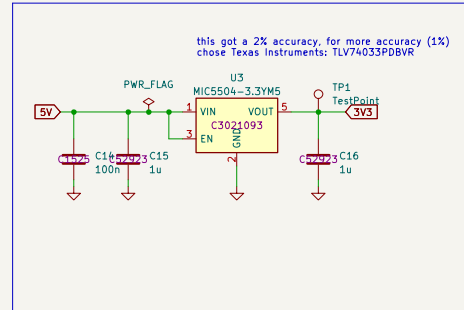

DESIRED GAIN (V/V)	R _G (Ω)	NEAREST 1% R _G (Ω)
1	—	—
2	49.4 k	49.9 k
5	12.35 k	12.4 k
10	5.489 k	5.49 k
20	2.600 k	2.61 k
50	1.008 k	1 k
100	499	499
200	248	249
500	99	100
1000	49.5	49.9