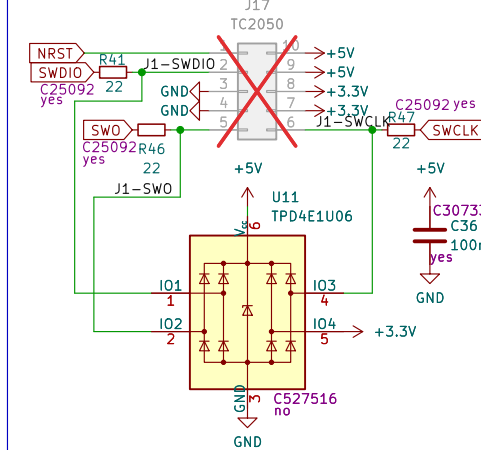


J5  
FFC3B07-12-T

+5V

TEMP\_10\_con

TEMP\_9\_con

TEMP\_8\_con

TEMP\_7\_con

TEMP\_6\_con

TEMP\_5\_con

TEMP\_4\_con

TEMP\_3\_con

TEMP\_2\_con

TEMP\_1\_con

GND

C5641303

U16 MCP2562-E-SN

TP\_CAN\_H1

CAN\_1+

CAN\_1-

TP\_CAN\_L1

C38 100n yes C307331

C37 100n yes C307331

R40 120, DNP

CAN1

CANH

CANL

VDD

VSS

Vio

STBY

CAN2\_TX

CAN2\_RX

+5V

+3.3V

C191417 no

The diagram illustrates a CAN bus termination circuit. It features two CAN transceivers, J2 and J3, connected to a CAN bus. J2 is marked with a large red 'X', indicating it is not to be used. The circuit includes a 140 Ohm resistor (C5140034) and a 16 Ohm diode (D16) in series with the bus. A 3A fuse (F1 3A C311062) is also present. The bus is connected to GND and a 5V supply (charging\_voltage/main\_voltage). The CAN bus is labeled CAN\_1+/- and CAN\_2+/-.