
ETSITS 125 433 V4.4.0 (2002-03)

Technical Specification

Universal Mobile Telecommunications System (UMTS); UTRAN lub Interface NBAP Signalling (3GPP TS 25.433 version 4.4.0 Release 4)

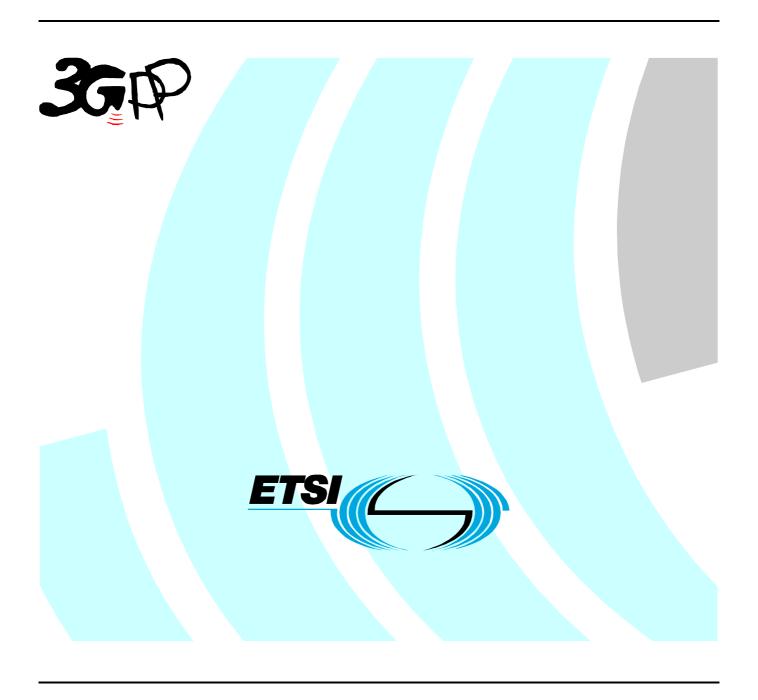

Reference RTS/TSGR-0325433Uv4R4 Keywords UMTS

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: http://www.etsi.org

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, send your comment to: editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2002.
All rights reserved.

DECTTM, **PLUGTESTS**TM and **UMTS**TM are Trade Marks of ETSI registered for the benefit of its Members. **TIPHON**TM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members. **3GPP**TM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under www.etsi.org/key.

Contents

Intelle	ectual Property Rights	2
Forev	word	2
Forev	word	15
1	Scope	16
2	References	16
3	Definitions, symbols and abbreviations	17
3.1	Definitions	
3.2	Symbols	
3.3	Abbreviations	18
4	General	19
4.1	Procedure Specification Principles	
4.2	Forwards and Backwards Compatibility	19
4.3	Specification Notations	19
5	NBAP Services	20
5.1	Parallel Transactions	
6	Services Expected from Signalling Transport	21
7	Functions of NBAP	
8	NBAP Procedures	22
8.1	Elementary Procedures	
8.2	NBAP Common Procedures	
8.2.1	Common Transport Channel Setup	
8.2.1.1		
8.2.1.2		
8.2.1.3	3 Unsuccessful Operation	27
8.2.1.4		
8.2.2	Common Transport Channel Reconfiguration	
8.2.2.1		
8.2.2.2	1	
8.2.2.3 8.2.2.4	1	
8.2.3	Common Transport Channel Deletion	
8.2.3.1	•	
8.2.3.2		
8.2.3.3	<u> •</u>	
8.2.3.4	4 Abnormal Conditions	32
8.2.4	Block Resource	
8.2.4.1		
8.2.4.2	<u>.</u>	
8.2.4.3 8.2.4.4	1	
8.2.5	Unblock Resource	
8.2.5.1		
8.2.5.2		
8.2.5.3	1	
8.2.6	Audit Required	
8.2.6.1		
8.2.6.2	1	
8.2.6.3		
8.2.7	Audit	
8.2.7.1 8.2.7.2		
0.4.1.4	2 Duccessiui Operanon	

8.2.7.3	Unsuccessful Operation	
8.2.7.4	Abnormal Conditions	
8.2.8	Common Measurement Initiation	
8.2.8.1	General	36
8.2.8.2	Successful Operation	36
8.2.8.3	Unsuccessful Operation	41
8.2.8.4	Abnormal Conditions	41
8.2.9	Common Measurement Reporting	42
8.2.9.1	General	42
8.2.9.2	Successful Operation	42
8.2.9.3	Abnormal Conditions	43
8.2.10	Common Measurement Termination	43
8.2.10.1	General	43
8.2.10.2	Successful Operation	43
8.2.10.3	Abnormal Conditions	43
8.2.11	Common Measurement Failure	43
8.2.11.1	General	43
8.2.11.2	Successful Operation	43
8.2.11.3	Abnormal Conditions	43
8.2.12	Cell Setup	44
8.2.12.1	General	
8.2.12.2	Successful Operation	
8.2.12.3	Unsuccessful Operation	
8.2.12.4	Abnormal Conditions	
8.2.13	Cell Reconfiguration	
8.2.13.1	General	
8.2.13.2	Successful Operation	
8.2.13.3	Unsuccessful Operation	
8.2.13.4	Abnormal Conditions	
8.2.14	Cell Deletion	
8.2.14.1	General	
8.2.14.2	Successful Operation	
8.2.14.3	Unsuccessful Operation	
8.2.14.4	Abnormal Conditions	
8.2.15	Resource Status Indication.	
8.2.15.1	General	
8.2.15.2	Successful Operation	
8.2.15.3	Abnormal Conditions	
8.2.16	System Information Update	
8.2.16.1	General	
8.2.16.2	Successful Operation	
8.2.16.3	Unsuccessful Operation	
8.2.16.4	Abnormal Conditions	
8.2.17	Radio Link Setup	
8.2.17.1	General	
8.2.17.2	Successful Operation	
8.2.17.3	Unsuccessful Operation	
8.2.17.4	Abnormal Conditions	
8.2.18	Physical Shared Channel Reconfiguration [TDD]	
8.2.18.1	General	
8.2.18.2	Successful Operation	
8.2.18.3	Unsuccessful Operation	
8.2.18.4	Abnormal Conditions	
8.2.19	Reset	
8.2.19.1	General	
8.2.19.1	Successful Operation	
8.2.19.2.1	Reset Initiated by the CRNC	
8.2.19.2.1	Reset Initiated by the CKNC Reset Initiated by the Node B	
8.2.19.3	Unsuccessful Operation.	
8.2.19.3	Abnormal Conditions	
8.2.20	Cell Synchronisation Initiation [TDD]	
8.2.20.1	General	
0.2.20.1	COLOTUI	

8.2.20.2	Successful Operation	
8.2.20.3	Unsuccessful Operation	62
8.2.20.4	Abnormal Conditions	
8.2.21	Cell Synchronisation Reconfiguration [TDD]	63
8.2.21.1	General	63
8.2.21.2	Successful Operation	63
8.2.21.3	Unsuccessful Operation	64
8.2.21.4	Abnormal Conditions	65
8.2.22	Cell Synchronisation Reporting [TDD]	65
8.2.22.1	General	65
8.2.22.2	Successful Operation	65
8.2.22.3	Abnormal Conditions	
8.2.23	Cell Synchronisation Termination [TDD]	65
8.2.23.1	General	
8.2.23.2	Successful Operation	65
8.2.23.3	Abnormal Conditions	
8.2.24	Cell Synchronisation Failure [TDD]	
8.2.24.1	General	
8.2.24.2	Successful Operation	66
8.2.24.3	Abnormal Conditions	
8.2.25	Cell Synchronisation Adjustment [TDD]	
8.2.25.1	General	
8.2.25.2	Successful Operation	
8.2.25.3	Unsuccessful Operation	
8.2.25.4	Abnormal Conditions	
8.2.26	Information Exchange Initiation	
8.2.26.1	General	
8.2.26.2	Successful Operation	
8.2.26.3	Unsuccessful Operation	
8.2.27.4	Abnormal Conditions	
8.2.27	Information Reporting	
8.2.27.1	General	
8.2.27.2	Successful Operation	
8.2.27.3	Abnormal Conditions	
8.2.28	Information Exchange Termination	
8.2.28.1	General	
8.2.28.2	Successful Operation	
8.2.28.3	Abnormal Conditions	
8.2.29	Information Exchange Failure	
8.2.29.1	General	
8.2.29.2	Successful Operation	
8.3	NBAP Dedicated Procedures	
8.3.1	Radio Link Addition	
8.3.1.1	General	
8.3.1.2	Successful Operation	
8.3.1.3	Unsuccessful Operation	
8.3.1.4	Abnormal conditions	
8.3.2	Synchronised Radio Link Reconfiguration Preparation	
8.3.2.1	General	
8.3.2.2	Successful Operation	
8.3.2.3	Unsuccessful Operation	
8.3.2.4	Abnormal Conditions	
8.3.3	Synchronised Radio Link Reconfiguration Commit	
8.3.3.1	General	
8.3.3.2	Successful Operation	
8.3.3.3	Abnormal Conditions	
8.3.4	Synchronised Radio Link Reconfiguration Cancellation	
8.3.4.1	General	
8.3.4.2	Successful Operation	
8.3.4.3	Abnormal Conditions	
8.3.5	Unsynchronised Radio Link Reconfiguration	
8351	General	82

8.3.5.2	Successful Operation	
8.3.5.3	Unsuccessful Operation	
8.3.5.4	Abnormal Conditions	
8.3.6	Radio Link Deletion	
8.3.6.1	General	
8.3.6.2	Successful Operation	
8.3.6.3	Unsuccessful Operation	
8.3.6.4	Abnormal Conditions	
8.3.7	Downlink Power Control [FDD]	
8.3.7.1	General	
8.3.7.2	Successful Operation	
8.3.7.3	Abnormal Conditions	
8.3.8	Dedicated Measurement Initiation	
8.3.8.1	General	
8.3.8.2	Successful Operation	
8.3.8.3	Unsuccessful Operation	
8.3.8.4	Abnormal Conditions	
8.3.9	Dedicated Measurement Reporting	
8.3.9.1	General	
8.3.9.2 8.3.9.3	Successful Operation	
8.3.9.3 8.3.10	Dedicated Measurement Termination	
8.3.10.1	General	
8.3.10.1	Successful Operation	
8.3.10.2	Abnormal Conditions	
8.3.10.3	Dedicated Measurement Failure	
8.3.11.1	General	
8.3.11.2	Successful Operation.	
8.3.11.3	Abnormal Conditions	
8.3.11.3	Radio Link Failure	
8.3.12.1	General	
8.3.12.2	Successful Operation	
8.3.12.3	Abnormal Conditions	
8.3.13	Radio Link Restoration	
8.3.13.1	General	
8.3.13.2	Successful Operation	
8.3.13.3	Abnormal Condition	
8.3.14	Compressed Mode Command [FDD]	
8.3.14.1	General	
8.3.14.2	Successful Operation	
8.3.14.3	Abnormal Conditions	
8.3.15	Downlink Power Timeslot Control [TDD]	
8.3.15.1	General	
8.3.15.2	Successful Operation	
8.3.15.3	Abnormal Conditions	97
8.3.16	Radio Link Pre-emption	97
8.3.16.1	General	97
8.3.16.2	Successful Operation	97
8.3.16.3	Abnormal Conditions	98
8.4	Error Handling Procedures	98
8.4.1	Error Indication	98
8.4.1.1	General	98
8.4.1.2	Successful Operation	
8.4.1.3	Abnormal Conditions	99
	lements for NBAP communication	
9.1	Message Functional Definition and Content	
9.1.1	General	
9.1.2	Message Contents	
9.1.2.1	Presence	
9.1.2.2	Criticality	
9123	Range	100

9.1.2.4	Assigned Criticality	100
9.1.3	COMMON TRANSPORT CHANNEL SETUP REQUEST	10
9.1.3.1	FDD Message	
9.1.3.2	TDD Message	106
9.1.4	COMMON TRANSPORT CHANNEL SETUP RESPONSE	
9.1.5	COMMON TRANSPORT CHANNEL SETUP FAILURE	111
9.1.6	COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST	112
9.1.6.1	FDD Message	112
9.1.6.2	TDD Message	
9.1.7	COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE	115
9.1.8	COMMON TRANSPORT CHANNEL RECONFIGURATION FAILURE	115
9.1.9	COMMON TRANSPORT CHANNEL DELETION REQUEST	
9.1.10	COMMON TRANSPORT CHANNEL DELETION RESPONSE	116
9.1.11	BLOCK RESOURCE REQUEST	
9.1.12	BLOCK RESOURCE RESPONSE	
9.1.13	BLOCK RESOURCE FAILURE	
9.1.14	UNBLOCK RESOURCE INDICATION	
9.1.15	AUDIT REQUIRED INDICATION	
9.1.16	AUDIT REQUEST	
9.1.17	AUDIT RESPONSE	
9.1.17A	AUDIT FAILURE	
9.1.18	COMMON MEASUREMENT INITIATION REQUEST	
9.1.19	COMMON MEASUREMENT INITIATION RESPONSE	
9.1.20	COMMON MEASUREMENT INITIATION FAILURE	
9.1.21	COMMON MEASUREMENT REPORT	
9.1.22	COMMON MEASUREMENT TERMINATION REQUEST	
9.1.23	COMMON MEASUREMENT FAILURE INDICATION	
9.1.24	CELL SETUP REQUEST	
9.1.24.1	FDD Message	
9.1.24.2	TDD Message	
9.1.25	CELL SETUP RESPONSE	
9.1.26	CELL SETUP FAILURE	
9.1.27	CELL RECONFIGURATION REQUEST	
9.1.27.1	FDD Message	
9.1.27.2 9.1.28	TDD Message CELL RECONFIGURATION RESPONSE	
	CELL RECONFIGURATION RESPONSE	
9.1.29 9.1.30	CELL DELETION REQUEST	
9.1.30	CELL DELETION RESPONSE	
9.1.31	RESOURCE STATUS INDICATION	
9.1.32	SYSTEM INFORMATION UPDATE REQUEST	
9.1.34	SYSTEM INFORMATION UPDATE RESPONSE	
9.1.35	SYSTEM INFORMATION UPDATE FAILURE	
9.1.36	RADIO LINK SETUP REQUEST	
9.1.36.1	FDD message	
9.1.36.2	TDD message	
9.1.37	RADIO LINK SETUP RESPONSE	
9.1.37.1	FDD message	
9.1.37.2	TDD Message	
9.1.38	RADIO LINK SETUP FAILURE	
9.1.38.1	FDD Message	
9.1.38.2	TDD Message	
9.1.39	RADIO LINK ADDITION REQUEST	
9.1.39.1	FDD Message	
9.1.39.2	TDD Message	151
9.1.40	RADIO LINK ADDITION RESPONSE	152
9.1.40.1	FDD message	
9.1.40.2	TDD Message	
9.1.41	RADIO LINK ADDITION FAILURE	
9.1.41.1	FDD Message	
9.1.41.2	TDD Message	
9 1 42	RADIO LINK RECONFIGURATION PREPARE	156

9.1.42.1	FDD Message	156
9.1.42.2	TDD Message	
9.1.43	RADIO LINK RECONFIGURATION READY	164
9.1.44	RADIO LINK RECONFIGURATION FAILURE	
9.1.45	RADIO LINK RECONFIGURATION COMMIT	165
9.1.46	RADIO LINK RECONFIGURATION CANCEL	
9.1.47	RADIO LINK RECONFIGURATION REQUEST	
9.1.47.1	FDD Message	
9.1.47.2	TDD Message	
9.1.48	RADIO LINK RECONFIGURATION RESPONSE	
9.1.49	RADIO LINK DELETION REQUEST	
9.1.50	RADIO LINK DELETION RESPONSE	
9.1.51	DL POWER CONTROL REQUEST [FDD]	
9.1.52	DEDICATED MEASUREMENT INITIATION REQUEST	
9.1.53	DEDICATED MEASUREMENT INITIATION RESPONSE	172
9.1.54	DEDICATED MEASUREMENT INITIATION FAILURE	
9.1.55	DEDICATED MEASUREMENT REPORT	
9.1.56	DEDICATED MEASUREMENT TERMINATION REQUEST	
9.1.57	DEDICATED MEASUREMENT FAILURE INDICATION	
9.1.58	RADIO LINK FAILURE INDICATION	
9.1.58 9.1.59	RADIO LINK PAIEURE INDICATION	
9.1.60	COMPRESSED MODE COMMAND [FDD]	
9.1.61	ERROR INDICATION	
9.1.62	PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST [TDD]	
	PHYSICAL SHARED CHANNEL RECONFIGURATION RESPONSE [TDD]PHYSICAL SHARED CHANNEL RECONFIGURATION RESPONSE [TDD]	
9.1.63	PHYSICAL SHARED CHANNEL RECONFIGURATION RESPONSE [TDD]PHYSICAL SHARED CHANNEL RECONFIGURATION FAILURE [TDD]	
9.1.64		
9.1.65	RESET REQUESTRESET RESPONSE	
9.1.66		
9.1.67	DL POWER TIMESLOT CONTROL REQUEST [TDD]RADIO LINK PREEMPTION REQUIRED INDICATION	
9.1.68		
9.1.69	INFORMATION EXCHANGE INITIATION REQUESTINFORMATION EXCHANGE INITIATION RESPONSE	105
9.1.70		
9.1.71	INFORMATION EXCHANGE INITIATION FAILURE	
9.1.72	INFORMATION REPORT	
9.1.73	INFORMATION EXCHANGE TERMINATION REQUEST	
9.1.74	INFORMATION EXCHANGE FAILURE INDICATION	
9.1.75	CELL SYNCHRONISATION INITIATION REQUEST [TDD]	180
9.1.76	CELL SYNCHRONISATION INITIATION RESPONSE [TDD]	186
9.1.77	CELL SYNCHRONISATION INITIATION FAILURE [TDD]	187
9.1.78	CELL SYNCHRONISATION RECONFIGURATION REQUEST [TDD]	
9.1.79	CELL SYNCHRONISATION RECONFIGURATION RESPONSE [TDD]	
9.1.80	CELL SYNCHRONISATION RECONFIGURATION FAILURE [TDD]	
9.1.81	CELL SYNCHRONISATION REPORT [TDD]	
9.1.82	CELL SYNCHRONISATION TERMINATION REQUEST [TDD]	
9.1.83	CELL SYNCHRONISATION FAILURE INDICATION [TDD]	
9.1.84	CELL SYNCHRONISATION ADJUSTMENT REQUEST [TDD]	
9.1.85	CELL SYNCHRONISATION ADJUSTMENT RESPONSE [TDD]	
9.1.86	CELL SYNCHRONISATION ADJUSTMENT FAILURE [TDD]	
9.2	Information Element Functional Definition and Contents	
9.2.0	General	
9.2.1	Common parameters	
9.2.1.1	Add/Delete Indicator	
9.2.1.1A	Allocation/Retention Priority	
9.2.1.2	Availability Status	
9.2.1.3	BCCH Modification Time	
9.2.1.4	Binding ID	
9.2.1.5	Blocking Priority Indicator	
9.2.1.5A	Burst mode parameters	
9.2.1.6	Cause	
9.2.1.7	CFN	
9.2.1.8	CFN Offset	
9219	C-ID	197

9.2.1.9A	Common Channels Capacity Consumption Law	
9.2.1.9B	Common Measurement Accuracy	198
9.2.1.10	Common Measurement Object Type	198
9.2.1.11	Common Measurement Type	199
9.2.1.12	Common Measurement Value	
9.2.1.12A	Common Measurement Value Information	
9.2.1.13	Common Physical Channel ID	
9.2.1.13A	Common Physical Channel Status Information	201
9.2.1.14	Common Transport Channel ID	
9.2.1.14A	Common Transport Channel Information Response	201
9.2.1.14B	Common Transport Channel Status Information	
9.2.1.15	Communication Control Port ID	
9.2.1.16	Configuration Generation ID	202
9.2.1.17	Criticality Diagnostics	
9.2.1.18	CRNC Communication Context ID	
9.2.1.19	DCH Combination Indicator	
9.2.1.20	DCH ID	
9.2.1.20A	Dedicated Channels Capacity Consumption Law	
9.2.1.20B	DL or Global Capacity Credit	
9.2.1.20C	DCH Information Response	
9.2.1.21	DL Power	
9.2.1.22	Dedicated Measurement Object Type	
9.2.1.23	Dedicated Measurement Type	
9.2.1.24	Dedicated Measurement Value	
9.2.1.24A	Dedicated Measurement Value Information	
9.2.1.24B	DGPS Corrections	
9.2.1.25	Diversity Control Field	
9.2.1.26	Diversity Indication	
9.2.1.27	DSCH ID	
9.2.1.27A	DSCH Information Response	
9.2.1.28	DSCH Transport Format Set	
9.2.1.29	DSCH Transport Format Combination Set	
9.2.1.29A	End Of Audit Sequence Indicator	
9.2.1.29B	FN reporting indicator	
9.2.1.30	Frame Handling Priority	
9.2.1.31	Frame Offset	
9.2.1.31A	IB_OC_ID	
9.2.1.31B	GPS Navigation Model & Time Recovery	
9.2.1.31C	GPS Ionospheric Model	
9.2.1.31D	GPS UTC Model	
9.2.1.31E	GPS Real-Time Integrity	
9.2.1.31F	GPS Almanac GPS Parities (GPS PARITIES)	
9.2.1.31G	GPS Receiver Geographical Position (GPS RX Pos)	
9.2.1.32	IB_SG_DATA	
9.2.1.33	IB_SG_POS	
9.2.1.34	IB_SG_REP	
9.2.1.35 9.2.1.36	IB Type	
9.2.1.36 9.2.1.36A	Indication Type	
9.2.1.36A 9.2.1.36B	Information Exchange Object Type	
	<u> </u>	
9.2.1.36C 9.2.1.36D	Information Exchange ID Information Type	
9.2.1.36E	Information Type	
9.2.1.36E 9.2.1.36F	IPDL Indicator	
9.2.1.30F 9.2.1.37	Limited Power Increase	
9.2.1.37 9.2.1.37A	Local Cell Group ID	
9.2.1.37A 9.2.1.38	Local Cell ID	
9.2.1.38	Maximum DL Power Capability	
9.2.1.39	Maximum Transmission Power	
9.2.1.40 9.2.1.40A	Measurement Availability Indicator	
9.2.1.40A 9.2.1.41	Measurement Filter Coefficient	
9.2.1.41	Measurement ID	
	1-1-w	

9.2.1.43	Measurement Increase/Decrease Threshold	
9.2.1.44	Measurement Threshold	222
9.2.1.45	Message Discriminator	222
9.2.1.45A	Message Structure	223
9.2.1.46	Message Type	223
9.2.1.46A	Minimum DL Power Capability	224
9.2.1.47	Minimum Spreading Factor	225
9.2.1.47A	N_INSYNC_IND	225
9.2.1.47B	N_OUTSYNC_IND	225
9.2.1.47C	Neighbouring FDD Cell Measurement Information	225
9.2.1.47D	Neighbouring TDD Cell Measurement Information	225
9.2.1.48	Node B Communication Context ID	226
9.2.1.49	Payload CRC Presence Indicator	226
9.2.1.49A	PICH Power	226
9.2.1.50	Puncture Limit	226
9.2.1.50A	QE-Selector	227
9.2.1.51	Report Characteristics	227
9.2.1.51A	Requested Data Value	
9.2.1.51B	Requested Data Value Information	
9.2.1.52	Resource Operational State	
9.2.1.52A	Retention Priority	
9.2.1.53	RL ID	
9.2.1.53a	RNC-Id	
9.2.1.53A	SFN	
9.2.1.53B	Segment type	
9.2.1.53C	SFN-SFN Measurement Threshold Information	
9.2.1.53D	SFN-SFN Measurement Time Stamp	
9.2.1.53E	SFN-SFN Measurement Value Information	
9.2.1.53F	SFN-SFN Value	
9.2.1.54	SIB Deletion Indicator	
9.2.1.55	SIB Originator	
9.2.1.56	Shutdown Timer	
9.2.1.56A	T_RLFAILURE	
9.2.1.56B	Start Of Audit Sequence Indicator	
9.2.1.57	TFCI Presence	
9.2.1.58	TFCS (Transport Format Combination Set)	
9.2.1.59	Transport Format Set	
9.2.1.60	ToAWE	237
9.2.1.61	ToAWS	238
9.2.1.62	Transaction ID	
9.2.1.62A	Transport Bearer Request Indicator	
9.2.1.63	Transport Layer Address	
9.2.1.64	TSTD Indicator	
9.2.1.64A	T _{UTRAN-GPS} Measurement Value Information	
9.2.1.64B	T _{UTRAN-GPS} Measurement Threshold Information	
9.2.1.64C	T _{UTRAN-GPS} Accuracy Class	
9.2.1.65	UARFCN	
9.2.1.65A	UL Capacity Credit	
9.2.1.65B	UTRAN Cell Identifier (UC-Id)	
9.2.1.66	UL FP Mode	
9.2.1.67	UL interference level.	241
9.2.1.67A	UL SIR	
9.2.2	FDD specific parameters	
9.2.2.A	Active Pattern Sequence Information.	
9.2.2.B	Adjustment Period.	
9.2.2.C	Adjustment Ratio	
9.2.2.D	AICH Power	
9.2.2.1	AICH Transmission Timing	
9.2.2.1A	AP Preamble Signature	
9.2.2.1B	AP Sub Channel Number	
9.2.2.1C	CD Sub Channel Numbers	
9.2.2.1D	Channel Assignment Indication	

9.2.2.2	Chip Offset	243
9.2.2.2	Closed Loop Timing Adjustment Mode	243
9.2.2.3	Common Channels Capacity Consumption Law	
9.2.2.3A	Compressed Mode Deactivation Flag	
9.2.2.4	Compressed Mode Method	
9.2.2.4A	CPCH Allowed Total Rate	
9.2.2.4B	CPCH Scrambling Code Number	
9.2.2.4C	CPCH UL DPCCH Slot Format	
9.2.2.4D	DCH FDD Information	
9.2.2.4E	DCHs FDD to Modify	
9.2.2.5	D-Field Length	
9.2.2.6	Dedicated Channels Capacity Consumption Law	
9.2.2.7	Diversity Control Field	
9.2.2.8	Diversity Indication	
9.2.2.9	Diversity mode	
9.2.2.10	DL DPCH Slot Format	
9.2.2.11	DL frame type	
9.2.2.12	DL or Global Capacity Credit	
9.2.2.12A	DL_power_averaging_window_size	
9.2.2.13	DL Scrambling Code	
9.2.2.13A	DL TPC pattern 01 count	
9.2.2.13B	DSCH FDD Information	
9.2.2.13C	DPC Mode	
9.2.2.13D	DSCH FDD Common Information	
9.2.2.13E	Enhanced DSCH PC	
9.2.2.13F	Enhanced DSCH PC Counter	
9.2.2.13G	Enhanced DSCH PC Indicator	
9.2.2.13H	Enhanced DSCH PC Wnd	
9.2.2.13I	Enhanced DSCH Power Offset	
9.2.2.14	FDD DL Channelisation Code Number	
9.2.2.14A	FDD DL Code Information	
9.2.2.15	FDD TDC DI	
9.2.2.16	FDD TPC DL step size	
9.2.2.16A	First RLS Indicator	
9.2.2.17 9.2.2.18	Gap Position Mode	
9.2.2.18A	Limited Power Increase	
9.2.2.18B	Inner Loop DL PC Status	
9.2.2.18C	IPDL FDD Parameters	
9.2.2.19	Max Adjustment Period	
9.2.2.20	Max Adjustment Step	
9.2.2.20A	Max Number of PCPCHes	
9.2.2.21	Maximum Number of UL DPDCHs	
9.2.2.22	Minimum UL Channelisation Code Length	
9.2.2.23	Multiplexing Position	
9.2.2.23A	N_EOT	
9.2.2.23B	NF_max	
9.2.2.23C	N_Start_Message	
9.2.2.24	Pattern Duration (PD)	
9.2.2.24A	PCP Length	
9.2.2.25	PDSCH code mapping	
9.2.2.26	PICH Mode	
9.2.2.27	Power Adjustment Type	256
9.2.2.28	Power Control Mode	
9.2.2.29	Power Offset	
9.2.2.29A	Power_Raise_Limit	
9.2.2.30	Power Resume Mode	
9.2.2.31	Preamble Signature	
9.2.2.32	Preamble Threshold	257
9.2.2.33	Primary CPICH Power	257
9.2.2.34	Primary Scrambling code	257
9.2.2.35	Propagation Delay	257

9.2.2.36	QE-Selector	
9.2.2.37	RACH Slot Format	258
9.2.2.38	RACH sub Channel numbers	258
9.2.2.39	RL Set ID	258
9.2.2.39A	Received total wide band power	258
9.2.2.40	S-Field Length	258
9.2.2.41	Scrambling Code Change	
9.2.2.42	Scrambling Code Number	
9.2.2.43	Secondary CCPCH Slot Format	
9.2.2.44	SSDT Cell Identity	
9.2.2.44A	SSDT Cell Identity for EDSCHPC	
9.2.2.45	SSDT Cell ID Length	
9.2.2.46	SSDT Support Indicator	
9.2.2.47	SSDT Indication	
9.2.2.48	STTD Indicator	
9.2.2.49	T Cell	
9.2.2.49A	TFCI2 Bearer Information Response	
9.2.2.50	TFCI signalling mode	
9.2.2.51	TGD	
9.2.2.52	TGL	
9.2.2.53	Transmit Diversity Indicator	
9.2.2.53A	Transmission Gap Pattern Sequence Information	
9.2.2.53B	Transmission Gap Pattern Sequence Code Information	
9.2.2.54	UL/DL compressed mode selection:	
9.2.2.55	UL delta SIR	
9.2.2.56	UL delta SIR after	
9.2.2.57	UL DPCCH Slot Format	
9.2.2.57	UL SIR	
9.2.2.59	UL Scrambling Code	
9.2.2.60	UL Capacity Credit	
9.2.3	TDD specific Parameters	
9.2.3.1	1	
	Block STTD Indicator	
9.2.3.2	Burst Type	
9.2.3.3	CCTrCH IDCell Parameter ID	
9.2.3.4 9.2.3.4A		
9.2.3.4A 9.2.3.4B	Constant Value	
	DL Timeslot ISCP	
9.2.3.4C	DCH TDD Information	
9.2.3.4D	DCHs TDD to Modify	
9.2.3.4E	DL Timeslot Information	
9.2.3.4F	DL Time Slot ISCP Info	
9.2.3.4G	Cell Sync Burst Code	
9.2.3.4H	Cell Sync Burst Code Shift	
9.2.3.4I	CSB Measurement ID	
9.2.3.4J	Cell Sync Burst Repetition Period	
9.2.3.4K	Cell Sync Burst SIR	
9.2.3.4L	Cell Sync Burst Timing	
9.2.3.4M	Cell Sync Burst Timing Threshold	
9.2.3.4N	CSB Transmission ID	
9.2.3.4O	DL Timeslot Information LCR	
9.2.3.40A	DL Time Slot ISCP Info LCR	
9.2.3.5	DPCH ID	
9.2.3.5A	DSCH TDD Information	
9.2.3.5B	DwPCH Power	
9.2.3.5C	Frame Adjustment value	
9.2.3.5D	IPDL TDD Parameter	
9.2.3.5E	Max FPACH Power	
9.2.3.6	Max PRACH Midamble shift	272
9.2.3.7	Midamble shift and burst type	273
9.2.3.7A	Midamble shift LCR	273
9.2.3.7B	Number of cycles per SFN period	
9.2.3.7C	Number of repetitions per cycle period	274

9.2.3.8	Paging Indicator Length	
9.2.3.9	PCCPCH Power	274
9.2.3.10	PDSCH ID	
9.2.3.11	PDSCH Set ID	
9.2.3.12	PUSCH ID	
9.2.3.13	PUSCH Set ID	
9.2.3.14	PRACH Midamble	
9.2.3.14A	•	
9.2.3.14B		
9.2.3.15	Repetition Length	
9.2.3.16	Repetition Period	
9.2.3.17	SCH Time Slot	
9.2.3.18	Sync case	
9.2.3.18A		
9.2.3.18B		
9.2.3.180	- ,	
9.2.3.18	J 1	
9.2.3.18E	J 1 J1	
9.2.3.19	TDD Channelisation Code	
9.2.3.19a		
9.2.3.19A		
9.2.3.19B		
9.2.3.190		
9.2.3.20 9.2.3.21	TDD Physical Channel Offset	
9.2.3.21 9.2.3.21 <i>A</i>	TDD TPC DL step size TDD UL Code Information	
9.2.3.21A 9.2.3.21B		
9.2.3.21E 9.2.3.22	TFCI Coding	
9.2.3.22 9.2.3.22a	e e e e e e e e e e e e e e e e e e e	
9.2.3.22a 9.2.3.22 <i>A</i>		
9.2.3.22 <i>F</i> 9.2.3.23	Time Slot	
9.2.3.24	Time Slot Direction	
9.2.3.24 9.2.3.24 <i>A</i>		
9.2.3.24 <i>F</i> . 9.2.3.25	Time Slot ECK	
9.2.3.26	Transmission Diversity Applied	
9.2.3.26A		
9.2.3.26B		
9.2.3.26C	· · · · · · · · · · · · · · · · · · ·	
9.2.3.26E		
9.2.3.26E		
9.2.3.26F		
9.2.3.27	USCH ID.	
9.2.3.28	USCH Information	
9.2.3.29	USCH Information Response	
9.2.3.30	SCTD Indicator	
9.3	Message and Information element abstract syntax (with ASN.1)	
9.3.0	General	
9.3.1	Usage of Private Message mechanism for non-standard use	
9.3.2	Elementary Procedure Definitions	
9.3.3	PDU Definitions	
9.3.4	Information Elements Definitions	
9.3.5	Common Definitions	
9.3.6	Constant Definitions	
9.3.7	Container Definitions	533
9.4	Message Transfer Syntax	
9.5	Timers	
10 11	andling of unknown unforesson and arrangesse meeting data	520
	andling of unknown, unforeseen and erroneous protocol data	
10.1	General	
10.2	Transfer Syntax Error	
10.3 10.3.1	Abstract Syntax Error	539
10 3 1	General	730

10.3.2	Criticality Information	539
10.3.3	·	
10.3.4	Not comprehended IE/IE group	540
10.3.4	.1 Procedure ID	540
10.3.4	.1A Type of Message	541
10.3.4	.2 IEs other than the Procedure ID and Type of Message	541
10.3.5		
10.3.6	IEs or IE groups received in wrong order or with too many occurrences or erroneously present	543
10.4	Logical Error	543
10.5	Exceptions	544
Anne	ex A (normative): Allocation and Pre-emption of Radio Links in the Node B	545
A.1	Deriving Allocation Information for a Radio Link	
A.1.1	Establishment of a New Radio Link	
A.1.2	Modification of an Existing Radio Link	545
A.2	Deriving Retention Information for a Radio Link	546
A.3	The Allocation/Retention Process	547
A.4	The Pre-emption Process	547
Anne	x B (informative): Measurement reporting	548
Anne	ex C (informative): Guidelines for Usage of the Criticality Diagnostics IE	553
C.1	EXAMPLE MESSAGE Layout	
C.2	Example on a Received EXAMPLE MESSAGE	
C.3	Content of Criticality Diagnostics	
C.3.1	Example 1	555
C.3.2	Example 2	556
C.3.3	Example 3	
C.3.4	Example 4	
C.3.5	Example 5	
C.4	ASN.1 of EXAMPLE MESSAGE	560
Anne	ex D (informative): Change history	562
Histor	rv	565

Foreword

This Technical Specification has been produced by the 3GPP.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of this TS, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 Indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies the radio network layer signalling protocol called Node B Application Part (NBAP) specification to be used for Control Plane over Iub Interface.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document in the same Release as the present document.
- [1] 3GPP TS 25.401: "UTRAN Overall Description". [2] 3GPP TS 25.426: "UTRAN Iur and Iub Interface Data Transport & Transport Signalling for DCH Data Streams". CCITT Recommendation X.731 (01/92): "Information Technology – Open Systems [3] Interconnection – Systems Management: State Management function". [4] 3GPP TS 25.215: "Physical layer – Measurements (FDD)". 3GPP TS 25.225: "Physical layer - Measurements (TDD)". [5] [6] 3GPP TS 25.430: "UTRAN Iub General Aspect and Principle". 3GPP TS 25.211: "Physical channels and mapping of transport channels onto physical channels [7] (FDD)". 3GPP TS 25.212: "Multiplexing and channel coding (FDD)". [8] 3GPP TS 25.213: "Spreading and modulation (FDD)". [9] [10] 3GPP TS 25.214: "Physical layer procedures (FDD)". ITU-T Recommendation X.691, (12/97) "Information technology - ASN.1 encoding rules -[11] Specification of Packed Encoding Rules (PER)".
- [12] ITU-T Recommendation X.680, (12/97) "Information Technology - Abstract Syntax Notation One (ASN.1):Specification of basic notation".
- ITU-T Recommendation X.681, (12/97) "Information Technology Abstract Syntax Notation One [13] (ASN.1): Information object specification".
- [14] 3GPP TS 25.104: "UTRA (BS) FDD; Radio Transmission and Reception".
- 3GPP TS 25.105: "UTRA (BS) TDD; Radio Transmission and Reception". [15]
- 3GPP TS 25.427: "UTRAN Iur/Iub Interface User Plane Protocol for DCH Data Stream". [16]
- [17] 3GPP TS 25.402: "Synchronisation in UTRAN Stage2".
- 3GPP TS 25.331: "RRC Protocol Specification". [18]

[19]	3GPP TS25.221: "Physical channels and mapping of transport channels onto physical channels[TDD]".
[20]	3GPP TS 25.223: "Spreading and modulation (TDD)".
[21]	3GPP TS 25.224: "Physical Layer Procedures (TDD)".
[22]	3GPP TS 25.133 (V3.3): "Requirements for support of Radio Resource management (FDD)".
[23]	3GPP TS 25.123 (V4.0): "Requirements for support of Radio Resource management (TDD)".
[24]	3GPP TS 25.435: "UTRAN Iub Interface: User Plane Protocols for Common Transport Channel Data Streams".
[25]	3GPP TS 25.302: "Services Provided by the Physical Layer".
[26]	3GPP TR 25.921: "Guidelines and Principles for Protocol Description and Error Handling".
[27	ICD-GPS-200: "Navstar GPS Space Segment/Navigation User Interface".
[28]	RTCM-SC104: "RTCM Recommended Standards for Differential GNSS Service (v.2.2)".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply.

CRNC Communication Context: The CRNC Communication Context contains the necessary information for the CRNC for communication with a specific UE. The CRNC Communication Context is identified by the CRNC Communication Context ID.

Elementary Procedure: The NBAP protocol consists of Elementary Procedures (EPs). An Elementary Procedure is a unit of interaction between the CRNC and the Node B.

An EP consists of an initiating message and possibly a response message.

Two kinds of EPs are used:

- Class 1: Elementary Procedures with response (success or failure).
- Class 2: Elementary Procedures without response.

For Class 1 EPs, the types of responses can be as follows:

Successful

- A signalling message explicitly indicates that the elementary procedure has been successfully completed with the receipt of the response.

Unsuccessful

- A signalling message explicitly indicates that the EP failed.

Class 2 EPs are considered always successful.

Node B Communication Context: The Node B Communication Context contains the necessary information for the Node B for communication with a specific UE. The Node B Communication Context is created by the Radio Link Setup procedure and deleted by the Radio Link Deletion procedure when deleting the last Radio Link within the Node B Communication Context. The Node B Communication Context is identified by the Node B Communication Context ID.

Prepared Reconfiguration: A Prepared Reconfiguration exists when the Synchronised Radio Link Reconfiguration Preparation procedure has been completed successfully. The Prepared Reconfiguration does not exist any more after

either of the procedures Synchronised Radio Link Reconfiguration Commit or Synchronised Radio Link Reconfiguration Cancellation has been completed.

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

A-GPS Assisted GPS

AICH Acquisition Indicator Channel

AP-AICH Access Preamble Acquisition Indicator Channel

ASN.1 Abstract Syntax Notation One BCCH Broadcast Control Channel

CCPCH Common Control Physical Channel

CFN Connection Frame Number

CM Compressed Mode
CPCH Common Packet Channel
CPICH Common Pilot Channel

CRNC Controlling Radio Network Controller
CSICH CPCH Status Indicator Channel

DCH Dedicated Channel
DGPS Differential GPS
DL Downlink

DPCCH Dedicated Physical Control Channel

DPCH Dedicated Physical Channel
DPDCH Dedicated Physical Data Channel
DSCH Downlink Shared Channel
FACH Forward Access Channel
FDD Frequency Division Duplex

FP Frame Protocol

GPS Global Positioning System
IPDL Idle Periods in the DownLink
ISCP Interference Signal Code Power

L1 Layer 1 L2 Layer 2

MIB Master Information Block
NBAP Node B Application Part
O&M Operation and Maintenance

PCCPCH Primary Common Control Physical Channel

PCH Paging Channel

PCPCH Physical Common Packet Channel PDSCH Physical Downlink Shared Channel

PICH Paging Indication Channel
PUSCH Physical Uplink Shared Channel
RACH Random Access Channel

RL Radio Link RLS Radio Link Set

RNC Radio Network Controller RRC Radio Resource Control SB Scheduling Block

SCCPCH Secondary Common Control Physical Channel

SCH Synchronisation Channel
SCTD Space Code Transmit Diversity
SIB System Information Block

SRNC Serving Radio Network Controller
SSDT Site Selection Diversity Transmission
STTD Space Time Transmit Diversity

TDD Time Division Duplex

TFC Transport Format Combination

TFCI Transport Format Combination Indicator
TFCS Transport Format Combination Set

TFS Transport Format Set
TPC Transmit Power Control

TSTD Time Switched Transmit Diversity

UARFCN UTRA Absolute Radio Frequency Channel Number

UE User Equipment

UL Uplink

UMTS Universal Mobile Telecommunications System

USCH Uplink Shared Channel

UTRA Universal Terrestrial Radio Access

UTRAN Universal Terrestrial Radio Access Network

4 General

4.1 Procedure Specification Principles

The principle for specifying the procedure logic is to specify the functional behaviour of the Node B exactly and completely. The CRNC functional behaviour is left unspecified. The Reset procedure is an exception from this principle.

The following specification principles have been applied for the procedure text in subclause 8:

- The procedure text discriminates between:
 - 1) Functionality which "shall" be executed

The procedure text indicates that the receiving node "shall" perform a certain function Y under a certain condition. If the receiving node supports procedure X but cannot perform functionality Y requested in the REQUEST message of a Class 1 EP, the receiving node shall respond with the message used to report unsuccessful outcome for this procedure, containing an appropriate cause value.

2) Functionality which "shall, if supported" be executed

The procedure text indicates that the receiving node "shall, if supported," perform a certain function Y under a certain condition. If the receiving node supports procedure X, but does not support functionality Y, the receiving node shall proceed with the execution of the EP, possibly informing the requesting node about the not supported functionality.

Any required inclusion of an optional IE in a response message is explicitly indicated in the procedure text. If the
procedure text does not explicitly indicate that an optional IE shall be included in a response message, the
optional IE shall not be included.

4.2 Forwards and Backwards Compatibility

The forwards and backwards compatibility of the protocol is assured by a mechanism where all current and future messages, and IEs or groups of related IEs, include Id and criticality fields that are coded in a standard format that will not be changed in the future. These parts can always be decoded regardless of the standard version.

4.3 Specification Notations

For the purposes of the present document, the following notations apply:

[FDD] This tagging of a word indicates that the word preceding the tag "[FDD]" applies only to FDD. This tagging of a heading indicates that the heading preceding the tag "[FDD]" and the section

following the heading applies only to FDD.

- [TDD] This tagging of a word indicates that the word preceding the tag "[TDD]" applies only to TDD, including 3.84Mcps TDD and 1.28Mcps TDD. This tagging of a heading indicates that the heading preceding the tag "[TDD]" and the section following the heading applies only to TDD, including 3.84Mcps TDD and 1.28Mcps TDD.
- [3.84Mcps TDD] This tagging of a word indicates that the word preceding the tag "[3.84Mcps TDD]" applies only to 3.84Mcps TDD. This tagging of a heading indicates that the heading preceding the tag "[3.84Mcps TDD]" and the section following the heading applies only to 3.84Mcps TDD.
- [1.28Mcps TDD] This tagging of a word indicates that the word preceding the tag "[1.28Mcps TDD]" applies only to 1.28Mcps TDD. This tagging of a heading indicates that the heading preceding the tag "[1.28Mcps TDD]" and the section following the heading applies only to 1.28Mcps TDD.
- [FDD ...] This tagging indicates that the enclosed text following the "[FDD " applies only to FDD.

 Multiple sequential paragraphs applying only to FDD are enclosed separately to enable insertion of TDD specific (or common) paragraphs between the FDD specific paragraphs.
- [TDD ...] This tagging indicates that the enclosed text following the "[TDD " applies only to TDD, including 3.84Mcps TDD and 1.28Mcps TDD. Multiple sequential paragraphs applying only to TDD are enclosed separately to enable insertion of FDD specific (or common) paragraphs between the TDD specific paragraphs.
- [3.84Mcps TDD ...] This tagging indicates that the enclosed text following the "[3.84Mcps TDD " applies only to 3.84Mcps TDD. Multiple sequential paragraphs applying only to 1.28Mcps TDD are enclosed separately to enable insertion of FDD and TDD specific (or common) paragraphs between the 3.84Mcps TDD specific paragraphs.
- [1.28Mcps TDD ...] This tagging indicates that the enclosed text following the "[1.28Mcps TDD " applies only to 1.28Mcps TDD. Multiple sequential paragraphs applying only to 1.28Mcps TDD are enclosed separately to enable insertion of FDD and TDD specific (or common) paragraphs between the 1.28Mcps TDD specific paragraphs.
- Procedure When referring to an elementary procedure in the specification the Procedure Name is written with the first letters in each word in upper case characters followed by the word "procedure", e.g. Radio Link Setup procedure.
- Message When referring to a message in the specification the MESSAGE NAME is written with all letters in upper case characters followed by the word "message", e.g. RADIO LINK SETUP REQUEST message.
- IE When referring to an information element (IE) in the specification the *Information Element Name* is written with the first letters in each word in upper case characters and all letters in Italic font followed by the abbreviation "IE", e.g. *Transport Format Set* IE.
- Value of an IE When referring to the value of an information element (IE) in the specification the "Value" is written as it is specified in subclause 9.2 enclosed by quotation marks, e.g. "Abstract Syntax Error (Reject)" or "SSDT Active in the UE".

5 NBAP Services

5.1 Parallel Transactions

Unless explicitly indicated in the procedure description, at any instance in time one protocol peer shall have a maximum of one ongoing dedicated NBAP procedure related to a certain Node B communication context.

6 Services Expected from Signalling Transport

NBAP requires an assured in-sequence delivery service from the signalling bearer, and notification if the assured in-sequence delivery service is no longer available.

7 Functions of NBAP

The NBAP protocol provides the following functions:

- Cell Configuration Management. This function gives the CRNC the possibility to manage the cell configuration information in a Node B.
- Common Transport Channel Management. This function gives the CRNC the possibility to manage the configuration of Common Transport Channels in a Node B.
- System Information Management. This function gives the CRNC the ability to manage the scheduling of System Information to be broadcast in a cell.
- Resource Event Management. This function gives the Node B the ability to inform the CRNC about the status of Node B resources.
- Configuration Alignment. This function gives the CRNC and the Node B the possibility to verify and enforce that both nodes have the same information on the configuration of the radio resources.
- Measurements on Common Resources. This function allows the CRNC to initiate measurements in the Node B. The function also allows the Node B to report the result of the measurements.
- Radio Link Management. This function allows the CRNC to manage radio links using dedicated resources in a Node B.
- Radio Link Supervision. This function allows the CRNC to report failures and restorations of a Radio Link.
- Compressed Mode Control [FDD]. This function allows the CRNC to control the usage of compressed mode in a Node B.
- Measurements on Dedicated Resources. This function allows the CRNC to initiate measurements in the Node B. The function also allows the Node B to report the result of the measurements.
- DL Power Drifting Correction [FDD]. This function allows the CRNC to adjust the DL power level of one or more Radio Links in order to avoid DL power drifting between the Radio Links.
- Reporting of General Error Situations. This function allows reporting of general error situations, for which function specific error messages have not been defined.
- Physical Shared Channel Management [TDD]. This function allows the CRNC to manage physical resources in the Node B belonging to Shared Channels (USCH/DSCH).
- DL Power Timeslot Correction [TDD]. This function enables the Node B to apply an individual offset to the transmission power in each timeslot according to the downlink interference level at the UE.
- Cell Synchronisation [TDD]. This function allows the synchronisation of cells or Node Bs via the air interface.
- Information Exchange. This function allows the CRNC to initiate information provision from the Node B. The function also allows the Node B to report the requested information.

The mapping between the above functions and NBAP elementary procedures is shown in the table below.

Table 1: Mapping between functions and NBAP elementary procedures

Function	Elementary Procedure(s)
Cell Configuration Management	a) Cell Setup
	b) Cell Reconfiguration
Octobra Transport Observat Management	c) Cell Deletion
Common Transport Channel Management	a) Common Transport Channel Setup b) Common Transport Channel
	Reconfiguration
	c) Common Transport Channel Deletion
System Information Management	System Information Update
Resource Event Management	a) Block Resource
	b) Unblock Resource
Configuration Alignment	c) Resource Status Indication a) Audit Required
Configuration Alignment	b) Audit Nequired
	c) Reset
Measurements on Common Resources	a) Common Measurement Initiation
	b) Common Measurement Reporting
	c) Common Measurement Termination
Padia Link Managament	d) Common Measurement Failure
Radio Link Management.	a) Radio Link Setup b) Radio Link Addition
	c) Radio Link Deletion
	d) Unsynchronised Radio Link Reconfiguration
	e) Synchronised Radio Link Reconfiguration
	Preparation
	f) Synchronised Radio Link Reconfiguration Commit
	g) Synchronised Radio Link Reconfiguration
	Cancellation
	h) Radio Link Pre-emption
Radio Link Supervision.	a) Radio Link Failure
0 14 1 0 1 1550	b) Radio Link Restoration
Compressed Mode Control [FDD]	a) Radio Link Setup b) Radio Link Addition
	c) Compressed Mode Command
	d) Unsynchronised Radio Link Reconfiguration
	e) Synchronised Radio Link Reconfiguration
	Preparation
	f) Synchronised Radio Link Reconfiguration
	Commit g) Synchronised Radio Link Reconfiguration
	Cancellation
Measurements on Dedicated Resources	a) Dedicated Measurement Initiation
	b) Dedicated Measurement Reporting
	c) Dedicated Measurement Termination
DL Power Drifting Correction [FDD]	d) Dedicated Measurement Failure Downlink Power Control
Reporting of General Error Situations	Error Indication
Physical Shared Channel Management [TDD]	Physical Shared Channel Reconfiguration
DL Power Timeslot Correction [TDD]	Downlink Power Timeslot Control
Cell Synchronisation [TDD]	a) Cell Synchronisation Initiation
	b) Cell Synchronisation Reconfiguration
	c) Cell Synchronisation Reporting d) Cell Synchronisation Termination
	e) Cell Synchronisation Fermination e) Cell Synchronisation Failure
	f) Cell Synchronisation Adjustment
Information Exchange	a) Information Exchange Initiation
	b) Information Reporting
	c) Information Exchange Termination
	d) Information Exchange Failure

8 NBAP Procedures

8.1 Elementary Procedures

NBAP procedures are divided into common procedures and dedicated procedures.

- NBAP common procedures are procedures that request initiation of a UE context for a specific UE in Node B or are not related to a specific UE. NBAP common procedures also incorporate logical O&M [1] procedures.
- NBAP dedicated procedures are procedures that are related to a specific UE context in Node B. This UE context is identified by a UE context identity.

The two types of procedures may be carried on separate signalling links.

In the following tables, all EPs are divided into Class 1 and Class 2 EPs:

Table 2: Class 1

OPTOCODURE CELL SETUP REQUEST CELL SETUP REPONSE CELL SETUP REJOUEST CELL SETUP REPONSE CELL SETUP FEAURE Cell Setup CELL SETUP REQUEST CELL SETUP REQUEST CELL CELL CELTION REQUEST CELL CELL CELTION RESPONSE CELL CELT CELTION RESPONSE CELL CELTION RESPONSE CELC CELT CELTION RESPONSE CELC CELT CELTION RESPONSE CELC CELT CELTION RESPONSE COMMON TRANSPORT CHANNEL SETUP RESPONSE PRIVAIL SETUP RESPONSE	Elementary	Message	Successful Outcome	Unsuccessful Outcome
Cell Deletion REQUEST CELL DELETION RESPONSE COMMON TRANSPORT CHANNEL SETUP CHANNEL SETUP FAILURE COMMON TRANSPORT COMMON TRANSPORT CHANNEL SETUP CHANNEL SETUP CHANNEL SETUP FAILURE COMMON TRANSPORT CHANNEL SETUP CHANNEL SETUP CHANNEL SETUP FAILURE COMMON TRANSPORT CHANNEL SETUP CHANNEL SETUP FAILURE COMMON TRANSPORT CHANNEL SETUP CHANNEL SETUP FAILURE COMMON TRANSPORT CHANNEL SETUP FAILURE COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE COMMON TRANSPORT CHANNEL RECONFIGURATION RECONFIGURATION RESPONSE COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE COMMON TRANSPORT CHANNEL DELETION RESPONSE COMMON TRANSPORT CHANNEL DELETION RESPONSE CHANNEL DELETION RESPONSE CHANNEL DELETION RESPONSE CHANNEL DELETION RESPONSE CHANNEL CHANNEL RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE CHANNEL CHANNEL CHANNEL RECONFIGURATION RESPONSE BLOCK RESOURCE BLOCK				
RECONFIGURATION RESPONSE Cell Deletion CELL DELETION REQUEST COMMON TRANSPORT CHANNEL SETUP CHANLE SETUP CHA	Cell Setup		CELL SETUP RESPONSE	CELL SETUP FAILURE
Common Common Channel Setup RESPONSE COMMON TRANSPORT CHANNEL SETUP RESPONSE RESPONSE RESPONSE RESPONSE COMMON TRANSPORT CHANNEL SETUP RESPONSE RES			RECONFIGURATION	RECONFIGURATION
Transport Channel Setup RESUDEST RESPONSE FAILURE Common Channel Setup RECOMFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE Physical Shared Channel RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE Physical Shared Channel RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE Physical Shared Channel RECONFIGURATION RESPONSE PAILURE System SYSTEM INFORMATION UPDATE RESPONSE PAILURE System SYSTEM INFORMATION SYSTEM INFORMATION UPDATE RESPONSE PAILURE UPDATE RESPONSE PAILURE OMMON MEASUREMENT INITIATION REQUEST RESPONSE PAILURE MEASUREMENT INITIATION REQUEST RESPONSE RADIO LINK ADDITION REQUEST RESPONSE RADIO LINK RECONFIGURATION R	Cell Deletion	CELL DELETION REQUEST		
Channel Setup Common ComMon Transport Channel Channel Channel Channel Channel RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE CHANNEL RECONFIGURATION RESPONSE RECONFIGURATION RESPONSE CHANNEL CHANNEL CHANNEL RECONFIGURATION RESPONSE CHANNEL RECONFIGURATION RESPONSE SYSTEM INFORMATION UPDATE RESPONSE RESPONSE SYSTEM INFORMATION UPDATE RESPONSE UPDATE FAILURE RECONFIGURATION RESPONSE RECONFIGURATION RESPONSE RESPONSE RESPONSE RESPONSE RECONFIGURATION RESPONSE RECONFIGURATION RECONFIGURATION RESPONSE RECONFIGURATION RECONFIGURATION RESPONSE RECONFIGURATION RECONFIGURA	Common	COMMON TRANSPORT	COMMON TRANSPORT	COMMON TRANSPORT
Common COMMON TRANSPORT CHANNEL RECONFIGURATION RESORDS CHANNEL RECONFIGURATION RESORDS CHANNEL RECONFIGURATION RESORDS RESPONSE CHANNEL RECONFIGURATION RESORDS CHANNEL RECONFIGURATION RESPONSE RESPONSE CHANNEL DELETION RESPONSE		CHANNEL SETUP		CHANNEL SETUP
Transport CHANNEL RECONFIGURATION RESPONSE Physical Shared Phy				
Channel RECONFIGURATION RESPONSE FAILURE Common COMMON TRANSPORT COMMON TRANSPORT CHANNEL DELETION RESPONSE RE				
Reconfiguration REQUEST RESPONSE FAILURE COMMON TRANSPORT COMMON TRANSPORT COMMON TRANSPORT CHANNEL DELETION RESPONSE Physical Shared CHANNEL CHANNEL CHANNEL CHANNEL RECONFIGURATION RESPONSE Reconfigure RECONFIGURATION RESPONSE FAILURE Audit AUDIT REQUEST RESPONSE FAILURE Block Resource BLOCK RESOURCE RESPONSE REJUEST RESPONSE FAILURE Radio Link Setup REJUEST REJUEST RESPONSE REJUEST RESPONSE FAILURE System REJUEST REJU		_		_
Common Channel Deletion Channel Deletion Channel Deletion Channel Deletion Physical Shared Channel Deletion Physical Shared Channel Ch				
Transport CHANNEL DELETION REQUEST REQUEST Physical Shared Channel Reconfigure RECONFIGURATION RESPONSE PHYSICAL SHARED CHANNEL RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE AUDIT FAILURE BLOCK RESOURCE REQUEST RESPONSE FAILURE RECONFIGURATION RESPONSE REQUEST RESPONSE REQUEST RESPONSE REQUEST RESPONSE REQUEST RESPONSE REQUEST RESPONSE RESPONSE REQUEST RESPONSE RESPONSE REQUEST RESPONSE RESPONSE RESPONSE REQUEST RESPONSE RESPONSE RESPONSE REQUEST RESPONSE RES				FAILURE
Channel Deletion Physical Shared Physical Shared Channel Reconfigure The Physical Shared Physical Shared Channel Reconfigure The Reconfiguration PAILURE Block Resource BLOCK RESOURCE REQUEST RESPONSE AUDIT FAILURE BLOCK RESOURCE REQUEST RESPONSE AUDIT FAILURE BLOCK RESOURCE REQUEST RESPONSE AUDIT FAILURE BLOCK RESOURCE REQUEST RESPONSE RESPONSE RESPONSE RESPONSE RESPONSE RESPONSE RESPONSE PAILURE PAILURE REQUEST RESPONSE RESPONSE RESPONSE RESPONSE PAILURE UPDATE REQUEST RESPONSE RESPONS				
Physical Shared Channel CHANNEL CHANNEL CHANNEL CHANNEL CHANNEL CHANNEL CHANNEL CHANNEL RECONFIGURATION RECORDIGURATION RECONFIGURATION RESPONSE FAILURE Audit				
Chánnel Reconfigure RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE AUDIT REQUEST AUDIT REQUEST AUDIT RESPONSE AUDIT RESPONSE AUDIT RESPONSE AUDIT RESPONSE SYSTEM INFORMATION UPDATE RESPONSE RES				PHYSICAL SHARED
RECONFIGURATION REQUEST RESPONSE RESPONSE FAILURE Block Resource BLOCK RESOURCE REQUEST RESPONSE AUDIT FAILURE Block Resource BLOCK RESOURCE REQUEST RESPONSE AUDIT FAILURE Block Resource BLOCK RESOURCE RESPONSE RESPONSE RESPONSE FAILURE RADIO LINK SETUP RESPONSE RESPONSE FAILURE System SYSTEM INFORMATION UPDATE RESPONSE SYSTEM INFORMATION UPDATE REQUEST UPDATE RESPONSE UPDATE FAILURE System SYSTEM INFORMATION UPDATE RESPONSE UPDATE FAILURE System SYSTEM INFORMATION UPDATE RESPONSE UPDATE FAILURE SYSTEM INFORMATION RESPONSE UPDATE FAILURE READIO LINK ADDITION RESPONSE RESPONSE SYSTEM INFORMATION RESPONSE UPDATE FAILURE RESPONSE READIO LINK RESPONSE UPDATE FAILURE SYSTEM INFORMATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE UPDATE FAILURE RESPONSE RESPONSE UPDATE FAILURE CELL SYNCHRONISATION RESPONSE UPDICATED DEDICATED MEASUREMENT INITIATION RESPONSE UPDICATED SYNCHRONISATION SYNCHRONISATION SYNCHRONISATION RECONFIGURATION RECONFIGURATION RESPONSE UPDICATED SYNCHRONISATION SYNCHRONISATION RECONFIGURATION RESPONSE UPDICATED SYNCHRONISATION AD	, ,			
TDD REQUEST RESPONSE FAILURE				_
AUDIT REQUEST AUDIT RESPONSE BLOCK RESOURCE REQUEST RESPONSE FAILURE			RESPONSE	
REQUEST RESPONSE FAILURE RADIO LINK SETUP RADIO LINK SETUP RESPONSE FAILURE System SYSTEM INFORMATION UPDATE REQUEST FAILURE System SYSTEM INFORMATION UPDATE REQUEST FAILURE System SYSTEM INFORMATION UPDATE REQUEST UPDATE RESPONSE FAILURE Common Weasurement Initiation Initiation REQUEST INITIATION REQUEST INITIATION RESPONSE INITIATION FAILURE COMMON MEASUREMENT INITIATION REQUEST INITIATION RESPONSE INITIATION FAILURE RADIO LINK ADDITION RADIO LINK ADDITION RESPONSE RADIO LINK DELETION RESPONSE RECONFIGURATION REQUEST RESPONSE Synchronised RADIO LINK RECONFIGURATION RECONFIGURATION PREPARE RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE FAILURE RADIO LINK RECONFIGURATION RESPONSE FAILURE DEDICATED DEDICATED DEDICATED DEDICATED DEDICATED MEASUREMENT INITIATION REQUEST INITIATION RESPONSE INITIATION FAILURE Cell SYNCHRONISATION RECONFIGURATION RESPONSE RESET RESPONSE Cell SYNCHRONISATION RECONFIGURATION RECON		AUDIT REQUEST	AUDIT RESPONSE	AUDIT FAILURE
RADIO LINK SETUP REQUEST RESPONSE System SySTEM INFORMATION UPDATE REQUEST UPDATE REQUEST UPDATE RESPONSE SySTEM INFORMATION UPDATE RESPONSE UPDATE RESPONSE UPDATE RESPONSE UPDATE RESPONSE UPDATE RESPONSE UPDATE FAILURE COMMON MEASUREMENT INITIATION REQUEST UNITIATION RESPONSE INITIATION FAILURE RADIO LINK ADDITION REQUEST RADIO LINK DELETION RESPONSE Synchronised RADIO LINK RESPONSE RADIO LINK RECONFIGURATION RESPONSE RESPONSE RESPONSE FAILURE RADIO LINK RECONFIGURATION RESPONSE FAILURE RESPONSE FAILURE RESPONSE CELL SYNCHRONISATION INITIATION REQUEST CELL SYNCHRONISATION REQUEST RESPONSE CELL SYNCHRONISATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE CELL SYNCHRONISATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE CELL SYNCHRONISATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE CELL SYNCHRONISATION RECONFIGURATION RESPONSE RESET RESPONSE CELL SYNCHRONISATION RECONFIGURATION RESPONSE RESET RESET RESPONSE RESET RESET RESPONSE RESET RESET RESPONSE RESET	Block Resource	BLOCK RESOURCE		BLOCK RESOURCE
REQUEST RESPONSE SYSTEM INFORMATION Information UPDATE REQUEST UPDATE RESPONSE UPDATE FAILURE SYSTEM INFORMATION UPDATE REQUEST UPDATE RESPONSE UPDATE FAILURE Common Measurement Initiation REQUEST UNITIATION REQUEST NITIATION RESPONSE INITIATION FAILURE Radio Link RADIO LINK ADDITION RESPONSE RESPONSE RADIO LINK ADDITION REQUEST RESPONSE RE				
System	Radio Link Setup			
Information Update UPDATE REQUEST UPDATE RESPONSE UPDATE FAILURE Common Measurement Initiation COMMON MEASUREMENT INITIATION REQUEST COMMON MEASUREMENT INITIATION RESPONSE COMMON MEASUREMENT INITIATION FAILURE Radio Link Addition RADIO LINK ADDITION REQUEST RADIO LINK ADDITION RESPONSE RADIO LINK ADDITION RESPONSE RADIO LINK ADDITION RADIO LINK DELETION RESPONSE RADIO LINK ADDITION FAILURE Synchronised Radio Link Reconfiguration Preparation RADIO LINK RECONFIGURATION PREPARE RADIO LINK RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE RADIO LINK RECONFIGURATION RECONFIGURATION RESPONSE RADIO LINK RECONFIGURATION RESPONSE RESONFIGURATION RESPONSE RECONFIGURATION RESPONSE RECOLITIATION FAILURE CELL SYNCHRONISATION RECONFIGURATION RESPONSE CELL SYNCHRONISATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE CELL SYNCHRONISATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGU				
Update				
Common Measurement Measurement Initiation COMMON MEASUREMENT INITIATION REQUEST COMMON MEASUREMENT INITIATION RESPONSE COMMON MEASUREMENT INITIATION RESPONSE Radio Link Addition RADIO LINK ADDITION RESPONSE RADIO LINK ADDITION RESPONSE RADIO LINK ADDITION RESPONSE Radio Link Deletion REQUEST RESPONSE RADIO LINK DELETION RESPONSE Synchronised Radio Link Reconfiguration Preparation RADIO LINK RECONFIGURATION RECONFIGURATION RECONFIGURATION READY RADIO LINK RECONFIGURATION RECONFIGURATION RECONFIGURATION REQUEST Dedicated Measurement Initiation DEDICATED MEASUREMENT INITIATION REQUEST DEDICATED MEASUREMENT INITIATION RESPONSE DEDICATED MEASUREMENT INITIATION RESPONSE Cell Synchronisation Initiation [TDD] CELL SYNCHRONISATION RECONFIGURATION RESPONSE RESET REQUEST CELL SYNCHRONISATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE Cell Synchronisation Reconfiguration [TDD] CELL SYNCHRONISATION RESPONSE CELL SYNCHRONISATION RESPONSE SYNCHRONISATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE Cell Synchronisation Reconfiguration [TDD] CELL SYNCHRONISATION RECONFIGURATION RESPONSE SYNCHRONISATION RECONFIGURATION RECONFIGURATION RESPONSE Cell Synchronisation Reconfiguration [TDD] CELL SYNCHRONISATION RESPONSE SYNCHRONISATION RECONFIGURATION RECONFIGURATION REC		UPDATE REQUEST	UPDATE RESPONSE	UPDATE FAILURE
Measurement Initiation INITIATION REQUEST MEASUREMENT INITIATION RESPONSE MEASUREMENT INITIATION FAILURE Radio Link RADIO LINK ADDITION REQUEST RADIO LINK ADDITION RESPONSE RADIO LINK ADDITION RESPONSE Radio Link Deletion RADIO LINK DELETION RESPONSE RADIO LINK DELETION RESPONSE RADIO LINK RECONFIGURATION RESPONSE Synchronised Radio Link Reconfiguration Preparation RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION READION READION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE RADIO LINK RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE Dedicated Measurement Initiation MEASUREMENT INITIATION REQUEST MEASUREMENT INITIATION RESPONSE MEASUREMENT INITIATION FAILURE Cell Synchronisation Initiation [TDD] CELL SYNCHRONISATION RECONFIGURATION RECONFIGURATI		COMMON MEASUREMENT	COMMON	COMMON
Initiation RaDio Link RADio Link Addition REQUEST RESPONSE RADio Link Addition REQUEST RESPONSE RADIO LINK ADDITION RADIO LINK ADDITION RADIO LINK ADDITION FAILURE RADIO LINK DELETION RESPONSE RESPONSE RESPONSE RESPONSE RADIO LINK DELETION REQUEST RESPONSE RADIO LINK RECONFIGURATION RESPONSE RESET REQUEST RESET RESPONSE				
Radio Link Addition RADIO LINK ADDITION REQUEST RADIO LINK ADDITION RESPONSE RADIO LINK ADDITION RESPONSE RADIO LINK ADDITION RESPONSE RADIO LINK ADDITION RESPONSE RADIO LINK DELETION RESPONSE RADIO LINK DELETION RESPONSE RADIO LINK RESPONSE RADIO LINK RECONFIGURATION RECONFIGURATION RADIO LINK RECONFIGURATION RECONFIGURATION RADIO LINK RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE RESPONSE DEDICATED DEDICATED MEASUREMENT INITIATION RESPONSE DEDICATED MEASUREMENT INITIATION RESPONSE DEDICATED MEASUREMENT INITIATION RESPONSE DEDICATED MEASUREMENT INITIATION RESPONSE CELL SYNCHRONISATION INITIATION FAILURE SYNCHRONISATION INITIATION FAILURE CELL SYNCHRONISATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE CELL SYNCHRONISATION RESPONSE SYNCHRONISATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE SYNCHRONISATION ADJUSTMENT FAILURE SYNCHRONISATION ADJUSTMENT FAILURE INFORMATION RESPONSE INFORMATION RECHANGE INITIATION INFORMATION RECHANGE INITIATION INFORMATION RECHANGE INITIATION INFORMATION RECHANGE INITIATION		INTIATION REGOLOT		
Addition REQUEST RESPONSE FAILURE Radio Link RADIO LINK DELETION RESPONSE Synchronised RADIO LINK RECONFIGURATION RECONFIGURATION PREPARE RESPONSE Unsynchronised RADIO LINK RECONFIGURATION RESPONSE FAILURE Dedicated Measurement MEASUREMENT INITIATION REQUEST RESET RESPONSE Cell SYNCHRONISATION RESPONSE CELL SYNCHRONISATION INITIATION REQUEST RESET RESPONSE CELL SYNCHRONISATION SYNCHRONISATION SYNCHRONISATION INITIATION FAILURE CELL SYNCHRONISATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE CELL SYNCHRONISATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE FAILURE CELL SYNCHRONISATION ADJUSTMENT FAILURE INFORMATION EXCHANGE INITIATION EXCHANGE INITIATION EXCHANGE INITIATION		RADIO LINK ADDITION		
DeletionREQUESTRESPONSESynchronised Radio Link Reconfiguration PreparationRADIO LINK RECONFIGURATION PREPARERADIO LINK RECONFIGURATION READYRADIO LINK RECONFIGURATION READYRADIO LINK RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSERADIO LINK RECONFIGURATION RECONFIGURATION RESPONSERADIO LINK RECONFIGURATION RECONFIGURATION RESPONSERADIO LINK RECONFIGURATION RECONFIGURATION RESPONSERADIO LINK RECONFIGURATION RECONFIGURATION RESPONSERADIO LINK RECONFIGURATION RESPONSEDedicated Measurement InitiationDEDICATED MEASUREMENT INITIATION RESPONSEDEDICATED MEASUREMENT INITIATION RESPONSEDEDICATED MEASUREMENT INITIATION RESPONSECell Synchronisation Initiation [TDD]CELL SYNCHRONISATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSECELL SYNCHRONISATION RECONFIGURATION RECONFIGURATION RESPONSECELL SYNCHRONISATION RECONFIGURATION RECONFIGURATION RECONFIGURATION ADJUSTMENT REQUESTCELL SYNCHRONISATION ADJUSTMENT FAILURECell Synchronisation Adjustment [TDD]CELL SYNCHRONISATION ADJUSTMENT FAILURE INFORMATION EXCHANGE INITIATIONCINFORMATION EXCHANGE INITIATIONINFORMATION EXCHANGE INITIATION	Addition		RESPONSE	
Synchronised Radio Link Reconfiguration PREPARE RECONFIGURATION RECONFIGURATION PREPARE RECONFIGURATION READY FAILURE PREPARE RECONFIGURATION READY FAILURE PREPARE RECONFIGURATION READY FAILURE PREPARE READY FAILURE PREPARE READY FAILURE PREPARE READY FAILURE PREPARE READY READY RECONFIGURATION READY FAILURE PREPARE RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE FAILURE DEDICATED MEASUREMENT INITIATION RESPONSE INITIATION RESPONSE INITIATION RESPONSE RESET REQUEST RESET RESPONSE RESET REQUEST RESET RESPONSE RESET REQUEST RESET RESPONSE RESET RESPONSE RECONFIGURATION INITIATION RESPONSE INITIATION RESPONSE RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE RESPONSE RESPONSE RESPONSE RECONFIGURATION RESPONSE RESPONSE RESPONSE RESPONSE RECONFIGURATION RECONFIGURATION RESPONSE RE	Radio Link			
Radio Link Reconfiguration Preparation Unsynchronised Radio Link Reconfiguration Preparation Unsynchronised Radio Link Reconfiguration Resoluest Response Dedicated Measurement Initiation Measurement Initiation Reset Rese				
Reconfiguration Preparation Unsynchronised Radio Link RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE FAILURE Dedicated DEDICATED DEDICATED MEASUREMENT INITIATION REQUEST RESET RESPONSE Reset RESET REQUEST RESET RESPONSE Cell Synchronisation Initiation [TDD] Cell Synchronisation REQUEST RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE Cell SYNCHRONISATION INITIATION REQUEST SYNCHRONISATION SYNCHRONISATION INITIATION RESPONSE Cell SYNCHRONISATION CELL SYNCHRONISATION INITIATION RESPONSE Cell SYNCHRONISATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE Cell SYNCHRONISATION RECONFIGURATION RECONFIGURATION RESPONSE Cell SYNCHRONISATION RECONFIGURATION RESPONSE Cell SYNCHRONISATION RECONFIGURATION RESPONSE Cell SYNCHRONISATION RECONFIGURATION RESPONSE Cell SYNCHRONISATION RECONFIGURATION RESPONSE Information INFORMATION EXCHANGE INFORMATION INFORMATION EXCHANGE INITIATION EXCHANGE INITIATION INFORMATION EXCHANGE INFORMATION INFORMATION EXCHANGE INITIATION				
Preparation				
Unsynchronised Radio Link Reconfiguration Reconfiguration Request Response Dedicated Measurement Initiation Initiation Initiation [TDD] CELL SYNCHRONISATION RECONFIGURATION RECONFIGURATION RESPONSE DEDICATED MEASUREMENT INITIATION RESPONSE DEDICATED MEASUREMENT INITIATION RESPONSE INITIATION RESPONSE DEDICATED MEASUREMENT INITIATION RESPONSE INITIATION FAILURE		PREPARE	READY	FAILURE
Radio Link ReconfigurationRECONFIGURATION REQUESTRECONFIGURATION RESPONSERECONFIGURATION FAILUREDedicated Measurement InitiationDEDICATED MEASUREMENT INITIATION REQUESTDEDICATED MEASUREMENT INITIATION RESPONSEDEDICATED MEASUREMENT INITIATION RESPONSECell Synchronisation Initiation [TDD]CELL SYNCHRONISATION INITIATION REQUESTCELL SYNCHRONISATION INITIATION RESPONSECELL SYNCHRONISATION INITIATION RESPONSECell Synchronisation Reconfiguration [TDD]CELL SYNCHRONISATION RECONFIGURATION RECONFIGURATION RESPONSECELL SYNCHRONISATION RECONFIGURATION RESPONSECELL SYNCHRONISATION RECONFIGURATION RESPONSECell Synchronisation Adjustment [TDD]CELL SYNCHRONISATION RESPONSECELL SYNCHRONISATION ADJUSTMENT REQUESTCELL SYNCHRONISATION ADJUSTMENT RESPONSEInformation ExchangeINFORMATION EXCHANGE INITIATION REQUESTINFORMATION EXCHANGE INITIATIONINFORMATION EXCHANGE INITIATION		RADIO I INK	BADIO I INK	BADIOTINK
ReconfigurationREQUESTRESPONSEFAILUREDedicatedDEDICATEDDEDICATEDDEDICATEDMeasurementMEASUREMENTMEASUREMENTMEASUREMENTInitiationINITIATION REQUESTINITIATION RESPONSEINITIATION FAILUREResetRESET REQUESTRESET RESPONSECELLCell Synchronisation Initiation [TDD]CELL SYNCHRONISATION INITIATION REQUESTCELL SYNCHRONISATION INITIATION RESPONSESYNCHRONISATION INITIATION FAILURECell Synchronisation Reconfiguration [TDD]CELL SYNCHRONISATION REQUESTCELL SYNCHRONISATION RECONFIGURATION RESPONSECELL SYNCHRONISATION RECONFIGURATION RESPONSECELL SYNCHRONISATION RECONFIGURATION RESPONSEInformation ExchangeINFORMATION EXCHANGE INITIATION REQUESTINFORMATION EXCHANGE INITIATIONINFORMATION EXCHANGE INITIATION				
Dedicated Dedicated Measurement Meas				
Initiation Initiation Request Initiation Response Initiation Failure				
Reset RESET REQUEST RESPONSE Cell Synchronisation Initiation [TDD] Cell Synchronisation Initiation [TDD] Cell Synchronisation Reconfiguration Reconfiguration [TDD] Cell Synchronisation Reconfiguration [TDD] Cell Synchronisation Reconfiguration [TDD] Cell Synchronisation Reconfiguration [TDD] Cell Synchronisation Adjustment [TDD] Response Information Information Exchange Information Exchange Initiation Exchange Initiatian Exchange Initiation Exchange Initiatian Exchange Initiatian Exchange Initiati	Measurement		MEASUREMENT	MEASUREMENT
Cell Synchronisation Initiation [TDD] Cell Synchronisation Initiation [TDD] Cell Synchronisation Reconfiguration Reconfiguration [TDD] Cell Synchronisation Reconfiguration [TDD] Cell Synchronisation Reconfiguration [TDD] Cell Synchronisation Reconfiguration [TDD] Cell Synchronisation Adjustment Request Synchronisation Adjustment [TDD] Cell Synchronisation Adjustment Reconfiguration Adjustment Reconfiguration Synchronisation Adjustment Reconfiguration Synchronisation Adjustment Reconfiguration Exchange Information Exchange Infor				INITIATION FAILURE
Synchronisation Initiation [TDD]INITIATION REQUESTSYNCHRONISATION INITIATION RESPONSESYNCHRONISATION INITIATION RESPONSECell Synchronisation Reconfiguration [TDD]CELL SYNCHRONISATION RECONFIGURATION REQUESTCELL SYNCHRONISATION RECONFIGURATION RESPONSESYNCHRONISATION RECONFIGURATION RESPONSECell Synchronisation Adjustment [TDD]CELL SYNCHRONISATION ADJUSTMENT REQUESTCELL SYNCHRONISATION ADJUSTMENT RESPONSECELL SYNCHRONISATION ADJUSTMENT RESPONSEInformation ExchangeINFORMATION EXCHANGE INITIATION REQUESTINFORMATION EXCHANGE INITIATIONINFORMATION EXCHANGE INITIATION	Reset	RESET REQUEST	RESET RESPONSE	
Synchronisation Initiation [TDD]INITIATION REQUESTSYNCHRONISATION INITIATION RESPONSESYNCHRONISATION INITIATION RESPONSECell Synchronisation Reconfiguration [TDD]CELL SYNCHRONISATION RECONFIGURATION REQUESTCELL SYNCHRONISATION RECONFIGURATION RESPONSESYNCHRONISATION RECONFIGURATION RESPONSECell Synchronisation Adjustment [TDD]CELL SYNCHRONISATION ADJUSTMENT REQUESTCELL SYNCHRONISATION ADJUSTMENT RESPONSECELL SYNCHRONISATION ADJUSTMENT RESPONSEInformation ExchangeINFORMATION EXCHANGE INITIATION REQUESTINFORMATION EXCHANGE INITIATIONINFORMATION EXCHANGE INITIATION	Cell	CELL SYNCHRONISATION	CELL	CELL
Initiation [TDD]				_
Synchronisation Reconfiguration [TDD] Reconfiguration [TDD] Cell Synchronisation Adjustment [TDD] Information [TDD] RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE CELL SYNCHRONISATION CELL SYNCHRONISATION ADJUSTMENT REQUEST SYNCHRONISATION ADJUSTMENT ADJUSTMENT FAILURE Information INFORMATION EXCHANGE INFORMATION EXCHANGE INITIATION EXCHANGE INITIATION EXCHANGE INITIATION RECONFIGURATION RECONFIGURATION RECONFIGURATION RESPONSE INFORMATION EXCHANGE INITIATION EXCHANGE INITIATION EXCHANGE INITIATION			INITIATION RESPONSE	INITIATION FAILURE
Reconfiguration [TDD] REQUEST RECONFIGURATION RESPONSE FAILURE Cell CELL SYNCHRONISATION ADJUSTMENT REQUEST SYNCHRONISATION ADJUSTMENT ADJUSTMENT FAILURE Information INFORMATION EXCHANGE INITIATION EXCHANGE INITIATION EXCHANGE INITIATION EXCHANGE INITIATION RECONFIGURATION RECONFIGURATION RECONFIGURATION FAILURE RESPONSE FAILURE CELL SYNCHRONISATION SYNCHRONISATION ADJUSTMENT FAILURE INFORMATION EXCHANGE INITIATION EXCHANGE INITIATION EXCHANGE INITIATION				
TDD				
Cell CELL SYNCHRONISATION CELL CELL Synchronisation ADJUSTMENT REQUEST SYNCHRONISATION SYNCHRONISATION Adjustment [TDD] ADJUSTMENT ADJUSTMENT FAILURE Information INFORMATION EXCHANGE INFORMATION INFORMATION Exchange INITIATION REQUEST EXCHANGE INITIATION EXCHANGE INITIATION		REQUEST		
Synchronisation Adjustment [TDD] Adjustment [TDD] ADJUSTMENT REQUEST SYNCHRONISATION ADJUSTMENT FAILURE RESPONSE Information INFORMATION EXCHANGE INFORMATION EXCHANGE INITIATION EXCHANGE INITIATION Exchange		OFIL OWNER OF THE STATE OF THE		
Adjustment [TDD] ADJUSTMENT RESPONSE ADJUSTMENT FAILURE RESPONSE Information INFORMATION EXCHANGE INFORMATION EXCHANGE INITIATION EXCHANGE INITIATION Exchange EXCHANGE INITIATION EXCHANGE INITIATION				
RESPONSE INFORMATION EXCHANGE INFORMATION INFORMATION Exchange INITIATION EXCHANGE INITIATION EXCHANGE INITIATION		ADJUSTMENT REQUEST		
Information INFORMATION EXCHANGE INFORMATION INFORMATION EXCHANGE INITIATION EXCHANGE INITIATION	Aujustinetit [1DD]			ADJUSTIVIENT FAILURE
Exchange INITIATION REQUEST EXCHANGE INITIATION EXCHANGE INITIATION	Information	INFORMATION EXCHANGE		INFORMATION
	_		RESPONSE	FAILURE

Table 3: Class 2

Elementary Procedure	Message
Resource Status Indication	RESOURCE STATUS INDICATION
Audit Required	AUDIT REQUIRED INDICATION
Common Measurement Reporting	COMMON MEASUREMENT
	REPORT
Common Measurement	COMMON MEASUREMENT
Termination	TERMINATION REQUEST
Common Measurement Failure	COMMON MEASUREMENT
	FAILURE INDICATION
Synchronised Radio Link	RADIO LINK RECONFIGURATION
Reconfiguration Commit	COMMIT
Synchronised Radio Link	RADIO LINK RECONFIGURATION
Reconfiguration Cancellation	CANCELLATION
Radio Link Failure	RADIO LINK FAILURE INDICATION
Radio Link Restoration	RADIO LINK RESTORE INDICATION
Dedicated Measurement Reporting	DEDICATED MEASUREMENT
	REPORT
Dedicated Measurement	DEDICATED MEASUREMENT
Termination	TERMINATION REQUEST
Dedicated Measurement Failure	DEDICATED MEASUREMENT
	FAILURE INDICATION
Downlink Power Control [FDD]	DL POWER CONTROL REQUEST
Compressed Mode Command [FDD]	COMPRESSED MODE COMMAND
Unblock Resource	UNBLOCK RESOURCE INDICATION
Error Indication	ERROR INDICATION
Downlink Power Timeslot Control	DL POWER TIMESLOT CONTROL
[TDD]	REQUEST
Radio Link Pre-emption	RADIO LINK PREEMPTION
	REQUIRED INDICATION
Cell Synchronisation Reporting	CELL SYNCHRONISATION
[TDD]	REPORT
Cell Synchronisation Termination	CELL SYNCHRONISATION
[TDD]	TERMINATION REQUEST
Cell Synchronisation Failure [TDD]	CELL SYNCHRONISATION
	FAILURE INDICATION
Information Reporting	INFORMATION REPORT
Information Exchange Termination	INFORMATION EXCHANGE
	TERMINATION REQUEST
Information Exchange Failure	INFORMATION EXCHANGE
	FAILURE INDICATION

8.2 NBAP Common Procedures

8.2.1 Common Transport Channel Setup

8.2.1.1 General

This procedure is used for establishing the necessary resources in Node B, regarding Secondary CCPCH, PICH, PRACH, PCPCH [FDD], AICH [FDD], AP_AICH [FDD], CD/CA-ICH [FDD], FACH, PCH, RACH, FPACH[1.28Mcps TDD] and CPCH [FDD].

8.2.1.2 Successful Operation




Figure 1: Common Transport Channel Setup procedure, Successful Operation

The procedure is initiated with a COMMON TRANSPORT CHANNEL SETUP REQUEST message sent from the CRNC to the Node B.

One message can configure only one of the following combinations:

- [FDD one Secondary CCPCH, and FACHs, PCH and PICH related to that Secondary CCPCH], or
- [TDD one CCTrCH consisting of Secondary CCPCHs and FACHes, PCH with the corresponding PICH related to that group of Secondary CCPCHs], or
- one [1.28Mcps TDD or more] PRACH, one RACH and one AICH [FDD] and one FPACH[1.28Mcps TDD] related to that PRACH.
- [FDD-PCPCHs, one CPCH, one AP_AICH and one CD/CA-ICH related to that group of PCPCHs.]

Secondary CCPCH:

[FDD - When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains a Secondary CCPCH, the Node B shall configure and activate it according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.]

[TDD - When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains one or more Secondary CCPCHs, the Node B shall configure and activate them according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.]

[TDD- FACHs and PCH may be mapped onto a CCTrCH which may consist of several Secondary CCPCHs]

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains one or several FACHs, the Node B shall configure and activate them according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains a PCH and a PICH, the Node B shall configure and activate them according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

PRACH:

When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains a PRACH, the Node B shall configure and activate it according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

[1.28Mcps TDD – FPACH]:

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains a FPACH, the Node B shall configure and activate it according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

[FDD-PCPCHs]:

When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains PCPCHs, the Node B shall configure and activate it according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *CD Signatures* IE, the Node B may use only the given CD signatures on CD/CA-ICH.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes Channel Request Parameters IE, the Node B shall use the parameters to distinguish the PCPCHs.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *AP Sub Channel Number* IE in Channel Request Parameters IE, the Node B shall use AP sub channel number to distinguish the PCPCHs.

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message includes *AP Sub Channel Number* IE in SF Request Parameters IE, the Node B shall use AP sub channel number to distinguish the requested Spreading Factors.

After successfully configuring the requested common transport channels and the common physical channels, the Node B shall store the value of *Configuration Generation ID* IE and it shall respond with the COMMON TRANSPORT CHANNEL SETUP RESPONSE message with the *Common Transport Channel ID* IE, the *Binding ID* IE and the *Transport Layer Address* IE for the configured common transport channels.

After a successful procedure and once the transport bearers are established, the configured common transport channels and the common physical channels shall adopt the state Enabled [6] in Node B and the common physical channels exist on the Uu interface.

8.2.1.3 Unsuccessful Operation




Figure 2: Common Transport Channel Setup procedure, Unsuccessful Operation

If the Node B is not able to support all or part of the configuration, it shall reject the configuration of all the channels in the COMMON TRANSPORT CHANNEL SETUP REQUEST message. The channels in the COMMON TRANSPORT CHANNEL SETUP REQUEST message shall remain in the same state as prior to the procedure. The *Cause* IE shall be set to an appropriate value. The value of *Configuration Generation ID* IE from the COMMON TRANSPORT CHANNEL SETUP REQUEST message shall not be stored.

If the configuration was unsuccessful, the Node B shall respond with a COMMON TRANSPORT CHANNEL SETUP FAILURE message.

Typical cause values are as follows:

Radio Network Layer Cause

- Cell not available
- Power level not supported
- Node B Resources unavailable
- Requested Tx Diversity Mode not supported
- UL SF not supported
- DL SF not supported
- Common Transport Channel Type not supported

Transport Layer Cause

- Transport Resources Unavailable

Miscellaneous Cause

- O&M Intervention
- Control processing overload
- HW failure

8.2.1.4 Abnormal Conditions

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *Secondary CCPCH* IE, and that IE contains [FDD – neither the *FACH Parameters* IE nor the *PCH Parameters* IE] [TDD – neither the *FACH* IE nor the *PCH* IE], the Node B shall reject the procedure using the COMMON TRANSPORT CHANNEL SETUP FAILURE message.

[FDD – If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains the *CD Sub Channel Numbers* IE, but the *CD Signatures* IE is not present, the Node B shall reject the procedure using the COMMON TRANSPORT CHANNEL SETUP FAILURE message.]

[TDD – If the FACH CCTrCH id IE or the PCH CCTrCH id IE does not equal the SCCPCH CCTrCH id IE the Node B shall regard the Common Transport Channel Setup procedure as having failed and the Node B shall send the COMMON TRANSPORT CHANNEL SETUP FAILURE message to the CRNC.]

[TDD – If the *TDD Physical Channel Offset* IE, the *Repetition Period* IE, and the *Repetition Length* IE are not equal for each SCCPCH configured within the CCTrCH the Node B shall regard the Common Transport Channel Setup procedure as having failed and the Node B shall send the COMMON TRANSPORT CHANNEL SETUP FAILURE message to the CRNC.]

If the state is already Enabled or Disabled [6] for at least one channel in the COMMON TRANSPORT CHANNEL SETUP REQUEST message which is received, the Node B shall reject the configuration of all channels with the *Cause* IE set to "Message not compatible with receiver state".

8.2.2 Common Transport Channel Reconfiguration

8.2.2.1 General

This procedure is used for reconfiguring common transport channels and/or common physical channels, while they still might be in operation.

8.2.2.2 Successful Operation



Figure 3: Common Transport Channel Reconfiguration, Successful Operation

The procedure is initiated with a COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message sent from the CRNC to the Node B.

One message can configure only one of the following combinations:

- [FDD – FACHs, one PCH and/or one PICH related to one Secondary CCPCH], or

- [TDD one CCTrCH consisting of Secondary CCPCHs and FACHs, PCH with the corresponding PICH related to that group of Secondary CCPCHs], or
- one RACH and/or one AICH[FDD])] and/or one FPACH[1.28Mcps TDD] related to one PRACH, or
- [FDD one CPCH and/or one AP-AICH and/or one CD/CA-ICH related to one CPCH].

[TDD - SCCPCH: If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *SCCPCH Power* IE, the Node B shall reconfigure the power that the indicated S-CCPCH shall use.]

FACH: When one or several FACHs are present Node B shall reconfigure the indicated FACHs.

[FDD - If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *Max FACH Power* IE, the Node B shall reconfigure the maximum power that the FACH may use.]

[1.28Mcps TDD - If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *Max FACH Power* IE, the Node B shall reconfigure the maximum power that the FACH may use.]

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *ToAWS* IE, the Node B shall reconfigure the time of arrival window startpoint that the FACH shall use.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *ToAWE* IE, the Node B shall reconfigure the time of arrival window endpoint that the FACH shall use.

PCH: When the PCH is present Node B shall reconfigure the indicated PCH.

[FDD - If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *PCH Power* IE, the Node B shall reconfigure the power that the PCH shall use.]

[1.28Mcps TDD - If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *PCH Power* IE, the Node B shall reconfigure the power that the PCH shall use.]

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *ToAWS* IE, the Node B shall reconfigure the time of arrival window startpoint that the PCH shall use.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *ToAWE* IE, the Node B shall reconfigure the time of arrival window endpoint that the PCH shall use.

PICH: When a PICH is present Node B shall reconfigure the indicated PICH.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *PICH Power* IE, the Node B shall reconfigure the power that the PICH shall use.

[FDD – PRACH]: When a PRACH is present Node B shall reconfigure the indicated PRACH.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the Allowed Preamble Signatures Information, the Node B shall reconfigure the preamble signatures that the PRACH shall use.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the Allowed Slot Format Information, the Node B shall reconfigure the slot formats that the PRACH shall use.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the Allowed Sub Channel Information, the Node B shall reconfigure the sub channel numbers that the PRACH shall use.

[FDD – AICH]: When a AICH is present Node B shall reconfigure the indicated AICH.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *AICH Power* IE, the Node B shall reconfigure the power that the AICH shall use.

[FDD – CPCH]: When a CPCH is present Node B shall reconfigure the indicated CPCH.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes UL SIR Information, the Node B shall reconfigure the UL SIR for the UL power control for the CPCH.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes Initial DL transmission Power Information, the Node B shall reconfigure the Initial DL transmission Power for the CPCH.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes Maximum DL Power Information, the Node B shall apply this value to the new configuration and never transmit with a higher power on any DL PCPCHs once the new configuration is being used.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes Minimum DL Power Information, the Node B shall apply this value to the new configuration and never transmit with a lower power on any DL PCPCHs once the new configuration is being used.

[FDD – AP-AICH]: When a AP-AICH is present Node B shall reconfigure the indicated AP-AICH.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *AP-AICH Power* IE, the Node B shall reconfigure the power that the AP-AICH shall use.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *CSICH Power* IE, the Node B shall reconfigure the power that the CSICH shall use.

[FDD-CD/CA-ICH]: When a CD/CA-ICH is present Node B shall reconfigure the indicated CD/CA-ICH.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *CD/CA-AICH Power* IE, the Node B shall reconfigure the power that the CD/CA-AICH shall use.

[1.28Mcps TDD - FPACH]: If the FPACH is included, the Node B shall reconfigure the indicated FPACH.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *Max FPACH Power* IE, the Node B shall reconfigure the power that the FPACH shall use.

After a successful procedure, the channels will have adopted the new configuration in Node B. The channels in the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message shall remain in the same state as prior to the procedure. Node B shall store the value of *Configuration Generation ID* IE, and the Node B shall respond with the COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE message.

8.2.2.3 Unsuccessful Operation




Figure 4: Common Transport Channel Reconfiguration procedure, Unsuccessful Operation

If the Node B is not able to support all or parts of the configuration, it shall reject the configuration of all the channels in the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message. The channels in the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message shall remain in the same state as prior to the procedure. The *Cause* IE shall be set to an appropriate value. The value of *Configuration Generation ID* IE from the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message shall not be stored.

If the configuration was unsuccessful, the Node B shall respond with the COMMON TRANSPORT CHANNEL RECONGURATION FAILURE message.

Typical cause values are as follows:

Radio Network Layer Cause

- Cell not available
- Power level not supported
- Node B Resources unavailable

Transport Layer Cause

- Transport Resources Unavailable

Miscellaneous Cause

- O&M Intervention
- Control processing overload
- HW failure

8.2.2.4 Abnormal Conditions

_

8.2.3 Common Transport Channel Deletion

8.2.3.1 General

This procedure is used for deleting common physical channels and common transport channels.

8.2.3.2 Successful Operation




Figure 5: Common Transport Channel Deletion procedure, Successful Operation

The procedure is initiated with a COMMON TRANSPORT CHANNEL DELETION REQUEST message sent from the CRNC to the Node B.

Secondary CCPCH:

When the COMMON TRANSPORT CHANNEL DELETION REQUEST message contains a Secondary CCPCH, Node B shall delete the indicated channel and the FACHs and PCH supported by that Secondary CCPCH. If there is a PCH that is deleted, the PICH associated with that PCH shall also be deleted.

PRACH: When the COMMON TRANSPORT CHANNEL DELETION REQUEST message

contains a PRACH, Node B shall delete the indicated channel and the RACH supported by

the PRACH. [FDD - The AICH associated with the RACH shall also be deleted.]

[FDD – PCPCHes]: When the COMMON TRANSPORT CHANNEL DELETION REQUEST message

contains one of PCPCHes for a CPCH, Node B shall delete all PCPCHs associated with the indicated channel and the CPCH supported by the PCPCHes. The AP-AICH and CD/CA-

ICH associated with the CPCH shall also be deleted.

[TDD – If the requested common physical channel is a part of a CCTrCH, all common transport channels and all common physical channels associated with this CCTrCH shall be deleted.]

After a successful procedure, the channels are deleted in Node B. The channels in the COMMON TRANSPORT CHANNEL DELETION REQUEST message shall be set to state Not Existing ref. [6]. Node B shall store the received value of the *Configuration Generation ID* IE, and respond with the COMMON TRANSPORT CHANNEL DELETION RESPONSE message.

8.2.3.3 Unsuccessful Operation

-

8.2.3.4 Abnormal Conditions

If the C-ID in the COMMON TRANSPORT CHANNEL DELETION REQUEST message is not existing in the Node B or the Common Physical Channel ID does not exist in the Cell, the Node B shall respond with the COMMON TRANSPORT CHANNEL DELETION RESPONSE message.

8.2.4 Block Resource

8.2.4.1 General

The Node B initiates this procedure to request the CRNC to prohibit the usage of the specified logical resources.

The logical resource that can be blocked is a cell.

8.2.4.2 Successful Operation




Figure 6: Block Resource procedure, Successful Operation

The procedure is initiated with a BLOCK RESOURCE REQUEST message sent from the Node B to the CRNC.

Upon reception of the BLOCK RESOURCE REQUEST message, the CRNC shall prohibit the use of the indicated logical resources according to the *Blocking Priority Indicator* IE.

If the *Blocking Priority Indicator* IE in the BLOCK RESOURCE REQUEST message indicates 'High Priority', the CRNC shall prohibit the use of the logical resources immediately.

The BLOCK RESOURCE REQUEST message shall include the *Shutdown Timer* IE when the *Blocking Priority Indicator* IE indicates 'Normal Priority'. The CRNC shall prohibit the use of the logical resources if the resources are idle or immediately upon expiry of the shutdown timer specified in the message. New traffic shall not be allowed to use the logical resources while the CRNC waits for the resources to become idle and once the resources are blocked.

If the *Blocking Priority Indicator* IE in the BLOCK RESOURCE REQUEST message indicates 'Low Priority', the CRNC shall prohibit the use of the logical resources when the resources become idle. New traffic shall not be allowed to use the logical resources while the CRNC waits for the resources to become idle and once the resources are blocked.

If the resources are successfully blocked, the CRNC shall respond with a BLOCK RESOURCE RESPONSE message. Upon reception of the BLOCK RESOURCE RESPONSE message, the Node B may disable [3.84Mcps TDD - SCH], [FDD - the Primary SCH, the Secondary SCH, the Primary CPICH, if present the Secondary CPICH(s)], [128Mcps Tdd – DwPCH] and the Primary CCPCH. The other logical resources in the cell shall be considered as blocked.

Reconfiguration of logical resources and change of System Information can be done, even when the logical resources are blocked.

Interactions with the Unblock Resource procedure:

If the UNBLOCK RESOURCE INDICATION message is received by the CRNC while a Block Resource procedure on the same logical resources is in progress, the CRNC shall cancel the Block Resource procedure and proceed with the Unblock Resource procedure.

If the BLOCK RESOURCE RESPONSE message or the BLOCK RESOURCE FAILURE message is received by the Node B after the Node B has initiated an Unblock Resource procedure on the same logical resources as the ongoing Block Resource procedure, the Node B shall ignore the response to the Block Resource procedure.

8.2.4.3 Unsuccessful Operation




Figure 7: Block Resource procedure, Unsuccessful Operation

The CRNC may reject the request to block the logical resources, in which case the logical resources will remain unaffected and the CRNC shall respond to the Node B with the BLOCK RESOURCE FAILURE message. Upon reception of the BLOCK RESOURCE FAILURE message, the Node B shall leave the logical resources in the state that they were in prior to the start of the Block Resource procedure.

Typical cause values are as follows:

Miscellaneous Cause

- O&M Intervention
- Control processing overload
- HW failure

Radio Network Layer Cause

- Priority transport channel established

8.2.4.4 Abnormal Conditions

-

8.2.5 Unblock Resource

8.2.5.1 General

The Node B initiates this procedure to indicate to the CRNC that logical resources are now unblocked.

The logical resource that can be unblocked is a cell.

8.2.5.2 Successful Operation



Figure 8: Unblock Resource procedure, Successful Operation

The procedure is initiated with an UNBLOCK RESOURCE INDICATION message sent from the Node B to the CRNC. Node B shall enable [TDD - SCH], [FDD - the Primary SCH, the Secondary SCH, the Primary CPICH, the Secondary CPICH(s) (if present)], [1.28Mcps TDD – DwPCH] and the Primary CCPCH that had been disabled due to the preceding Block Resource procedure before sending the UNBLOCK RESOURCE INDICATION message. Upon reception of the UNBLOCK RESOURCE INDICATION message, the CRNC may permit the use of the logical resources.

When the logical resource indicated is a cell, all associated physical channels and transport channels are unblocked.

8.2.5.3 Abnormal Conditions

-

8.2.6 Audit Required

8.2.6.1 General

The Node B initiates this procedure to request the CRNC to perform an audit of the logical resources at the Node B. This procedure is used to indicate a possible misalignment of state or configuration information

8.2.6.2 Successful Operation



Figure 9: Audit Required procedure, Successful Operation

The procedure is initiated with an AUDIT REQUIRED INDICATION message sent from the Node B to the CRNC.

If the Node B cannot ensure alignment of the state or configuration information, it should initiate the Audit Required procedure.

Upon receipt of the AUDIT REQUIRED INDICATION message, the CRNC should initiate the Audit procedure.

8.2.6.3 Abnormal Conditions

-

8.2.7 Audit

8.2.7.1 General

This procedure is executed by the CRNC to perform an audit of the configuration and status of the logical resources in the Node B. A complete audit of a Node B is performed by one or more Audit procedures, together performing an audit sequence. The audit may cause the CRNC to re-sync the Node B to the status of logical resources known by the CRNC, that the Node B can support.

8.2.7.2 Successful Operation




Figure 10: Audit procedure, Successful Operation

The procedure is initiated with an AUDIT REQUEST message sent from the CRNC to the Node B.

If the *Start of Audit Sequence* IE in the AUDIT REQUEST message is set to "start of audit sequence" a new audit sequence is started, any ongoing audit sequence shall be aborted and the Node B shall provide (part of the) audit information. If the *Start of Audit Sequence* IE is set to "not start of audit sequence", the Node B shall provide (part of) the remaining audit information not already provided during this audit sequence.

If the information provided in the AUDIT RESPONSE message completes the audit sequence, the Node B shall set the *End Of AuditSequence Indicator* IE in the AUDIT RESPONSE message to "End of Audit Sequence". If not all audit information has been provided yet as part of the ongoing audit sequence, the Node B shall set the *End Of AuditSequence Indicator* IE in the AUDIT RESPONSE message to "Not End of Audit Sequence".

Information Provided In One Audit Sequence.

The Node B shall include one *Local Cell Information* IE for each local cell present in the Node B. The Node B shall include the *Maximum DL Power Capability* IE and the *Minimum DL Power Capability* IE when any of those values are known by the Node B.

[TDD - The Node B shall include the *Reference Clock availability* IE to indicate the availability of a Reference clock connected to the Local cell.]

If Node B internal resources are pooled for a group of cells, the Node B shall include one *Local Cell Group Information* IE containing Node B internal resource capacity and consumption laws per group of cells. If the *UL Capacity Credit* IE is not present, then the internal resource capabilities of the Node B are modelled as shared resources between Uplink and Downlink.

The Node B shall include for each local cell present in the Node B the Node B internal resource capability and consumption laws within the *Local Cell Information* IE. If the *UL Capacity Credit* IE is not present, then the internal resource capabilities of the local cell are modelled as shared resources between Uplink and Downlink. If the Local Cell utilises Node B internal resource capabilities that are pooled for several Local Cell(s), the *Local Cell Group ID* IE shall contain the identity of the used Local Cell Group.

The Node B shall include one *Cell Information* IE for each cell in the Node B and information about all common transport channels and all common physical channels for each cell. If a *Configuration Generation ID* IE for a cell can not be trusted, the Node B shall set this *Configuration Generation ID* IE = '0'.

The Node B shall also include one *Communication Control Port Information* IE for each communication control port in the Node B.

8.2.7.3 Unsuccessful Operation



Figure 10A: Audit procedure, Unsuccessful Operation

If the Node B can not perform an audit of the configuration and status of the logical resources, it shall send a AUDIT FAILURE with the *Cause* IE set to an appropriate value.

8.2.7.4 Abnormal Conditions

If the Node B receives the AUDIT REQUEST message with the *Start of Audit Sequence* IE set to "not start of audit sequence" and there is no ongoing audit sequence, the Node B shall send the AUDIT FAILURE message with the appropriate cause value.

8.2.8 Common Measurement Initiation

8.2.8.1 General

This procedure is used by a CRNC to request the initiation of measurements on common resources in a Node B.

8.2.8.2 Successful Operation




Figure 11: Common Measurement Initiation procedure, Successful Operation

The procedure is initiated with a COMMON MEASUREMENT INITIATION REQUEST message sent from the CRNC to the Node B using the Node B control port.

Upon reception, the Node B shall initiate the requested measurement according to the parameters given in the request. Unless specified below, the meaning of the parameters are given in other specifications.

[TDD - If the Time Slot Information is provided in the *Common Measurement Object Type* IE , the measurement request shall apply to the requested time slot individually.]

[FDD - If the Spreading Factor Information is provided in the *Common Measurement Object Type* IE, measurement request shall apply to the PCPCHs whose minimum allowed spreading factor (Min UL Channelisation Code Length) is equal to the value of Spreading Factor Information.

If the *Common Measurement Type* IE is not set to 'SFN-SFN Observed Time Difference' and the *SFN Reporting Indicator* IE is set to "FN Reporting Required", the *SFN* IE shall be included in the measurement report or in the measurement response, the latter only in the case the *Report Characteristics* IE is set to 'On-Demand'. The reported SFN shall be the SFN at the time when the measurement value was reported by the layer 3 filter, referred to as point C in the measurement model [25]. If the *Common Measurement Type* IE is set to 'SFN-SFN Observed Time Difference' and the *SFN Reporting Indicator* IE is ignored.

If the *SFN* IE is provided, it indicates the frame for which the first measurement shall be provided. The provided measurement value shall be the one reported by the layer 3 filter, referred to as point C in the measurement model [25].

Common measurement type

If the *Common Measurement Type* IE is set to 'SFN-SFN Observed Time Difference', then the Node B shall initiate the SFN-SFN Observed Time Difference measurements between the reference cell identified by *C-ID* IE and the neighbouring cells identified by the *UTRAN Cell Identifier(UC-Id)* IE.

Report characteristics

The Report Characteristics IE indicates how the reporting of the measurement shall be performed. See also Annex B.

If the *Report Characteristics* IE is set to 'On-Demand', the Node B shall report the result of the requested measurement immediately.

If the *Report Characteristics* IE is set to 'Periodic', the Node B shall periodically initiate a Measurement Reporting procedure for this measurement, with the requested report frequency. If the *Common Measurement Type* IE is set to 'SFN-SFN Observed Time Difference', all the available measurement results shall be reported in the *Successful Neighbouring cell SFN-SFN Observed Time Difference Measurement Information* IE in the *SFN-SFN Measurement Value Information* IE and the Node B shall indicate in the *Unsuccessful Neighbouring cell SFN-SFN Observed Time Difference Measurement Information* IE all the remaining neighbouring cells with no measurement result available in the Common Measurement Reporting procedure.

If the *Report Characteristics* IE is set to 'Event A', the Node B shall initiate the Common Measurement Reporting procedure when the measured entity rises above the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the Node B shall use the value zero for the hysteresis time.

If the *Report Characteristics* IE is set to 'Event B', the Node B shall initiate the Common Measurement Reporting procedure when the measured entity falls below the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the Node B shall use the value zero for the hysteresis time.

If the *Report Characteristics* IE is set to 'Event C', the Node B shall initiate the Common Measurement Reporting procedure when the measured entity rises by an amount greater than the requested threshold within the requested time. After having reported this type of event, the next C event reporting for the same measurement cannot be initiated before the rising/falling time has elapsed since the previous event reporting.

If the *Report Characteristics* IE is set to 'Event D', the Node B shall initiate the Common Measurement Reporting procedure when the measured entity falls more than the requested threshold within the requested time. After having reported this type of event, the next D event reporting for the same measurement cannot be initiated before the rising/falling time has elapsed since the previous event reporting.

If the *Report Characteristics* IE is set to 'Event E', the Node B shall initiate the Common Measurement Reporting procedure when the measured entity rises above the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (Report A). When the conditions for Report A are met and the *Report Periodicity* IE is provided, the Node B shall initiate the Common Measurement Reporting procedure periodically. If the conditions for Report A have been met and the measured entity falls below the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time', the Node B shall initiate the Common Measurement Reporting procedure (Report B) as well as terminating any corresponding periodic reporting. If 'Measurement Threshold 2' is not present, the Node B shall use 'Measurement Threshold 1' instead. If no 'Measurement Hysteresis Time' is provided, the Node B shall use the value zero as hysteresis times for both Report A and Report B.

If the *Report Characteristics* IE is set to 'Event F', the Node B shall initiate the Common Measurement Reporting procedure when the measured entity falls below the 'Measurement Threshold 1' and stays there for the 'Measurement

Hysteresis Time' (Report A). When the conditions for Report A are met and the *Report Periodicity* IE is provided the Node B shall also initiate the Common Measurement Reporting procedure periodically. If the conditions for Report A have been met and the measured entity rises above the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time', the Node B shall initiate the Common Measurement Reporting procedure (Report B) as well as terminating any corresponding periodic reporting. If 'Measurement Threshold 2' is not present, the Node B shall use 'Measurement Threshold 1' instead. If no 'Measurement Hysteresis Time' is provided, the Node B shall use the value zero as hysteresis times for both Report A and Report B.

If the *Report Characteristics* IE is set to 'On Modification', the Node B shall report the result of the requested measurement immediately. Then the Node B shall initiate the Common Measurement Reporting procedure in accordance to the following conditions: 1. If the *Common Measurement Type* IE is set to 'UTRAN GPS Timing of Cell Frame for LCS':

If the $T_{UTRAN-GPS}$ Change Limit IE is included in the $T_{UTRAN-GPS}$ Measurement Threshold Information IE, the Node B shall each time a new measurement result is received after point C in the measurement model [25], calculate the change of $T_{UTRAN-GPS}$ value (F_n). The Node B shall initiate the Common Measurement Reporting procedure and set n equal to zero when the absolute value of F_n rises above the threshold indicated by the $T_{UTRAN-GPS}$ Change Limit IE. The change of $T_{UTRAN-GPS}$ value (F_n) is calculated according to the following:

```
F_n = 0 \ for \ n = 0 F_n = (M_n - M_{n-1}) \ mod \ 37152912000000 - ((SFN_n - SFN_{n-1}) \ mod \ 4096) \ *10*3.84*10^3*16 + F_{n-1} + F_{n-1}
```

 F_n is the change of the T_{UTRAN-GPS} value expressed in unit [1/16 chip] when n measurement results has been received after first Common Measurement Reporting at initiation or after the last event was triggered.

 M_n is the latest measurement result received after point C in the measurement model [25], measured at SFN_n

 M_{n-1} is the previous measurement result received after point C in the measurement model [25], measured at SFN_{n-1}

 M_1 is the first measurement result received after point C in the measurement model [25], after first Common Measurement Reporting at initiation or after the last event was triggered.

 M_0 is equal to the value reported in the first Common Measurement Reporting at initiation or in the Common Measurement Reporting when the event was triggered.

If the $Predicted\ T_{UTRAN-GPS}$ $Deviation\ Limit\ IE$ is included in the $T_{UTRAN-GPS}$ $Measurement\ Threshold\ Information\ IE$, the Node B shall each time a new measurement result is received after point C in the measurement model [25], update the P_n and P_n . The Node B shall initiate the Common Measurement Reporting procedure and set n equal to zero when P_n rises above the threshold indicated by the $Predicted\ T_{UTRAN-GPS}$ $Deviation\ Limit\ IE$. The P_n and P_n are calculated according to the following:

```
\begin{split} P_n &= b \;\; for \; n = 0 \\ P_n &= ((a/16)*((SFN_n - SFN_{n-1}) \; mod \; 4096)/100 + ((SFN_n - SFN_{n-1}) \; mod \; 4096)*10*3.84*10^3*16 + P_{n-1}) \\ mod \; 37158912000000 \;\; for \;\; n > 0 \\ F_n &= min((M_n - P_n) \; mod \; 37158912000000), \; (P_n - M_n) \; mod \; 37158912000000) \quad for \; n > 0 \end{split}
```

 P_n is the predicted $T_{UTRAN-GPS}$ value when n measurement results has been received after first Common Measurement Reporting at initiation or after the last event was triggered.

a is the last reported T_{UTRAN-GPS} Drift Rate value.

b is the last reported T_{UTRAN-GPS} value.

 F_n is the deviation of the last measurement result from the predicted $T_{UTRAN-GPS}$ value (P_n) when n measurements has been received after first Common Measurement Reporting at initiation or after the last event was triggered.

 M_n is the latest measurement result received after point C in the measurement model [25], measured at SFN_n.

 M_I is the first measurement result received after point C in the measurement model [25], after first Common Measurement Reporting at initiation or after the last event was triggered.

The $T_{UTRAN-GPS}$ Drift Rate is determined by the Node B in an implementation-dependent way after point B in the measurement model [26].

2. If the Common Measurement Type IE is set to 'SFN-SFN Observed Time Difference':

If the SFN-SFN Change Limit IE is included in the SFN-SFN Measurement Threshold Information IE, the Node B shall each time a new measurement result is received after point C in the measurement model [25], calculate the change of SFN-SFN value (F_n) . The Node B shall initiate the Common Measurement Reporting procedure in order to report the particular SFN-SFN measurement which has triggered the event and set n equal to zero when F_n rises above the threshold indicated by the SFN-SFN Change Limit IE. The change of the SFN-SFN value is calculated according to the following:

$$F_n=0 \text{ for } n=0$$

[FDD - $F_n=(M_n-a) \mod 614400 \text{ for } n>0$]
[TDD - $F_n=(M_n-a) \mod 40960 \text{ for } n>0$]

 F_n is the change of the SFN-SFN

value expressed in unit [1/16 chip] when n measurement results has been received after first Common Measurement Reporting at initiation or after the last event was triggered.

a is the last reported SFN-SFN.

 M_n is the latest measurement result received after point C in the measurement model [25], measured at SFN_n.

 M_1 is the first measurement result received after point C in the measurement model [25] after first Common Measurement Reporting at initiation or after the last event was triggered.

If the $Predicted\ SFN-SFN\ Deviation\ Limit\ IE$ is included in the $SFN-SFN\ Measurement\ Threshold\ Information\ IE$, the Node B shall each time a new measurement result is received after point C in the measurement model [25], update the P_n and F_n . The Node B shall initiate the Common Measurement Reporting procedure in order to report the particular SFN-SFN measurement which has triggered the event and set n equal to zero when the F_n rises above the threshold indicated by the $Predicted\ SFN-SFN\ Deviation\ Limit\ IE$. The P_n and F_n are calculated according to the following:

```
\begin{split} P_n &= b \;\; for \; n = 0 \\ &[\text{FDD -} P_n = ((a/16) * ((SFN_n - SFN_{n-1}) \; mod \; 4096)/100 + \; P_{n-1} \;) \; mod \; 614400 \quad for \;\; n > 0 \\ F_n &= \min((M_n - P_n) \; mod \; 614400, \; (P_n - M_n) \; mod \; 614400) \quad for \; n > 0] \\ &[\text{TDD -} P_n &= ((a/16) * (15*(SFN_n - SFN_{n-1}) mod \; 4096 + (TS_n - TS_{n-1}))/1500 + P_{n-1} \;) \; mod \; 40960 \; for \;\; n > 0 \\ F_n &= \min((M_n - P_n) \; mod \; 40960, \; (P_n - M_n) \; mod \; 40960) \quad for \; n > 0] \end{split}
```

 P_n is the predicted SFN-SFN value when n measurement results has been received after first Common Measurement Reporting at initiation or after the last event was triggered.

a is the last reported SFN-SFN Drift Rate value.

b is the last reported SFN-SFN value.

abs denotes the absolute value.

 F_n is the deviation of the last measurement result from the predicted SFN-SFN value (P_n) when n measurements has been received after first Common Measurement Reporting at initiation or after the last event was triggered.

 M_n is the latest measurement result received after point C in the measurement model [25], measured at the [TDD -Time Slot TS_n] of the Frame SFN_n.

 M_1 is the first measurement result received after point C in the measurement model [25] after first Common Measurement Reporting at initiation or after the last event was triggered.

The SFN-SFN Drift Rate is determined by the Node B in an implementation-dependent way after point B in the measurement model [26].

If the *Report Characteristics* IE is not set to 'On-Demand', the Node B is required to perform reporting for a common measurement object, in accordance with the conditions provided in the COMMON MEASUREMENT INITIATION REQUEST message, as long as the object exists. If no common measurement object(s) for which a measurement is defined exists any more the Node B shall terminate the measurement locally without reporting this to the CRNC.

If at the start of the measurement, the reporting criteria are fulfilled for any of Event A, Event B, Event E or Event F, the Node B shall initiate the Common Measurement Reporting procedure immediately, and then continue with the measurements as specified in the COMMON MEASUREMENT INITIATION REQUEST message.

Higher laver filtering

The *Measurement Filter Coefficient* IE indicates how filtering of the measurement values shall be performed before measurement event evaluation and reporting.

The averaging shall be performed according to the following formula.

$$F_n = (1-a) \cdot F_{n-1} + a \cdot M_n$$

The variables in the formula are defined as follows:

 F_n is the updated filtered measurement result

 F_{n-1} is the old filtered measurement result

 M_n is the latest received measurement result from physical layer measurements, the unit used for M_n is the same unit as the reported unit in the COMMON MEASUREMENT INITIATION RESPONSE, COMMON MEASUREMENT REPORT messages or the unit used in the event evaluation (i.e. same unit as for Fn)

 $a = 1/2^{(k/2)}$ -, where k is the parameter received in the *Measurement Filter Coefficient* IE. If the *Measurement Filter Coefficient* IE is not present, a shall be set to 1 (no filtering)

In order to initialise the averaging filter, F_0 is set to M_1 when the first measurement result from the physical layer measurement is received.

Common measurement accuracy

If the *Common Measurement Type* IE is set to 'UTRAN GPS Timing of Cell Frame for LCS', then the Node B shall use the *UTRAN GPS Timing Measurement Accuracy Class* IE included in the *Common Measurement Accuracy* IE according to the following:

If the *UTRAN GPS Timing Measurement Accuracy Class* IE indicates 'Class A', then the Node B shall perform the measurement with highest supported accuracy within the accuracy classes A, B and C.

If the *UTRAN GPS Timing Measurement Accuracy Class* IE indicates 'Class B', then the Node B shall perform the measurement with highest supported accuracy within the accuracy classes B and C.

If the *UTRAN GPS Timing Measurement Accuracy Class* IE indicates 'Class C' then the Node B shall perform the measurements with the accuracy according to class C.

Response message

If the Node B was able to initiate the measurement requested by the CRNC it shall respond with the COMMON MEASUREMENT INITIATION RESPONSE message sent over the Node B control port. The message shall include the same Measurement ID that was used in the measurement request. Only in the case when the *Report Characteristics* IE is set to "On-Demand", or "On Modification", the COMMON MEASUREMENT INITIATION RESPONSE message shall contain the measurement result and also the *Common Measurement Achieved Accuracy* IE if the *Common Measurement Type* IE is set to 'UTRAN GPS Timing of Cell Frame for LCS'.

If the Common Measurement Type IE is set to 'SFN-SFN Observed Time Difference' and the Report Characteristics IE is set to 'On Demand' or "On Modification", all the available measurement results shall be reported in the Successful Neighbouring cell SFN-SFN Observed Time Difference Measurement Information IE in the SFN-SFN Measurement

Value Information IE and the Node B shall indicate in the Unsuccessful Neighbouring cell SFN-SFN Observed Time Difference Measurement Information IE all the remaining neighbouring cells with no measurement result available in the COMMON MEASUREMENT INITIATION RESPONSE message.

8.2.8.3 Unsuccessful Operation



Figure 12: Common Measurement Initiation procedure, Unsuccessful Operation

If the requested measurement cannot be initiated, the Node B shall send a COMMON MEASUREMENT INITIATION FAILURE message sent over the Node B control port. The message shall include the same Measurement ID that was used in the COMMON MEASUREMENT INITIATION REQUEST message and the *Cause* IE set to an appropriate value.

Typical cause values are as follows:

Radio Network Layer Cause

- Measurement not supported for the object.
- Measurement Temporarily not Available

8.2.8.4 Abnormal Conditions

If the Common Measurement Type received in the *Common Measurement Type* IE is not defined in ref. [4] or [5] to be measured on the Common Measurement Object Type received in the *Common Measurement Object Type* IE in the COMMON MEASUREMENT INITIATION REQUEST message the Node B shall regard the Common Measurement Initiation procedure as failed.

[TDD - If the common measurement type requires the Time Slot Information but the [3.84Mcps TDD - *Time Slot IE*] [1.28Mcps TDD - - *Time SlotLCR* IE] is not provided in the *Common Measurement Object Type* IE in the COMMON MEASUREMENT INITIATION REQUEST message the Node B shall regard the Common Measurement Initiation procedure as failed.]

If the COMMON MEASUREMENT INITIATION REQUEST message contains the *SFN-SFN Measurement Threshold Information* IE (in the *Measurement Threshold* IE contained in the *Report Characteristics* IE) and it does not contain at least one IE, the Node B shall reject the procedure using the COMMON MEASUREMENT INITIATION FAILURE message.

If the COMMON MEASUREMENT INITIATION REQUEST message contains the $T_{UTRAN-GPS}$ Measurement Threshold Information IE (in the Measurement Threshold IE contained in the Report Characteristics IE) and it does not contain at least one IE, the Node B shall reject the procedure using the COMMON MEASUREMENT INITIATION FAILURE message.

If the *Common Measurement Type* IE is set to 'SFN-SFN Observed Time Difference', but the *Neighbouring Cell Measurement Information* IE is not received in the COMMON MEASUREMENT INITIATION REQUEST message, the Node B shall regard the Common Measurement Initiation procedure as failed.

If the Common Measurement Type IE is set to 'UTRAN GPS Timing of Cell Frame for LCS', but the $T_{UTRAN-GPS}$ Measurement Accuracy Class IE in the Common Measurement Accuracy IE is not received in the COMMON MEASUREMENT INITIATION REQUEST message, the Node B shall regard the Common Measurement Initiation procedure as failed.

The allowed combinations of the Common measurement type and Report characteristics type are shown in the table below marked with "X". For not allowed combinations, the Node B shall regard the Common Measurement Initiation procedure as failed.

Table 4: Allowed Common measurement type and Report characteristics type combinations

Common measurement type	Report characteristics type								
	On Demand	Periodic	Event A	Event B	Event C	Event D	Event E	Event F	On Modification
Received total wide band power	X	X	X	X	Х	X	X	X	
Transmitted Carrier Power	Х	Х	Х	X	Х	Х	X	X	
Acknowledged PRACH preambles	Х	Х	Х	Х	Х	Х	Х	Х	
UL Timeslot ISCP	Х	Х	Χ	Χ	Χ	Χ	Χ	Χ	
Acknowledged PCPCH Access Preambles	Х	Х	Х	Х	Х	Х	Х	Х	
Detected PCPCH Access Preambles	Х	Х	Х	Х	Х	Х	Х	Х	
UTRAN GPS Timing of Cell Frames for LCS	Х	Х							Х
SFN-SFN Observed Time Difference	Х	Х							Х

8.2.9 Common Measurement Reporting

8.2.9.1 General

This procedure is used by a Node B to report the result of measurements requested by the CRNC with the Common Measurement Initiation procedure.

8.2.9.2 Successful Operation



Figure 13: Common Measurement Reporting procedure, Successful Operation

If the requested measurement reporting criteria are met, the Node B shall initiate the Common Measurement Reporting procedure. The COMMON MEASUREMENT REPORT message shall use the Node B control port.

The *Common Measurement ID* IE shall be set to the Common Measurement ID provided by the CRNC when initiating the measurement with the Common Measurement Initiation procedure.

If the achieved measurement accuracy does not fulfil the given accuracy requirement (see ref.[22] and [23]), the Measurement not available shall be reported.

8.2.9.3 Abnormal Conditions

_

8.2.10 Common Measurement Termination

8.2.10.1 General

This procedure is used by the CRNC to terminate a measurement previously requested by the Common Measurement Initiation procedure.

8.2.10.2 Successful Operation



Figure 14: Common Measurement Termination procedure, Successful Operation

This procedure is initiated with a COMMON MEASUREMENT TERMINATION REQUEST message, sent from the CRNC to the Node B using the Node B control port.

Upon reception, the Node B shall terminate reporting of measurements corresponding to the Common Measurement ID.

8.2.10.3 Abnormal Conditions

_

8.2.11 Common Measurement Failure

8.2.11.1 General

This procedure is used by the Node B to notify the CRNC that a measurement previously requested by the Common Measurement Initiation procedure can no longer be reported.

8.2.11.2 Successful Operation



Figure 15: Common Measurement Failure procedure, Successful Operation

This procedure is initiated with a COMMON MEASUREMENT FAILURE INDICATION message, sent from the Node B to the CRNC using the Node B control port, to inform the CRNC that a previously requested measurement can no longer be reported. The Node B has locally terminated the indicated measurement.

8.2.11.3 Abnormal Conditions

_

8.2.12 Cell Setup

8.2.12.1 General

This procedure is used to set up a cell in Node B. The CRNC takes the cell, identified via the *C-ID* IE, into service and uses the resources in Node B identified via the *Local Cell ID* IE.

8.2.12.2 Successful Operation




Figure 16: Cell Setup procedure, Successful Operation

The procedure is initiated with a CELL SETUP REQUEST message sent from CRNC to Node B. Upon Reception, the Node B shall reserve the necessary resources and configure the new cell according to the parameters given in the message.

[FDD - If the CELL SETUP REQUEST message includes one or more *Secondary CPICH Information* IE the Node B shall configure and activate the Secondary CPICH(s) in the cell according to received configuration data.]

The *Maximum Transmission Power* IE value shall be stored in the Node B and at any instance of time the total maximum output power in the cell shall not be above this value.

[FDD - If the *Closed Loop Timing Adjustment Mode* IE is included in the CELL SETUP REQUEST message, the value shall be stored in the Node B and applied when closed loop Feed-Back mode diversity is used on DPCH.]

[TDD - If the *Reference SFN offset* IE is included in the CELL SETUP REQUEST message, Node B where a reference clock is connected shall consider the SFN derived from the synchronisation port and the reference offset for reference time setting. All other Node B shall ignore the *Reference SFN offset* IE if included.]

If the *IPDL Parameter Information* IE is included in the CELL SETUP REQUEST message, the parameters defining IPDL shall be stored in the Node B and applied according to the *IPDL Indicator* IE value.

When the cell is successfully configured the Node B shall store the *Configuration Generation ID* IE value and send a CELL SETUP RESPONSE message as a response.

[FDD - When the cell is successfully configured CPICH(s), Primary SCH, Secondary SCH, Primary CCPCH and BCH exist.][3.84Mcps TDD - When the cell is successfully configured SCH, Primary CCPCH and BCH exist and the switching-points for the 3.84Mcps TDD frame structure are defined.] [1.28Mcps TDD - When the cell is successfully configured, DwPCH, Primary CCPCH and BCH exist and the switching-points for the 1.28Mcps TDD frame structure are defined.] The cell and the channels shall be set to state Enabled [6].

8.2.12.3 Unsuccessful Operation




Figure 17: Cell Setup procedure: Unsuccessful Operation

If the Node B cannot set up the cell according to the information given in CELL SETUP REQUEST message the CELL SETUP FAILURE message shall be sent to CRNC.

In this case the cell is Not Existing in Node B. The Configuration Generation ID shall not be changed in Node B.

The Cause IE shall be set to an appropriate value.

Typical cause values are as follows:

Radio Network Layer Cause

- S-CPICH not supported
- Requested Tx Diversity Mode not supported
- Power level not supported
- Node B Resources unavailable
- IPDL not supported

Miscellaneous Cause

- O&M Intervention
- Control processing overload
- HW failure

8.2.12.4 Abnormal Conditions

If the state of the cell already is Enabled or Disabled [6] when the CELL SETUP REQUEST message is received in Node B, it shall reject the configuration of the cell and all channels in the CELL SETUP REQUEST message with the Cause IE set to "Message not compatible with receiver state".

8.2.13 Cell Reconfiguration

8.2.13.1 General

This procedure is used to reconfigure a cell in Node B.

8.2.13.2 Successful Operation




Figure 18: Cell Reconfiguration procedure, Successful Operation

The procedure is initiated with a CELL RECONFIGURATION REQUEST message sent from CRNC to Node B. Upon Reception, the Node B shall reconfigure the cell according to the parameters given in the message.

[FDD - If the CELL RECONFIGURATION REQUEST message includes the *Primary SCH Information* IE the Node B shall reconfigure Primary SCH power in the cell according to *Primary SCH Power* IE value.]

[FDD - If the CELL RECONFIGURATION REQUEST message includes the *Secondary SCH Information* IE the Node B shall reconfigure Secondary SCH power in the cell according to the *Secondary SCH Power* IE value.]

[FDD - If the CELL RECONFIGURATION REQUEST message includes the *Primary CPICH Information* IE the Node B shall reconfigure Primary CPICH power in the cell according to the *Primary CPICH Power* IE value. Node B shall adjust all the transmitted power levels relative to the Primary CPICH power according to the new value.]

[FDD - If the CELL RECONFIGURATION REQUEST message includes one or more *Secondary CPICH Information* IE the Node B shall reconfigure the power for each Secondary CPICH in the cell according to their *Secondary CPICH Power* IE value.]

[3.84Mcps TDD - If the CELL RECONFIGURATION REQUEST message includes the *SCH Information* IE the Node B shall reconfigure SCH power in the cell according to the *SCH Power* IE value.]

[3.84Mcps TDD - If the CELL RECONFIGURATION REQUEST message includes the *Timing Advance Applied* IE the Node B shall apply the necessary functions for Timing Advance in that cell including reporting of the Rx Timing Deviation measurement, according to the *Timing Advance Applied* IE value.]

[FDD - If the CELL RECONFIGURATION REQUEST message includes the *Primary CCPCH Information* IE the Node B shall reconfigure BCH power in the cell according to the *BCH Power* IE value.]

[TDD - If the CELL RECONFIGURATION REQUEST message includes the *Primary CCPCH Information* IE the Node B shall reconfigure P-CCPCH power in the cell according to the *P-CCPCH Power* IE value. Node B shall adjust all the transmitted power levels relative to the Primary CPPCH power according to the new value.]

If the CELL RECONFIGURATION REQUEST message includes the *Maximum Transmission Power* IE the value shall be stored in the Node B and at any instance of time the total maximum output power in the cell shall not be above this value.

[TDD - If the CELL RECONFIGURATION REQUEST message includes the *Timeslot Information* IE the Node B shall reconfigure switching-point structure in the cell according to the *Timeslot* IE value.]

[TDD - If the CELL RECONFIGURATION REQUEST message includes any of the *Constant Value* IEs, the Node B shall use these values when generating the appropriate SIB.]

If the CELL RECONFIGURATION REQUEST message includes the *IPDL Parameter Information* IE with the *IPDL Indicator* IE having the value 'active' the Node B shall apply the IPDL in that cell according the latest downloaded parameters defined by the *IPDL FDD Parameters* IE / *IPDL TDD Parameters* IE.

If the CELL RECONFIGURATION REQUEST message includes *IPDL Parameter Information* IE with *the IPDL Indicator* IE having the value 'inactive' the Node B shall deactivate the ongoing IPDL.

When the cell is successfully reconfigured the Node B shall store the new *Configuration Generation ID* IE value and send a CELL RECONFIGURATION RESPONSE message as a response.

If the CELL RECONFIGURATION REQUEST message includes the *Synchronisation Configuration* IE the Node B shall reconfigure the indicated parameters in the cell according to the IE value. When the parameters in the *Synchronisation Configuration* IE affect the thresholds applied to a RL set, the Node B shall immediately apply the new thresholds. When applying the new thresholds the Node B shall not change the state or value of any of the timers and counters for which the new thresholds apply.

8.2.13.3 Unsuccessful Operation




Figure 19: Cell Reconfiguration procedure: Unsuccessful Operation

If the Node B cannot reconfigure the cell according to the information given in CELL RECONFIGURATION REQUEST message the CELL RECONFIGURATION FAILURE message shall be sent to CRNC.

In this case, the Node B shall keep the old configuration of the cell and the Configuration Generation ID shall not be changed in Node B.

The Cause IE shall be set to an appropriate value.

Typical cause values are as follows:

Radio Network Layer Cause

- Power level not supported
- Node B Resources unavailable
- IPDL not supported

Miscellaneous Cause

- O&M Intervention
- Control processing overload
- HW failure

8.2.13.4 Abnormal Conditions

If the *IPDL Indicator* IE having the value 'active' is included in the CELL RECONFIGURATION REQUEST message and there is active IPDL ongoing in the Node B, the Node B shall response with CELL RECONFIGURATION FAILURE- message with the cause value 'IPDL already activated'.]

If the *IPDL Indicator* IE having the value 'active' is included in the CELL RECONFIGURATION REQUEST message and there is no IPDL stored to Node B defining the IPDL, the Node B shall response with CELL RECONFIGURATION FAILURE- message with the cause value 'IPDL parameters not available'.]

8.2.14 Cell Deletion

8.2.14.1 General

This procedure is used to delete a cell in Node B.

8.2.14.2 Successful Operation




Figure 10: Cell Deletion procedure, Successful Operation

The procedure is initiated with a CELL DELETION REQUEST message sent from CRNC to Node B. Upon Reception, the Node B shall remove the cell and any remaining common and dedicated channels within the cell. The states for the cell and the deleted common channels shall be set to Not Existing [6]. The Node B shall remove all Radio Links from the Cell and all Node B Communication Contexts that as a result do not have a Radio Link. The Node B shall also initiate release of the user plane transport bearers for the removed common and dedicated channels.

When the cell is deleted, the Node B shall send a CELL DELETION RESPONSE message as a response.

8.2.14.3 Unsuccessful Operation

-

8.2.14.4 Abnormal Conditions

If the CELL DELETION REQUEST message includes a *C-ID* IE value that is not existing in Node B the Node B shall respond with the CELL DELETION RESPONSE message.

8.2.15 Resource Status Indication

8.2.15.1 General

This procedure is used in the following cases:

- 1. When a Local Cell becomes Existing at the Node B.
- 2. When a Local Cell is to be deleted in Node B, i.e. become Not Existing.
- 3. When the capabilities of the Local Cell change at the Node B.
- 4. When a cell has changed its capability and/or its resource operational state at Node B.
- 5. When common physical channels and/or common transport channels have changed their capabilities at a Node B.
- 6. When a communication control port changed its resource operational state at the Node B.

7. When a Local Cell Group has changed its resource capability at the Node B.

Each of the above cases shall trigger a Resource Status Indication procedure and the RESOURCE STATUS INDICATION message shall contain the logical resources affected for that case and the cause value when applicable.

8.2.15.2 Successful Operation



Figure 21: Resource Status Indication procedure, Successful Operation

The procedure is initiated with a RESOURCE STATUS INDICATION message sent from the Node B to CRNC.

Local Cell Becomes Existing:

When a Local Cell becomes Existing at the Node B, the Node B shall make it available to the CRNC by sending a RESOURCE STATUS INDICATION message with the *Indication Type* IE set equal to "No Failure", the *Local Cell ID* IE and the *Add/Delete Indicator* IE set equal to 'Add'.

When the capacity credits and consumption laws are shared between several Local Cells, the Node B includes the *Local Cell Group ID* IE for the Local Cell. If the *Local Cell Group Information* IE is not already reported in a previous RESOURCE STATUS INDICATION message, the Node B shall include the capacity credits and the consumption laws in the *Local Cell Group Information* IE.

If the Local Cell IE contains both the DL or Global Capacity Credit IE and the UL Capacity Credit IE then the internal resource capabilities of the Local Cell are modelled independently in the Uplink and Downlink direction. If the UL Capacity Credit IE is not present, then the internal resource capabilities of the Local Cell are modelled as shared resources between Uplink and Downlink. If the Local Cell Group Information IE contains both the DL or Global Capacity Credit IE and the UL Capacity Credit IE then the internal resource capabilities of the Local Cell Group are modelled independently in the Uplink and Downlink direction. If the UL Capacity Credit IE IE is not present, then the internal resource capabilities of the Local Cell Group are modelled as shared resources between Uplink and Downlink.

[TDD - The Node B shall include the *Reference Clock availability* IE within the *Local Cell* IE to indicate the availability of a Reference clock connected to the Local Cell, when a Local Cell is made available to the CRNC.]

Local Cell Deletion:

When a Local Cell is to be deleted in Node B, i.e. become Not Existing, the Node B shall withdraw the Local Cell from the CRNC by sending a RESOURCE STATUS INDICATION message with the *Indication Type* IE set equal to "No Failure", the *Local Cell ID* IE and the *Add/Delete Indicator* IE set equal to 'Delete'. The Node B shall not withdraw a previously configured cell at the Node B that the CRNC had configured using the Cell Setup procedure, until the CRNC has deleted that cell at the Node B using the Cell Delete procedure.

Capability Change of a Local Cell:

When the capabilities of a Local Cell change at the Node B, the Node B shall report the new capability by sending a RESOURCE STATUS INDICATION message with the *Indication Type* IE set equal to "Service Impacting" and the Local Cell ID. The Node B shall include the *Minimum DL Power Capability* IE when it is known by the Node B. If the DL power capability has changed, the new capability shall be indicated in the *DL Power Capability* IE. If the DL capability for supporting the minimum spreading factor has changed, the new capability shall be indicated in the *Minimum Spreading Factor* IE. [TDD - If the availability of the Reference clock connected to a Local Cell has changed, the new availability condition shall be indicated in the *Reference Clock availability* IE.] The *Cause* IE in the RESOURCE STATUS INDICATION message shall be set to the appropriate value. If the internal resource capabilities of the Local Cell are affected, it shall be reported in the following way: If the internal resource capabilities of the Local Cell are modelled as shared resources between Uplink and Downlink, the new capacity shall be reported in the *DL or Global Capacity Credit* IE. If the internal resource capabilities of the Local Cell are modelled independently in the Uplink and Downlink direction, then the *DL or Global Capacity Credit* IE and the *UL Capacity Credit* IE shall be

present in the RESOURCE STATUS INDICATION. If the maximum DL power capability of the Local Cell is affected, this shall be reported using the *Maximum DL Power Capability* IE.

Capability Change of a Cell:

When the capabilities and/or resource operational state of a cell changes at the Node B, the Node B shall report the new capability and/or resource operational state by sending a RESOURCE STATUS INDICATION message with the *Indication Type* IE set equal to "Service Impacting", the *C-ID* IE, the *Resource Operational State* IE and the *Availability Status* IE. The *Cause* IE in the RESOURCE STATUS INDICATION message shall be set to the appropriate value.

Capability Change of a Common Physical Channel and/or Common Transport Channel:

The Node B shall not delete any common or dedicated channels, due to the cell being "Disabled". For all affected common and dedicated channels, the Node B shall report the impact to the CRNC with the relevant procedures.

When the capabilities and/or resource operational state of common physical channels and/or common transport channels have changed, the Node B shall report the new capability and/or resource operational state by sending a RESOURCE STATUS INDICATION message with the *Indication Type* IE set equal to "Service Impacting", the *Resource Operational State* IE and the *Availability Status* IE set to appropriate values for the affected channel(s). The *Cause* IE in the RESOURCE STATUS INDICATION message shall be set to the appropriate value.

When a power value for a common physical channel and/or a common transport channel becomes beyond the supported power value range due to a change in capability in Node Bs, it shall be reported to the CRNC in the RESOURCE STATUS INDICATION message, with the *Resource Operational State* IE set to "Enabled", the *Availability Status* IE set to "Degraded" and the *Cause* IE set to "Power level not supported". Affected channels shall use the nearest power value that is supported.

Capability Change of a Communication Control Port:

When the resource operational state of a communication control port has changed, the Node B shall report the new resource operational state by sending a RESOURCE STATUS INDICATION message with the *Indication Type* IE set equal to "Service Impacting" and the *Communication Control Port ID* IE. The *Cause* IE in the RESOURCE STATUS INDICATION message shall be set to the appropriate value.

Capability Change of a Local Cell Group:

When the resource capabilities of a Local Cell Group change at the Node B, the Node B shall report the new capability by sending a RESOURCE STATUS INDICATION message with the *Indication Type* IE set equal to "Service Impacting" and the *Local Cell Group Information* IE reporting the change. The *Cause* IE in the RESOURCE STATUS INDICATION message shall be set to an appropriate value. If the RESOURCE STATUS INDICATION message contains both the *DL or Global Capacity Credit* IEand the *UL Capacity Credit* IEthen the internal resource capabilities of the Node B are modelled independently in the Uplink and Downlink direction. If the *UL Capacity Credit* IE is not present, then the internal resource capabilities of the Node B are modelled as shared resources between Uplink and Downlink.

General:

When the RESOURCE STATUS INDICATION is used to report an error, only one cause value for all reported objects can be sent in one message. When the RESOURCE STATUS INDICATION is used to clear errors, only all errors for one object can be cleared per message. It is not possible to clear one out of several errors for one object.

8.2.15.3 Abnormal Conditions

-

8.2.16 System Information Update

8.2.16.1 General

The System Information Update procedure performs the necessary operations in order for the Node B to apply the correct scheduling of and/or to include the appropriate content to the system information segments broadcast on the BCCH.

8.2.16.2 Successful Operation




Figure 22: System Information Update procedure, Successful Operation

The procedure is initiated with a SYSTEM INFORMATION UPDATE REQUEST message sent from the CRNC to the Node B.

The Node B shall consider the requested updates to the BCCH schedule in the same order as the MIB/SB/SIB information is included in the SYSTEM INFORMATION UPDATE REQUEST message.

If the SYSTEM INFORMATION UPDATE REQUEST message includes the *BCCH Modification Time* IE, the updates to the BCCH schedule (possibly consisting of IB occurrence additions, IB occurrence deletions and IB occurrence content updates) indicated in the SYSTEM INFORMATION UPDATE REQUEST message shall be applied by Node B at the first time instance starting from the SFN value set by the *BCCH Modification Time* IE. If no *BCCH Modification Time* IE is included, the updates to the BCCH schedule shall be applied as soon as possible.

Information Block addition

If the SYSTEM INFORMATION UPDATE REQUEST message includes segments of a certain MIB/SB/SIB, the Node B shall assume that all segments for that Information Block are included in the message and ordered with increasing Segment Index (starting from 0). For each included segment, segment type information and *IB SG POS* IE are also given in the SYSTEM INFORMATION UPDATE REQUEST message.

The Node B shall determine the correct cell system frame number(s) (SFN) for transmission of the segments of system information, from the scheduling parameters provided in the SYSTEM INFORMATION UPDATE REQUEST message. The SFN for transmitting the segments shall be determined by the *IB SG REP* IE and *IB SG POS* IE such that:

- SFN mod IB_SG_REP = IB_SG_POS

If the SYSTEM INFORMATION UPDATE REQUEST message contains Master Information Block (MIB) segments in addition to SIB or SB segments, the MIB segments shall first be sent in the physical channel by the Node B. Once these MIB segments have been sent in the physical channel, the updated SB/SIB segments shall then be sent in the physical channel.

Only if the inclusion of each new IB segment in the BCCH schedule leads to a valid segment combination according to [18], the Node B shall accept the system information update.

If the *SIB Originator* IE value is set to 'Node B ' the Node B shall create the SIB segment of the SIB type given by the *IB Type* IE and autonomously update the SIB segment and apply the scheduling and repetition as given by the *IB SG REP* IE and *IB SG POS* IE.

SIBs originating from the Node B can only be SIBs containing information that the Node B can obtain on its own.

Information Block deletion

If an IB Deletion is indicated in an instance of *MIB/SB/SIB information* IE in the SYSTEM INFORMATION UPDATE REQUEST message, the Node B shall delete the IB indicated by the *IB Type* IE and *IB OC ID* IE from the transmission schedule on BCCH.

Information Block update

If the SYSTEM INFORMATION UPDATE REQUEST message contains segments for an IB without *IB SG REP* IE and *IB SG POS* IE and there is already an IB in the BCCH schedule with the same IB Type and IB OC ID which is not requested to be deleted from the BCCH schedule by an IB deletion indicated in a *MIB/SB/SIB information* IE repetition present in the SYSTEM INFORMATION UPDATE REQUEST message before the IB segments are included, then the Node B shall only update the contents of the IB segments without any modification in segment scheduling.

If the Node B successfully completes the updating of the physical channel scheduling cycle according to the parameters given in the SYSTEM INFORMATION UPDATE REQUEST message, it shall respond to the CRNC with a SYSTEM INFORMATION UPDATE RESPONSE message.

8.2.16.3 Unsuccessful Operation




Figure 23: System Information Update procedure: Unsuccessful Operation

If the Node B is unable to update the physical channel scheduling cycle according to all the parameters given in the SYSTEM INFORMATION UPDATE REQUEST message, it shall respond with a SYSTEM INFORMATION UPDATE FAILURE message with an appropriate cause value. No changes to the BCCH schedule are made in this case.

Typical cause values are:

Radio Network Layer Cause

- SIB Origination in Node B not Supported

Miscellaneous Cause

- Hardware failure
- Control Processing overload
- O&M Intervention

In the case of failure, the Node B shall not incorporate any of the requested changes into the physical channel scheduling cycle, and the previous system information configuration shall remain intact.

8.2.16.4 Abnormal Conditions

Node B shall reject, with cause value 'SIB origination in Node B not supported', requests for Node B originated system information blocks that make use of a value tag.

Node B shall reject the requested update with cause value "BCCH scheduling error" if:

- After having handled a certain MIB/SB/SIB information IE repetition, an illegal BCCH schedule results;
- If a MIB/SB/SIB information IE repetition includes an *IB SG REP* IE or an *IB SG POS* IE and there is already an IB in the BCCH schedule with the same IB Type and IB OC ID which is not requested to be deleted from the BCCH schedule by an IB deletion indicated in a *MIB/SB/SIB information* IE repetition present in the SYSTEM INFORMATION UPDATE REQUEST message before the IB addition is indicated. This rule shall apply even if the scheduling instructions in *IB SG REP* IE and *IB SG POS* IE were the same as the current scheduling instructions for the concerned IB;
- If a MIB/SB/SIB information IE repetition includes no *IB SG REP* IE and *IB SG POS* IE and there is no IB in the BCCH schedule with the same IB Type and IB OC ID;
- If a MIB/SB/SIB information IE repetition includes no *IB SG REP* IE and *IB SG POS* IE and there is already an IB in the BCCH schedule with the same IB Type and IB OC ID but it is requested to be deleted from the BCCH schedule by an IB deletion indicated in a *MIB/SB/SIB information* IE repetition present in the SYSTEM INFORMATION UPDATE REQUEST message before the IB addition is indicated.

8.2.17 Radio Link Setup

8.2.17.1 General

This procedure is used for establishing the necessary resources for a new Node B Communication Context in the Node B.

[FDD – The RL Setup procedure is used to establish one or more radio links. The procedure establishes one or more DCHs on all radio links, and in addition, it can include the establishment of one or more DSCHs on one radio link.]

[TDD – The RL Setup procedure is used for establish one radio link including one or more transport channels. The transport channels can be a mixture of DCHs, DSCHs, and USCHs, including also combinations where one or more transport channel types are not present.]

8.2.17.2 Successful Operation



Figure 24: Radio Link Setup procedure, Successful Operation

The procedure is initiated with a RADIO LINK SETUP REQUEST message sent from the CRNC to Node B.

Upon reception of RADIO LINK SETUP REQUEST message, the Node B shall reserve necessary resources and configure the new Radio Link(s) according to the parameters given in the message.

The Node B shall prioritise resource allocation for the RL(s) to be established according to Annex A.

Transport Channels Handling:

DCH(s):

[TDD – If the *DCH Information* IE is present, the Node B shall configure the new DCH(s) according to the parameters given in the message.]

If the RADIO LINK SETUP REQUEST message includes a *DCH Information* IE with multiple *DCH Specific Info* IEs then, the Node B shall treat the DCHs in the *DCH Information* IE as a set of co-ordinated DCHs. The Node B shall include these DCHs in the new configuration only if it can include all of them in the new configuration.

[FDD – For DCHs which do not belong to a set of co-ordinated DCHs with the *QE-Selector* IE set to "selected", the Transport channel BER from that DCH shall be the base for the QE in the UL data frames. If no Transport channel BER is available for the selected DCH the Physical channel BER shall be used for the QE, ref. [16]. If the QE-Selector is set to "non-selected", the Physical channel BER shall be used for the QE in the UL data frames, ref. [16].]

For a set of co-ordinated DCHs the Transport channel BER from the DCH with the *QE-Selector* IE set to "selected" shall be used for the QE in the UL data frames, ref. [16]. [FDD - If no Transport channel BER is available for the selected DCH the Physical channel BER shall be used for the QE, ref. [16]. If all DCHs have *QE-Selector* IE set to "non-selected" the Physical channel BER shall be used for the QE, ref. [16]].

The Node B shall use the included *UL FP Mode* IE for a DCH or a set of co-ordinated DCHs to be added as the FP Mode in the Uplink of the user plane for the DCH or the set of co-ordinated DCHs in the configuration.

- The Node B shall use the included *ToAWS* IE for a DCH or a set of co-ordinated DCHs to be added as the Time of Arrival Window Start Point in the user plane for the DCH or the set of co-ordinated DCHs in the configuration.
- The Node B shall use the included *ToAWE* IE for a DCH or a set of co-ordinated DCHs to be added as the Time of Arrival Window End Point in the user plane for the DCH or the set of co-ordinated DCHs in the configuration.
- The received *Frame Handling Priority* IE specified for each Transport Channel should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the Node B once the new RL(s) has been activated.
- [FDD The *Diversity Control Field* IE indicates for each RL (except the first RL in the message) whether the Node B shall combine the concerned RL or not. If the *Diversity Control Field* IE is set to "May", then Node B shall decide for either of the alternatives. If the *Diversity Control Field* IE is set to "Must", the Node B shall combine the RL with one of the other RL. Diversity combining is applied to Dedicated Transport Channels (DCH), i.e. it is not applied to the DSCHs. When a new RL is to be combined, the Node B shall choose which RL(s) to combine it with. If the *Diversity Control Field* IE is set to "Must not", the Node B shall not combine the RL with any other existing RL.]
- [FDD In the RADIO LINK SETUP RESPONSE message the Node B shall indicate with the *Diversity Indication* IE whether the RL is combined or not. In case of combining, only the *Reference RL ID* IE shall be included to indicate one of the existing RLs that the concerned RL is combined with. In case of not combining the Node B shall include in the RL SETUP RESPONSE the *Binding ID* IE and *Transport Layer Address* IE for the transport bearer to be established for each DCH of this RL.]
- [TDD The Node B shall include in the RADIO LINK SETUP RESPONSE the *Binding ID* IE and *Transport Layer Address* IE for the transport bearer to be established for each DCH of this RL.]
- In case of coordinated DCH, the *Binding ID* IE and the *Transport Layer Address* IE shall be specified for only one of the coordinated DCHs.

DSCH(s):

- If the *DSCH Information* IE is present, the Node B shall configure the new DSCH(s) according to the parameters given in the message.
- [FDD If the RADIO LINK SETUP REQUEST message includes the *TFC12 Bearer Information* IE then the Node B shall support the establishment of a transport bearer on which the DSCH TFCI Signaling control frames shall be received. The Node B shall manage the time of arrival of these frames according to the values of ToAWS and ToAWE specified in the IE's. The *Binding ID* IE and *Transport Layer Address* IE for the new bearer to be set up for this purpose shall be returned in the RADIO LINK SETUP RESPONSE message.]
- The Node B shall include in the RADIO LINK SETUP RESPONSE the *Binding ID* IE and *Transport Layer Address* IE for the transport bearer to be established for each DSCH of this RL.
- [TDD USCH(s)]:
- [TDD If the *USCH Information* IE is present, the Node B shall configure the new USCH(s) according to the parameters given in the message.]
- [TDD In case the *USCH Information* IE is present, the Node B shall include in the RADIO LINK SETUP RESPONSE the *Binding ID* IE and *Transport Layer Address* IE for the transport bearer to be established for each USCH of this RL.]

Physical Channels Handling:

- [FDD Compressed Mode]:
- [FDD If the RADIO LINK SETUP REQUEST message includes the *Transmission Gap Pattern Sequence Information* IE, the Node B shall store the information about the Transmission Gap Pattern Sequences to be used in the Compressed Mode Configuration. This Compressed Mode Configuration shall be valid in the Node B until the next Compressed Mode Configuration is configured in the Node B or Node B Communication Context is deleted.]

- [FDD If the *Downlink compressed mode method* IE in one or more Transmission Gap Pattern Sequence is set to 'SF/2' in the RADIO LINK SETUP REQUEST message, the Node B shall use or not the alternate scrambling code as indicated for each DL Channelisation Code in the *Transmission Gap Pattern Sequence Code Information* IE.]
- [FDD If the RADIO LINK SETUP REQUEST message includes the *Transmission Gap Pattern Sequence Information* IE and the *Active Pattern Sequence Information* IE, the Node B shall use the information to activate the indicated Transmission Gap Pattern Sequence(s) in the new RL. The received *CM Configuration Change CFN* refers to the latest passed CFN with that value The Node B shall treat the received *TGCFN* IEs as follows:]
 - [FDD If any received *TGCFN* IE has the same value as the received *CM Configuration Change CFN* IE, the Node B shall consider the concerning Transmission Gap Pattern Sequence as activated at that CFN.]
 - [FDD If any received *TGCFN* IE does not have the same value as the received *CM Configuration Change CFN* IE but the first CFN after the CM Configuration Change CFN with a value equal to the *TGCFN* IE has already passed, the Node B shall consider the concerning Transmission Gap Pattern Sequence as activated at that CFN.]
 - [FDD For all other Transmission Gap Pattern Sequences included in the Active Pattern Sequence
 Information IE, the Node B shall activate each Transmission Gap Pattern Sequence at the first CFN after
 the CM Configuration Change CFN with a value equal to the TGCFN IE for the Transmission Gap
 Pattern Sequence.]
- [FDD DL Code Information]:
- [FDD When more than one DL DPDCH are assigned per RL, the segmented physical channel shall be mapped on to DL DPDCHs according to [8]. When *p* number of DL DPDCHs are assigned to each RL, the first pair of DL Scrambling Code and FDD DL Channelisation Code Number corresponds to "*PhCH number 1*", the second to "*PhCH number 2*", and so on until the *pth* to "*PhCH number p*".]

General:

- [FDD If the *Propagation Delay* IE is included, the Node B may use this information to speed up the detection of L1 synchronisation.]
- [FDD The *UL SIR Target* IE included in the message shall be used by the Node B as initial UL SIR target for the UL inner loop power control.]
- [1.28Mcps TDD The *UL SIR Target* IE included in the message shall be used by the Node B as initial UL SIR target for the UL inner loop power control according [19] and [21].]
- [FDD If the received *Limited Power Increase* IE is set to 'Used', the Node B shall, if supported, use Limited Power Increase according to ref. [10] subclause 5.2.1 for the inner loop DL power control.]
- [FDD If the *TFCI Signalling Mode* IE within the RADIO LINK SETUP message indicates that there shall be a hard split on the TFCI field but the *TFCI2 Bearer Information* IE is not included in the message then the Node B shall transmit the TFCI2 field with zero power.]
- [FDD If the *TFCI Signalling Mode* IE within the RADIO LINK SETUP message indicates that there shall be a hard split on the TFCI and the *TFCI2 Bearer Information* IE is included in the message then the Node B shall transmit the TFCI2 field with zero power until Synchronization is achieved on the TFCI2 transport bearer and the first valid DSCH TFCI Signalling control frame is received on this bearer (see ref.[24]).]

Radio Link Handling:

- [FDD Transmit Diversity]:
- [FDD When *Diversity Mode* IE is "STTD", "Closedloop mode1", or "Closedloop mode2", the Node B shall activate/deactivate the Transmit Diversity to each Radio Link in accordance with Transmit Diversity Indication IE]
- DL Power Control:

- [FDD The Node B shall start the DL transmission using the initial DL power specified in the message on each DL DPCH of the RL until either UL synchronisation on the Uu is achieved for the RLS or Power Balancing is activated. No inner loop power control or balancing shall be performed during this period. The DL power shall then vary according to the inner loop power control (see ref.[10], subclause 5.2.1.2) and the power control procedure (see subclause 8.3.7), but shall always be kept within the maximum and minimum limit specified in the RADIO LINK SETUP REQUEST message. During compressed mode, the $P_{SIR}(k)$, as described in ref.[10] subclause 5.2.1.3, shall be added to the maximum DL power in slot k.]
- [FDD If the *DPC Mode* IE is present in the RADIO LINK SETUP REQUEST message, the Node B shall apply the DPC mode indicated in the message, and be prepared that the DPC mode may be changed during the life time of the RL. If the *DPC Mode* IE is not present in the RADIO LINK SETUP REQUEST message, DPC mode 0 shall be applied (see ref. [10]).]]
- [TDD The Node B shall start the DL transmission using the initial DL power specified in the message on each DL DPCH and on each Time Slot of the RL until the UL synchronisation on the Uu is achieved for the RL. No inner loop power control shall be performed during this period. The DL power shall then vary according to the inner loop power control (see ref.[22], subclause 4.2.3.3), but shall always be kept within the maximum and minimum limit specified in the RL SETUP REQUEST message.]
- [TDD If the [3.84Mcps TDD *DL Time Slot ISCPInfo* IE] or [1.28Mcps TDD *DL Timeslot ISCP LCR* IE] is present, the Node B shall use the indicated value when deciding the initial DL TX Power for each timeslot as specified in [21], i.e. it shall reduce the DL TX power in those downlink timeslots of the radio link where the interference is low, and increase the DL TX power in those timeslots where the interference is high, while keeping the total downlink power in the radio link unchanged].
- [FDD If the received *Inner Loop DL PC Status* IE is set to "Active", the Node B shall activate the inner loop DL power control for all RLs. If *Inner Loop DL PC Status* IE is set to "Inactive", the Node B shall deactivate the inner loop DL power control for all RLs according to ref. [10]]

General:

- [FDD If the RADIO LINK SETUP REQUEST message includes the *SSDT Cell Identity* IE and the *S-Field Length* E, the Node B shall activate SSDT, if supported, using the *SSDT Cell Identity* IE and *SSDT Cell Identity Length* IE.]
- [FDD Irrespective of SSDT activation, the Node B shall include in the RADIO LINK SETUP RESPONSE message an indication concerning the capability to support SSDT on this RL. Only if the RADIO LINK SETUP REQUEST message requested SSDT activation and the RADIO LINK SETUP RESPONSE message indicates that the SSDT capability is supported for this RL, SSDT is activated in the Node B.]
 - [FDD If the RADIO LINK SETUP REQUEST message includes the SSDT Cell Identity for EDSCHPC IE, the Node B shall activate enhanced DSCH power control, if supported, using the SSDT Cell Identity for EDSCHPC IE and SSDT Cell Identity Length IE as well as Enhanced DSCH PC IE in accordance with ref. [10] subclause 5.2.2. If the RADIO LINK SETUP REQUEST message includes both SSDT Cell Identity IE and SSDT Cell Identity for EDSCHPC IE, then the Node B shall ignore the value in SSDT Cell Identity for EDSCHPC IE]

[FDD - Radio Link Set Handling]:

- [FDD The *First RLS Indicator* IE indicates if the concerning RL shall be considered part of the first RLS established towards this UE. The *First RLS Indicator* IE shall be used by the Node B together with the value of the *DL TPC pattern 01 count* IE which the Node B has received in the Cell Setup procedure, to determine the initial TPC pattern in the DL of the concerning RL and all RLs which are part of the same RLS, as described in [10], section 5.1.2.2.1.2.]
- [FDD For each RL not having a common generation of the TPC commands in the DL with another RL, the Node B shall assign the *RL Set ID* IE included in the RADIO LINK SETUP RESPONSE message a value that uniquely identifies the RL Set within the Node B Communication context.]
- [FDD For all RLs having a common generation of the TPC commands in the DL with another RL, the Node B shall assign the *RL Set ID* IE included in the RADIO LINK SETUP RESPONSE message the same value. This value shall uniquely identify the RL Set within the Node B Communication context.]

[FDD – The UL out-of-sync algorithm defined in [10] shall for each of the established RL Set(s) use the maximum value of the parameters N_OUTSYNC_IND and T_RLFAILURE, and the minimum value of the parameters N_INSYNC_IND, that are configured in the cells supporting the radio links of the RL Set]

Response Message:

If the RLs are successfully established, the Node B shall start reception on the new RL(s) and respond with a RADIO LINK SETUP RESPONSE message.

After sending of the RADIO LINK SETUP RESPONSE message the Node B shall continuously attempt to obtain UL synchronisation on the Uu and start reception on the new RL. [FDD – The Node B shall start transmission on the new RL after synchronisation is achieved in the DL user plane as specified in [16].] [TDD – The Node B shall start transmission on the new RL immediately as specified in [16].]

8.2.17.3 Unsuccessful Operation



Figure 25: Radio Link Setup procedure: Unsuccessful Operation

If the establishment of at least one radio link is unsuccessful, the Node B shall respond with a RADIO LINK SETUP FAILURE message. The message contains the failure cause in the *Cause* IE.

[FDD – If some radio links were established successfully, the Node B shall indicate this in the RADIO LINK SETUP FAILURE message in the same way as in the RADIO LINK SETUP RESPONSE message.]

Typical cause values are as follows:

Radio Network Layer Cause

- Combining not supported
- Combining Resources not available
- Requested Tx Diversity Mode not supported
- Number of DL codes not supported
- Number of UL codes not supported
- UL SF not supported
- DL SF not supported
- Dedicated Transport Channel Type not supported
- Downlink Shared Channel Type not supported
- Uplink Shared Channel Type not supported
- CM not supported
- DPC mode change not supported

Transport Layer Cause

- Transport Resources Unavailable

Miscellaneous Cause

- O&M Intervention
- Control processing overload
- HW failure

8.2.17.4 Abnormal Conditions

[FDD – If the RADIO LINK SETUP REQUEST message contains the *Active Pattern Sequence Information* IE, but the *Transmission Gap Pattern Sequence Information* IE is not present, then the Node B shall reject the procedure using the RADIO LINK SETUP FAILURE message.]

If more than one DCH of a set of co-ordinated DCHs has the *QE-Selector* IE set to "selected" [TDD – or no DCH of a set of co-ordinated DCHs has the *QE-Selector* IE set to "selected"] the Node B shall regard the Radio Link Setup procedure as failed and shall respond with a RADIO LINK SETUP FAILURE message.

If the RADIO LINK SETUP REQUEST message includes a *DCH Information* IE with multiple *DCH Specific Info* IEs, and if the DCHs in the *DCH Information* IE do not have the same *Transmission Time Interval* IE in the *Semi-static Transport Format Information* IE, then the Node B shall reject the procedure using the RADIO LINK SETUP FAILURE message

8.2.18 Physical Shared Channel Reconfiguration [TDD]

8.2.18.1 General

This procedure is used for handling PDSCH Sets and PUSCH Sets in the Node B, i.e.

- Adding new PDSCH Sets and/or PUSCH Sets,
- Modifying these, and
- Deleting them.

8.2.18.2 Successful Operation




Figure 26: Physical Shared Channel Reconfiguration: Successful Operation

The procedure is initiated with a PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message sent from the CRNC to the Node B.

If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes an *SFN* IE the Node B will activate the new configuration on that specified SFN.

PDSCH/PUSCH Addition

If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any PDSCH sets or PUSCH sets to be added the Node B shall add these new sets to its PDSCH/PUSCH configuration.

PDSCH/PUSCH Modification

If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any PDSCH sets or PUSCH sets to be modified, and includes any of [3.84Mcps TDD - TDD Channelisation Code IE, Midamble shift and burst type IE, Time Slot IE], [1.28Mcps TDD - TDD Channelisation Code LCR IE, Midamble shift LCR IE, Time Slot LCR IE], TDD Physical Channel Offset IE, Repetition Period IE, Repetition Length IE, or TFCI presence IE the Node B shall apply these as the new values, otherwise the old values specified for this set are still applicable.

PDSCH/PUSCH Deletion

If the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message includes any PDSCH sets or PUSCH sets to be deleted the Node B shall delete these new sets to its PDSCH/PUSCH configuration.

In the successful case, the Node B shall add, modify and delete the PDSCH Sets and PUSCH Sets in the Common Transport Channel data base, as requested in the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST, and shall make these available to all the current and future DSCH and USCH transport channels; and shall respond with PHYSICAL SHARED CHANNEL RECONFIGURATION RESPONSE:

8.2.18.3 Unsuccessful Operation




Figure 27: Physical Shared Channel Reconfiguration procedure: Unsuccessful Opreration

If the Node B is not able to support all parts of the configuration, it shall reject the configuration of all the channels in the PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST message. The *Cause Value* IE shall be set to an appropriate value.

If the configuration was unsuccessful, the Node B shall respond with the PHYSICAL SHARED CHANNEL RECONFIGURATION FAILURE message:

Typical cause values are as follows:

Radio Network Laver Cause

- Cell not available
- Node B Resources unavailable

Transport Layer Cause

- Transport Resources Unavailable

Miscellaneous Cause

- O&M Intervention
- Control processing overload
- HW failure

8.2.18.4 Abnormal Conditions

-

8.2.19 Reset

8.2.19.1 General

The purpose of the reset procedure is to align the resources in the CRNC and Node B in the event of an abnormal failure. The CRNC or Node B may initiate the procedure.

8.2.19.2 Successful Operation

8.2.19.2.1 Reset Initiated by the CRNC




Figure 27A Reset procedure (CRNC to Node B), Successful Operation

The procedure is initiated with a RESET REQUEST message sent from the CRNC to the Node B.

If the *Reset Indicator* IE is set to 'CommunicationContext', the Node B shall remove all the indicated Node B Communication Contexts (typically identified by a *Node B Communication Context ID* IE) and all the radio resources allocated for these Node B Communication Contexts. The Node B shall also initiate release of the user plane transport bearers that were involved in these Contexts. After clearing all related resources, the Node B shall return the RESET RESPONSE message to the CRNC.

If the *Reset Indicator* IE is set to 'CommunicationControlPort', the Node B shall remove all the Node B Communication Contexts controlled via the indicated Communication Control Port(s) and all the radio resources allocated for these Node B Communication Contexts. The Node B shall also initiate release of the user plane transport bearers that were involved in these Contexts. After clearing all related resources, the Node B shall return the RESET RESPONSE message to the CRNC.

If the *Reset Indicator* IE is set to 'Node B', the Node B shall remove all the Node B Communication Contexts within the Node B and all the radio resources allocated for these Node B Communication Contexts. The Node B shall also initiate release of the user plane transport bearers that were involved in these Contexts. After clearing all related resources, the Node B shall return the RESET RESPONSE message to the CRNC.

8.2.19.2.2 Reset Initiated by the Node B




Figure 27B Reset procedure (Node B to CRNC), Successful Operation

The procedure is initiated with a RESET REQUEST message sent from the Node B to the CRNC.

If the *Reset Indicator* IE is set to 'CommunicationContext', for all indicated CRNC Communication Contexts (indicated by a *CRNC Communication Context ID* IE) the CRNC shall remove the information related to this Node B and all the radio resources allocated in the CRNC. The CRNC shall also initiate release of the user plane transport bearers towards the Node B involved in the indicated CRNC Communication Contexts. After clearing all related resources, the CRNC shall return the RESET RESPONSE message to the Node B.

If the *Reset Indicator* IE is set to 'CommunicationControlPort', for all the CRNC Communication Contexts controlled via the indicated Communication Control Port(s) the CRNC shall remove the information related to this Node B and all the radio resources allocated in the CRNC. The CRNC shall also initiate release of the user plane transport bearers

towards the Node B involved in the CRNC Communication Contexts controlled via the indicated Communication Control Port(s). After clearing all related resources, the CRNC shall return the RESET RESPONSE message to Node B.

If the *Reset Indicator* IE is set to the 'Node B', for all the CRNC Communication Contexts related to this Node B the CRNC shall remove the information related to this Node B and all the radio resources allocated in the CRNC. The CRNC shall also initiate release of the user plane transport bearers towards the Node B involved in the CRNC Communication Contexts related to this Node B. After clearing all related resources, the CRNC shall return the RESET RESPONSE message to Node B.

8.2.19.3 Unsuccessful Operation

_

8.2.19.4 Abnormal Conditions

If the RESET message is received any ongoing procedure related to a CRNC Communication Context in the CRNC or Node B Communication Context in the Node B indicated (explicitly or implicitly) in the message shall be aborted.

8.2.20 Cell Synchronisation Initiation [TDD]

8.2.20.1 General

This procedure is used by a CRNC to request the transmission of cell sync bursts and/or to start measurements on cell sync bursts in a Node B.

8.2.20.2 Successful Operation




Figure 27C Cell Synchronisation Initiation procedure, Successful Operation

The procedure is initiated with a CELL SYNCHRONISATION INITIATION REQUEST message sent from the CRNC to the Node B using the Node B control port.

Upon reception, the Node B shall initiate the requested transmission according to the parameters given in the request and start the measurement on cell sync bursts if requested.

Cell Sync Burst Transmission Initiation

When the Cell Sync Burst Transmission Initiation Information is present, the Node B shall configure the transmission of the cell sync burst according to the parameters given in the CELL SYNCHRONISATION INITIATION REQUEST message. The *SFN* IE indicates the frame number when the cell shall start transmitting cell sync bursts.

When the Cell Sync Burst Transmission Initiation Information is present and the 'Frequency Acquisition' is indicated within the *Synchronisation Report Type* IE, the Node B shall first perform only frequency locking on received cell sync bursts. Transmission of the indicated cell sync bursts shall be started only if the frequency locking is performed successfully and 'Frequency Acquisition completed' is reported to the RNC.

Cell Sync Burst Measurement characteristics

When the Cell Sync Burst Measurement Initiation Information is present, the Node B shall initiate measurements on the indicated cell sync burst.

In case the *SFN* IE is present, the Node B shall after measurement of the indicated cell sync burst adjust the frame number of the indicated cell according to the SFN of the CELL SYNCHRONISATION INITIATION REQUEST message. This adjustment shall only apply to the late entrant cell at the late entrant phase.

Synchronisation Report characteristics

The *Synchronisation Report Characteristics* IE indicates how the reporting of the cell sync burst measurement shall be performed. Whenever the Cell Synchronisation Initialtion procedure is initiated, only the 'Frequency Acquisition completed' or 'Frame related' report characteristic type shall apply.

If the *Synchronisation Report characteristics type* IE is set to 'Frequency Acquisition completed', the Node B shall signal completion of frequency acquisition to the RNC when locking is completed.

If the *Synchronisation Report characteristics type* IE is set to 'Frame related', the Node B shall report the result of the cell sync burst measurement after every measured frame.

Response message

If the Node B was able to initiate the cell sync burst transmission and/or measurement requested by the CRNC it shall respond with the CELL SYNCHRONISATION INITIATION RESPONSE message sent over the Node B control port.

8.2.20.3 Unsuccessful Operation




Figure 27D Cell Synchronisation Initiation procedure, Unsuccessful Operation

If the requested transmission or measurement on cell sync bursts cannot be initiated, the Node B shall send a CELL SYNCHRONISATION INITIATION FAILURE message over the Node B control port. The message shall include the *Cause* IE set to an appropriate value.

Typical cause values are as follows:

Radio Network Layer Cause

- Cell Synchronisation not supported
- Power level not supported
- Measurement Temporarily not Available
- Frequency Acquisition not supported

Miscellaneous Cause

- O&M Intervention
- HW failure

8.2.20.4 Abnormal Conditions

-

8.2.21 Cell Synchronisation Reconfiguration [TDD]

8.2.21.1 General

This procedure is used by a CRNC to reconfigure the transmission of cell sync bursts and/or to reconfigure measurements on cell sync bursts in a Node B.

8.2.21.2 Successful Operation




Figure 27E Cell Synchronisation Reconfiguration procedure, Successful Operation

The procedure is initiated with a CELL SYNCHRONISATION RECONFIGURATION REQUEST message sent from the CRNC to the Node B using the Node B control port.

Upon reception, the Node B shall reconfigure the cell sync burst transmission and/or measurements according to the parameters given in the request.

Cell Sync Burst Schedule

Within the CELL SYNCHRONISATION RECONFIGURATION REQUEST message first the schedule for the steady state phase is fixed. I.e. the number of cycles per SFN period is defined with the same schedule. For each cycle the number of repetitions is defined according to following equations:

Cycle length: 4096 / value of the IE 'Number of cycles per SFN period'

Repetition period: Cycle length / value of IE 'Number of repetitions per cycle period'

Cell Sync Frame number is calculated by:

SFN = floor((k-1) * Cycle length + (i-1)* Repetition period)

 $k = \{1, 2, 4, ... \text{ Number of cycle per SFN period}\}$

 $i = \{1, 2, 3, ... \text{ Cell Sync Frame number within cycle period}\}$

Cell Sync Burst Transmission Reconfiguration

When the Cell Sync Burst Transmission Reconfiguration Information is present, the Node B shall reconfigure the transmission of the cell sync burst according to the parameters given in the CELL SYNCHRONISATION RECONFIGURATION REQUEST message.

If the CELL SYNCHRONISATION RECONFIGURATION REQUEST message includes the *Cell Sync Burst Code* IE the Node B shall reconfigure the synchronisation code in the cell according to the *Cell Sync Burst Code* IE value.

If the CELL SYNCHRONISATION RECONFIGURATION REQUEST message includes the *Cell Sync Burst Code* shift IE the Node B shall reconfigure the synchronisation code shift in the cell according to the *Cell Sync Burst Code* shift IE value.

If the CELL SYNCHRONISATION RECONFIGURATION REQUEST message includes the *DL transmission Power* IE the Node B shall reconfigure the Dl transmission power of the cell sync burst in the cell according to the *DL transmission Power* IE value.

Cell Sync Burst Measurement Reconfiguration

When the Cell Sync Burst Measurement Reconfiguration Information is present, the Node B shall reconfigure the cell sync burst measurements according the parameters given in the message.

If the CELL SYNCHRONISATION RECONFIGURATION REQUEST message includes the Cell Sync Burst Measurement Information the measurements shall apply on the individual cell sync bursts on the requested Sync Frame number.

If the *Synchronisation Report Type* IE is provided, the measurement reporting shall apply according the parameter given in the message.

Synchronisation Report characteristics

The Synchronisation Report Characteristics IE indicates how the reporting of the cell sync burst measurement shall be performed.

If the *Synchronisation Report characteristics type* IE is set to 'Frame related', the Node B shall report the result of the cell sync burst measurement after every measured frame.

If the *Synchronisation Report characteristics type* IE is set to 'SFN period related', the Node B shall report the result of the cell sync burst measurements after every SFN period.

If the *Synchronisation Report characteristics type* IE is set to 'Cycle length related', the Node B shall report the result of the cell sync burst measurements after every cycle length within the SFN period.

If the *Synchronisation Report characteristics type* IE is set to 'Threshold exceeding', the Node B shall report the result of the cell sync burst measurement when the cell sync burst timing rises or falls more than the requested threshold value compared to the arrival time in synchronised state which is represented by the *Cell Sync Burst Arrival Time* IE.

Response message

If the Node B was able to reconfigure the cell sync burst transmission and/or measurement requested by the CRNC it shall respond with the CELL SYNCHRONISATION RECONFIGURATION RESPONSE message sent over the Node B control port.

8.2.21.3 Unsuccessful Operation




Figure 27F Cell Synchronisation Reconfiguration procedure, Unsuccessful Operation

If the Node B cannot reconfigure the requested transmission or measurement on cell sync burst, the CELL SYNCHRONISATION RECONFIGURATION FAILURE message shall be sent to the CRNC. The message shall include the *Cause* IE set to an appropriate value.

Typical cause values are as follows:

Radio Network Layer Cause

- Cell Synchronisation not supported
- Power level not supported
- Measurement Temporarily not Available

Miscellaneous Cause

O&M Intervention

- HW failure

8.2.21.4 Abnormal Conditions

-

8.2.22 Cell Synchronisation Reporting [TDD]

8.2.22.1 General

This procedure is used by a Node B to report the result of cell sync burst measurements requested by the CRNC with the Cell Synchronisation Initiation or Cell Synchronisation Reconfiguration procedure.

8.2.22.2 Successful Operation




Figure 27G Cell Synchronisation Reporting procedure, Successful Operation

If the requested synchronisation measurement reporting criteria are met, the Node B shall initiate a Cell Synchronisation Reporting procedure. The CELL SYNCHRONISATION REPORT message shall use the Node B control port.

In the steady state phase when several cell sync bursts shall be measured per Sync Frame number, the sequence of the reported measured values shall be the same as defined in the Cell Synchronisation Reconfiguration procedure.

If the achieved measurement accuracy does not fulfil the given accuracy requirement defined in [23], the Cell Sync Burst not available shall be reported.

8.2.22.3 Abnormal Conditions

_

8.2.23 Cell Synchronisation Termination [TDD]

8.2.23.1 General

This procedure is used by the CRNC to terminate a cell sync burst transmission or measurement previously requested by the Cell Synchronisation Initiation procedure or Cell Synchronisation Reconfiguration procedure.

8.2.23.2 Successful Operation



Figure 27H Cell Synchronisation Termination procedure, Successful Operation

This procedure is initiated with a CELL SYNCHRONISATION TERMINATION REQUEST message, sent from the CRNC to the Node B using the Node B control port.

Upon reception, the Node B shall terminate transmission of cell sync bursts or reporting of cell sync burst measurements corresponding to the CSB Transmission Id or CSB Measurement Id.

8.2.23.3 Abnormal Conditions

_

8.2.24 Cell Synchronisation Failure [TDD]

8.2.24.1 General

This procedure is used by the Node B to notify the CRNC that a synchronisation burst transmission or synchronisation measurement procedure can no longer be supported.

8.2.24.2 Successful Operation



Figure 27I Cell Synchronisation Failure procedure, Successful Operation

This procedure is initiated with a CELL SYNCHRONISATION FAILURE INDICATION message, sent from the Node B to the CRNC using the Node B control port, to inform the CRNC that a previously requested transmission or measurement on cell sync bursts can no longer be supported.

8.2.24.3 Abnormal Conditions

-

8.2.25 Cell Synchronisation Adjustment [TDD]

8.2.25.1 General

The purpose of Cell Synchronisation Adjustment procedure is to allow the CRNC to adjust the timing of the radio transmission of a cell within a Node B for time alignment.

8.2.25.2 Successful Operation




Figure 27J Cell Synchronisation Adjustment, Successful Operation

This procedure is initiated with a CELL SYNCHRONISATION ADJUSTMENT REQUEST message sent by the CRNC to the Node B using the Node B control port.

Upon reception, the Node B adjusts its timing according to the parameters given in the message.

If the CELL SYNCHRONISATION ADJUSTMENT REQUEST message includes the *Frame Adjustment value* IE the Node B shall apply the frame adjustment in the cell according to the *Frame Adjustment value* IE value.

If the CELL SYNCHRONISATION ADJUSTMENT REQUEST message includes the *Timing Adjustment value* IE the Node B shall apply the timing adjustment in the cell according to the *Timing Adjustment value* IE value.

If the CELL SYNCHRONISATION ADJUSTMENT REQUEST message includes the *DL Transmission Power* IE the Node B shall apply the transmission power of the cell sync burst according to the *DL Transmission Power* IE value.

If the CELL SYNCHRONISATION ADJUSTMENT REQUEST message includes the *SFN* IE the Node B shall apply the synchronisation adjustment starting with the SFN number indicated in the message.

When the cell synchronisation adjustment is successfully done by the Node B the Node B shall respond with a CELL SYNCHRONISATION ADJUSTMENT RESPONSE message.

8.2.25.3 Unsuccessful Operation




Figure 27K Cell Synchronisation Adjustment, Unsuccessful Operation

If the Node B cannot perform the indicated cell synchronisation adjustment due to hardware failure or other problem it shall send the CELL SYNCHRONISATION ADJUSTMENT FAILURE as a response.

Typical cause values are as follows:

Radio Network Layer Cause

- Cell Synchronisation Adjustment not supported
- Power level not supported

Miscellaneous Cause

- O&M Intervention
- HW failure

8.2.25.4 Abnormal Conditions

_

8.2.26 Information Exchange Initiation

8.2.26.1 General

This procedure is used by a CRNC to request the initiation of information provisioning from a Node B.

8.2.26.2 Successful Operation




Figure 27L: Information Exchange Initiation procedure, Successful Operation

The procedure is initiated with the INFORMATION EXCHANGE INITIATION REQUEST message sent from the CRNC to the Node B using the Node B control port.

Upon reception, the Node B shall provide the requested information according to the *Information Type Item* IE. Unless specified below, the meaning of the parameters are given in other specifications.

Information Report Characteristics

The Information Report Characteristics IE indicates how the reporting of the information shall be performed.

If the *Information Report Characteristics* IE is set to 'On Demand', the Node B shall report the requested information immediately.

If the *Information Report Characteristics* IE is set to 'Periodic', the Node B shall periodically initiate the Information Reporting procedure for all the requested information, with the requested reporting frequency.

If the *Information Report Characteristics* IE is set to 'On Modification', the Node B shall immediately report the requested information and then shall initiate the Information Reporting procedure in accordance to the following conditions related to the *Information Type* IE:

- 1) If the *Information Type Item* IE is set to 'DGPS Corrections', the Node B shall initiate the Information Reporting procedure when either the PRC has drifted from the previously reported value more than the threshold indicated in the *PRC Deviation* IE or a change has occurred in the IODE.
- 2) If the *Information Type Item* IE is set to 'GPS Information' and the *GPS Information Item* IE includes 'GPS Navigation Model & Time Recovery', the Node B shall initiate the Information Reporting procedure for this specific GPS Information Item when a change has occurred regarding either the IODC or the list of visible satellites, identified by the *SatID* IEs.
- 3) If the *Information Type Item* IE is set to 'GPS Information' and the *GPS Information Item* IE includes 'GPS Ionospheric Model', the Node B shall initiate the Information Reporting procedure for this specific GPS Information Item when any change has occurred.
- 4) If the *Information Type Item* IE is set to 'GPS Information' and the *GPS Information Item* IE includes 'GPS UTC Model', the Node B shall initiate the Information Reporting procedure for this specific GPS Information Item when a change has occurred in the t_ot parameter.
- 5) If the *Information Type Item* IE is set to 'GPS Information' and the *GPS Information Item* IE includes 'GPS Almanac', the Node B shall initiate the Information Reporting procedure for this specific GPS Information Item when any change has occurred.
- 6) If the *Information Type Item* IE is set to 'GPS Information' and the *GPS Information Item* IE includes 'GPS Real-Time Integrity', the Node B shall initiate the Information Reporting procedure for this specific GPS Information Item when any change has occurred.

Response message

If the Node B was able to initiate the information provision requested by the CRNC it shall respond with the INFORMATION EXCHANGE INITIATION RESPONSE message sent over the Node B control port. The message shall include the same Information Exchange ID that was included in the INFORMATION EXCHANGE REQUEST message. When the *Report Characteristics* IE is set to "On-Demand" or "On Modification" or "Periodic", the INFORMATION EXCHANGE INITIATION RESPONSE message shall contain the requested data.

8.2.26.3 Unsuccessful Operation




Figure 27M: Information Exchange Initiation procedure, Unsuccessful Operation

If the Information Type Item received in the *Information Type Item* IE indicates a type of information that cannot be provided, the Node B shall regard the Information Exchange Initiation procedure as failed.

If the requested information provision cannot be initiated, the Node B shall send the INFORMATION EXCHANGE INITIATION FAILURE message over the Node B control port. The message shall include the same Information Exchange ID that was used in the INFORMATION EXCHANGE INITIATION REQUEST message and the *Cause* IE set to an appropriate value.

Typical cause values are as follows:

Radio Network Layer Cause

Information temporarily not available.

Information Provision not supported for the object.

8.2.27.4 Abnormal Conditions

If the *Information Report Characteristics* IE is set to 'On Modification', and the *Information Type Item* IE is set to 'DGPS Corrections', but the *Information Threshold* IE is not received in the INFORMATION EXCHANGE INITIATION REQUEST message, the Node B shall regard the Information Exchange Initiation procedure as failed.

8.2.27 Information Reporting

8.2.27.1 General

This procedure is used by a Node B to report the information requested by the CRNC with the Information Exchange Initiation procedure.

8.2.27.2 Successful Operation



Figure 27N: Information Reporting procedure, Successful Operation

If the requested information reporting criteria are met, the Node B shall initiate the Information Reporting procedure. The INFORMATION REPORT message shall use the Node B control port. Unless specified below, the meaning of the parameters are given in other specifications.

The *Information Exchange ID* IE shall be set to the Information Exchange ID provided by the CRNC when initiating the Information Exchange with the Information Exchange Initiation procedure.

The Requested Data Value IE shall include at least one IE containing the data to be reported.

8.2.27.3 Abnormal Conditions

_

8.2.28 Information Exchange Termination

8.2.28.1 General

This procedure is used by the CRNC to terminate the provision of information previously requested by the Information Exchange Initiation procedure.

8.2.28.2 Successful Operation



Figure 270: Information Exchange Termination procedure, Successful Operation

This procedure is initiated with an INFORMATION EXCHANGE TERMINATION REQUEST message, sent from the CRNC to the Node B using the Node B control port.

Upon reception, the Node B shall terminate the provision of information corresponding to the Information Exchange ID.

8.2.28.3 Abnormal Conditions

_

8.2.29 Information Exchange Failure

8.2.29.1 General

This procedure is used by the Node B to notify the CRNC that information previously requested by the Information Exchange Initiation procedure can no longer be reported.

8.2.29.2 Successful Operation



Figure 27P: Information Exchange Failure procedure, Successful Operation

This procedure is initiated with the INFORMATION EXCHANGE FAILURE INDICATION message, sent from the Node B to the CRNC using the Node B control port, to inform the CRNC that information previously requested by the Information Exchange Initiation procedure can no longer be reported. The message shall include the same Information Exchange ID that was used in the INFORMATION EXCHANGE INITIATION REQUEST message and the *Cause* IE set to an appropriate value.

8.3 NBAP Dedicated Procedures

8.3.1 Radio Link Addition

8.3.1.1 General

This procedure is used for establishing the necessary resources in the Node B for one or more additional RLs towards a UE when there is already a Node B communication context for this UE in the Node B.

The Radio Link Addition procedure shall not be initiated if a Prepared Reconfiguration exists, as defined in subclause 3.1.

8.3.1.2 Successful Operation




Figure: 28 Radio Link Addition procedure, Successful Operation

The procedure is initiated with a RADIO LINK ADDITION REQUEST message sent from the CRNC to the Node B.

Upon reception, the Node B shall reserve the necessary resources and configure the new RL(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

The Node B shall prioritise resource allocation for the RL(s) to be established according to Annex A.

Physical Channels Handling:

- [TDD If the *UL DPCH Information* IE is present, the Node B shall configure the new UL DPCH(s) according to the parameters given in the message.]
- [TDD If the *DL DPCH Information* IE is present, the Node B shall configure the new DL DPCH(s) according to the parameters given in the message.]
 - [FDD Compressed Mode]:
 - [FDD If the RADIO LINK ADDITION REQUEST includes the *Compressed Mode Deactivation Flag* IE with value "Deactivate", the Node B shall not activate any compressed mode pattern in the new RLs. In all the other cases (Flag set to "Maintain Active" or not present), the ongoing compressed mode (if existing) shall be applied also to the added RLs.]
 - [FDD- If the RADIO LINK ADDITION REQUEST contains the *Transmission Gap Pattern Sequence Code Information* IE for any of the allocated DL Channelisation Codes, the Node B shall apply the alternate scrambling code as indicated for each DL Channelisation Code for which the *Transmission Gap Pattern Sequence Code Information* IE is set to "Code Change".]
 - [FDD DL Code Information]:
 - [FDD When more than one DL DPDCH are assigned per RL, the segmented physical channel shall be mapped on to DL DPDCHs according to ref. [8]. When *p* number of DL DPDCHs are assigned to each RL, the first pair of DL Scrambling Code and FDD DL Channelisation Code Number corresponds to "*PhCH number 1*", the second to "*PhCH number 2*", and so on until the *p*th to "*PhCH number p*".]
 - [TDD CCTrCH Handling]:
 - [TDD If the *UL CCTrCH Information* IE is present, the Node B shall configure the new UL CCTrCH(s) according to the parameters given in the message.]
 - [TDD If the *DL CCTrCH Information* IE is present, the Node B shall configure the new DL CCTrCH(s) according to the parameters given in the message.]

Radio Link Handling:

Diversity Combination Control:

- The *Diversity Control Field* IE indicates for each RL whether the Node B shall combine the new RL with existing RL(s) or not. If the *Diversity Control Field* IE is set to "May", then Node B shall decide for any of the alternatives. If the *Diversity Control Field* IE is set to "Must", the Node B shall combine the RL with one of the other RL. When a new RL is to be combined, the Node B shall choose which RL(s) to combine it with. If the *Diversity Control Field* IE is set to "Must not" the Node B shall not combine the RL with any other existing RL.
- In the case of combining an RL with existing RL(s) the Node B shall indicate in the RADIO LINK ADDITION RESPONSE message with the Diversity Indication that the RL is combined. In this case the Reference RL ID shall be included to indicate one of the existing RLs that the new RL is combined with.
- In the case of not combining an RL with existing RL(s), the Node B shall indicate in the RADIO LINK ADDITION RESPONSE message with the Diversity Indication that no combining is done. In this case the Node B shall include both the Transport Layer Address and the binding ID for the transport bearer to be established for each DCH, [TDD DSCH, USCH] of the RL in the RADIO LINK ADDITION RESPONSE message.
- In case of coordinated DCH, the binding ID and the transport address shall be included for only one of the coordinated DCHs.
- [TDD The Node B shall include in the RADIO LINK ADDITION RESPONSE message both the *Transport Layer Address* IE and the *Binding ID* IE for the transport bearer to be established for each DSCH and USCH.]
- [FDD Transmit Diversity]:
- [FDD When *Diversity Mode* IE is "STTD", "Closedloop mode1", or "Closedloop mode2", the Node B shall activate/deactivate the Transmit Diversity to each Radio Link in accordance with Transmit Diversity Indication IE.]

[FDD – When *Transmit Diversity Indicator* IE is present Node B shall activate/deactivate the Transmit Diversity to each new Radio Link in accordance with the *Transmit Diversity Indicator* IE and the already known diversity mode.]

DL Power Control:

- [FDD If the RADIO LINK ADDITION REQUEST message includes the *Initial DL Transmission Power* IE, the Node B shall apply the given power to the transmission on each DL DPCH of the RL when starting transmission until either UL synchronisation on the Uu is achieved for the RLS or Power Balancing is activated. If no *Initial DL Transmission power* IE is included, the Node B shall use any transmission power level currently used on already existing RL's for this UE. No inner loop power control or balancing shall be performed during this period. The DL power shall then vary according to the inner loop power control (see ref.[10], subclause 5.2.1.2) with DPC MODE currently configured for the relevant Node B Communication Context and the downlink power control procedure (see 8.3.7).]
- [TDD If the RADIO LINK ADDITION REQUEST message includes the [3.84Mcps TDD *Initial DL Transmission Power* IE] [1.28Mcps TDD *DL Time Slot ISCP Info LCR* IE], the Node B shall apply the given power to the transmission on each DL DPCH and on each Time Slot of the RL when starting transmission until the UL synchronisation on the Uu is achieved for the RL. If no *Initial DL Transmission power* IE is included, the Node B shall use any transmission power level currently used on already existing RL's for this UE. No inner loop power control shall be performed during this period. The DL power shall then vary according to the inner loop power control (see ref.[22], subclause 4.2.3.3).]
- If the RADIO LINK ADDITION REQUEST message includes the *Maximum DL power* IE, the Node B shall store this value and not transmit with a higher power on any DL DPCH of the RL. If no *Maximum DL power* IE is included, any Maximum DL power stored for already existing RLs for this UE shall be applied. [FDD During compressed mode, the $P_{SIR}(k)$, as described in ref.[10] subclause 5.2.1.3, shall be added to the maximum DL power in slot k.]
- If the RADIO LINK ADDITION REQUEST message includes the *Minimum DL power* IE, the Node B shall store this value and never transmit with a lower power on any DL DPCH of the RL. If no *Minimum DL power* IE is included, any Minimum DL power stored for already existing RLs for this UE shall be applied.
- [TDD If the RADIO LINK ADDITION REQUEST message includes the *DL Time Slot ISCP Info* IE, the Node B shall use the indicated value when deciding the DL TX Power for each timeslot as specified in ref. [21], i.e. it shall reduce the DL TX power in those downlink timeslots of the radio link where the interference is low, and increase the DL TX power in those timeslots where the interference is high, while keeping the total downlink power in the radio link unchanged].

General:

[FDD – If the RADIO LINK ADDITION REQUEST message contains an *SSDT Cell Identity* IE the Node B shall activate SSDT, if supported, for the concerned new RL, with the indicated SSDT cell identity used for that RL.]

[FDD – Radio Link Set Handling]:

- [FDD For each RL not having a common generation of the TPC commands in the DL with another RL, the Node B shall assign the *RL Set ID* IE included in the RADIO LINK ADDITION RESPONSE message a value that uniquely identifies the RL Set within the Node B Communication context.]
- [FDD For all RLs having a common generation of the TPC commands in the DL with another new or existing RL, the Node B shall assign the *RL Set ID* IE included in the RADIO LINK ADDITION RESPONSE message the same value. This value shall uniquely identify the RL Set within the Node B Communication context.]
- [FDD After addition of the new RL(s), the UL out-of-sync algorithm defined in [10] shall for each of the previously existing and newly established RL Set(s) use the maximum value of the parameters $N_{OUTSYNC_IND}$ and $T_{RLFAILURE}$, and the minimum value of the parameters N_{INSYNC_IND} , that are configured in the cells supporting the radio links of the RL Set.]

Response Message:

If all requested RLs are successfully added, the Node B shall respond with a RADIO LINK ADDITION RESPONSE message.

After sending of the RADIO LINK ADDITION RESPONSE message the Node B shall continuously attempt to obtain UL synchronisation on the Uu and start reception on the new RL. [FDD – The Node B shall start transmission on the new RL after synchronisation is achieved in the DL user plane as specified in [16].] [TDD – The Node B shall start transmission on the new RL immediately as specified in [16].]

8.3.1.3 Unsuccessful Operation




Figure 29: Radio Link Addition procedure: Unsuccessful Operation

If some RL(s) were established successfully, the Node B shall indicate this in the RADIO LINK ADDITION FAILURE message in the same way as in the RADIO LINK ADDITION RESPONSE message.

[FDD – If the RADIO LINK ADDITION REQUEST contains a *C-ID* IE indicating that a Radio Link must be established on a Cell where DPC Mode change is not supported and DPC Mode can be changed for the relevant Node B Communication Context, the Node B shall consider the procedure as failed for the concerned Radio Link and shall respond with a RADIO LINK ADDITION FAILURE with the appropriate cause value ('DPC Mode change not supported').]

Typical cause values are as follows:

Radio Network Layer Cause

- Combining not supported
- Combining Resources not available
- Requested Tx Diversity Mode not supported
- UL SF not supported
- DL SF not supported
- Reconfiguration CFN not elapsed
- CM not supported
- [FDD DPC Mode change not supported]

Transport Layer Cause

- Transport Resources Unavailable

Miscellaneous Cause

- O&M Intervention
- Control processing overload
- HW failure

8.3.1.4 Abnormal conditions

[FDD – If the RADIO LINK ADDITION REQUEST contains the *Compressed Mode Deactivation Flag* IE with the value "Deactivate" when compressed mode is active for the existing RL(s), and at least one of the new RL is added in a

cell that has the same UARFCN (both UL and DL) of at least one cell with an already existing RL, the Node B shall regard the Radio Link Addition procedure as failed and shall respond with a RADIO LINK ADDITION FAILURE message with the cause value "Invalid CM settings".]

8.3.2 Synchronised Radio Link Reconfiguration Preparation

8.3.2.1 General

The Synchronised Radio Link Reconfiguration Preparation procedure is used to prepare a new configuration of Radio Link(s) related to one UE-UTRAN connection within a Node B.

The Synchronised Radio Link Reconfiguration Preparation procedure shall not be initiated if a Prepared Reconfiguration exists, as defined in subclause 3.1.

8.3.2.2 Successful Operation




Figure 30: Synchronised Radio Link Reconfiguration Preparation procedure, Successful Operation

The Synchronised Radio Link Reconfiguration Preparation procedure is initiated by the CRNC by sending the message RADIO LINK RECONFIGURATION PREPARE to the Node B. The message shall use the Communication Control Port assigned for this Node B Communication Context.

Upon reception, the Node B shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

The Node B shall prioritise resource allocation for the RL(s) to be modified according to Annex A.

DCH Modification:

If the RADIO LINK RECONFIGURATION PREPARE message includes any *DCHs to Modify* IEs then the Node B shall treat them each as follows:

- If the *DCHs to Modify* IE includes the *Frame Handling Priority* IE, the Node B should store this information for this DCH in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the Node B once the new configuration has been activated.
- If the *DCHs to Modify* IE includes the *Transport Format Set* IE for the UL of a DCH, the Node B shall apply the new Transport Format Set in the Uplink of this DCH in the new configuration.
- If the *DCHs to Modify* IE includes the *Transport Format Set* IE for the DL of a DCH, the Node B shall apply the new Transport Format Set in the Downlink of this DCH in the new configuration.
- If the *DCHs to Modify* IE includes multiple *DCH Specific Info* IEs then the Node B shall treat the DCHs in the *DCHs to Modify* IE as a set of co-ordinated DCHs. The Node B shall include these DCHs in the new configuration only if it can include all of them in the new configuration.
- If the *DCHs to Modify* IE includes the *UL FP Mode* IE for a DCH or a DCH which belongs to a set of coordinated DCHs, the Node B shall apply the new FP Mode in the Uplink of the user plane for the DCH or the set of co-ordinated DCHs in the new configuration.

- If the *DCHs to Modify* IE includes the *ToAWS* IE for a DCH or a DCH which belongs to a set of co-ordinated DCHs, the Node B shall apply the new ToAWS in the user plane for the DCH or the set of co-ordinated DCHs in the new configuration.
- If the *DCHs to Modify* IE includes the *ToAWE* IE for a DCH or a DCH which belongs to a set of co-ordinated DCHs, the Node B shall apply the new ToAWE in the user plane for the DCH or the set of co-ordinated DCHs in the new configuration.
- [TDD If the *DCHs to Modify* IE includes the *CCTrCH ID* IE for the DL of a DCH to be modified, the Node B shall apply the new CCTrCH ID in the Downlink of this DCH in the new configuration.]
- [TDD If the *DCHs to Modify* IE includes the *CCTrCH ID* IE for the UL of a DCH to be modified, the Node B shall apply the new CCTrCH ID in the Uplink of this DCH in the new configuration.]

DCH Addition:

If the RADIO LINK RECONFIGURATION PREPARE message includes any *DCHs to Add* IEs then the Node B shall treat them each as follows:

- If the *DCHs to Add* IE includes multiple *DCH specific Info* IEs then, the Node B shall treat the DCHs in the *DCHs to Add* IE as a set of co-ordinated DCHs. The Node B shall include these DCHs in the new configuration only if it can include all of them in the new configuration.
- [FDD For DCHs which do not belong to a set of co-ordinated DCHs with the *QE-Selector* IE set to "selected", the Transport channel BER from that DCH shall be the base for the QE in the UL data frames. If no Transport channel BER is available for the selected DCH the Physical channel BER shall be used for the QE, ref. [16]. If the QE-Selector is set to "non-selected", the Physical channel BER shall be used for the QE in the UL data frames, ref. [16].]
- For a set of co-ordinated DCHs the Transport channel BER from the DCH with the *QE-Selector* IE set to "selected" shall be used for the QE in the UL data frames, ref. [16]. [FDD If no Transport channel BER is available for the selected DCH the Physical channel BER shall be used for the QE, ref. [16]. If all DCHs have *QE-Selector* IE set to "non-selected" the Physical channel BER shall be used for the QE, ref. [16].]
- The Node B should store the *Frame Handling Priority* IE received for a DCH to be added in the new configuration The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the Node B once the new configuration has been activated.
- The Node B shall use the included *UL FP Mode* IE for a DCH or a set of co-ordinated DCHs to be added as the new FP Mode in the Uplink of the user plane for the DCH or the set of co-ordinated DCHs in the new configuration.
- The Node B shall use the included *ToAWS* IE for a DCH or a set of co-ordinated DCHs to be added as the new Time of Arrival Window Start Point in the user plane for the DCH or the set of co-ordinated DCHs in the new configuration.
- The Node B shall use the included *ToAWE* IE for a DCH or a set of co-ordinated DCHs to be added as the new Time of Arrival Window End Point in the user plane for the DCH or the set of co-ordinated DCHs in the new configuration.
- [TDD The Node B shall apply the *CCTrCH ID* IE (for the DL) in the Downlink of this DCH in the new configuration.]
- [TDD The Node B shall apply the *CCTrCH ID* IE (for the UL) in the Uplink of this DCH in the new configuration.]

DCH Deletion:

If the RADIO LINK RECONFIGURATION PREPARE message includes any *DCHs to Delete* IEs, the Node B shall not include the referenced DCHs in the new configuration.

If all of the DCHs belonging to a set of coordinated DCHs are requested to be deleted, the Node B shall not include this set of coordinated DCHs in the new configuration.

Physical Channel Modification:

[FDD – If the RADIO LINK RECONFIGURATION PREPARE message includes an *UL DPCH Information* IE then the Node B shall apply the parameters to the new configuration as follows:]

- [FDD If the *UL DPCH Information* IE includes the *Uplink Scrambling Code* IE, the Node B shall apply this Uplink Scrambling Code to the new configuration.]
- [FDD If the *UL DPCH Information* IE includes the *Min UL Channelisation Code Length* IE, the Node B shall apply the value in the new configuration. The Node B shall apply the contents of the *Max Number of UL DPDCHs* IE (if it is included) in the new configuration.]
- [FDD If the *UL DPCH Information* IE includes the *UL SIR Target* IE, the Node B shall use the value for the UL inner loop power control when the new configuration is being used.]
- [FDD If the *UL DPCH Information* IE includes the *Puncture Limit* IE, the Node B shall apply the value in the uplink of the new configuration.]
- [FDD The Node B shall use the *TFCS* IE for the UL (if present) when reserving resources for the uplink of the new configuration. The Node B shall apply the new TFCS in the Uplink of the new configuration.]
- [FDD If the *UL DPCH Information* IE includes the *UL DPCCH Slot Format* IE, the Node B shall set the new Uplink DPCCH Structure to the new configuration.]
- [FDD If the *UL DPCH Information* IE includes the *Diversity Mode* IE, the Node B shall apply diversity according to the given value.]
- [FDD If the *UL DPCH Information* IE includes an *SSDT Cell Identity Length* IE and/or an *S-Field Length* IE, the Node B shall apply the values in the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes a *DL DPCH Information* IE then the Node B shall apply the parameters to the new configuration as follows:]

- [FDD The Node B shall use the *TFCS* IE for the DL (if it is present) when reserving resources for the downlink of the new configuration. The Node B shall apply the new TFCS in the Downlink of the new configuration.]
- [FDD If the *DL DPCH Information* IE includes the *TFCI Signalling Mode* IE or the *TFCI Presence* IE, the Node B shall use the information when building TFCIs in the new configuration.]
- [FDD If the *DL DPCH Information* IE includes the *DL DPCCH Slot Format* IE, group the Node B shall set the new Downlink DPCCH Structure to the new configuration.]
- [FDD If the *DL DPCH Information* IE includes the *Multiplexing Position* IE, the Node B shall apply the indicated multiplexing type in the new configuration.]
- [FDD If the *DL DPCH Information* IE includes the *Limited Power Increase* IE and the IE is set to 'Used', the Node B shall, if supported, use Limited Power Increase ref. [10] subclause 5.2.1 for the inner loop DL power control in the new configuration.]
- [FDD If the *DL DPCH Information* IE includes the *Limited Power Increase* IE and the IE is set to 'Not Used', the Node B shall not use Limited Power Increase for the inner loop DL power control in the new configuration.]
- [FDD If the *DL DPCH Information* IE includes the *PDSCH code mapping* IE then the Node B shall apply the defined mapping between TFCI values and PDSCH channelisation codes.]
- [FDD If the *DL DPCH Information* IE includes the *PDSCH RL ID* IE then the Node B shall infer that the PDSCH for the specified user will be transmitted on the defined radio link.]

[FDD – If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transmission Gap Pattern Sequence Information* IE the Node B shall store the new information about the Transmission Gap Pattern Sequences to be used in the new Compressed Mode Configuration. This new Compressed Mode Configuration shall be valid in the Node B until the next Compressed Mode Configuration is configured in the Node B or Node B Communication Context is deleted.]

[TDD – UL/DL CCTrCH Modification]

[TDD – If the RADIO LINK RECONFIGURATION PREPARE message includes any *UL CCTrCH to Modify* or *DL CCTrCH to Modify* IEs, then the Node B shall treat them each as follows:]

- [TDD If the IE includes any of *TFCS* IE, *TFCI coding* IE or *Puncture Limit* IE the Node B shall apply these as the new values, otherwise the old values specified for this CCTrCH are still applicable.]
- [TDD If the IE includes any *UL DPCH to add* or *DL DPCH to add* IEs, the Node B shall include this DPCH in the new configuration.]
- [TDD If the IE includes any *UL DPCH to delete* or *DL DPCH to delete* IEs, the Node B shall remove this DPCH in the new configuration.]
- [TDD If the IE includes any UL *DPCH to modify* or *DL DPCH to modify* IEs, and includes any of *Repetition Period* IE, *Repetition Length* IE, or *TDD DPCH Offset* IE or the message includes UL/DL Timeslot Information and includes any of [3.84Mcps TDD Midamble shift and Burst Type IE, Time Slot IE], [1.28Mcps TDD Midamble shift LCR IE, Time Slot LCR IE], or *TFCI presence* IE or the message includes UL/DL Code information and includes [3.84Mcps TDD *TDD Channelisation Code* IE], [1.28Mcps TDD *TDD Channelisation Code LCR* IE], the Node B shall apply these specified information elements as the new values, otherwise the old values specified for this DPCH configuration are still applicable.]
- [1.28Mcps TDD If the *UL CCTrCH to Modify* IE includes the *UL SIR Target* IE, the Node B shall use the value for the UL inner loop power control according [19] and [21] when the new configuration is being used.]

[TDD – UL/DL CCTrCH Addition]

[TDD – If the RADIO LINK RECONFIGURATION PREPARE message includes any *UL CCTrCH to Add* IE or *DL CCTrCH to Add* IE, the Node B shall include this CCTrCH in the new configuration.]

[TDD – If the *UL/DL CCTrCH to Add* IE includes any *UL/DL DPCH Information* IE, the Node B shall reserve necessary resources for the new configuration of the UL/DL DPCH(s) according to the parameters given in the message.]

[TDD – If the RADIO LINK RECONFIGURATION PREPARE message includes a *DL CCTrCH to Add* IE, the Node B shall set the TPC step size of that CCTrCH to the same value as the lowest numbered DL CCTrCH in the current configuration.]

[1.28Mcps TDD – The Node B shall use the *UL SIR Target* IE in the *UL CCTrCH to Add* IE as the UL SIR value for the inner loop power control for this CCTrCH according [19] and [21] in the new configuration.]

[TDD – UL/DL CCTrCH Deletion]

[TDD – If the RADIO LINK RECONFIGURATION PREPARE message includes any UL or DL CCTrCH to be deleted , the Node B shall remove this CCTrCH in the new configuration.]

DSCH Addition/Modification/Deletion:

If the RADIO LINK RECONFIGURATION PREPARE message includes any *DSCH to modify*, *DSCH to add* or *DSCH to delete* IEs, then the Node B shall use this information to add/modify/delete the indicated DSCH channels to/from the radio link, in the same way as the DCH info is used to add/modify/release DCHs.

The Node B shall include in the RADIO LINK RECONFIGURATION READY message both the *Transport Layer Address* IE and the *Binding ID* IE for the transport bearer to be established for each DSCH.

[FDD – If the RADIO LINK RECONFIGURATION PREPARE message includes the *TFCI2 Bearer Information* IE then the Node B shall support the establishment of a transport bearer on which the DSCH TFCI Signaling control frames shall be received if one does not already exist or shall apply the new values if such a bearer does already exist. The *Binding ID* IE and *Transport Layer Address* IE of any new bearer to be set up for this purpose shall be returned in the RADIO LINK RECONFIGURATION READY message. If the RADIO LINK RECONFIGURATION PREPARE message specifies that the TFCI2 transport bearer is to be deleted then the Node B shall release the resources associated with that bearer in the new configuration.

[FDD – If the *TFCI Signalling Mode* IE within the RADIO LINK RECONFIGURATION PREPARE message indicates that there shall be a hard split on the TFCI field but a TFCI2 transport bearer has not already been set up and *TFCI2 Bearer Information* IE is not included in the message then the Node B shall transmit the TFCI2 field with zero power in the new configuration.]

[FDD – If the *TFCI Signalling Mode* IE within the RADIO LINK RECONFIGURATION PREPARE message indicates that there shall be a hard split on the *TFCI and the TFCI Bearer Information* IE is included in the message then the

Node B shall transmit the TFCI2 field with zero power until Synchronisation is achieved on the TFCI2 transport bearer and the first valid DSCH TFCI Signalling control frame is received on this bearer in the new configuration (see ref. [24]).]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *DSCH Common Information IE*, the Node B shall treat it as follows:]

- [FDD If the *Enhanced DSCH PC Indicator* IE is included and set to "Enhanced DSCH PC Active in the UE", the Node B shall activate enhanced DSCH power control in accordance with ref. [10] subclause 5.2.2, if supported, using either:]
 - [FDD the SSDT Cell Identity for EDSCHPC IE in the RL Information IE, if the SSDT Cell Identity IE is not included in the RL Information IE or]
 - [FDD the SSDT Cell Identity IE in the RL Information IE, if both the SSDT Cell Identity IE and the SSDT Cell Identity for EDSCHPC IE are included in the RL Information IE.]

[FDD - together with the SSDT Cell Identity Length IE in UL DPCH Information IE, and Enhanced DSCH PC IE, in the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *Enhanced DSCH PC Indicator* IE set to "Enhanced DSCH PC not Active in the UE", the Node B shall deactivate enhanced DSCH power control in the new configuration.]

[TDD – USCH Addition/Modification/Deletion:]

- [TDD If the RADIO LINK RECONFIGURATION PREPARE message includes USCH information for the
 USCHs to be added/modified/deleted then the Node B shall use this information to add/modify/delete the
 indicated USCH channels to/from the radio link, in the same way as the DCH info is used to add/modify/release
 DCHs.]
- [TDD The Node B shall include in the RADIO LINK RECONFIGURATION READY message both the *Transport Layer Address* IE and the *Binding ID* IE for the transport bearer to be established for each USCH.]

RL Information:

If the RADIO LINK RECONFIGURATION PREPARE message includes the *RL Information* IE, the Node B shall treat it as follows:

- [FDD When more than one DL DPDCH are assigned per RL, the segmented physical channel shall be mapped on to DL DPDCHs according to [8]. When *p* number of DL DPDCHs are assigned to each RL, the first pair of DL Scrambling Code and FDD DL Channelisation Code Number corresponds to "*PhCH number 1*", the second to "*PhCH number 2*", and so on until the *pth* to "*PhCH number p*".]
- [FDD If the *RL Information* IE includes the *SSDT Indication* IE set to "SSDT Active in the UE", the Node B may activate SSDT using the *SSDT Cell Identity* IE in the new configuration.]
- [FDD If the *RL Information* IE includes the *SSDT Indication* IE set to "SSDT not Active in the UE", the Node B shall deactivate SSDT in the new configuration.]
- [FDD If the *RL Information* IE includes a *DL Code Information* IE, the Node B shall apply the values in the new configuration.]
- [FDD If the *RL Information* IE contains the *Transmission Gap Pattern Sequence Code Information* IE in the *DL Code Information* IE for any of the allocated DL Channelisation Codes, the Node B shall apply the alternate scrambling code as indicated whenever the downlink compressed mode method SF/2 is active in the new configuration.]
- If the *RL Information* IE includes the *Maximum DL Power* and/or the *Minimum DL Power* IEs, the Node B shall apply the values in the new configuration. [FDD During compressed mode, the $P_{SIR}(k)$, as described in ref.[10] subclause 5.2.1.3, shall be added to the maximum DL power in slot k.].
- [TDD If the *RL Information* IE includes the *Initial DL Transmission Power* IE, the Node B shall apply the given power to the transmission on each DPCH of the CCTrCH when starting transmission on a new CCTrCH.until the UL synchronisation on the Uu is achieved for the CCTrCH. If no *Initial DL Transmission power* IE is included with a new CCTrCH, the Node B shall use any transmission power level currently used on

already existing CCTrCH's when starting transmission for a new CCTrCH. No inner loop power control shall be performed during this period. The DL power shall then vary according to the inner loop power control (see ref.[22], subclause 4.2.3.3).]

General

If the requested modifications are allowed by the Node B and the Node B has successfully reserved the required resources for the new configuration of the Radio Link(s), it shall respond to the CRNC with the RADIO LINK RECONFIGURATION READY message. When this procedure has been completed successfully there exist a Prepared Reconfiguration, as defined in subclause 3.1.

In the RADIO LINK RECONFIGURATION READY message, the Node B shall include the *RL Information Response* IE for each affected Radio Link.

The Node B shall include in the RADIO LINK RECONFIGURATION READY message the Transport Layer Address and the Binding ID for any Transport Channel being added, or any Transport Channel being modified for which a new transport bearer was requested with the *Transport Bearer Request Indicator* IE.

In case of a DCH requiring a new transport bearer on Iub, the *Transport Layer Address* IE and the *Binding ID* shall be included in the IE *DCH Information Response* IE.

In case of a set of coordinated DCHs requiring a new transport bearer on Iub, the *Transport Layer Address* IE and the *Binding ID* IE in the *DCH Information Response* IE shall be included only for one of the DCH in the set of coordinated DCHs.

In case of a Radio Link being combined with another Radio Link within the Node B, the RL Information Response IE shall be included only for one of the combined RLs. The *Transport Layer Address* IE and the *Binding ID* IE in the *DCH Information Response* IE shall be included only for one of the combined Radio Links.

8.3.2.3 Unsuccessful Operation




Figure 31: Synchronised Radio Link Reconfiguration Preparation procedure, Unsuccessful Operation

If the Node B cannot reserve the necessary resources for all the new DCHs of one set of co-ordinated DCHs requested to be added, it shall regard the Synchronised Radio Link Reconfiguration Preparation procedure as having failed.

If the requested Synchronised Radio Link Reconfiguration Preparation procedure fails for one or more RLs the Node B shall send the RADIO LINK RECONFIGURATION FAILURE message to the CRNC, indicating the reason for failure.

Typical cause values are as follows:

Radio Network Layer Cause

- UL SF not supported
- DL SF not supported
- Downlink Shared Channel Type not supported
- Uplink Shared Channel Type not supported
- CM not supported
- Number of DL codes not supported

- Number of UL codes not supported

Transport Layer Cause

- Transport Resources Unavailable

Miscellaneous Cause

- O&M Intervention
- Control processing overload
- HW failure

8.3.2.4 Abnormal Conditions

If only a subset of all the DCHs belonging to a set of co-ordinated DCHs is requested to be deleted, the Node B shall regard the Synchronised Radio Link Reconfiguration Preparation procedure as having failed and the Node B shall send the RADIO LINK RECONFIGURATION FAILURE message to the CRNC.

If more than one DCH of a set of co-ordinated DCHs has the *QE-Selector* IE set to "selected" [TDD – or no DCH of a set of co-ordinated DCHs has the *QE-Selector* IE set to "selected"] the Node B shall regard the Synchronised Radio Link Reconfiguration Preparation procedure as failed and shall respond with a RADIO LINK RECONFIGURATION FAILURE message.

[FDD - If the *RL Information* IE includes the *SSDT Indication* IE set to "SSDT Active in the UE" and SSDT is not active in the current configuration, the Node B shall regard the Synchronised Radio Link Reconfiguration Preparation procedure as failed if the *UL DPCH Information* IE does not include the *SSDT Cell Identity Length* IE. In this case, it shall respond with a RADIO LINK RECONFIGURATION FAILURE message.]

If the RADIO LINK RECONFIGURATION PREPARE message includes a *DCHs to Modify* IE or *DCHs to Add* IE with multiple *DCH Specific Info* IEs, and if the DCHs in the *DCHs to Modify* IE or *DCHs to Add* IE do not have the same *Transmission Time Interval* IE in the *Semi-static Transport Format Information* IE, then the Node B shall reject the procedure using the RADIO LINK SETUP FAILURE message.

8.3.3 Synchronised Radio Link Reconfiguration Commit

8.3.3.1 General

This procedure is used to order the Node B to switch to the new configuration for the Radio Link(s) within the Node B, previously prepared by the Synchronised Radio Link Reconfiguration Preparation procedure.

The message shall use the Communication Control Port assigned for this Node B Communication Context.

8.3.3.2 Successful Operation



Figure 32:Synchronised Radio Link Reconfiguration Commit procedure, Successful Operation

The Node B shall switch to the new configuration previously prepared by the Synchronised Radio Link Reconfiguration Preparation procedure at the next coming CFN with a value equal to the value requested by the CRNC in the *CFN* IE when receiving the RADIO LINK RECONFIGURATION COMMIT message from the CRNC.

[FDD – If the *Active Pattern Sequence Information* IE is included in the RADIO LINK RECONFIGURATION COMMIT message, the *CM Configuration Change CFN* IE in the *Active Pattern Sequence Information* IE shall be ignored by the Node B.]

When this procedure has been completed the Prepared Reconfiguration does not exist any more, see subclause 3.1.

In the case of a transport channel modification for which a new transport bearer was requested and established, the switch to the new transport bearer shall also take place at the indicated CFN. The detailed frame protocol handling during transport bearer replacement is described in [16], section 5.10.1 and in [24], subclause 5.8.2.

[FDD – If the RADIO LINK RECONFIGURATION COMMIT includes the *Active Pattern Sequence Information* IE, the Node B shall deactivate all the ongoing Transmission Gap Pattern Sequences at the *CFN* IE. From that moment on all Transmission Gap Pattern Sequence shall be started when the indicated *TGCFN* IE elapses. The *CFN* IE and *TGCFN* IE for each sequence refer to the next coming CFN with that value. If the values of the *CFN* IE and the *TGCFN* IE are equal, the concerning Transmission Gap Pattern Sequence shall be started immediately at the CFN with a value equal to the value received in the *CFN* IE.]

8.3.3.3 Abnormal Conditions

If a new transport bearer is required for the new reconfiguration and it is not available at the requested CFN, the Node B shall initiate the Radio Link Failure procedure.

8.3.4 Synchronised Radio Link Reconfiguration Cancellation

8.3.4.1 General

This procedure is used to order the Node B to release the new configuration for the Radio Link(s) within the Node B, previously prepared by the Synchronised Radio Link Preparation Reconfiguration procedure.

The message shall use the Communication Control Port assigned for this Node B Communication Context.

8.3.4.2 Successful Operation



Figure 33:Synchronised Radio Link Reconfiguration Cancellation procedure, Successful Operation

When receiving the RADIO LINK RECONFIGURATION CANCEL message from the CRNC, the Node B shall release the new configuration ([FDD - including the new Transmission Gap Pattern Sequence parameters (if existing)]) previously prepared by the Synchronised Radio Link Reconfiguration Preparation procedure and continue using the old configuration. When this procedure has been completed the Prepared Reconfiguration does not exist any more, see subclause 3.1.

8.3.4.3 Abnormal Conditions

_

8.3.5 Unsynchronised Radio Link Reconfiguration

8.3.5.1 General

The Unsynchronised Radio Link Reconfiguration procedure is used to reconfigure Radio Link(s) related to one UE-UTRAN connection within a Node B.

The Unsynchronised Radio Link Reconfiguration procedure is used when there is no need to synchronise the time of the switching from the old to the new configuration in one Node B used for a UE-UTRAN connection with any other Node B also used for the UE-UTRAN connection.

The Unsynchronised Radio Link Reconfiguration procedure shall not be initiated if a Prepared Reconfiguration exists, as defined in subclause 3.1.

8.3.5.2 Successful Operation




Figure 34: Unsynchronised Radio Link Reconfiguration Procedure, Successful Operation

The Unsynchronised Radio Link Reconfiguration procedure is initiated by the CRNC by sending the message RADIO LINK RECONFIGURATION REQUEST to the Node B. The message shall use the Communication Control Port assigned for this Node B Communication Context.

Upon reception, the Node B shall modify the configuration of the Radio Link(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

The Node B shall prioritise resource allocation for the RL(s) to be modified according to Annex A.

DCH Modification:

If the RADIO LINK RECONFIGURATION REQUEST message includes any *DCHs to Modify* IEs then the Node B shall treat them each as follows:

- If the *DCHs to Modify* IE includes on the *Frame Handling Priority* IE, the Node B should store this information for this DCH in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the Node B once the new configuration has been activated.
- If the *DCHs to Modify* IE includes the *Transport Format Set* IE for the UL, the Node B shall apply the new Transport Format Set in the Uplink of this DCH in the new configuration.
- If the *DCHs to Modify* IE includes the *Transport Format Set* IE for the DL, the Node B shall apply the new Transport Format Set in the Downlink of this DCH in the new configuration.
- If the *DCHs to Modify* IE includes multiple *DCH Specific Info* IEs then the Node B shall treat the DCHs in the *DCHs to Modify* IE as a set of co-ordinated DCHs. The Node B shall include these DCHs in the new configuration only if it can include all of them in the new configuration.
- If the *DCHs to Modify* IE includes the *UL FP Mode* IE for a DCH or a set of co-ordinated DCHs, the Node B shall apply the new FP Mode in the Uplink of the user plane for the DCH or the set of co-ordinated DCHs in the new configuration.
- If the *DCHs to Modify* IE includes the *ToAWS* IE for a DCH or a set of co-ordinated DCHs, the Node B shall apply the new ToAWS in the user plane for the DCH or the set of co-ordinated DCHs in the new configuration.
- If the *DCHs to Modify* IE includes the *ToAWE* IE for a DCH or a set of co-ordinated DCHs, the Node B shall apply the new ToAWE in the user plane for the DCH or the set of co-ordinated DCHs in the new configuration.
- [TDD If the RADIO LINK RECONFIGURATION REQUEST message includes the *CCTrCH ID* IE for the DL of a DCH to be modified, the Node B shall apply the new CCTrCH ID in the Downlink of this DCH in the new configuration.]
- [TDD If the RADIO LINK RECONFIGURATION REQUEST message includes the *CCTrCH ID* IE for the UL of a DCH to be modified, the Node B shall apply the new CCTrCH ID in the Uplink of this DCH in the new configuration.]

DCH Addition:

If the RADIO LINK RECONFIGURATION REQUEST message includes any *DCH to Add* IEs, the Node B shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message and include these DCHs in the new configuration. In particular:

- If a *DCHs to Add* IE includes multiple *DCH Specific Info* IEs for a DCH to be added, the Node B shall treat the DCHs in the *DCHs to Add* IE as a set of co-ordinated DCHs. The Node B shall include these DCHs in the new configuration only if it can include all of them in the new configuration.
- [FDD For DCHs which do not belong to a set of co-ordinated DCHs with the *QE-Selector* IE set to "selected", the Node B shall use the Transport channel BER from that DCHas the base for the QE in the UL data frames. If no Transport channel BER is available for the selected DCH, the Physical channel BER shall be used for the QE [16]. If the QE-Selector is set to "non-selected", the Physical channel BER shall be used for the QE in the UL data frames, ref. [16].]
- For a set of co-ordinated DCHs, the Node B shall use the Transport channel BER from the DCH with the *QE-Selector* IE set to "selected" as the QE in the UL data frames [16]. [FDD If no Transport channel BER is available for the selected DCH, the Physical channel BER shall be used for the QE [16]. If all DCHs have *QE-Selector* IE set to "non-selected" the Physical channel BER shall be used for the QE [16].]
- The Node B should store the *Frame Handling Priority* IE received for a DCH to be added in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the Node B once the new configuration has been activated.
- The Node B shall use the included *UL FP Mode* IE for a DCH or a set of co-ordinated DCHs to be added as the new FP Mode in the Uplink of the user plane for the DCH or the set of co-ordinated DCHs in the new configuration.
- The Node B shall use the included *ToAWS* IE for a DCH or a set of co-ordinated DCHs to be added as the new Time of Arrival Window Start Point in the user plane for the DCH or the set of co-ordinated DCHs in the new configuration.
- The Node B shall use the included *ToAWE* IE for a DCH or a set of co-ordinated DCHs to be added as the new Time of Arrival Window End Point in the user plane for the DCH or the set of co-ordinated DCHs in the new configuration.
- [TDD If the RADIO LINK RECONFIGURATION REQUEST message includes the *CCTrCH ID* IE for the DL of a DCH to be modified, the Node B shall apply the new CCTrCH ID in the downlink of this DCH in the new configuration.]
- [TDD If the RADIO LINK RECONFIGURATION REQUEST message includes the *CCTrCH ID* IE for the UL of a DCH to be modified, the Node B shall apply the new CCTrCH ID in the Uplink of this DCH in the new configuration.]

DCH Deletion:

If the RADIO LINK RECONFIGURATION REQUEST message includes any DCH to be deleted from the Radio Link(s), the Node B shall not include this DCH in the new configuration.

If all of the DCHs belonging to a set of co-ordinated DCHs are requested to be deleted, the Node B shall not include this set of coordinated DCHs in the new configuration.

[FDD - Physical Channel Modification:]

[FDD - If the RADIO LINK RECONFIGURATION REQUEST message includes an *UL DPCH Information* IE, then the Node B shall apply the parameters to the new configuration as follows:]

- [FDD – If the *UL DPCH Information* IE includes the *TFCS* IE for the UL, the Node B shall apply the new TFCS in the Uplink of the new configuration.]

[FDD – If the RADIO LINK RECONFIGURATION REQUEST message includes a *DL DPCH Information* IE, then the Node B shall apply the parameters to the new configuration as follows:]

- [FDD – If the *DL DPCH Information* IE includes on the *TFCS* IE for the DL, the Node B shall apply the new TFCS in the Downlink of the new configuration.]

- [FDD If the *DL DPCH Information* IE includes the *TFCI Signalling Mode* IE, the Node B shall use the use the information when building TFCIs in the new configuration.
- [FDD If the *DL DPCH Information* IE includes the *Limited Power Increase* IE and the IE is set to 'Used', the Node B shall, if supported, use Limited Power Increase according to ref. [10] subclause 5.2.1 for the inner loop DL power control in the new configuration.]
- [FDD If the *DL DPCH Information* IE message includes the *Limited Power Increase* IE and the IE is set to 'Not Used', the Node B shall not use Limited Power Increase for the inner loop DL power control in the new configuration.]

[FDD – If the RADIO LINK RECONFIGURATION REQUEST message includes the *Transmission Gap Pattern Sequence Information* IE the Node B shall store the new information about the Transmission Gap Pattern Sequences to be used in the new Compressed Mode Configuration. This new Compressed Mode Configuration shall be valid in the Node B until the next Compressed Mode Configuration is configured in the Node B or Node B Communication Context is deleted.]

[TDD – UL/DL CCTrCH Modification]

[TDD – If the RADIO LINK RECONFIGURATION REQUEST message includes any *UL CCTrCH to modify* IE or *DL CCTrCH to modify* IE in the Radio Link(s), the Node B shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message.]

[TDD – If the *UL/DL CCTrCH to modify* IE includes *TFCS* IE, and/or *Puncture Limit* IE the Node B shall apply these as the new values, otherwise the old values specified for this CCTrCH are still applicable.]

[TDD - UL/DL CCTrCH Deletion]

[TDD – If the RADIO LINK RECONFIGURATION REQUEST message includes any *UL CCTrCH to delete* IE or *DL CCTrCH to delete* IE, the Node B shall not include this CCTrCH in the new configuration.]

RL Information:

If the RADIO LINK RECONFIGURATION REQUEST message includes the *RL Information* IE, the Node B shall treat it as follows:

- If the *RL Information* IE includes the *Maximum DL Power* IE, the Node B shall apply this value to the new configuration and not transmit with a higher power on any Downlink DPCH of the Radio Link once the new configuration is being used. [FDD During compressed mode, the $P_{SIR}(k)$, as described in ref.[10] subclause 5.2.1.3, shall be added to the maximum DL power in slot k.]
- If the *RL Information* IE includes the *Minimum DL Power* IE, the Node B shall apply this value to the new configuration and never transmit with a lower power on any Downlink Channelisation Code of the Radio Link once the new configuration is being used.
- [FDD If the *RL Information* IE contains the *Transmission Gap Pattern Sequence Code Information* IE in the *DL Code Information* IE for any of the allocated DL Channelisation Codes, the Node B shall apply the alternate scrambling code as indicated whenever the downlink compressed mode method SF/2 is active in the new configuration.]

General

If the requested modifications are allowed by the Node B, the Node B has successfully allocated the required resources, and changed to the new configuration it shall respond to the CRNC with the RADIO LINK RECONFIGURATION RESPONSE message.

In the RADIO LINK RECONFIGURATION RESPONSE message, the Node B shall include the *RL Information Response* IE for each affected Radio Link.

The Node B shall include in the RADIO LINK RECONFIGURATION RESPONSE message the *Transport Layer Address* IE and the *Binding ID* IE in the *DCH Information Response* IE for any Transport Channel being added, or any Transport Channel being modified for which a new transport bearer was requested with the *Transport Bearer Request Indicator* IE. The detailed frame protocol handling during transport bearer replacement is described in [16], section 5.10.1.

In case of a set of coordinated DCHs requiring a new transport bearer on Iub, the *Transport Layer Address* IE and the *Binding ID* IE in the *DCH Information Response* IE shall be included only for one of the DCH in the set of coordinated DCHs.

In case of a Radio Link being combined with another Radio Link within the Node B, *RL Information Response* IE shall be included only for one of the combined Radio Links. The *Transport Layer Address* IE and the *Binding ID* IE in the *DCH Information Response* IE shall be included only for one of the combined Radio Links.

8.3.5.3 Unsuccessful Operation




Figure 35: Unsynchronised Radio Link Reconfiguration procedure, Unsuccessful Operation

If the Node B cannot allocate the necessary resources for all the new DCHs of one set of coordinated, DCHs requested to be set-up it shall regard the Unsynchronised Radio Link Reconfiguration procedure as having failed.

If the requested Unsynchronised Radio Link Reconfiguration procedure fails for one or more Radio Link(s) the Node B shall send the RADIO LINK RECONFIGURATION FAILURE message to the CRNC, indicating the reason for failure.

Typical cause values are as follows:

Radio Network Layer Cause

CM not supported

Transport Layer Cause

- Transport Resources Unavailable

Miscellaneous Cause

- O&M Intervention
- Control processing overload
- HW failure

8.3.5.4 Abnormal Conditions

If only a subset of all the DCHs belonging to a set of co-ordinated DCHs is requested to be deleted, the Node B shall regard the Unsynchronised Radio Link Reconfiguration procedure as having failed and shall send the RADIO LINK RECONFIGURATION FAILURE message to the CRNC.

[FDD – If the *RL Information* IE contains the *DL Code Information* IE and this IE includes *DL Scrambling Code* and *FDD DL Channelisation Code Number* IEs not matching the DL Channelisation code(s) already allocated to the Radio Link identified by *RL ID* IE, then the Node B shall consider the Unsynchronised Radio Link Reconfiguration procedure as having failed and it shall send the RADIO LINK RECONFIGURATION FAILURE message to the CRNC.

If more than one DCH of a set of co-ordinated DCHs has the *QE-Selector* IE set to "selected" [TDD – or no DCH of a set of co-ordinated DCHs has the *QE-Selector* IE set to "selected"] the Node B shall regard the Unsynchronised Radio Link Reconfiguration Preparation procedure as failed and shall respond with a RADIO LINK RECONFIGURATION FAILURE message.

If the RADIO LINK RECONFIGURATION REQUEST message includes a *DCHs to Modify* IE or *DCHs to Add* IE with multiple *DCH Specific Info* IEs, and if the DCHs in the *DCHs to Modify* IE or *DCHs to Add* IE do not have the

same *Transmission Time Interval* IE in the *Semi-static Transport Format Information* IE, then the Node B shall reject the procedure using the RADIO LINK SETUP FAILURE message.

8.3.6 Radio Link Deletion

8.3.6.1 General

The Radio Link Deletion procedure is used to release the resources in a Node B for one or more established radio links towards a UE.

The Radio Link Deletion procedure may be initiated by the CRNC at any time when the Node B Communication Context exists.

8.3.6.2 Successful Operation




Figure 36: Radio Link Deletion procedure, Successful Operation

The procedure is initiated with a RADIO LINK DELETION REQUEST message sent from the CRNC to the Node B.

Upon receipt of this message, the Node B shall delete the radio link(s) identified by the *RL ID* IE, *Node B Communication ID* IE and *CRNC Communication ID* IE and release all associated resources and respond to the CRNC with a RADIO LINK DELETION RESPONSE message.

[FDD – After deletion of the RL(s), the UL out-of-sync algorithm defined in ref. [10] shall for each of the remaining RL Set(s) use the maximum value of the parameters N_OUTSYNC_IND and T_RLFAILURE, and the minimum value of the parameters N_INSYNC_IND, that are configured in the cells supporting the radio links of the RL Set].

8.3.6.3 Unsuccessful Operation

_

8.3.6.4 Abnormal Conditions

If the RL indicated by the *RL ID* IE, *Node B Communication ID* IE and *CRNC Communication ID* IE does not exists, the Node B shall response with the RADIO LINK DELETION RESPONSE message and use the *CRNC Communication Context ID* IE received in the RADIO LINK DELETION REQUEST message.

8.3.7 Downlink Power Control [FDD]

8.3.7.1 General

The purpose of this procedure is to balance the DL transmission powers of one or more Radio Links used for the related UE-UTRAN connection within the Node B. The Downlink Power Control procedure may be initiated by the CRNC at any time when the Node B communication context exists, irrespective of other ongoing CRNC initiated dedicated NBAP procedures towards this Node B communication context. The only exception occurs when the CRNC has requested the deletion of the last RL via this Node B, in which case the Downlink Power Control procedure shall no longer be initiated.

8.3.7.2 Successful Operation



Figure 37: Downlink Power Control procedure, Successful Operation

The procedure is initiated by the CRNC sending a DL POWER CONTROL REQUEST message to the Node B.

The Power Adjustment Type IE defines the characteristic of the power adjustment.

If the value of the *Power Adjustment Type* IE is *Common*, the Power Balancing Adjustment Type of the Node B Communication Context shall be set to "Common". As long as the Power Balancing Adjustment Type of the Node B Communication Context is set to "Common", the Node B shall perform the power adjustment (see below) for all existing and future radio links associated with the context identified by the *Node B Communication Context ID* IE and use a common DL reference power level.

If the value of the *Power Adjustment Type* IE is *Individual*, the Power Balancing Adjustment Type of the Node B Communication Context shall be set to "Individual". The Node B shall perform the power adjustment (see below) for all radio links addressed in the message using the given DL Reference Powers per RL. If the Power Balancing Adjustment Type of the Node B Communication Context was set to "Common" before this message was received, power balancing on all radio links not addressed by the DL POWER CONTROL REQUEST message shall remain to be executed in accordance with the existing power balancing parameters which are now considered RL individual parameters. Power balancing will not be started on future radio links without a specific request.

If the value of the *Power Adjustment Type* IE is '*None*', the Power Balancing Adjustment Type of the Node B Communication Context shall be set to "None" and the Node B shall suspend on going power adjustments for all radio links for the UE Context.

If the *Inner Loop DL PC Status* IE is present and set to 'Active', the Node B shall activate inner loop DL power control for all radio links for the Node B communication context. If the *Inner Loop DL PC Status* IE is present and set to 'Inactive', the Node B shall deactivate inner loop DL power control for all radio links for the Node B communication context according to ref. [10].

Power Adjustment

The power balancing adjustment shall be superimposed on the inner loop power control adjustment (see Ref. [10]) if activated. The power balancing adjustment shall be such that:

$$\sum P_{bal} = (1 - r)(P_{ref} + P_{P-CPICH} - P_{init}) \text{ with an accuracy of } \pm 0.5 \text{ dB}$$

where the sum is performed over an adjustment period corresponding to a number of frames equal to the value of the *Adjustment Period* IE, *Pref* is the value of the *DL Reference Power* IE, $P_{P-CPICH}$ is the power used on the primary CPICH, P_{init} is the code power of the last slot of the previous adjustment period and r is given by the *Adjustment Ratio* IE. If the last slot of the previous adjustment period is within a transmission gap due to compressed mode, P_{init} shall be set to the same value as the code power of the slot just before the transmission gap.

The adjustment within one adjustment period shall in any case be performed with the constraints given by the *Max Adjustment Step* IE and the DL TX power range set by the CRNC.

The power adjustments shall be started at the first slot of a frame with CFN modulo the value of *Adjustment Period* IE equal to 0 and shall be repeated for every adjustment period and shall be restarted at the first slot of a frame with CFN=0, until a new DL POWER CONTROL REQUEST message is received or the RL is deleted.

8.3.7.3 Abnormal Conditions

-

8.3.8 Dedicated Measurement Initiation

8.3.8.1 General

This procedure is used by a CRNC to request the initiation of measurements on dedicated resources in a Node B.

The Dedicated Measurement Initiation procedure shall not be initiated if a Prepared Reconfiguration exists, as defined in subclause 3.1.

8.3.8.2 Successful Operation




Figure 38: Dedicated Measurement Initiation procedure, Successful Operation

The procedure is initiated with a DEDICATED MEASUREMENT INITIATION REQUEST message sent from the CRNC to the Node B using the communication control port assigned to the Node B communication context.

Upon reception, the Node B shall initiate the requested measurement according to the parameters given in the request. Unless specified below the meaning of the parameters are given in other specifications.

If the *Node B Communication Context ID* IE equals the reserved value 'All NBCC', this measurement request shall apply for all current and future Node B Communication Contexts controlled via the Communication Control Port on which the DEDICATED MEASUREMENT INITIATION REQUEST message was received. Otherwise, this measurement request shall apply for the requested Node B Communication Context ID only.

If the *Node B Communication Context ID* IE equals the reserved value 'All NBCC', the measurement request shall be treated as a single measurement, despite applying to multiple contexts. This means that it may only be terminated or failed on 'All NBCC'.

If the *Node B Communication Context ID* IE equals the reserved value 'All NBCC', the measurement shall be initiated only for those Node B Communication Contexts handling a mode (FDD, 3.84Mcps TDD or 1.28Mcps TDD) for which the concerned measurement is specified in [4] and [5].

If the *Dedicated Measurement Object Type* IE is set to "RL", measurement results shall be reported for all indicated Radio Links.

[FDD – If the *Dedicated Measurement Object Type* IE is set to "RLS", measurement results shall be reported for all indicated Radio Link Sets.]

[FDD - If the *Dedicated Measurement Object Type* IE is set to "ALL RL", measurement results shall be reported for all current and future Radio Links within the Node B Communication Context.]

[TDD - If the *Dedicated Measurement Object Type* IE is set to "ALL RL", measurement results shall be reported for one existing DPCH per CCTrCH in each used time slot of current and future Radio Links within the Node B Communication Context, provided the measurement type is applicable to the respective DPCH.]

[FDD – If the *Dedicated Measurement Object Type* IE is set to "ALL RLS", measurement results shall be reported for all existing and future Radio Link Sets within the Node B Communication Context.]

[TDD – If the *DPCH ID* IE is provided within the RL Information the measurement request shall apply for the requested physical channel individually. If no *DPCH ID* IE and no *PUSCH Information* IE is provided within the RL Information the measurement request shall apply for one existing physical channel per CCTrCH in each used time slot of the Radio Link, provided the measurement type is applicable to this physical channel.]

[TDD – If the *PUSCH Information* IE is provided within the RL Information the measurement request shall apply for the requested physical channel individually.]

If the *CFN Reporting Indicator* IE is set to "FN Reporting Required", the *CFN* IE shall be included in the measurement report or in the measurement response, the latter only in the case the *Report Characteristics* IE is set to 'On-Demand'. The reported CFN shall be the CFN at the time when the measurement value was reported by the layer 3 filter, referred to as point C in the measurement model [25].

If the *CFN* IE is provided, it indicates the frame for which the first measurement shall be provided. The provided measurement value shall be the one reported by the layer 3 filter, referred to as point C in the measurement model [25].

Report characteristics

The Report Characteristics IE is set to how the reporting of the measurement shall be performed. See also Annex B.

If the *Report Characteristics* IE is set to 'On-Demand', the Node B shall return the result of the measurement immediately.

If the *Report Characteristics* IE is set to 'Periodic', the Node B shall periodically initiate the Dedicated Measurement Report procedure for this measurement, with the requested report frequency.

If the *Report Characteristics* IE is set to 'Event A', the Node B shall initiate the Dedicated Measurement Reporting procedure when the measured entity rises above the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the Node B shall use the value zero for the hysteresis time.

If the *Report Characteristics* IE is set to 'Event B', the Node B shall initiate the Dedicated Measurement Reporting procedure when the measured entity falls below the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the Node B shall use the value zero for the hysteresis time.

If the *Report Characteristics* IE is set to 'Event C', the Node B shall initiate the Dedicated Measurement Reporting procedure when the measured entity rises by an amount greater than the requested threshold within the requested time. After having reported this type of event, the next C event reporting for the same measurement cannot be initiated before the rising/falling time has elapsed since the previous event reporting.

If the *Report Characteristics* IE is set to 'Event D', the Node B shall initiate the Dedicated Measurement Reporting procedure when the measured entity falls by an amount greater than the requested threshold within the requested time. After having reported this type of event, the next D event reporting for the same measurement cannot be initiated before the rising/falling time has elapsed since the previous event reporting.

If the *Report Characteristics* IE is set to 'Event E', the Node B shall initiate the Dedicated Measurement Reporting procedure when the measured entity rises above the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (Report A). When the conditions for Report A are met and the *Report Periodicity* IE is provided the Node B shall also initiate the Dedicated Measurement Reporting procedure periodically. If the conditions for Report A have been met and the measured entity falls below the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time', the Node B shall initiate the Dedicated Measurement Reporting procedure (Report B) as well as terminating any corresponding periodic reporting. If 'Measurement Threshold 2' is not present, the Node B shall use 'Measurement Threshold 1' instead. If no 'Measurement Hysteresis Time' is provided, the Node B shall use the value zero as hysteresis times for both Report A and Report B.

If the *Report Characteristics* IE is set to 'Event F', the Node B shall initiate the Dedicated Measurement Reporting procedure when the measured entity falls below the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (Report A). When the conditions for Report A are met and the *Report Periodicity* IE is provided the Node B shall also initiate the Dedicated Measurement Reporting procedure periodically. If the conditions for Report A have been met and the measured entity rises above the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time', the Node B shall initiate the Dedicated Measurement Reporting procedure (Report B) as well as terminating any corresponding periodic reporting. If 'Measurement Threshold 2' is not present, the Node B shall use 'Measurement Threshold 1' instead. If no 'Measurement Hysteresis Time' is provided, the Node B shall use the value zero as hysteresis times for both Report A and Report B.

If the *Report Characteristics* IE is not set to 'On-Demand', the Node B is required to perform reporting for a dedicated measurement object, in accordance with the conditions provided in the DEDICATED MEASUREMENT INITIATION REQUEST message, as long as the object exists. If no dedicated measurement object(s) for which a measurement is defined exists any more the Node B shall terminate the measurement locally, i.e. without reporting this to the CRNC.

If at the start of the measurement, the reporting criteria are fulfilled for any of Event A, Event B, Event E or Event F, the Node B shall initiate the Dedicated Measurement Reporting procedure immediately, and then continue with the measurements as specified in the DEDICATED MEASUREMENT INITIATION REQUEST message.

Higher layer filtering

The *Measurement Filter Coefficient* IE indicates how filtering of the measurement values shall be performed before measurement event evaluation and reporting.

The averaging shall be performed according to the following formula.

$$F_n = (1-a) \cdot F_{n-1} + a \cdot M_n$$

The variables in the formula are defined as follows

 F_n is the updated filtered measurement result

 F_{n-1} is the old filtered measurement result

 M_n is the latest received measurement result from physical layer measurements, the unit used for M_n is the same unit as the reported unit in the DEDICATED MEASUREMENT INITIATION RESPONSE, DEDICATED MEASUREMENT REPORT messages or the unit used in the event evaluation (i.e. same unit as for Fn)

 $a = 1/2^{(k/2)}$, where k is the parameter received in the *Measurement Filter Coefficient IE*. If the *Measurement Filter Coefficient IE* is not present, a shall be set to 1 (no filtering)

In order to initialise the averaging filter, F_0 is set to M_1 when the first measurement result from the physical layer measurement is received.

Response message

If the Node B was able to initiate the measurement requested by the CRNC, it shall respond with the DEDICATED MEASUREMENT INITIATION RESPONSE message using the communication control port assigned to the Node B communication context. The message shall include the same Measurement ID that was used in the measurement request.

Only in the case when *Report Characteristics* IE is set to "On-Demand", the DEDICATED MEASUREMENT INITIATION RESPONSE message shall contain the measurement result. In this case also the *Dedicated Measurement Object* IE shall be included if it was included in the request message.

In the case that the *Node B Communication Context ID* IE is set to 'All NBCC', the *CRNC Communication Context ID* IE in the DEDICATED MEASUREMENT INITIATION RESPONSE shall be set to the value 'All CRNCCC', which is reserved for this purpose.

Interaction with Reset Procedure

If a measurement has been requested with the *Node B Communication Context ID* IE set to 'All NBCC', the Node B shall terminate the measurement locally if either the CRNC or the Node B initiates the Reset procedure for the relevant Communication Control Port or the entire Node B.

8.3.8.3 Unsuccessful Operation




Figure 39: Dedicated Measurement Request procedure: Unsuccessful Operation

If the requested measurement cannot be initiated, the Node B shall send a DEDICATED MEASUREMENT INITIATION FAILURE message using the communication control port assigned to the Node B communication

context. The message shall include the same Measurement ID that was used in the DEDICATED MEASUREMENT INITIATION REQUEST message and the *Cause* IE set to an appropriate value.

In the case that the *Node B Communication Context ID* IE is set to 'All NBCC' the *CRNC Communication Context ID* IE in the DEDICATED MEASUREMENT INITIATION FAILURE shall be set to the value 'All CRNCCC', which is reserved for this purpose.

Typical cause values are as follows:

Radio Network Layer cause

- Measurement not supported for the object
- Measurement Temporarily not Available

Miscellaneous Cause

- O&M Intervention
- Control processing overload
- HW failure

8.3.8.4 Abnormal Conditions

The allowed combinations of the Dedicated Measurement Type and Report Characteristics Type are shown in the table below marked with "X". For not allowed combinations, the Node B shall regard the Dedicated Measurement Initiation procedure as failed.

Table 4: Allowed Dedicated Measurement Type and Report Characteristics Type combinations

Dedicated Measurement	Report Characteristics Type									
Туре	On Demand	Periodic	Event A	Event B	Event C	Event D	Event E	Event F	On Modification	
SIR	Х	Х	Х	Х	Х	Х	Х	Х		
SIR Error	Х	Х	Х	Х	Х	Х	Х	Х		
Transmitted Code Power	Х	Х	Х	Х	Х	Х	Х	Х		
RSCP	Х	Х	Х	Х	Х	Х	Х	Х		
Rx Timing Deviation	Х	Х	Х	Х	Х	Х	Х	Х		
Round Trip Time	X	Х	Х	Х	Х	Х	Х	Х		

If the Dedicated Measurement Type received in the *Dedicated Measurement Type* IE is not defined in ref. [4] or [5] to be measured on the Dedicated Measurement Object Type received in the *Dedicated Measurement Object Type* IE in the DEDICATED MEASUREMENT INITIATION REQUEST message, the Node B shall regard the Dedicated Measurement Initiation procedure as failed.

8.3.9 Dedicated Measurement Reporting

8.3.9.1 General

This procedure is used by the Node B to report the result of measurements requested by the CRNC with the Dedicated Measurement Initiation procedure. The Node B may initiate the Dedicated Measurement Reporting procedure at any time after establishing a Radio Link, as long as the Node B communication context exists.

8.3.9.2 Successful Operation



Figure 40: Dedicated Measurement Reporting procedure, Successful Operation

If the requested measurement reporting criteria are met, the Node B shall initiate the Dedicated Measurement Reporting procedure. The DEDICATED MEASUREMENT REPORT message shall use the communication control port assigned to the Node B communication context. If the measurement was initiated (by the Dedicated Measurement Initiation procedure) for multiple dedicated measurement objects, the Node B may include measurement values for multiple objects in the DEDICATED MEASUREMENT REPORT message. Unless specified below, the meaning of the parameters are given in other specifications.

The *Dedicated Measurement ID* IE shall be set to the Dedicated Measurement ID provided by the CRNC when initiating the measurement with the Dedicated Measurement Initiation procedure.

If the achieved measurement accuracy does not fulfil the given accuracy requirement, the Measurement not available shall be reported.

8.3.9.3 Abnormal Conditions

-

8.3.10 Dedicated Measurement Termination

8.3.10.1 General

This procedure is used by the CRNC to terminate a measurement previously requested by the Dedicated Measurement Initiation procedure.

The Dedicated Measurement Termination procedure shall not be initiated if a Prepared Reconfiguration exists, as defined in subclause 3.1.

8.3.10.2 Successful Operation



Figure 41: Dedicated Measurement Termination procedure, Successful Operation

This procedure is initiated with a DEDICATED MEASUREMENT TERMINATION REQUEST message, sent from the CRNC to the Node B using the communication control port assigned to the Node B communication context.

Upon reception, the Node B shall terminate reporting of measurements corresponding to the received Dedicated Measurement ID.

8.3.10.3 Abnormal Conditions

_

8.3.11 Dedicated Measurement Failure

8.3.11.1 General

This procedure is used by the Node B to notify the CRNC that a measurement previously requested by the Dedicated Measurement Initiation procedure can no longer be reported. The Node B is allowed to initiate the DEDICATED MEASUREMENT FAILURE INDICATION message at any time after having sent the RADIO LINK SETUP RESPONSE message, as long as the Node B communication context exists.

8.3.11.2 Successful Operation



Figure 42: Dedicated Measurement Failure procedure, Successful Operation

This procedure is initiated with a DEDICATED MEASUREMENT FAILURE INDICATION message, sent from the Node B to the CRNC using the communication control port assigned to the Node B communication context, to inform the CRNC that a previously requested measurement can no longer be reported. The Node B has locally terminated the indicated measurement.

If the failed measurement was initiated with the *Node B Communication Context ID* IE set to the reserved value "All NBCC" and the Node B has terminated the measurement reporting of the measurement corresponding to the Measurement ID indicated in the DEDICATED MEASUREMENT FAILURE INDICATION message, the *CRNC Communication Context ID* IE shall be set to the value 'All CRNCCC'.

8.3.11.3 Abnormal Conditions

_

8.3.12 Radio Link Failure

8.3.12.1 General

This procedure is used by Node B to indicate a failure in one or more Radio Links [FDD - or Radio Link Sets][TDD or CCTrCHs within a Radio Link].

The Node B may initiate the Radio Link Failure procedure at any time after establishing a Radio Link.

8.3.12.2 Successful Operation




Figure 43: Radio Link Failure procedure, Successful Operation

When Node B detects that one or more Radio Link [FDD - or Radio Link Sets] [TDD - or CCTrCHs within a Radio Link] is no longer available, it sends the RADIO LINK FAILURE INDICATION message to CRNC indicating the

failed Radio Links or Radio Link Sets or CCTrCHs with the most appropriate cause values in the *Cause* IE. If the failure concerns one or more individual Radio Links the Node B shall indicate the affected Radio Link(s) using the *RL Information* IE. [FDD - The Node B shall indicate the affected Radio Link Set(s) using the *RL Set Information* IE.] [TDD – If the failure concerns only the failure of one or more CCTrCH's within in a radio link the Node B shall indicate the affected CCTrCH's using the *CCTrCH ID* IE.]

When the Radio Link Failure procedure is used to notify the loss of UL synchronisation of a [FDD – Radio Link Set] [TDD – Radio Link or CCTrCHs within a Radio Link] on the Uu, the message shall be sent, with the cause value 'Synchronisation Failure', when indicated by the UL out-of-sync algorithm defined in [10] and [21]. [FDD – The algorithm in [10] shall use the maximum value of the parameters N_OUTSYNC_IND and T_RLFAILURE, and the minimum value of the parameters N_INSYNC_IND, that are configured in the cells supporting the radio links of the RL Set.]

[FDD – When the Radio Link Failure procedure is used to indicate permanent failure in one or more Radio Links/Radio Link Sets due the occurrence of an UL or DL frame with more than one transmission gap caused by one or more compressed mode pattern sequences, the DL transmission shall be stopped and the RADIO LINK FAILURE INDICATION message shall be sent with the cause value 'Invalid CM Settings'. After sending the RADIO LINK FAILURE INDICATION message to notify the permanent failure, the Node B shall not remove the Radio Link(s)/Radio Link Set(s) from the UE Context, or the UE Context itself.]

In the other cases Radio Link Failure procedure is used to indicate that one or more Radio Links/Radio Link Sets are permanently unavailable and cannot be restored. After sending the RADIO LINK FAILURE INDICATION message to notify the permanent failure, the Node B shall not remove the Radio Link/Radio Link Set from the UE Context, or the UE Context itself. When applicable, the retention priorities associated with the transport channels shall be used by the Node B to prioritise which Radio Links/Radio Link Sets to indicate as unavailable to the CRNC.

Typical cause values are:

Radio Network Layer Causes:

- Synchronisation Failure
- Invalid CM settings

Transport Layer Causes:

- Transport Resources Unavailable

Miscellaneous Causes:

- Control Processing Overload
- HW Failure
- O&M Intervention

8.3.12.3 Abnormal Conditions

_

8.3.13 Radio Link Restoration

8.3.13.1 General

This procedure is used by the Node B to notify the achievement and re-achievement of uplink synchronisation of one or more [FDD - Radio Link Sets][TDD - Radio Links or CCTrCHs within a Radio Link] on the Uu.

The Node B may initiate the Radio Link Restoration procedure at any time after establishing a Radio Link.

8.3.13.2 Successful Operation



Figure 44: Radio Link Restoration procedure, Successful Operation

The Node B shall send the RADIO LINK RESTORE INDICATION message to the CRNC when indicated by the UL sync detection algorithm defined in ref. [10] and [21]. [FDD – The algorithm in ref. [10] shall use the minimum value of the parameters N INSYNC IND that are configured in the cells supporting the radio links of the RL Set.]

[TDD – If the re-established Uu synchronisation concerns one or more individual Radio Links the Node B shall indicate the affected Radio Link(s) using the *RL Information* IE.] [TDD – If the re-established Uu synchronization concerns one or more individual CCTrCHs within a radio link the Node B shall indicate the affected CCTrCHs using the *CCTrCH ID* IE.] [FDD – If the re-established Uu synchronisation concerns one or more Radio Link Sets the Node B shall indicate the affected Radio Link Set(s) using the *RL Set Information* IE.]

8.3.13.3 Abnormal Condition

_

8.3.14 Compressed Mode Command [FDD]

8.3.14.1 General

The Compressed Mode Command procedure is used to activate or deactivate the compressed mode in the Node B for one UE-UTRAN connection.

The Compressed Mode Command procedure shall not be initiated if a Prepared Reconfiguration exists, as defined in subclause 3.1.

8.3.14.2 Successful Operation



Figure 47: Compressed Mode Command procedure, Successful Operation

The Node B shall deactivate all the ongoing Transmission Gap Pattern Sequences at the *CM Configuration Change CFN* IE requested by CRNC when receiving COMPRESSED MODE COMMAND message from the CRNC. From that moment on all Transmission Gap Pattern Sequences included in *Transmission Gap Pattern Sequence Status* IE repetitions (if present) shall be started when the indicated *TGCFN* IE elapses. The *CM Configuration Change CFN* IE in the *Active Pattern Sequence Information* IE and *TGCFN* IE for each sequence refer to the next coming CFN with that value.

If the values of the *CM Configuration Change CFN* IE and the *TGCFN* IE are equal, the concerning Transmission Gap Pattern Sequence shall be started immediately at the CFN with a value equal to the value received in the *CM Configuration Change CFN* IE.

8.3.14.3 Abnormal Conditions

-

8.3.15 Downlink Power Timeslot Control [TDD]

8.3.15.1 General

The purpose of this procedure is to enable the Node B to use the indicated DL Timeslot ISCP values when deciding the DL TX Power for each timeslot

The Downlink Power Timeslot Control procedure can be initiated by the CRNC at any time when the Node B communication context exists, irrespective of other ongoing CRNC initiated dedicated NBAP procedures towards this Node B communication context. The only exception occurs when the CRNC has requested the deletion of the last RL via this Node B, in which case the Downlink Power Timeslot Control procedure shall no longer be initiated.

8.3.15.2 Successful Operation



Figure 47A: Downlink Power Timeslot Control procedure, Successful Operation

The procedure is initiated by the CRNC sending a DL POWER TIMESLOT CONTROL REQUEST message to the Node B.

Upon reception, the Node B shall use the indicated DL Timeslot ISCP value when deciding the DL TX Power for each timeslot as specified in ref. [21], i.e. it shall reduce the DL TX power in those downlink timeslots of the radio link where the interference is low, and increase the DL TX power in those timeslots where the interference is high, while keeping the total downlink power in the radio link unchanged.

8.3.15.3 Abnormal Conditions

_

8.3.16 Radio Link Pre-emption

8.3.16.1 General

This procedure is started by the Node B when resources need to be freed.

The Node B may initiate the Radio Link Pre-emption procedure at any time after establishing a Radio Link.

8.3.16.2 Successful Operation

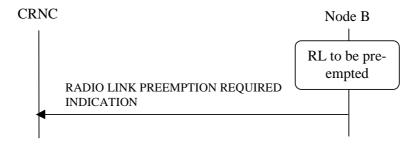


Figure 47B: RL Pre-emption procedure, Successful Operation

When Node B detects that a one or more Radio Links should be pre-empted, see Annex A, it shall send the RADIO LINK PREEMPTION REQUIRED INDICATION message to the CRNC. If all Radio Links for a CRNC Communication Context ID should be pre-empted, the *RL Information* IE shall be omitted. If one or several but not all Radio Links should be pre-empted for a CRNC Communication Context, the Radio Links that should be pre-empted shall be indicated in the *RL Information* IE. The Radio Link(s) that should be pre-empted should be deleted by the CRNC.

8.3.16.3 Abnormal Conditions

-

8.4 Error Handling Procedures

8.4.1 Error Indication

8.4.1.1 General

The Error Indication procedure is initiated by a node in order report detected errors in one incoming message, provided they cannot be reported by an appropriate response message.

8.4.1.2 Successful Operation

When the conditions defined in subclause 10 are fulfilled, the Error Indication procedure is initiated by an ERROR INDICATION message sent from the receiving node.

When the ERROR INDICATION message is sent from a Node B to its CRNC, the *CRNC Communication Context ID* IE shall be included in the message if available. When the ERROR INDICATION message is sent from a CRNC to a Node B, the *Node B Communication Context ID* IE shall be included in the message if available.

When a message for a dedicated procedure is received in the Node B with an invalid *Node B Communication Context ID* IE, the Node B shall include the unknown *Node B Communication Context ID* IE from the received message in the ERROR INDICATION message, unless another handling is specified in the procedure text for the affected procedure.

When a message for a dedicated procedure is received in the CRNC with an invalid *CRNC Communication Context ID* IE, the CRNC shall include the unknown *CRNC Communication Context ID* IE from the received message in the ERROR INDICATION message, unless another handling is specified in the procedure text for the affected procedure.

The ERROR INDICATION message shall include either the *Cause* IE, or the *Criticality Diagnostics* IE, or both the *Cause* IE and the *Criticality Diagnostics* IE.

Typical cause values for the ERROR INDICATION message are:

Protocol Causes:

- Transfer Syntax Error
- Abstract Syntax Error (Reject)
- Abstract Syntax Error (Ignore and Notify)
- Message not Compatible with Receiver State
- Unspecified



Figure 49: Error Indication procedure (Node B to CRNC): Successful Operation

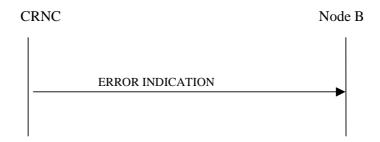


Figure 50: Error Indication procedure (CRNC to Node B), Successful Operation

8.4.1.3 Abnormal Conditions

_

9 Elements for NBAP communication

9.1 Message Functional Definition and Content

9.1.1 General

Subclause 9.1 presents the contents of NBAP messages in tabular format. The corresponding ASN.1 definition is presented in subclause 9.3. In case there is contradiction between the tabular format in subclause 9.1 and the ASN.1 definition, the ASN.1 shall take precedence, except for the definition of conditions for the presence of conditional IEs, where the tabular format shall take precedence.

NOTE: The messages have been defined in accordance to the guidelines specified in ref. [26].

9.1.2 Message Contents

9.1.2.1 Presence

An information element can be of the following types:

M	IEs marked as Mandatory (M) shall always be included in the message.
0	IEs marked as Optional (O) may or may not be included in the message.
С	IEs marked as Conditional (C) shall be included in a message only if the condition is satisfied.
	Otherwise the IE shall not be included.

In case of an information element group, the group is preceded by a name for the info group (in bold). It is also indicated how many times a group may be repeated in the message and whether the group is conditional. The presence

field of the information elements inside one group defines if the information element is mandatory, optional or conditional <u>if the group is present.</u>

9.1.2.2 Criticality

Each information element or Group of information elements may have a criticality information applied to it. Following cases are possible:

_	No criticality information is applied explicitly.
YES	Criticality information is applied. 'YES' is usable only for non-repeatable information elements.
GLOBAL	The information element and all its repetitions together have one common criticality information.
	'GLOBAL' is usable only for repeatable information elements.
EACH	Each repetition of the information element has its own criticality information. It is not allowed to assign
	different criticality values to the repetitions. 'EACH' is usable only for repeatable information elements.

9.1.2.3 Range

The Range column indicates the allowed number of copies of repetitive IEs/IE.

9.1.2.4 Assigned Criticality

This column provides the actual criticality information as defined in subclause 10.3.2, if applicable.

101

9.1.3 COMMON TRANSPORT CHANNEL SETUP REQUEST

9.1.3.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		-	
C-ID	М		9.2.1.9		YES	reject
Configuration Generation ID	М		9.2.1.16		YES	reject
CHOICE Common Physical Channel To Be Configured	М				YES	ignore
>Secondary CCPCH					_	
>>Secondary CCPCH		1				
>>>Common Physical Channel ID	М		9.2.1.13		_	
>>>FDD SCCPCH Offset	M		9.2.2.15	Corresponds to [7]: S-	-	
>>>DL Scrambling Code	C-PCH		9.2.2.13		-	
>>>FDD DL Channelisation Code Number	M		9.2.2.14		1	
>>>TFCS	М		9.2.1.58	For the DL.	-	
>>>Secondary CCPCH Slot Format	М		9.2.2.43		-	
>>>TFCI Presence	C – SlotFormat		9.2.1.57	Refer to TS [7]	-	
>>>Multiplexing Position	М		9.2.2.23	1-1	_	
>>>Power Offset		1			-	
Information						
>>>P01	М		Power Offset 9.2.2.29	Power offset for the TFCI bits	-	
>>>>PO3	M		Power Offset 9.2.2.29	Power offset for the pilot bits	1	
>>>STTD Indicator	М		9.2.2.48		-	
>>>FACH Parameters		0 <ma xnoofF ACHs></ma 			GLOBAL	reject
>>>Common Transport Channel ID	М		9.2.1.14		_	
>>>Transport Format Set	М		9.2.1.59	For the DL.	-	
>>>ToAWS	М		9.2.1.61		_	
>>>ToAWE	М		9.2.1.60			
>>>>Max FACH Power	М		DL Power 9.2.1.21	Maximum allowed power on the FACH.	_	
>>>PCH Parameters		01			YES	reject
>>>Common Transport Channel ID	М		9.2.1.14		-	
>>>Transport Format Set	М		9.2.1.59	For the DL.	_	

	1		П	1		
>>>ToAWS	М		9.2.1.61			
>>>ToAWE	M		9.2.1.60		_	
>>>PCH Power	M		DL Power		_	
			9.2.1.21			
>>>PICH		1			_	
Parameters						
>>>>Common	M		9.2.1.13		_	
Physical Channel						
ID						
>>>>FDD DL	М		9.2.2.14		1	
Channelisation						
Code Number						
>>>>PICH Power	М		9.2.1.49A		_	
>>>>PICH Mode	M		9.2.2.26	Number of	_	
/// TOTT Wode	IVI		3.2.2.20	PI per frame	_	
>>>>STTD	M		9.2.2.48	r i per ilalile		
	IVI		9.2.2.40		_	
Indicator						
>PRACH						
>>PRACH		1				
>>>Common Physical	М		9.2.1.13		_	
Channel ID						
>>>Scrambling Code	M		9.2.2.42		_	
Number						
>>>TFCS	M		9.2.1.58	For the UL.	_	
>>>Preamble Signatures	M		9.2.2.31		-	
>>>Allowed Slot		1 <ma< td=""><td></td><td></td><td>_</td><td></td></ma<>			_	
Format Information		xnoofSI				
		otForm				
		atsPRA				
		CH>				
>>>RACH Slot	М	0112	9.2.2.37		_	
Format	141		0.2.2.07			
>>>RACH Sub Channel	M		9.2.2.38			
	IVI		9.2.2.30		_	
Numbers			0.04.50	E (1 11)		
>>>Puncture Limit	M		9.2.1.50	For the UL		
>>>Preamble Threshold	М		9.2.2.32			
>>>RACH Parameters		1			YES	Reject
>>>Common	M		9.2.1.14		_	
Transport Channel ID						
>>>>Transport Format	М		9.2.1.59	For the UL.	_	
Set						
>>AICH Parameters		1				
>>>Common Physical	М		9.2.1.13		_	
Channel ID						
>>>AICH Transmission	М		9.2.2.1		_	
Timing						
>>>FDD DL Channelisation	М		9.2.2.14		_	
Code Number			V.L.Z. 1 T			
>>>AICH Power	M		9.2.2.D			
>>>STTD Indicator	M		9.2.2.48			
	IVI		3.2.2.40		_	
>PCPCHes						
>>CPCH Parameters		1			_	
>>>Common Transport	М		9.2.1.14		_	
Channel ID						
>>>Transport Format Set	M		9.2.1.59	For the UL.	_	
>>>AP Preamble	М		CPCH		_	
Scrambling Code			Scrambling			
			Code			

		1		1		
			Number			
	<u> </u>		9.2.2.4B			
>>>CD Preamble	M		CPCH		_	
Scrambling Code			Scrambling			
3			Code			
			Number			
			9.2.2.4B			
>>>TFCS	М		9.2.1.58	For the UL	_	
	0		Preamble	Note: When	_	
>>>CD Signatures	0				_	
			Signatures	not present,		
			9.2.2.31	all CD		
				signatures		
				are to be		
				used.		
>>>CD Sub Channel			9.2.2.1C		_	
Numbers						
>>>Puncture Limit	М		9.2.1.50	For the UL	_	
>>>CPCH UL DPCCH Slot	М		9.2.2.4C	For UL	_	
Format				CPCH		
				message		
				control part		
>>>UL SIR	M		UL SIR	control part		
>>>UL 21K	IVI				_	
			9.2.1.67A			
>>>Initial DL transmission	M		DL Power		_	
Power			9.2.1.21			
>>>Maximum DL Power	M		DL Power		_	
			9.2.1.21			
>>>Minimum DL Power	M		DL Power		_	
			9.2.1.21			
>>>PO2	М		Power	Power offset	_	
			Offset	for the TPC		
			9.2.2.29	bits relative		
			0.2.2.20	to the pilot		
				bits.		
>>>FDD TPC DL Step Size	М		9.2.2.16	Dito.		
					_	
>>>N_Start_Message	M		9.2.2.23C		_	
>>>N_EOT	M		9.2.2.23A		_	
>>>Channel Assignment	М		9.2.2.1D		_	
Indication						
>>>CPCH Allowed Total	M		9.2.2.4A		_	
Rate		<u> </u>				
>>>PCPCH Channel		1 <ma< td=""><td></td><td></td><td>_</td><td></td></ma<>			_	
Information		xnoofP				
		CPCHs				
		>				
>>>>Common Physical	М		9.2.1.13		_	
Channel ID	141		9.2.1.13		_	
	М		0.0.0.45	For I''		
>>>>CPCH Scrambling	IVI		9.2.2.4B	For UL	_	
Code Number	1		00515	PCPCH		
>>>DL Scrambling Code	M		9.2.2.13	For DL	_	
				CPCH		
				message		
				part		
>>>FDD DL	М		9.2.2.14	For DL	_	
Channelisation Code				CPCH		
Number				message		
				part		
>>>PCP Length	М		9.2.2.24A	j	_	
Or Longin	141	1	J.L.L.LTA	I	_	

>>>UCSM Information	C-NCA	1			_	
>>>>Min UL	M	†	9.2.2.22		_	
Channelisation Code			0.2.2.22			
Length						
>>>>NF_max	М		9.2.2.23B		_	
>>>>Channel		0 <ma< td=""><td></td><td></td><td>_</td><td></td></ma<>			_	
Request Parameters		xAPSig				
-		Num>				
>>>>AP Preamble	M		9.2.2.1A		_	
Signature						
>>>>AP Sub	0		9.2.2.1B		_	
Channel Number						
>>>VCAM Mapping	C-CA	1 <ma< td=""><td></td><td>Refer to TS</td><td>_</td><td></td></ma<>		Refer to TS	_	
Information		xnoofL		[18]		
		en>				
>>>Min UL	М		9.2.2.22		_	
Channelisation Code						
Length		<u> </u>				
>>>NF_max	M		9.2.2.23B		_	
>>>Max Number of	M		9.2.2.20A		_	
PCPCHes		 				
>>>SF Request		1 <ma< td=""><td></td><td></td><td>_</td><td></td></ma<>			_	
Parameters		xAPSig				
		Num>	_			
>>>>AP Preamble	M		9.2.2.1A		_	
Signature						
>>>>AP Sub Channel	0		9.2.2.1B		_	
Number		1				
>>>AP-AICH Parameters	N4	1	0.04.40		_	
>>>Common Physical Channel ID	M		9.2.1.13		_	
>>>FDD DL	M		9.2.2.14			
Channelisation Code	IVI		9.2.2.14		_	
Number						
>>>>AP-AICH Power	М	1	AICH		_	
///AI -AIGIT FUWEI	IVI		Power		_	
			9.2.2.D			
>>>CSICH Power	M		AICH	For CSICH	_	
2222001110001	'*'		Power	bits at end of		
			9.2.2.D	AP-AICH		
				slot		
>>>STTD Indicator	М		9.2.2.48		_	
>>>CD/CA-ICH		1			_	
Parameters						
>>>>Common Physical	М		9.2.1.13		_	
Channel ID						
>>>FDD DL	М		9.2.2.14		_	
Channelisation Code						
Number						
>>>CD/CA-ICH Power	М		AICH		_	
			Power			
			9.2.2.D			
>>>STTD Indicator	М		9.2.2.48		_	

Condition	Explanation
SlotFormat	The IE shall be present if the Secondary CCPCH Slot
	Format IE is set to any of the values from 8 to 17.
CA	The IE shall be present if the Channel Assignment
	Indication IE is set to "CA Active".
NCA	The IE shall be present if the Channel Assignment
	Indication IE is set to "CA Inactive".
PCH	The IE shall be present if the PCH parameters IE is
	not present.

Range bound	Explanation
MaxnoofFACHs	Maximum number of FACHs that can be defined on a
	Secondary CCPCH.
MaxnoofPCPCHs	Maximum number of PCPCHs for a CPCH
MaxnoofLen	Maximum number of Min UL Channelisation Code
	Length
MaxnoofSlotFormatsPRACH	Maximum number of SF for a PRACH
MaxAPSigNum	Maximum number of AP Signatures.

9.1.3.2 TDD Message

IE/Group Name	Presence	Range	IE type and	Semantics description	Criticality	Assigned Criticality
			reference			
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
C-ID	M		9.2.1.9		YES	reject
Configuration Generation ID	M		9.2.1.16		YES	reject
CHOICE Common Physical Channel To Be Configured	М				YES	ignore
>Secondary CCPCHs					_	
>>SCCPCH CCTrCH ID	М		CCTrCH ID 9.2.3.3	For DL CCTrCH supporting one or several Secondary CCPCHs	_	
>>TFCS	М		9.2.1.58	For DL CCTrCH supporting one or several Secondary CCPCHs	_	
>>TFCI Coding	М		9.2.3.22	001 0110	_	
>>Puncture Limit	M		9.2.1.50		_	
>>Secondary CCPCH		0 <ma xnoofS CCPC Hs></ma 		Mandatory For 3.84Mcps TDD only	GLOBAL	reject
>>>Common Physical Channel ID	М		9.2.1.13		_	
>>>TDD Channelisation Code	М		9.2.3.19		_	
>>>Time Slot	M		9.2.3.23		-	
>>>Midamble shift and Burst Type	М		9.2.3.7		_	
>>>TDD Physical Channel Offset	М		9.2.3.20		_	
>>>Repetition Period	М		9.2.3.16		_	
>>>Repetition Length	М		9.2.3.15		_	
>>>SCCPCH Power	М		DL Power 9.2.1.21		_	
>>FACH		0 <ma xnoofF ACHs></ma 			GLOBAL	reject
>>>Common Transport Channel ID	М		9.2.1.14		_	
>>>FACH CCTrCH ID	М		CCTrCH ID 9.2.3.3		_	
>>>Transport Format Set	М		9.2.1.59	For the DL.	-	
>>>ToAWS	М		9.2.1.61		_	-
>>>ToAWE	М		9.2.1.60			

>>>Max FACH Power	0		DL Power 9.2.1.21	For 1.28Mcps TDD only	YES	reject
>>PCH		01			YES	reject
>>>Common Transport Channel ID	М		9.2.1.14		-	
>>>PCH CCTrCH ID	М		CCTrCH ID 9.2.3.3		-	
>>>Transport Format Set	М		9.2.1.59	For the DL.	-	
>>>ToAWS	М		9.2.1.61		_	
>>>ToAWE	М		9.2.1.60		_	
>>>PICH Parameters		01		Mandatory For 3.84Mcps TDD only	YES	reject
>>>Common Physical Channel ID	М		9.2.1.13		_	
>>>TDD Channelisation Code	М		9.2.3.19		-	
>>>Time Slot	M		9.2.3.23		_	
>>>>Midamble shift and Burst Type	М		9.2.3.7		-	
>>>>TDD Physical Channel Offset	М		9.2.3.20		-	
>>>Repetition period	М		9.2.3.16		_	
>>>Repetition length	М		9.2.3.15		_	
>>>Paging Indicator Length	М		9.2.3.8		-	
>>>PICH Power	М		9.2.1.49A		_	
>>>PCH Power	0		DL Power 9.2.1.21	For 1.28Mcps TDD only	_	
>>>PICH Parameters LCR		01		Mandatory For 1.28Mcps TDD only	YES	reject
>>>>Common Physical Channel ID	М		9.2.1.13		-	
>>>TDD Channelisation Code LCR	М		9.2.3.19a		_	
>>>>Time Slot LCR	M		9.2.3.24A		_	
>>>>Midamble shift LCR	М		9.2.3.7A			
>>>TDD Physical Channel Offset	М		9.2.3.20		-	
>>>Repetition period	М		9.2.3.16		_	
>>>Repetition length	М		9.2.3.15		_	
>>>Paging Indicator Length	М		9.2.3.8		-	
>>>PICH Power	М		9.2.1.49A		_	
					l l	

>>Secondary CCPCH LCR		0 <ma xnoofS</ma 		Mandatory For	GLOBAL	reject
		- CCPC		1.28Mcps TDD only		
		HLCRs				
		>				
>>>Common Physical	М		9.2.1.13		_	
Channel ID						
>>>TDD Channelisation Code LCR	М		9.2.3.19a		_	
>>>Time Slot LCR	М		9.2.3.24A		_	
>>>Midamble shift LCR	М		9.2.3.7A		_	
>>>TDD Physical Channel Offset	М		9.2.3.20		-	
>>>Repetition Period	М		9.2.3.16		_	
>>>Repetition Length	M		9.2.3.15		_	
>>>SCCPCH Power	M		DL Power		-	
>PRACH			9.2.1.21			
>>PRACH	M	01		Mandatory for 3.84Mcps TDD only	YES	reject
>>>Common Physical Channel ID	М		9.2.1.13	,	-	
>>>TFCS	М		9.2.1.58		_	
>>>Time Slot	М		9.2.3.23		_	
>>>TDD Channelisation Code	М		9.2.3.19		-	
>>>Max PRACH Midamble Shifts	М		9.2.3.6		-	
>>>PRACH Midamble	М		9.2.3.14		_	
>>>RACH	141	1	0.2.0.11		YES	reject
>>>Common Transport Channel ID	М		9.2.1.14		-	
>>>>Transport Format Set	М		9.2.1.59	For the UL	-	
>>PRACH LCR		0		Mandatory	YES	reject
771 W.G. (201)		<maxn< td=""><td></td><td>For</td><td>. 20</td><td>10,000</td></maxn<>		For	. 20	10,000
		oofPR		1.28Mcps		
		ACHL CRs>		TDD only		
>>>Common Physical Channel ID	М	23	9.2.1.13		-	
>>>TFCS	М		9.2.1.58		_	
>>>Time Slot LCR	M		9.2.3.24A		_	
>>>TDD Channelisation Code LCR	М		9.2.3.19a		-	
>>>Max PRACH	М		9.2.3.6		-	
Midamble Shifts	N4		00044			
>>>PRACH Midamble >>>RACH	M	1	9.2.3.14			noic of
>>>RACH >>>>Common	М	1	9.2.1.14		YES _	reject
Transport Channel ID	IVI		J.Z.1.14		_	
>>>>Transport Format Set	М		9.2.1.59	For the UL	-	
>>FPACH		01		Mandatory for 1.28Mcps TDD only	GLOBAL	reject

>>>Common Physical	М	9.2.1.13	-
Channel ID			
>>>TDD Channelisation	M	9.2.3.19a	_
Code LCR			
>>>Time Slot LCR	M	9.2.3.24A	_
>>>Midamble shift LCR	M	9.2.3.7A	_
>>>Max FPACH Power	M	9.2.3.5 ^E	_

Range bound	Explanation
MaxnoofSCCPCHs	Maximum number of Secondary CCPCHs per
	CCTrCH for 3.84Mcps TDD.
MaxnoofS-CCPCHLCRs	Maximum number of Secondary CCPCHs per
	CCTrCH for 1.28Mcps TDD.
MaxnoofCCTrCHs	Maximum number of CCTrCHs that can be defined in
	a cell.
MaxnoofFACHs	Maximum number of FACHs that can be defined on a
	Secondary CCPCH.
MaxnoofPRACHLCRs	Maximum number of PRACH LCR that can be defined
	on a RACH for 1.28Mcps TDD.

9.1.4 COMMON TRANSPORT CHANNEL SETUP RESPONSE

Message Discriminator Message Type	M		and	description		
	M		reference	•		Criticality
			9.2.1.45		_	
I IVICUOUGU I YDU	М		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	,
FACH Parameters info		0 <ma< td=""><td></td><td>The FACH</td><td>GLOBAL</td><td>ignore</td></ma<>		The FACH	GLOBAL	ignore
		xnoofF		Parameters		
		ACHs>		may be		
				combined		
				with PCH		
				Parameters		
>FACH Parameters	M		Common		_	
			Transport			
			Channel			
			Information			
			Response			
			9.2.1.14A			
PCH Parameters	0		Common	The PCH	YES	ignore
			Transport	Parameters		
			Channel	may be		
			Information	combined		
			Response	with FACH		
			9.2.1.14A	Parameters		
RACH parameters	0		Common	The RACH	YES	ignore
			Transport	Parameters		
			Channel	shall not be		
			Information	combined		
			Response	with FACH		
			9.2.1.14A	Parameters		
				or PCH		
ODOLL			0	Parameters	VEO	
CPCH parameters	0		Common	The CPCH	YES	ignore
			Transport	Parameters		
			Channel	shall not be		
			Information	combined		
			Response 9.2.1.14A	with FACH		
			9.2.1.14A	Parameters or PCH		
				Parameters		
				or RACH		
				Parameters		
Criticality Diagnostics	0		9.2.1.17	i alameters	YES	ignore

Range bound	Explanation
MaxnoofFACHs	Maximum number of FACHs that can be defined on a
	Secondary CCPCH[FDD] / a group of Secondary
	CCPCHs [TDD].

9.1.5 COMMON TRANSPORT CHANNEL SETUP FAILURE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	_
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	_
Cause	M		9.2.1.6		YES	ignore
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.6 COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST

9.1.6.1 FDD Message

IE/Group Name	Presence	Range	IE type and	Semantics description	Criticality	Assigned Criticality
			reference			
Message Discriminator	M		9.2.1.45		-	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		-	
C-ID	M		9.2.1.9		YES	reject
Configuration Generation ID	М		9.2.1.16		YES	reject
CHOICE Common Physical Channel To Be Configured	M				YES	reject
>Secondary CCPCH					_	
>>FACH parameters		0 <maxfa CHCell></maxfa 			GLOBAL	reject
>>>Common Transport Channel ID	М	OFFICER	9.2.1.14		-	
>>>Max FACH Power	0		DL Power 9.2.1.21	Maximum allowed power on the FACH.	-	
>>>ToAWS	0		9.2.1.61		_	
>>>ToAWE	0		9.2.1.60		_	
>>PCH Parameters		01			YES	reject
>>>Common Transport Channel ID	М		9.2.1.14		_	
>>>PCH Power	0		DL Power 9.2.1.21	Power to be used on the PCH.	-	
>>>ToAWS	0		9.2.1.61		_	
>>>ToAWE	0		9.2.1.60		ı	
>>PICH Parameters		01			YES	reject
>>>Common Physical Channel ID	М		9.2.1.13		_	
>>>PICH Power	0		9.2.1.49A		_	
>PRACH					_	
>>PRACH		0 <mexpr< td=""><td></td><td></td><td>GLOBAL</td><td>reject</td></mexpr<>			GLOBAL	reject
Parameters		ACHCell>				
>>>Common Physical Channel ID	М		9.2.1.13		-	
>>>Preamble Signatures	0		9.2.2.31		_	
>>>Allowed Slot Format Information		0 <maxno ofSlotForm atsPRACH ></maxno 			-	
>>>>RACH Slot Format	М		9.2.2.37		-	
>>>RACH Sub Channel Numbers	0		9.2.2.38		-	
>>AICH Parameters		0 <maxpr ACHCell></maxpr 			GLOBAL	reject

>>>Common Physical Channel ID	М		9.2.1.13		-	
>>>AICH Power	0		9.2.2.D		_	
>CPCH					_	
>>CPCH Parameters		0 <maxno ofCPCHs></maxno 			GLOBAL	reject
>>>Common Transport Channel ID	М		9.2.1.14		_	
>>>UL SIR	0		9.2.1.67A		_	
>>>Initial DL transmission Power	0		DL Power 9.2.1.21		_	
>>>Maximum DL Power	0		DL Power 9.2.1.21		_	
>>>Minimum DL Power	0		DL Power 9.2.1.21		_	
>>AP-AICH Parameters		0 <maxno ofCPCHs></maxno 			GLOBAL	reject
>>>Common Physical Channel ID	М		9.2.1.13		_	
>>>AP-AICH Power	0		AICH Power 9.2.2.D		-	
>>>CSICH Power	0		AICH Power 9.2.2.D	For CSICH bits at end of AP-AICH slot	-	
>>CD/CA-ICH Parameters		0 <maxno ofCPCHs></maxno 			GLOBAL	reject
>>>Common Physical Channel ID	М		9.2.1.13		_	
>>>CD/CA-ICH Power	0		AICH Power 9.2.2.D		_	

Range bound	Explanation
MaxFACHCell	Maximum number of FACHs that can be defined in a
	Cell
MaxnoofCPCHs	Maximum number of CPCHs that can be defined in a
	Cell
MaxPRACHCell	Maximum number of PRACHs and AICHe that can be
	defined in a Cell
MaxnoofSlotFormatsPRACH	Maximum number of SF for a PRACH

9.1.6.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	
C-ID	М		9.2.1.9		YES	reject
Configuration Generation ID	М		9.2.1.16		YES	reject
Secondary CCPCH parameters		0 1			YES	reject

_	1			1	1	
>CCTrCH ID	M		9.2.3.3	For DL CCTrCH supporting one or several Secondary CCPCHs	_	
>Secondary CCPCHs to be configured		0 <maxnoofs CCPCHs></maxnoofs 			GLOBAL	reject
>>Common Physical Channel ID	М		9.2.1.13		_	
>>SCCPCH Power	0		DL power 9.2.1.21		_	
PICH Parameters		01			YES	reject
>Common Physical Channel ID	М		9.2.1.13		_	
>PICH Power	0		9.2.1.49A		_	
FACH parameters		0 <maxno ofFACHs></maxno 			GLOBAL	reject
>Common Transport Channel ID	М		9.2.1.14		_	
>ToAWS	0		9.2.1.61		_	
>ToAWE	0		9.2.1.60			
>Max FACH Power	0		DL Power 9.2.1.21	For 1.28Mcps TDD only	YES	reject
PCH parameters		0 1			YES	reject
>Common Transport Channel ID	М		9.2.1.14		_	
>ToAWS	0		9.2.1.61		_	
>ToAWE	0		9.2.1.60		_	
>PCH Power	0		DL Power 9.2.1.21	For 1.28Mcps TDD only	YES	reject
FPACH parameters		01		Mandatory for 1.28Mcps TDD only	YES	reject
>Common Physical Channel ID	М		9.2.1.13		_	
>Max FPACH Power	0		9.2.3.5E		_	

Range bound	Explanation
MaxnoofSCCPCHs	Maximum number of SCCPCH that can be repeated
	in a Cell
MaxnoofFACHs	Maximum number of FACHs that can be repeated in a
	Cell

9.1.7 COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.8 COMMON TRANSPORT CHANNEL RECONFIGURATION FAILURE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
Cause	M		9.2.1.6		YES	ignore
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.9 COMMON TRANSPORT CHANNEL DELETION REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
C-ID	M		9.2.1.9		YES	reject
Common Physical Channel ID	М		9.2.1.13	Indicates the Common Physical Channel for which the Common Transport Channels (together with the Common Physical Channel) shall be deleted.	YES	reject
Configuration Generation ID	М		9.2.1.16		YES	reject

9.1.10 COMMON TRANSPORT CHANNEL DELETION RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		ı	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.11 BLOCK RESOURCE REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		-	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
C-ID	M		9.2.1.9		YES	reject
Blocking Priority Indicator	M		9.2.1.5		YES	reject
Shutdown Timer	C-		9.2.1.56		YES	reject
	BlockNormal					

Condition	Explanation
BlockNormal	The IE shall be present if the Blocking Priority
	Indicator IE indicates "Normal Priority".

9.1.12 BLOCK RESOURCE RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		-	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.13 BLOCK RESOURCE FAILURE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	
Cause	М		9.2.1.6		YES	ignore
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.14 UNBLOCK RESOURCE INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		ı	
Message Type	М		9.2.1.46		YES	ignore
Transaction ID	М		9.2.1.62		_	
C-ID	М		9.2.1.9		YES	ignore

9.1.15 AUDIT REQUIRED INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	ignore
Transaction ID	М		9.2.1.62		_	

9.1.16 AUDIT REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	
Start Of Audit Sequence Indicator	М		9.2.1.56B		YES	reject

9.1.17 AUDIT RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		-	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		-	
End Of Audit Sequence Indicator	М		9.2.1.29A		YES	ignore
Cell Information		0 <maxcellin NodeB ></maxcellin 			EACH	ignore
>C-ID	М		9.2.1.9		-	
>Configuration Generation ID	M		9.2.1.16		-	
>Resource Operational State	М		9.2.1.52		_	
>Availability Status	М		9.2.1.2		1	
>Local Cell ID	M		9.2.1.38	The local cell that the cell is configured on	-	
>Primary SCH Information	0		Common Physical Channel Status Information 9.2.1.13A		YES	ignore
>Secondary SCH Information	0		Common Physical Channel Status Information 9.2.1.13A		YES	ignore
>Primary CPICH Information	0		Common Physical Channel Status Information 9.2.1.13A		YES	ignore
>Secondary CPICH Information		0 <maxsc PICHCell></maxsc 	3.2.1.10/1		EACH	ignore
>>Secondary CPICH Individual Information	M		Common Physical Channel Status Information 9.2.1.13A		-	
>Primary CCPCH Information	0		Common Physical Channel Status Information 9.2.1.13A		YES	ignore
>BCH Information	0		Common Transport Channel Status Information 9.2.1.13A		YES	ignore

	1		T	1		
>Secondary CCPCH		0 <maxsc< td=""><td></td><td></td><td>EACH</td><td>ignore</td></maxsc<>			EACH	ignore
Information		CPCHCell				
		>				
>>Secondary CCPCH	М		Common		_	
Individual Information			Physical			
			Channel			
			Status			
			Information			
DOLL Information	_		9.2.1.13A			
>PCH Information	0		Common		YES	ignore
			Transport Channel			
			Status			
			Information			
			9.2.1.14B			
>PICH Information	0		Common		YES	ignore
			Physical		120	ignore
			Channel			
			Status			
			Information			
			9.2.1.13A			
>FACH Information		0 <maxfa< td=""><td></td><td></td><td>EACH</td><td>ignore</td></maxfa<>			EACH	ignore
		CHCell>				
>>FACH Individual	M		Common			
Information			Transport			
			Channel			
			Status			
			Information			
			9.2.1.14B			
>PRACH Information		0 <maxpr< td=""><td>3.2.1.170</td><td></td><td>EACH</td><td>ignoro</td></maxpr<>	3.2.1.170		EACH	ignoro
		ACHCell>			EACH	ignore
>>PRACH Individual		AUTICEII>				
Information	M		Common		_	
mormation			Physical			
			Channel			
			Status			
			Information			
			9.2.1.13A			
>RACH Information		0 <maxra< td=""><td></td><td></td><td>EACH</td><td>ignore</td></maxra<>			EACH	ignore
		CHCell>				
>>RACH Individual	М		Common			
Information			Transport			
			Channel			
			Status			
			Information			
			9.2.1.14B			
>AICH Information		0 <maxpr< td=""><td>3.4.1.14D</td><td></td><td>EACH</td><td>ianoro</td></maxpr<>	3.4.1.14D		EACH	ianoro
- Aug. I illorination					EACH	ignore
>>AICH Individual	1 14	ACHCell>	0			
>>AICH Individual Information	M		Common		_	
IIIIOIIIIalioii			Physical			
			Channel			
			Status			
			Information			
			9.2.1.13A			
>PCPCH Information		0 <maxpc< td=""><td></td><td></td><td>EACH</td><td>ignore</td></maxpc<>			EACH	ignore
		PCHCell>				3
>>PCPCH Individual	М		Common		_	
Information			Physical			
			Channel			
			Status			
			Information	l		

			9.2.1.13A			
>CPCH Information		0 <maxcp CHCell></maxcp 	0.2.1.10/1		EACH	ignore
>>CPCH Individual Information	М		Common Transport Channel Status Information 9.2.1.14B		-	
>AP-AICH Information		0 <maxcp CHCell></maxcp 	<u> </u>		EACH	ignore
>>AP-AICH Individual Information	М	of rooms	Common Physical Channel Status Information 9.2.1.13A		-	
>CD/CA-ICH Information		0 <maxcp CHCell></maxcp 			EACH	ignore
>>CD/CA-ICH Individual Information	М		Common Physical Channel Status Information 9.2.1.13A		-	
>SCH Information	0		Common Physical Channel Status Information 9.2.1.13A	TDD Sync Channel	YES	ignore
>FPACH Information		0 <maxfp ACHCell></maxfp 		For 1.28Mcps TDD only	EACH	ignore
>>FPACH Individual Information	M		Common Physical Channel Status Information 9.2.1.13A		-	
>DwPCH Information	0		Common Physical Channel Status Information 9.2.1.13A	For 1.28Mcps TDD only	YES	ignore
Communication Control Port Information		0 <maxccpi nNodeB></maxccpi 	5.2		EACH	ignore
>Communication Control Port ID	М		9.2.1.15		_	
>Resource Operational State	М		9.2.1.52		-	
>Availability Status	M		9.2.1.2			
Local Cell Information		0 <maxlocal CellinNode B></maxlocal 			EACH	ignore
>Local Cell ID	М		9.2.1.38		_	

	1	1		1		
>DL or Global Capacity	M		9.2.1.20B		_	
Credit						
>UL Capacity Credit	0		9.2.1.65A		1	
>Common Channels	M		9.2.1.9A		_	
Capacity Consumption						
Law						
>Dedicated Channels	M		9.2.1.20A		_	
Capacity Consumption						
Law						
>Maximum DL Power Capability	0		9.2.1.39		-	
>Minimum Spreading	0		9.2.1.47			
Factor			3.2.1.41		_	
>Minimum DL Power	0		9.2.1.46A		_	
Capability						
>Local Cell Group ID	0		9.2.1.37A		_	
>Reference Clock	0		9.2.3.14A	TDD only	YES	ignore
availability						
Local Cell Group		0			EACH	ignore
Information		<maxlocal< td=""><td></td><td></td><td></td><td>· ·</td></maxlocal<>				· ·
		CellinNode				
		B>				
>Local Cell Group ID	М		9.2.1.37A		_	
>DL or Global Capacity	М		9.2.1.20B		_	
Credit						
>UL Capacity Credit	0		9.2.1.65A		_	
>Common Channels	М		9.2.1.9A		-	
Capacity Consumption						
Law						
>Dedicated Channels	M		9.2.1.20A		_	
Capacity Consumption Law						
Criticality Diagnostics	0		9.2.1.17		YES	ignore
,			0.2.1.17	1	120	ignore

Range bound	Explanation
MaxCellinNodeB	Maximum number of Cell that can be configured in Node B
MaxCCPinNodeB	Maximum number of communication control ports that can exist in the Node B
MaxCPCHCell	Maximum number of CPCHes that can be defined in a Cell
MaxLocalCellinNodeB	Maximum number of Local Cells that can exist in the Node B
MaxPCPCHCell	Maximum number of PCPCHes that can be defined in a Cell
MaxSCPICHCell	Maximum number of Secondary CPICH that can be defined in a Cell.
MaxSCCPCHCell	Maximum number of Secondary CCPCH that can be defined in a Cell.
MaxFACHCell	Maximum number of FACHes that can be defined in a Cell
MaxPRACHCell	Maximum number of PRACHes that can be defined in a Cell
MaxRACHCell	Maximum number of RACHes that can be defined in a Cell
MaxFPACHCell	Maximum number of FPACHes that can be defined in a Cell

9.1.17A AUDIT FAILURE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	
Cause	М		9.2.1.6		YES	ignore
Criticality diagnostics	0	•	9.2.1.17		YES	ignore

123

9.1.18 COMMON MEASUREMENT INITIATION REQUEST

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	•
Measurement ID	M		9.2.1.42		YES	reject
Common Measurement Object Type	М		9.2.1.10		YES	reject
CHOICE Common Measurement Object Type	М				YES	reject
>Cell					_	
>>C-ID	M		9.2.1.9		_	
>>Time Slot	0		9.2.3.23	For 3.84Mcps TDD only	-	
>>Time Slot LCR	0		9.2.3.24A	For 1.28Mcps TDD only	YES	reject
>>Neighbouring Cell Measurement Information		0 <maxno MeasNCell s></maxno 			GLOBAL	ignore
>>>CHOICE Neighbouring Cell Measurement Information					_	_
>>>> Neighbouring FDD Cell Measurement Information				FDD only	-	_
>>>> Neighbouring FDD Cell Measurement Information	M		9.2.1.47C		_	_
>>>> Neighbouring TDD Cell Measurement Information				3.84Mcps TDD only	-	-
>>>> Neighbouring TDD Cell Measurement Information	M		9.2.1.47D		_	_
>RACH				FDD only	_	
>>C-ID	М		9.2.1.9	<u> </u>	_	
>>Common Transport Channel ID	М		9.2.1.14		-	
>CPCH				FDD only	_	
>>C-ID	М		9.2.1.9		_	
>>Common Transport Channel ID	М		9.2.1.14		_	
>>Spreading Factor	0		Minimum UL Channelisa tion Code Length 9.2.2.22		-	
Common Measurement Type	М		9.2.1.11		YES	reject
Measurement Filter Coefficient	0		9.2.1.41		YES	reject
Report Characteristics	М		9.2.1.51		YES	reject
SFN reporting indicator	М		FN reporting		YES	reject

		indicator 9.2.1.29B		
SFN	0	9.2.1.53A	YES	reject
Common Measurement Accuracy	0	9.2.1.9B	YES	reject

Range bound	Explanation
maxnoMeasNCells	Maximum number of neighbouring cells that can be
	measured on.

9.1.19 COMMON MEASUREMENT INITIATION RESPONSE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	-
Measurement ID	M		9.2.1.42		YES	ignore
CHOICE Common Measurement Object Type	0			Common Measuremen t Object Type that the measuremen t was initiated with.	YES	ignore
>Cell					YES	
>>Common Measurement value	М		9.2.1.12		_	
>RACH				FDD only	_	
>>Common Measurement Value	М		9.2.1.12	-	1	
>CPCH				FDD only	-	
>>Common Measurement Value	M		9.2.1.12		I	
SFN	0		9.2.1.53A	Common Measuremen t Time Reference	YES	ignore
Criticality Diagnostics	0		9.2.1.17		YES	ignore
Common Measurement Achieved Accuracy	0		Common Measurem ent Accuracy 9.2.1.9B		YES	ignore

9.1.20 COMMON MEASUREMENT INITIATION FAILURE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
Measurement ID	M		9.2.1.42		YES	Ignore
Cause	M		9.2.1.6		YES	Ignore
Criticality Diagnostics	0		9.2.1.17		YES	Ignore

9.1.21 COMMON MEASUREMENT REPORT

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	ignore
Transaction ID	M		9.2.1.62		-	
Measurement ID	M		9.2.1.42		YES	ignore
CHOICE Common Measurement Object Type	М			Common Measuremen t Object Type that the measuremen t was initiated with.	YES	ignore
>Cell					-	
>>Common Measurement Value Information	M		9.2.1.12A		-	
>RACH				FDD only	_	
>>Common Measurement Value Information	M		9.2.1.12A		I	
>CPCH				FDD only	ı	
>>Common Measurement Value Information	M		9.2.1.12A			
SFN	0		9.2.1.53A	Common Measuremen t Time Reference	YES	ignore

9.1.22 COMMON MEASUREMENT TERMINATION REQUEST

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		-	
Message Type	М		9.2.1.46		YES	ignore
Transaction ID	М		9.2.1.62		_	
Measurement ID	М		9.2.1.42		YES	ignore

9.1.23 COMMON MEASUREMENT FAILURE INDICATION

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	ignore
Transaction ID	M		9.2.1.62		_	
Measurement ID	M		9.2.1.42		YES	ignore
Cause	M		9.2.1.6		YES	ignore

9.1.24 CELL SETUP REQUEST

9.1.24.1 FDD Message

IE/Group Name	Presence	Range	IE type and Reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
Local Cell ID	M		9.2.1.38		YES	reject
C-ID	M		9.2.1.9		YES	reject
Configuration Generation ID	M		9.2.1.16		YES	reject
T Cell	M		9.2.2.49		YES	reject
UARFCN	М		9.2.1.65	Corresponds to Nu [14]	YES	reject
UARFCN	М		9.2.1.65	Corresponds to Nd [14]	YES	reject

Maximum Transmission Power	M		9.2.1.40	YES	reject
Closed Loop Timing Adjustment Mode	0		9.2.2.2A	YES	reject
Primary Scrambling Code	М		9.2.2.34	YES	reject
Synchronisation		1		YES	reject
Configuration					,
>N_INSYNC_IND	M		9.2.1.47A	_	
>N_OUTSYNC_IND	M		9.2.1.47B	_	
>T_RLFAILURE	M		9.2.1.56A	_	
DL TPC pattern 01 count	M		9.2.2.13A	YES	reject
Primary SCH Information		1		YES	reject
>Common Physical	M		9.2.1.13	_	
Channel ID					
>Primary SCH Power	M		DL Power	-	
			9.2.1.21		
>TSTD Indicator	M		9.2.1.64	_	
Secondary SCH Information		1		YES	reject
>Common Physical	М		9.2.1.13	_	
Channel ID					
>Secondary SCH power	М		DL Power	_	
			9.2.1.21		
>TSTD Indicator	М		9.2.1.64	_	
Primary CPICH		1		YES	reject
Information					,
>Common Physical	M		9.2.1.13	_	
Channel ID					
>Primary CPICH power	M		9.2.2.33	1	
>Transmit Diversity	M		9.2.2.53	-	
Indicator					
Secondary CPICH		0 <maxsc< td=""><td></td><td>EACH</td><td>reject</td></maxsc<>		EACH	reject
Information		PICHCell>			
>Common Physical Channel ID	M		9.2.1.13	-	
>DL Scrambling code	M		9.2.2.13	ı	
>FDD DL Channelisation	M		9.2.2.14	-	
Code Number					
>Secondary CPICH Power	M		DL Power	_	
			9.2.1.21		
>Transmit Diversity	M		9.2.2.53	_	
Indicator					
Primary CCPCH		1		YES	reject
Information					
>Common Physical	M		9.2.1.13	_	
Channel ID		_			
>BCH Information	 	1	<u> </u>	_	
>>Common Transport Channel ID	M		9.2.1.14	_	
>>BCH Power	M		DL Power 9.2.1.21	_	
>STTD Indicator	M		9.2.2.48		
Limited power increase		1		YES	reject
information					
>Power_Raise_Limit	M		9.2.2.29A	1	
>DL_power_averaging_wi	M		9.2.2.12A	_	
ndow_size					
IPDL Parameter		01		YES	reject
Information					
>IPDL FDD Parameters	M		9.2.2.18C	_	
IDDI Indicator	M	İ	9.2.1.36F	_	
>IPDL Indicator	14.				

Range bound	Explanation
MaxSCPICHCell	Maximum number of Secondary CPICH that can be defined in a Cell.

9.1.24.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
Local Cell ID	M		9.2.1.38		YES	reject
C-ID	M		9.2.1.9		YES	reject
Configuration Generation Id	М		9.2.1.16		YES	reject
UARFCN	М		9.2.1.65	Corresponds to Nt [15]	YES	reject
Cell Parameter ID	M		9.2.3.4		YES	reject
Maximum Transmission Power	M		9.2.1.40		YES	reject
Transmission Diversity Applied	M		9.2.3.26	On DCHs	YES	reject
Sync Case	М		9.2.3.18		YES	reject
Synchronisation		1	0.2.00		YES	reject
Configuration						10,000
>N_INSYNC_IND	М		9.2.1.47A		_	
>N_OUTSYNC_IND	M		9.2.1.47B		_	
>T_RLFAILURE	M		9.2.1.47B 9.2.1.56A			
					-	
DPCH Constant Value	M		Constant Value		YES	reject
PUSCH Constant Value	M		Constant Value		YES	reject
PRACH Constant Value	M		Constant Value		YES	reject
Timing Advance Applied	M		9.2.3.22A		YES	reject
SCH Information		01		Mandatory For 3.84Mcps TDD only	YES	reject
>Common Physical Channel ID	M		9.2.1.13		_	
>CHOICE Sync Case	M				YES	reject
>>Case 1					_	•
>>>Time Slot	М		9.2.3.23		_	
>>Case 2					_	
>>>SCH Time Slot	M		9.2.3.17		_	
>SCH Power	М		DL Power 9.2.1.21		_	
>TSTD Indicator	M		9.2.1.64		_	
PCCPCH Information		01		Mandatory For 3.84Mcps TDD only	YES	reject
>Common Physical Channel ID	М		9.2.1.13		_	
>TDD Physical Channel Offset	М		9.2.3.20		_	
>Repetition Period	М		9.2.3.16		_	
>Repetition Length	М		9.2.3.15		_	
>PCCPCH Power	М		9.2.3.9		_	
>SCTD Indicator	M		9.2.3.30		_	
Time Slot Configuration		0 15		Mandatory For 3.84Mcps TDD only	GLOBAL	reject
>Time Slot	M		9.2.3.23		_	
>Time Slot Status	M		9.2.3.25		_	
>Time Slot Direction	M		9.2.3.24		_	

Time Slot Configuration LCR	M	07	0.2.2.244	Mandatory For 1.28Mcps TDD only	GLOBAL	reject
	M		9.2.3.24A		_	
>Time Slot Status			9.2.3.25		_	
>Time Slot Direction	M	0.4	9.2.3.24		-	
PCCPCH Information LCR		01		Mandatory For 1.28Mcps TDD only	YES	reject
>Common physical channel ID	М		9.2.1.13		_	
>TDD Physical Channel Offset	М		9.2.3.20		_	
>Repetition Period	M		9.2.3.16		_	
>Repetition Length	M		9.2.3.15		_	
>PCCPCH Power	M		9.2.3.9		_	
>SCTD Indicator	M		9.2.3.30		_	
>TSTD Indicator	M		9.2.1.64		_	
DwPCH Information		01		Mandatory For 1.28Mcps TDD only	YES	reject
>Common Physical Channel ID	М		9.2.1.13		_	
>TSTD Indicator	M		9.2.1.64		_	
>SYNC_DL Code ID	М		9.2.3.18B		_	
>DwPCH Power	М		9.2.3.5B		_	
Reference SFN offset	0		9.2.3.14B		YES	ignore
IPDL Parameter Information		01			YES	reject
>IPDL TDD Parameters	М		9.2.3.5D		_	
>IPDL Indicator	М		9.2.1.36F		_	

9.1.25 CELL SETUP RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.26 CELL SETUP FAILURE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		-	
Cause	М		9.2.1.6		YES	ignore
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.27 CELL RECONFIGURATION REQUEST

9.1.27.1 FDD Message

IE/Group Name	Presence	Range	IE type	Semantics	Criticality	Assigned
			and reference	description		Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	
C-ID	М		9.2.1.9		YES	reject
Configuration Generation ID	M		9.2.1.16		YES	reject
Maximum Transmission	0		9.2.1.40		YES	reject
Power						
Synchronisation		0,1			YES	reject
Configuration						
>N_INSYNC_IND	M		9.2.1.47A		_	
>N_OUTSYNC_IND	M		9.2.1.47B		_	
>T_RLFAILURE	M		9.2.1.56A		_	
Primary SCH Information		0,1			YES	reject
>Common Physical Channel ID	M		9.2.1.13		_	
>Primary SCH power	М		DL Power 9.2.1.21		_	
Secondary SCH		0,1			YES	reject
Information						-
>Common Physical Channel ID	М		9.2.1.13		_	
>Secondary SCH power	М		DL Power 9.2.1.21		_	
Primary CPICH Information		0,1			YES	reject
>Common Physical	M		9.2.1.13			
Channel ID	IVI		9.2.1.13		_	
>Primary CPICH power	M		9.2.2.33		_	
Secondary CPICH		0 <maxsc< td=""><td></td><td></td><td>YES</td><td>reject</td></maxsc<>			YES	reject
Information		PICHCell>				
>Common Physical Channel ID	M		9.2.1.13		_	
>Secondary CPICH Power	М		DL Power 9.2.1.21		_	
Primary CCPCH Information		0,1			YES	reject
>BCH Information		1			_	
>>Common Transport Channel ID	М		9.2.1.14		_	
>>BCH Power	М		DL Power 9.2.1.21		_	
IPDL Parameter Information		01			YES	reject
>IPDL FDD Parameters	0		9.2.2.18C		_	
>IPDL Indicator	М		9.2.1.36F		_	

Range bound	Explanation				
MaxSCPICHCell	Maximum number of Secondary CPICH that can be				
	defined in a Cell.				

9.1.27.2 TDD Message

IE/Group Name	Presence	Range	IE type and	Semantics description	Criticality	Assigned Criticality
			reference			
Message Discriminator	M		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	-
C-ID	М		9.2.1.9		YES	reject
Configuration Generation ID	М		9.2.1.16		YES	reject
Synchronisation		0,1			YES	reject
Configuration		,				,
>N_INSYNC_IND	М		9.2.1.47A		_	
>N_OUTSYNC_IND	М		9.2.1.47B		_	
>T_RLFAILURE	М		9.2.1.56A		_	
Timing Advance Applied	0		9.2.3.22A	For	YES	reject
				3.84Mcps TDD only		,
SCH Information		0,1		For 3.84Mcps TDD only	YES	reject
>Common Physical Channel ID	М		9.2.1.13		-	
>SCH Power	М		DL Power 9.2.1.21		-	
PCCPCH Information		0,1			YES	reject
>Common Physical Channel ID	М		9.2.1.13		_	.,
>PCCPCH Power	М		9.2.3.9		_	
Maximum Transmission Power	0		9.2.1.40		YES	reject
DPCH Constant Value	0		Constant Value		YES	reject
PUSCH Constant Value	0		Constant Value		YES	reject
PRACH Constant Value	0		Constant Value		YES	reject
Time Slot Configuration		015		Mandatory For 3.84Mcps TDD only	GLOBAL	reject
>Time Slot	M		9.2.3.23		_	
>Time Slot Status	M		9.2.3.25		_	
>Time Slot Direction	M		9.2.3.24		_	
Time Slot Configuration LCR		07		Mandatory For 1.28Mcps TDD only	GLOBAL	reject
>Time Slot LCR	М		9.2.3.24A		_	
>Time Slot Status	М		9.2.3.25		_	
>Time Slot Direction	М		9.2.3.24		_	
DwPCH Information		01		Mandatory For 1.28Mcps TDD only	YES	reject
>Common Physical Channel ID	М		9.2.1.13		_	
>DwPCH Power	М		9.2.3.5B		_	
IPDL Parameter Information		01			YES	reject
>IPDL TDD Parameters	0		9.2.3.5D		_	
>IPDL Indicator	M		9.2.1.36F		_	

9.1.28 CELL RECONFIGURATION RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.29 CELL RECONFIGURATION FAILURE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
Cause	M		9.2.1.6		YES	ignore
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.30 CELL DELETION REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
C-ID	M		9.2.1.9		YES	reject

9.1.31 CELL DELETION RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.32 RESOURCE STATUS INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	ignore
Transaction ID	M		9.2.1.62		_	
Indication Type	M		9.2.1.36		YES	ignore
CHOICE Indication Type	M				YES	ignore
>No Failure					-	
>>Local Cell Information		1 <max LocalCellin NodeB ></max 			EACH	ignore
>>>Local Cell ID	M		9.2.1.38		_	
>>>Add/Delete	M		9.2.1.1		_	
Indicator						
>>>DL or Global Capacity Credit	C-add		9.2.1.20B		_	
>>>UL Capacity Credit	0		9.2.1.65A		_	
>>>Common Channels Capacity Consumption Law	C-add		9.2.1.9A		_	
>>>Dedicated Channels Capacity Consumption Law	C-add		9.2.1.20A		_	
>>>Maximum DL Power Capability	C-add		9.2.1.39		_	
>>>Minimum Spreading Factor	C-add		9.2.1.47		_	
>>>Minimum DL Power Capability	C-add		9.2.1.46A		_	
>>>Reference Clock availability	C-add		9.2.3.14A	TDD only	YES	ignore
>>>Local Cell Group ID	0		9.2.1.37A		-	
>>Local Cell Group Information		0 <maxlocal CellinNode B></maxlocal 			EACH	ignore
>>>Local Cell Group ID	М		9.2.1.37A		_	
>>>DL or Global Capacity Credit	М		9.2.1.20B		_	
>>>UL Capacity Credit	0		9.2.1.65A		-	
>>>Common Channels Capacity Consumption Law	М		9.2.1.9A		_	
>>>Dedicated Channels Capacity Consumption Law	М		9.2.1.20A		-	
>Service Impacting		1				
>>Local Cell Information		0 <maxlocal CellinNode B></maxlocal 			EACH	ignore
>>>Local Cell ID	М		9.2.1.38		_	
>>>DL or Global Capacity Credit	0		9.2.1.20B		_	
>>>UL Capacity Credit	0		9.2.1.65A		_	

>>>Common Channels Capacity Consumption Law	0		9.2.1.9A		-	
>>>Dedicated Channels Capacity Consumption Law	0		9.2.1.20A		-	
>>>Maximum DL Power Capability	0		9.2.1.39		-	
>>>Minimum Spreading Factor	0		9.2.1.47		_	
>>>Minimum DL Power Capability	0		9.2.1.46A		_	
>>>Reference Clock availability	0		9.2.3.14A	TDD only	YES	ignore
>>Local Cell Group Information		0 <maxlocal CellinNode B></maxlocal 			EACH	ignore
>>>Local Cell Group ID	М		9.2.1.37A		_	
>>>DL or Global Capacity Credit	0		9.2.1.20B		_	
>>>UL Capacity Credit	0		9.2.1.65A		_	
>>>Common Channels Capacity Consumption Law	0		9.2.1.9A		-	
>>>Dedicated Channels Capacity Consumption Law	0		9.2.1.20A		-	
>>Communication Control Port Information		0 <maxccpi nNodeB></maxccpi 			EACH	ignore
>>>Communication Control Port ID	М		9.2.1.15		_	
>>>Resource Operational State	M		9.2.1.52		_	
>>>Availability Status	M		9.2.1.2		_	
>>Cell Information		0 <maxcellin NodeB></maxcellin 			EACH	ignore
>>>C-ID	M		9.2.1.9		_	
>>>Resource Operational State	0		9.2.1.52		_	
>>>Availability Status	0		9.2.1.2		_	
>>>Primary SCH Information	0		Common Physical Channel Status Information 9.2.1.13A	FDD only	YES	ignore
>>>Secondary SCH Information	0		Common Physical Channel Status Information 9.2.1.13A	FDD only	YES	ignore
>>>Primary CPICH Information	0		Common Physical Channel Status Information	FDD only	YES	ignore

			9.2.1.13A			
>>>Secondary CPICH Information		0 <maxsc PICHCell></maxsc 		FDD only	EACH	ignore
>>>Secondary CPICH Individual Information	М		Common Physical Channel Status Information 9.2.1.13A		-	
>>>Primary CCPCH Information	0		Common Physical Channel Status Information 9.2.1.13A		YES	ignore
>>>BCH Information	0		Common Transport Channel Status Information 9.2.1.14B		YES	ignore
>>>Secondary CCPCH Information		0 <maxsc CPCHCell ></maxsc 			EACH	ignore
>>>Secondary CCPCH Individual Information	М		Common Physical Channel Status Information 9.2.1.13A		-	
>>>PCH Information	0		Common Transport Channel Status Information 9.2.1.14B		YES	ignore
>>>PICH Information	0		Common Physical Channel Status Information 9.2.1.13A		YES	ignore
>>>FACH Information		0 <maxfac HCell></maxfac 			EACH	ignore
>>>>FACH Individual Information	М		Common Transport Channel Status Information 9.2.1.14B		-	
>>>PRACH Information		0 <maxpr ACHCell></maxpr 			EACH	ignore
>>>>PRACH Individual Information	М		Common Physical Channel Status Information 9.2.1.13A		-	
>>>RACH Information		0 <maxpra CHCell></maxpra 			EACH	ignore
>>>>RACH Individual Information	М		Common Transport Channel Status Information		_	

			9.2.1.14B			
>>>AICH Information		0 <maxpra CHCell></maxpra 		FDD only	EACH	ignore
>>>AICH Individual Information	М		Common Physical Channel Status Information 9.2.1.13A		-	
>>>PCPCH Information		0 <maxpc PCHCell></maxpc 		FDD only	EACH	ignore
>>>PCPCH Individual Information	М		Common Physical Channel Status Information 9.2.1.13A		-	
>>>CPCH Information		0 <maxcpc HCell></maxcpc 		FDD only	EACH	ignore
>>>CPCH Individual Information	М		Common Transport Channel Status Information 9.2.1.14B		-	
>>>AP-AICH Information		0 <maxcpc HCell></maxcpc 		FDD only	EACH	ignore
>>>AP-AICH Individual Information	М		Common Physical Channel Status Information 9.2.1.13A		-	
>>>CD/CA-ICH Information		0 <maxcpc HCell></maxcpc 		FDD only	EACH	ignore
>>>CD/CA-ICH Individual Information	М		Common Physical Channel Status Information 9.2.1.13A		-	
>>>SCH Information	0		Common Physical Channel Status Information 9.2.1.13A	3.84Mcps TDD only	YES	ignore
>>>FPACH Information		0 <maxfpa CHCell></maxfpa 		For 1.28Mcps TDD only	EACH	ignore
>>>>FPACH Individual Information	М		Common Physical Channel Status Information 9.2.1.13A		_	
>>>DwPCH Information	0		Common Physical Channel Status Information 9.2.1.13A	For 1.28Mcps TDD only	YES	ignore
			0.2.1.10/1			

Condition	Explanation
add	The IE shall be present if the Add/Delete Indicator IE is set to
	"Add".

Range bound	Explanation
MaxLocalCellinNodeB	Maximum number of Local Cells that can exist in the
	Node B
MaxCellinNodeB	Maximum number of C ID that can be configured in
	Node B
MaxCPCHCell	Maximum number of CPCHes that can be defined in a
	Cell
MaxSCPICHCell	Maximum number of Secondary CPICH that can be
	defined in a Cell.
MaxSCCPCHCell	Maximum number of Secondary CCPCH that can be
	defined in a Cell.
MaxFACHCell	Maximum number of FACHes that can be defined in a
	Cell
MaxPCPCHCell	Maximum number of PCPCHes that can be defined in
	a Cell
MaxPRACHCell	Maximum number of PRACHes and AICHes that can
	be defined in a Cell
MaxCCPinNodeB	Maximum number of communication control ports that
	can exist in the Node B
MaxFPACHCell	Maximum number of FPACHes that can be defined in
	a Cell

9.1.33 SYSTEM INFORMATION UPDATE REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	

C-ID	M		9.2.1.9		YES	reject
BCCH Modification Time	0		9.2.1.3		YES	reject
MIB/SB/SIBInformation		1 maxIB			GLOBAL	reject
>IB Type	M		9.2.1.35		_	
>IB OC ID	М		9.2.1.31A	In one message, every occurrence of IB Type can only be deleted once and/or added once.	_	
>CHOICE IB DeletionIndicator	М				_	
>>NoDeletion					_	
>>>SIB Originator	C-SIB		9.2.1.55		_	
>>>IB SG REP	0		9.2.1.34		_	
>>>Segment Information		1 maxIBSEG			GLOBAL	reject
>>>IB SG POS	0		9.2.1.33		_	
>>>Segment type	C – CRNCOrigi nation		9.2.1.53B		-	
>>>IB SG DATA	C – CRNCOrigi nation		9.2.1.32		-	
>>Deletion			NULL		_	

Range bound	Explanation
1maxIB	Maximum number of information Blocks supported in
	one message.
1maxIBSEG	Maximum number of segments for one Information
	Block

Condition	Explanation
CRNCOrigination	The IE shall be present if the SIB Originator IE is set to "CRNC" or if the IB Type IE is set to "MIB", "SB1" or "SB2".
SIB	Th IE shall be present if the IB Type IE is set to "SIB".

9.1.34 SYSTEM INFORMATION UPDATE RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		I	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.35 SYSTEM INFORMATION UPDATE FAILURE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
Cause	М		9.2.1.6		YES	ignore
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.36 RADIO LINK SETUP REQUEST

9.1.36.1 FDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
CRNC Communication Context ID	М		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	reject
Transaction ID	M		9.2.1.62		_	
UL DPCH Information		1			YES	reject
>UL Scrambling Code	M		9.2.2.59		_	
>Min UL Channelisation Code length	M		9.2.2.22		1	
>Max Number of UL	C –		9.2.2.21		_	
DPDCHs	CodeLen					
>puncture Limit	M		9.2.1.50	For UL	-	
>TFCS	M		9.2.1.58	for UL	_	
>UL DPCCH Slot Format	M		9.2.2.57		_	
> UL SIR Target	M		UL SIR		_	
-			9.2.1.67A			
>Diversity mode	М		9.2.2.9		_	
>SSDT cell ID Length	0		9.2.2.45		_	
>S Field Length	0		9.2.2.40		_	
>DPC mode	0		9.2.2.13C		YES	reject
DL DPCH Information		1			YES	reject
>TFCS	M		9.2.1.58	For DL	_	
>DL DPCH Slot Format	M		9.2.2.10		_	
>TFCI signalling mode	M		9.2.2.50		_	
>TFCI presence	C- SlotFormat		9.2.1.57		_	
>Multiplexing Position	М		9.2.2.23		_	
>PDSCH RL ID	C-DSCH		RL ID 9.2.1.53		_	
>PDSCH code mapping	C-DSCH		9.2.2.25		_	
>Power Offset		1			_	
Information >>PO1	M		Power Offset 9.2.2.29	Power offset for the TFCI bits	_	
>>PO2	М		Power Offset 9.2.2.29	Power offset for the TPC bits	-	
>>P03	М		Power Offset 9.2.2.29	Power offset for the pilot bits	_	
>FDD TPC DL Step Size	M		9.2.2.16		_	
>Limited Power Increase	M		9.2.2.18A		_	
>Inner Loop DL PC Status	M		9.2.2.18B		_ VE0	mait
DCH Information	M		DCH FDD Information 9.2.2.4D		YES	reject
DSCH Information	0		DSCH FDD Information		YES	reject

			9.2.2.13B			
TFCI2 bearer information		01			YES	ignore
>ToAWS	М		9.2.1.61		-	
>ToAWE	М		9.2.1.60		-	
RL Information		1 to <maxnoof RLs></maxnoof 			EACH	notify
>RL ID	M		9.2.1.53		_	
>C-ID	M		9.2.1.9		_	
>First RLS Indicator	M		9.2.2.16A		_	
>Frame Offset	M		9.2.1.31		_	
>Chip Offset	M		9.2.2.2		_	
>Propagation Delay	0		9.2.2.35		_	
>Diversity Control Field	C – NotFirstRL		9.2.1.25		_	
>DL Code Information	М		FDD DL Code Information 9.2.2.14A		-	
>Initial DL transmission Power	М		DL Power 9.2.1.21	Initial power on DPCH	-	
>Maximum DL power	М		DL Power 9.2.1.21	Maximum allowed power on DPCH	-	
>Minimum DL power	М		DL Power 9.2.1.21	Minimum allowed power on DPCH	-	
>SSDT Cell Identity	0		9.2.2.44		_	
>Transmit Diversity Indicator	C – Diversity mode		9.2.2.53		-	
>SSDT Cell Identity for EDSCHPC	C- EDSCHPC		9.2.2.44A		YES	ignore
Transmission Gap Pattern Sequence Information	0		9.2.2.53A		YES	reject
Active Pattern Sequence Information	0		9.2.2.A		YES	reject
DSCH Common Information	0		DSCH FDD Common Information 9.2.2.13D		YES	ignore

Condition	Explanation
CodeLen	The IE shall be present if Min UL Channelisation Code Length IE
	equals to 4.
NotFirstRL	The IE shall be present if the RL is not the first one in the RL
	Information IE.
DSCH	The IE shall be present if the DSCH Information IE is present.
SlotFormat	The IE shall be present if the DL DPCH Slot Format IE is equal to
	any of the values from 12 to 16.
Diversity mode	The IE shall be present if Diversity Mode IE in UL DPCH
	Information IE is not set to "none".
EDSCHPC	The IE shall be present if Enhanced DSCH PC IE is present in
	the DSCH Common Information IE.

Range bound	Explanation
MaxnoofRLs	Maximum number of RLs for one UE.

9.1.36.2 TDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
CRNC Communication Context ID	M		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	reject
Transaction ID	M		9.2.1.62		_	
UL CCTrCH Information		0 to <maxno CCTrCH></maxno 			EACH	notify
>CCTrCH ID	M		9.2.3.3		_	
>TFCS	M		9.2.1.58		_	
>TFCI Coding	M		9.2.3.22		_	
>Puncture Limit	M		9.2.1.50		_	
> UL SIR Target	0		UL SIR 9.2.1.67A	Mandatory for 1.28Mcps TDD; not applicable for 3.84Mcps TDD	YES	reject
>UL DPCH Information		01		For 3.84Mcps TDD only	YES	notify
>>Repetition Period	M		9.2.3.16		1	
>>Repetition Length	M		9.2.3.15		1	
>>TDD DPCH Offset	M		9.2.3.19A		1	
>>UL Timeslot Information	M		9.2.3.26C		_	
>UL DPCH Information LCR		01		For 1.28Mcps TDD only	YES	notify
>>Repetition Period	M		9.2.3.16		1	
>>Repetition Length	M		9.2.3.15		_	
>>TDD DPCH Offset	М		9.2.3.19A			
>>UL Timeslot Information LCR	M		9.2.3.26E		ı	
DL CCTrCH Information		0 to <maxno CCTrCH></maxno 			EACH	notify
>CCTrCH ID	М		9.2.3.3		_	
>TFCS	М		9.2.1.58		_	
>TFCI Coding	М		9.2.3.22		_	
>Puncture Limit	М		9.2.1.50		_	
>TDD TPC DL Step Size	М		9.2.3.21			
>TPC CCTrCH List		0 to <maxnoc CTrCH></maxnoc 		List of uplink CCTrCH which provide TPC	_	
>>TPC CCTrCH ID	М		CCTrCH ID 9.2.3.3		-	
>DL DPCH information		01		For 3.84Mcps TDD only	YES	notify
>>Repetition Period	М		9.2.3.16		ı	
>>Repetition Length	M		9.2.3.15		_	

>>TDD DPCH Offset	М		9.2.3.19A		_	
>>DL Timeslot	М		9.2.3.4E		_	
Information						
>DL DPCH information LCR		01		For 1.28Mcps TDD only	YES	notify
>>Repetition Period	М		9.2.3.16		_	
>>Repetition Length	М		9.2.3.15		_	
>>TDD DPCH Offset	М		9.2.3.19A		_	
>>DL Timeslot Information LCR	М		9.2.3.40		-	
>>TSTD Indicator	М		9.2.1.64		_	
DCH Information	0		DCH TDD Information 9.2.3.4C		YES	reject
DSCH Information	0		DSCH TDD Information 9.2.3.5A		YES	reject
USCH Information	0		9.2.3.28		YES	reject
RL Information		1			YES	reject
>RL ID	М		9.2.1.53		_	
>C-ID	М		9.2.1.9		_	
>Frame Offset	М		9.2.1.31		_	
>Special Burst Scheduling	М		9.2.3.18A		_	
>Initial DL transmission Power	М		DL Power 9.2.1.21	Initial power on DPCH	-	
>Maximum DL power	М		DL Power 9.2.1.21	Maximum allowed power on DPCH	-	
>Minimum DL power	М		DL Power 9.2.1.21	Minimum allowed power on DPCH	-	
>DL Time Slot ISCP Info	0		9.2.3.4F	For 3.84Mcps TDD only	_	
>DL Time Slot ISCP Info LCR	0		9.2.3.40A	For 1.28Mcps TDD only	YES	reject

Range bound	Explanation				
MaxnoCCTrCH	Number of CCTrCH for one UE.				

9.1.37 RADIO LINK SETUP RESPONSE

9.1.37.1 FDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
CRNC Communication Context ID	М		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	ignore
Transaction ID	M		9.2.1.62		_	
Node B Communication Context ID	М		9.2.1.48	The reserved value "All NBCC" shall not be used.	YES	ignore
Communication Control Port ID	М		9.2.1.15		YES	ignore
RL Information Response		1 to <maxnoofrl s></maxnoofrl 			EACH	ignore
>RL ID	M		9.2.1.53		_	
>RL Set ID	M		9.2.2.39			
>Received total wide band power	М		9.2.2.39A		_	
>Diversity Indication	C- NotFirstRL		9.2.1.26		-	
>CHOICE diversity Indication	M				_	
>>Combining					_	
>>>RL ID	M		9.2.1.53	Reference RL ID for the combining	_	
>>Non Combining or First RL					-	
>>>DCH Information Response	М		9.2.1.20C		-	
>DSCH Information Response	0		9.2.1.27A		YES	ignore
>SSDT Support Indicator	М		9.2.2.46		_	
TFCI2 Bearer Information Response	0		9.2.2.49A		YES	ignore
Criticality Diagnostics	0		9.2.1.17		YES	ignore

Condition	Explanation
NotFirstRL	The IE shall be present if the RL is not the first one in the RL
	Information Response IE.

Range bound	Explanation		
MaxnoofRLs	Maximum number of RLs for one UE.		

9.1.37.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
CRNC Communication Context ID	М		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	ignore
Transaction ID	M		9.2.1.62		_	
Node B Communication Context ID	М		9.2.1.48	The reserved value "All NBCC" shall not be used.	YES	ignore
Communication Control Port ID	М		9.2.1.15		YES	ignore
RL Information Response		01		Mandatory For 3.84Mcps TDD only	YES	ignore
>RL ID	M		9.2.1.53		_	
>UL Time Slot ISCP Info	M		9.2.3.26D		_	
>UL PhysCH SF Variation	M		9.2.3.26B		_	
>DCH Information Response	0		9.2.1.20C		YES	ignore
>DSCH Information Response	0		9.2.1.27A		YES	ignore
>USCH Information Response	0		9.2.3.28		YES	ignore
RL Information Response LCR		01		Mandatory For 1.28Mcps TDD only	YES	ignore
>RL ID	M		9.2.1.53		_	
>UL Time Slot ISCP Info LCR	М		9.2.3.26F		_	
>UL PhysCH SF Variation	М		9.2.3.26B		_	
>DCH Information Response	0		9.2.1.20C		YES	ignore
>DSCH Information Response	0		9.2.1.27A		YES	ignore
>USCH Information Response	0		9.2.3.28		YES	ignore
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.38 RADIO LINK SETUP FAILURE

9.1.38.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
CRNC Communication Context ID	M		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	ignore
Transaction ID	М		9.2.1.62		_	
Node B Communication Context ID	C-Success		9.2.1.48	The reserved value "All NBCC" shall not be used	YES	ignore
Communication Control Port ID	0		9.2.1.15		YES	ignore
CHOICE Cause Level	М				YES	ignore
>General					_	
>>Cause	М		9.2.1.6			
>RL specific						
>>Unsuccessful RL Information Response		1 to <maxnoo fRLs></maxnoo 			EACH	ignore
>>>RL ID	М		9.2.1.53		_	
>>>Cause	М		9.2.1.6		_	
>>Successful RL Information Response		0 to <maxnoo fRLs-1></maxnoo 			EACH	ignore
>>>RL ID	М		9.2.1.53		_	
>>>RL Set ID	М		9.2.2.39			
>>>Received total wide band power	М		9.2.2.39A		_	
>>>Diversity Indication	C-NotFirstRL		9.2.1.26		_	
>>>CHOICE Diversity Indication	М				_	
>>>Combining					_	
>>>>RL ID	M		9.2.1.53	Reference RL ID for the combining	_	
>>>Non Combining or First RL					_	
>>>>DCH Information Response	М		9.2.1.20C		-	
>>>DSCH Information Response	0		9.2.1.27A		YES	ignore
>>>TFCI2 Bearer Information Response	0		9.2.2.49A		-	
>>>SDT Support Indicator	М		9.2.2.46		_	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

Condition	Explanation
Success	The IE shall be present if at least one of the radio links has been
	successfully set up.
NotFirstRL	The IE shall be present if the RL is not the first one in the
	Successful RL Information Response IE.

Range bound	Explanation			
MaxnoofRLs	Maximum number of RLs for one UE.			

9.1.38.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
CRNC Communication Context ID	M		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	ignore
Transaction ID	M		9.2.1.62		_	
CHOICE Cause Level	M				YES	ignore
>General					_	
>>Cause	M		9.2.1.6		_	
>RL specific					_	
>>Unsuccessful RL		1			YES	ignore
Information Response						
>>>RL ID	M		9.2.1.53		_	_
>>>Cause	M		9.2.1.6		_	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.39 RADIO LINK ADDITION REQUEST

9.1.39.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		ı	
Message Type	M		9.2.1.46		YES	reject
Node B Communication Context ID	M		9.2.1.48	The reserved value "All NBCC" shall not be used.	YES	reject
Transaction ID	M		9.2.1.62		_	
Compressed Mode Deactivation Flag	0		9.2.2.3A		YES	reject
RL Information		1 <ma xnoofR L-1></ma 			EACH	notify
>RL ID	M		9.2.1.53		_	
>C-ID	M		9.2.1.9		_	
>Frame Offset	M		9.2.1.31		_	
>Chip Offset	M		9.2.2.2		_	
>Diversity Control Field	М		9.2.1.25		-	
>DL Code Information	М		FDD DL Code Information 9.2.2.14A		-	
>Initial DL transmission power	0		DL Power 9.2.1.21	Initial power on DPCH	_	
>Maximum DL power	0		DL Power 9.2.1.21	Maximum allowed power on DPCH	-	
>Minimum DL power	0		DL Power 9.2.1.21	Minimum allowed power on DPCH	-	
>SSDT Cell Identity	0		9.2.2.44		_	
>Transmit Diversity Indicator	0		9.2.2.53		_	

Range bound	Explanation		
MaxnoofRL	Maximum number of RLs for one UE		

9.1.39.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Node B Communication Context ID	М		9.2.1.48	The reserved value "All NBCC" shall not be used.	YES	reject
Transaction ID	М		9.2.1.62		_	
UL CCTrCH Information		0 to <maxn o CCTrC H></maxn 			GLOBAL	reject
>CCTrCH ID	М		9.2.3.3		_	
>UL DPCH Information		01		For 3.84Mcps TDD only	YES	notify
>>Repetition Period	M		9.2.3.16		_	
>>Repetition Length	M		9.2.3.15		_	
>>TDD DPCH Offset	М		9.2.3.19A		_	
>>UL Timeslot Information	M		9.2.3.26C		_	
>UL DPCH Information LCR		01		For 1.28Mcps TDD only	YES	notify
>>Repetition Period	M		9.2.3.16		_	
>>Repetition Length	M		9.2.3.15		_	
>>TDD DPCH Offset	M		9.2.3.19A		_	
>>UL Timeslot Information LCR	M		9.2.3.26E		_	
DL CCTrCH Information		0 to <maxn o CCTrC H></maxn 			GLOBAL	reject
>CCTrCH ID	M		9.2.3.3		_	
>DL DPCH information		01		For 3.84Mcps TDD only	YES	notify
>>Repetition Period	M		9.2.3.16		_	
>>Repetition Length	M		9.2.3.15		_	
>>TDD DPCH Offset	M		9.2.3.19A		_	
>>DL Timeslot Information	M		9.2.3.4E		_	
>DL DPCH information LCR		01		For 1.28Mcps TDD only	YES	notify
>>Repetition Period	M		9.2.3.16		_	
>>Repetition Length	M	<u> </u>	9.2.3.15			
>>TDD DPCH Offset	М		9.2.3.19A		_	
>>DL Timeslot Information LCR	M		9.2.3.40		_	
RL Information		1			YES	reject
>RL ID	M		9.2.1.53		_	
>C-ID	M		9.2.1.9		-	
>Frame Offset	M		9.2.1.31		_	
>Diversity Control Field	M		9.2.1.25		_	
>Initial DL transmission Power >Maximum DL power	0		DL Power 9.2.1.21 DL Power	Initial power on DPCH Maximum	_	

		9.2.1.21	allowed power on DPCH		
>Minimum DL power	0	DL Power 9.2.1.21	Minimum allowed power on DPCH	_	
>DL Time Slot ISCP Info	0	9.2.3.4F	For 3.84Mcps TDD only	_	
>DL Time Slot ISCP Info LCR	0	9.2.3.40A	For 1.28Mcps TDD only	YES	reject

Range bound	Explanation
MaxnoCCTrCH	Number of CCTrCH for one UE.

9.1.40 RADIO LINK ADDITION RESPONSE

9.1.40.1 FDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		-	
Message Type	M		9.2.1.46		YES	reject
CRNC Communication Context ID	M		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	ignore
Transaction ID	M		9.2.1.62		-	
RL Information Response		1 <maxno ofRL-1></maxno 			EACH	ignore
>RL ID	М		9.2.1.53		-	
>RL Set ID	М		9.2.2.39		_	
> Received total wide band power	M		9.2.2.39A		_	
>Diversity Indication	М		9.2.1.26		_	
>CHOICE Diversity Indication	M				_	
>>Combining					-	
>>>RL ID	M		9.2.1.53	Reference RL	_	
>>Non combining					_	
>>>DCH Information Response	M		9.2.1.20C		_	
>SSDT support indicator	М		9.2.2.46			
Criticality Diagnostics	0		9.2.1.17		YES	ignore

Range bound	Explanation			
MaxnoofRL	Maximum number of RLs for one UE			

9.1.40.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
CRNC Communication Context ID	М		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	ignore
Transaction ID	M		9.2.1.62		1	
RL Information response		01		Mandatory for 3.84Mcps TDD only	YES	ignore
>RL ID	M		9.2.1.53		_	
>UL Time Slot ISCP Info	M		9.2.3.26D		_	
>UL PhysCH SF Variation	M		9.2.3.26B		_	
>DCH Information		01			_	
>>Diversity Indication	М		9.2.1.26		_	
>>CHOICE Diversity Indication	M				_	
>>>Combining				In TDD it indicates whether the old Transport Bearer shall be reused or not	-	
>>>>RL ID	М		9.2.1.53	Reference RL	-	
>>>Non combining					_	
>>>>DCH Information Response	M		9.2.1.20C		_	
>DSCH Information Response	0		9.2.1.27A		YES	ignore
>USCH Information Response	0		9.2.3.29		YES	ignore
Criticality Diagnostics	0		9.2.1.17		YES	ignore
RL Information response LCR		01		Mandatory for 1.28Mcps TDD only	YES	ignore
>RL ID	М		9.2.1.53		-	
>UL Time Slot ISCP Info LCR	М		9.2.3.26F			
>UL PhysCH SF Variation	М		9.2.3.26B		_	
>DCH Information		01				
>>Diversity Indication	M		9.2.1.26		_	
>>CHOICE diversity indication	M				ı	
>>>Combining				In TDD it indicates whether the old Transport Bearer shall be reused or not	-	
>>>RL ID	М		9.2.1.53	Reference RL	_	
>>>Non combining					-	
>>>DCH Information Response	M		9.2.1.20C			
>DSCH Information Response	0		9.2.1.27A		YES	ignore
>USCH Information Response	0		9.2.3.29		YES	ignore

9.1.41 RADIO LINK ADDITION FAILURE

9.1.41.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
CRNC Communication Context ID	M		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	ignore
Transaction ID	M		9.2.1.62		_	
CHOICE Cause Level	M				YES	Ignore
>General					_	
>>Cause	M		9.2.1.6		_	
>RL specific					_	
>>Unsuccessful RL Information Response		1 <ma xnoofR L-1></ma 			EACH	ignore
>>>RL ID	M		9.2.1.53		_	
>>>Cause	M		9.2.1.6		_	
>>Succcessful RL Information Response		0 <ma xnoofR L-2></ma 			EACH	ignore
>>>RL ID	M		9.2.1.53		_	
>>>RL Set ID	M		9.2.2.39			
>>> Received total wide band power	М		9.2.2.39A		_	
>>>Diversity Indication	M		9.2.1.26		_	
>>>CHOICE Diversity Indication	М				_	
>>>Combining					_	
>>>>RL ID	М		9.2.1.53	Reference RL	_	
>>>Non combining					_	
>>>>DCH Information Response	M		9.2.1.20C		_	
>>>SSDT support indicator	М		9.2.2.46		_	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

Range bound	Explanation		
MaxnoofRL	Maximum number of RLs for one UE		

9.1.41.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
CRNC Communication	М		9.2.1.18	The	YES	ignore
Context ID				reserved		
				value		
				"All CRNCC		
				C" shall not		
				be used.		
Transaction ID	М		9.2.1.62		_	
CHOICE Cause Level	М				YES	Ignore
>General					_	
>>Cause	М		9.2.1.6		_	
>RL specific					_	
>>Unsuccessful RL		1			YES	ignore
Information						
Response						
>>>RL ID	М		9.2.1.53		_	_
>>>Cause	М		9.2.1.6		_	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.42 RADIO LINK RECONFIGURATION PREPARE

9.1.42.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Node B Communication Context ID	M		9.2.1.48	The reserved value "All NBCC" shall not be used.	YES	reject
Transaction ID	M		9.2.1.62		_	
UL DPCH Information		01			YES	reject
>UL Scrambling code	0		9.2.2.59		_	
>UL SIR Target	0		UL SIR 9.2.1.67A		-	
>Min UL Channelistion Code Length	0		9.2.2.22		_	
>Max Number of UL DPDCHs	C – CodeLen		9.2.2.21		-	
>Puncture Limit	0		9.2.1.50	For UL	_	
>TFCS	0		9.2.1.58		_	
>UL DPCCH Slot Format	0		9.2.2.57		_	
>Diversity mode	0		9.2.2.9		_	
>SSDT Cell Identity Length	0		9.2.2.45		_	
>S-Field Length	0		9.2.2.40		_	
DL DPCH Information		01			YES	reject
>TFCS	0		9.2.1.58		_	
>DL DPCH Slot Format	0		9.2.2.10		_	
>TFCI Signalling Mode	0		9.2.2.50		_	
>TFCI presence	C-Slot Format		9.2.1.57		_	
>Multiplexing Position	0		9.2.2.23		_	
>PDSCH code mapping	0		9.2.2.25		_	
>PDSCH RL ID	0		RL ID 9.2.1.53		_	
>Limited Power Increase	0		9.2.2.18A		_	
DCHs to Modify	0		DCHs FDD to Modify 9.2.2.4E		YES	reject
DCHs to Add	0		DCH FDD Information 9.2.2.4D		YES	reject
DCHs to Delete		0 <max noofDC Hs></max 			GLOBAL	reject
>DCH ID	M		9.2.1.20		_	
DSCH to modify		0 <max noofDS CHs></max 			YES	reject
>DSCH ID	М		9.2.1.27		_	
>Transport Format Set	0		9.2.1.59	For the DL.	_	
>Allocation/Retention Priority	0		9.2.1.1A		_	
>Frame Handling Priority	0		9.2.1.30		_	
>ToAWS	0		9.2.1.61		_	
>ToAWE	0		9.2.1.60		_	

>Transport Bearer Request Indicator	M		9.2.1.62A		_	
DSCH to add	0		DSCH FDD Information 9.2.2.13B		YES	reject
DSCH to Delete		0 <max noofDS CHs></max 			YES	reject
>DSCH ID	М		9.2.1.27		_	
TFCI2 bearer specific information		01			YES	reject
>CHOICE TFCI2 bearer action	M				_	
>>Add or modify					_	
>>>ToAWS	М		9.2.1.61		_	
>>>ToAWE	М		9.2.1.60		_	
>>Delete			NULL		_	
RL Information		0 <max noofRLs ></max 			EACH	reject
>RL ID	М		9.2.1.53		_	
>DL Code Information	0		FDD DL Code Information 9.2.2.14A		_	
>Maximum DL Power	0		DL Power 9.2.1.21	Maximum allowed power on DPCH	_	
>Minimum DL Power	0		DL Power 9.2.1.21	Minimum allowed power on DPCH	_	
>SSDT Indication	0		9.2.2.47		_	
>SSDT Cell Identity	C- SSDTIndON		9.2.2.44		_	
>Transmit Diversity Indicator	C – Diversity mode		9.2.2.53		_	
>SSDT Cell Identity for EDSCHPC	C- EDSCHPC		9.2.2.44A		YES	ignore
Transmission Gap Pattern Sequence Information	0		9.2.2.53A		YES	reject
DSCH Common Information	0		DSCH FDD Common Information 9.2.2.13D		YES	ignore

Condition	Explanation
SSDTIndON	The IE shall be present if the SSDT Indication IE is
	set to "SSDT Active in the UE".
CodeLen	The IE shall be present if the Min UL Channelisation
	Code Length IE is equals to 4.
SlotFormat	The IE shall be present if the DL DPCH Slot Format
	IE is equal to any of the values from 12 to 16.
Diversity mode	The IE shall be present if Diversity Mode IE is present
	in the UL DPCH Information IEand is not set to
	"none".
EDSCHPC	The IE shall be present if Enhanced DSCH PC IE is
	present in the DSCH Common Information IE.

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofDSCHs	Maximum number of DSCHs for a UE.
MaxnoofRLs	Maximum number of RLs for a UE.

9.1.42.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Node B Communication Context ID	M		9.2.1.48	The reserved value "All NBCC" shall not be used.	YES	reject
Transaction ID	M		9.2.1.62		_	
UL CCTrCH to Add		O <maxno cctrc="" hs="" of=""></maxno>			GLOBAL	reject
>CCTrCH ID	М		9.2.3.3		_	
>TFCS	М		9.2.1.58		_	
>TFCI Coding	М		9.2.3.22		_	
>Puncture Limit	М		9.2.1.50		_	
> UL SIR Target	0		UL SIR 9.2.1.67A	Mandatory for 1.28Mcps TDD; not applicable for 3.84Mcps TDD	YES	reject
>UL DPCH Information		01		For 3.84Mcps TDD only	YES	reject
>>Repetition Period	M		9.2.3.16		_	
>>Repetition Length	М		9.2.3.15		_	
>>TDD DPCH Offset	M		9.2.3.19A		_	
>>UL Timeslot Information	M		9.2.3.26C		_	
>UL DPCH Information LCR		01		For 1.28Mcps TDD only	YES	reject
>>Repetition Period	M		9.2.3.16		_	
>>Repetition Length	M		9.2.3.15		_	
>>TDD DPCH Offset	М		9.2.3.19A		_	
>>UL Timeslot Information LCR	М		9.2.3.26E		_	
UL CCTrCH to Modify		0 <maxno cctrc="" hs="" of=""></maxno>			GLOBAL	reject
>CCTrCH ID	M		9.2.3.3		_	
>TFCS	0		9.2.1.58			
>TFCI Coding	0		9.2.3.22		_	
>Puncture Limit	0		9.2.1.50		_	
> UL SIR Target	0		UL SIR 9.2.1.67A	For 1.28Mcps TDD only	YES	reject
>UL DPCH to add		01		For 3.84Mcps TDD only	YES	reject
>>Repetition Period	M		9.2.3.16		_	
>>Repetition Length	M		9.2.3.15		_	
>>TDD DPCH Offset	M		9.2.3.19A		_	
>>UL Timeslot Information	М		9.2.3.26C			

>UL DPCH to modify		01			YES	reject
>>Repetition Period	0		9.2.3.16		- 1	
>>Repetition Length	0		9.2.3.15		_	
>>TDD DPCH Offset	0		9.2.3.19A		_	
>>UL Timeslot Information		0 to <maxno ofULts></maxno 		For 3.84Mcps TDD only	-	
>>>Time Slot	М		9.2.3.23	•	_	
>>>Midamble Shift and	0		9.2.3.7		_	
Burst Type						
>>>TFCI Presence	0		9.2.1.57		_	
>>>UL Code Information		0 to <maxno OfDPC H></maxno 			_	
>>>DPCH ID	М		9.2.3.5		_	
>>>TDD	0		9.2.3.19		_	
Channelisation Code						
>>UL Timeslot Information LCR		0 to <maxno ofULtsL CR></maxno 		For 1.28Mcps TDD only	GLOBAL	reject
>>>Time Slot LCR	M		9.2.3.24A		_	
>>>Midamble shift LCR	0		9.2.3.7A			
>>>TFCI Presence	0		9.2.1.57		_	
>>>UL Code Information LCR		0 to <maxno OfDPC HLCR></maxno 			_	
>>>DPCH ID	M		9.2.3.5		_	
>>>>TDD Channelisation Code LCR	0		9.2.3.19a		-	
>UL DPCH to delete		0 <maxno of DPCHs</maxno 			GLOBAL	reject
>>DPCH ID	М		9.2.3.5		_	
>UL DPCH to add LCR		01		For 1.28Mcps TDD only	YES	reject
>>Repetition Period	M		9.2.3.16		_	
>>Repetition Length	M		9.2.3.15		_	
>>TDD DPCH Offset	M		9.2.3.19A		_	
>>UL Timeslot Information LCR	М		9.2.3.26E		_	
UL CCTrCH to Delete		0 <maxno of CCTrC Hs></maxno 			GLOBAL	reject
>CCTrCH ID	M		9.2.3.3		_	
DL CCTrCH to Add		O <maxno of CCTrC Hs></maxno 			GLOBAL	reject
>CCTrCH ID	M		9.2.3.3		_	
>TFCS	M		9.2.1.58		_	
>TFCI Coding	M		9.2.3.22		-	
>PunctureLimit	М		9.2.1.50		_	

	1		•	1	· · · · · · · · · · · · · · · · · · ·	
>TPC CCTrCH List		0 to		List of uplink	-	
		<maxno CCTrC</maxno 		CCTrCH which		
		Hs>		provide TPC		
>>TPC CCTrCH ID	M	110>	CCTrCH	provide TFC	_	
>> IFC CCTICH ID	IVI		ID			
			9.2.3.3			
>DL DPCH Information		01		For	YES	reject
				3.84Mcps		
				TDD only		
>>Repetition Period	M		9.2.3.16		_	
>>Repetition Length	M		9.2.3.15		_	
>>TDD DPCH Offset	M		9.2.3.19A		_	
>>DL Timeslot Information	M		9.2.3.4E		-	
>DL DPCH Information LCR		01		For	YES	reject
				1.28Mcps TDD only		
>>Repetition Period	М		9.2.3.16		_	
>>Repetition Length	M		9.2.3.15		_	
>>TDD DPCH Offset	М		9.2.3.19A		_	
>>DL Timeslot Information	M		9.2.3.40		_	
LCR						
DL CCTrCH to Modify		0			GLOBAL	reject
DE COTTON to Modify		<maxno< td=""><td></td><td></td><td>OLODAL</td><td>10,000</td></maxno<>			OLODAL	10,000
		of				
		CCTrC				
		Hs>				
>CCTrCH ID	M		9.2.3.3.		-	
>TFCS	0		9.2.1.58		_	
>TFCI Coding	0		9.2.3.22		_	
>PunctureLimit	0		9.2.1.50		_	
>TPC CCTrCH List		0 to		List of uplink	_	
>11 0 0011011 Elst		<maxno< td=""><td></td><td>CCTrCH</td><td></td><td></td></maxno<>		CCTrCH		
		CCTrC		which		
		Hs>		provide TPC		
>>TPC CCTrCH ID	M		CCTrCH		-	
			ID			
		0.4	9.2.3.3	-	\/F0	
>DL DPCH to add		01	9.2.3.3	For	YES	reject
>DL DPCH to add		01	9.2.3.3	3.84Mcps	YES	reject
	M	01				reject
>>Repetition Period	M	01	9.2.3.16	3.84Mcps	-	reject
>>Repetition Period >>Repetition Length	М	01	9.2.3.16 9.2.3.15	3.84Mcps	_ 	reject
>>Repetition Period >>Repetition Length >>TDD DPCH Offset	M M	01	9.2.3.16 9.2.3.15 9.2.3.19A	3.84Mcps	- - -	reject
>>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information	М		9.2.3.16 9.2.3.15	3.84Mcps	- - -	
>>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >DL DPCH to modify	M M M	01	9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E	3.84Mcps	- - -	reject
>>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information	M M M		9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16	3.84Mcps	- - -	
>>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >DL DPCH to modify	M M M		9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15	3.84Mcps	- - -	
>>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >DL DPCH to modify >>Repetition Period	M M M		9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16	3.84Mcps	- - -	
>>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >DL DPCH to modify >>Repetition Period >>Repetition Length	M M M		9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15	3.84Mcps TDD only	- - -	
>>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >DL DPCH to modify >>Repetition Period >>Repetition Length >>TDD DPCH Offset	M M M	01	9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15	3.84Mcps TDD only	- - -	
>>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >DL DPCH to modify >>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information	M M M	01 0 <maxno< td=""><td>9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15</td><td>3.84Mcps TDD only For 3.84Mcps</td><td>- - -</td><td></td></maxno<>	9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15	3.84Mcps TDD only For 3.84Mcps	- - -	
>>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >DL DPCH to modify >>Repetition Period >>Repetition Length >>TDD DPCH Offset	M M M O O O O	01 0 <maxno< td=""><td>9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15 9.2.3.19A</td><td>3.84Mcps TDD only For 3.84Mcps</td><td>- - - YES - - -</td><td></td></maxno<>	9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15 9.2.3.19A	3.84Mcps TDD only For 3.84Mcps	- - - YES - - -	
>>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >DL DPCH to modify >>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >>DL Timeslot Information	M M M O O O O M M	01 0 <maxno< td=""><td>9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15 9.2.3.19A</td><td>3.84Mcps TDD only For 3.84Mcps</td><td>- - - YES - - -</td><td></td></maxno<>	9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15 9.2.3.19A	3.84Mcps TDD only For 3.84Mcps	- - - YES - - -	
>>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >DL DPCH to modify >>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >>DL Timeslot Information	M M M O O O O M M	01 0 <maxno< td=""><td>9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15 9.2.3.19A</td><td>3.84Mcps TDD only For 3.84Mcps</td><td>- - - YES - - -</td><td></td></maxno<>	9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15 9.2.3.19A	3.84Mcps TDD only For 3.84Mcps	- - - YES - - -	
>>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >DL DPCH to modify >>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >>>TIMESLOT Information >>>Time Slot >>>Midamble Shift and Burst Type >>>TFCI Presence	M M M O O O O O	01 0 <maxno ofdlts=""></maxno>	9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.23	3.84Mcps TDD only For 3.84Mcps	- - - YES - - - -	
>>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >DL DPCH to modify >>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >>STDD DPCH Offset >>DL Timeslot Information >>>Time Slot >>>Midamble Shift and Burst Type >>>TFCI Presence >>>DL Code	M M M O O O O O	01 0 <maxno< td=""><td>9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.23</td><td>3.84Mcps TDD only For 3.84Mcps</td><td>- - - YES - - - -</td><td></td></maxno<>	9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.23	3.84Mcps TDD only For 3.84Mcps	- - - YES - - - -	
>>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >DL DPCH to modify >>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >>>TDD DPCH Offset >>>DL Timeslot Information >>>Time Slot >>>Midamble Shift and Burst Type >>>TFCI Presence	M M M O O O O O	O1 O <maxno ofdlts=""> O</maxno>	9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.23	3.84Mcps TDD only For 3.84Mcps	- - - YES - - - -	
>>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >DL DPCH to modify >>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >>STDD DPCH Offset >>DL Timeslot Information >>>Time Slot >>>Midamble Shift and Burst Type >>>TFCI Presence >>>DL Code	M M O O O O O O	O1 O <maxno ofdlts=""> O <maxno are<="" area="" td=""><td>9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.23 9.2.3.7</td><td>3.84Mcps TDD only For 3.84Mcps</td><td>- - - YES - - - -</td><td></td></maxno></maxno>	9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.23 9.2.3.7	3.84Mcps TDD only For 3.84Mcps	- - - YES - - - -	
>>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >DL DPCH to modify >>Repetition Period >>Repetition Length >>TDD DPCH Offset >>DL Timeslot Information >>STDD DPCH Offset >>DL Timeslot Information >>>Time Slot >>>Midamble Shift and Burst Type >>>TFCI Presence >>>DL Code	M M M O O O O O	01 0 <maxno ofdlts=""> 0 <maxno ofdpc<="" td=""><td>9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.23</td><td>3.84Mcps TDD only For 3.84Mcps</td><td>- - - YES - - - -</td><td></td></maxno></maxno>	9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.4E 9.2.3.16 9.2.3.15 9.2.3.19A 9.2.3.23	3.84Mcps TDD only For 3.84Mcps	- - - YES - - - -	

Channelisation Code						
>>DL Timeslot Information LCR		0 <maxno ofDLtsL CR></maxno 		For 1.28Mcps TDD only	GLOBAL	reject
>>>Time Slot LCR	М		9.2.3.24A		_	
>>>Midamble shift LCR	0		9.2.3.7A			
>>>TFCI Presence	0		9.2.1.57		-	
>>>DL Code Information LCR		0 <maxno OfDPC HLCRs ></maxno 			-	
>>>DPCH ID	M		9.2.3.5		-	
>>>>TDD Channelisation Code LCR	0		9.2.3.19a		-	
>DL DPCH to delete		O <maxno dpchs="" of=""></maxno>			GLOBAL	reject
>>DPCH ID	M		9.2.3.5		_	
>DL DPCH to add LCR		01		For 1.28Mcps TDD only	YES	reject
>>Repetition Period	M		9.2.3.16		_	
>>Repetition Length	M		9.2.3.15		_	
>>TDD DPCH Offset	M		9.2.3.19A		_	
>>DL Timeslot Information LCR	M		9.2.3.40		_	
DL CCTrCH to Delete		O <maxno cctrc="" hs="" of=""></maxno>			GLOBAL	reject
>CCTrCH ID	M		9.2.3.3		_	
DCHs to Modify	0		DCHs TDD to Modify 9.2.3.4D		YES	reject
DCHs to Add	0		DCH TDD Information 9.2.3.4C		YES	reject
DCHs to Delete		0 <max noofDC Hs></max 			GLOBAL	reject
>DCH ID	M		9.2.1.20		_	
DSCH Information to modify		0 <maxno of DSCHs ></maxno 			GLOBAL	reject
>DSCH ID	M		9.2.1.27		_	
>CCTrCH ID	0		9.2.3.3	DL CCTrCH in which the DSCH is mapped	_	
>Transport Format Set	0		9.2.1.59		_	
>Allocation/Retention Priority	0		9.2.1.1A		_	<u> </u>
>Frame Handling Priority	0		9.2.1.30		_	
>ToAWS	0		9.2.1.61		_	
>ToAWE	0		9.2.1.60		- T	

>Transport Bearer Request Indicator	М		9.2.1.62A		_	
DSCH Information to add	0		DSCH TDD Information 9.2.3.5A		YES	reject
DSCH Information to delete		0 <maxno of DSCHs ></maxno 			GLOBAL	reject
>DSCH ID	М		9.2.1.27		_	
USCH Information to modify		0 <maxno of USCHs ></maxno 			GLOBAL	reject
>USCH ID	М		9.2.3.27		_	
>Transport Format Set	0		9.2.1.59		_	
> Allocation/Retention Priority	0		9.2.1.1A		_	
>CCTrCH ID	0		9.2.3.2	UL CCTrCH in which the USCH is mapped	-	
>Transport Bearer Request Indicator	М		9.2.1.62A		-	
USCH Information to add	0		USCH Information 9.2.3.28		YES	reject
USCH Information to delete		0 <maxno of USCHs ></maxno 			GLOBAL	reject
>USCH ID	М		9.2.3.27		_	
RL Information		01			YES	reject
>RL ID	M		9.2.1.53		_	
>Maximum Downlink Power	0		DL Power 9.2.1.21	Maximum allowed power on DPCH	-	
>Minimum Downlink Power	0		DL Power 9.2.1.21	Minimum allowed power on DPCH	Т	
>Initial DL transmission Power	0		DL Power 9.2.1.21	Initial power on DPCH	YES	ignore

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.
Maxnoof DPCHs	Maximum number of DPCHs in one CCTrCH for
	3.84Mcps TDD.
MaxnoOfDPCHLCRs	Maximum number of DPCHs in one CCTrCH for
	1.28Mcps TDD.
MaxnoofDSCHs	Maximum number of DSCHs for one UE
MaxnoofUSCHs	Maximum number of USCHs for one UE
MaxnoofDLts	Maximum number of Downlink time slots per Radio Link
	for 3.84Mcps TDD.
MaxnoofDLtsLCR	Maximum number of Downlink time slots per Radio Link
	for 1.28Mcps TDD.
MaxnoofULts	Maximum number of Uplink time slots per Radio Link for
	3.84Mcps TDD.
MaxnoofULtsLCR	Maximum number of Uplink time slots per Radio Link for
	1.28Mcps TDD.

9.1.43 RADIO LINK RECONFIGURATION READY

IE/Group name	Presence	Range	IE Type and Reference	Semantic Description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
CRNC Communication Context ID	M		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	ignore
Transaction ID	М		9.2.1.62		_	
RL Information Response		0 <max noofRLs ></max 		Only one RL information response group for one group of combined RLs shall be present	EACH	ignore
>RL ID	М		9.2.1.53		_	
>DCH Information Response	0		9.2.1.20C		YES	ignore
>DSCH Information Response	0		9.2.1.27A		YES	ignore
>USCH Information Response	0		9.2.3.29	TDD only	YES	ignore
>TFCI2 Bearer Information Response	0		9.2.2.49A	FDD only	_	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

Range Bound	Explanation
MaxnoofRLs	Maximum number of RLs for a UE.

9.1.44 RADIO LINK RECONFIGURATION FAILURE

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
CRNC Communication Context ID	M		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	ignore
Transaction ID	М		9.2.1.62		_	
CHOICE Cause Level	M				YES	ignore
>General					_	
>>Cause	М		9.2.1.6		YES	ignore
>RL specific					_	
>>RLs Causing Reconfiguration Failure		0 <max noofRLs ></max 			EACH	ignore
>>>RL ID	M		9.2.1.53		_	
>>>Cause	M		9.2.1.6		_	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

Range Bound	Explanation
MaxnoofRLs	Maximum number of RLs for a UE.

9.1.45 RADIO LINK RECONFIGURATION COMMIT

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message type	M		9.2.1.46		YES	ignore
Node B Communication Context ID	M		9.2.1.48	The reserved value "All NBCC" shall not be used.	YES	ignore
Transaction ID	М		9.2.1.62		ı	
CFN	М		9.2.1.7		YES	ignore
Active Pattern Sequence Information	0		9.2.2.A		YES	ignore

9.1.46 RADIO LINK RECONFIGURATION CANCEL

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message type	M		9.2.1.46		YES	ignore
Node B Communication Context ID	M		9.2.1.48	The reserved value "All NBCC" shall not be used.	YES	ignore
Transaction ID	М		9.2.1.62		_	

9.1.47 RADIO LINK RECONFIGURATION REQUEST

FDD Message 9.1.47.1

IE/Group Name	Presence	Range	IE Type	Semantic	Criticality	Assigned
			and Reference	Description		Criticality
Managara Diagrippinatar	M		9.2.1.45		_	
Message Discriminator	M		9.2.1.46		YES	reject
Message Type	M		9.2.1.48	The	YES	-
Node B Communication Context ID	W			reserved value "All NBCC" shall not be used.	165	reject
Transaction ID	M		9.2.1.62		_	
UL DPCH Information		01			YES	reject
>TFCS	0		9.2.1.58	For the UL.	_	
DL DPCH Information		01			YES	reject
>TFCS	0		9.2.1.58	For the DL.	_	
>TFCI Signalling Mode	0		9.2.2.50		_	
>Limited Power Increase	0		9.2.2.18A		_	
DCHs to Modify	0		DCHs FDD to Modify 9.2.2.4E		YES	reject
DCHs to Add	0		DCH FDD Information 9.2.2.4D		YES	reject
DCHs to Delete		0 <maxn oofDCHs ></maxn 			GLOBAL	reject
>DCH ID	M		9.2.1.20		_	
Radio Link Information		0 <maxn oofRLs></maxn 			EACH	reject
>RL ID	M		9.2.1.53		_	
>Maximum DL Power	0		DL Power 9.2.1.21	Maximum allowed power on DPCH	-	
>Minimum DL Power	0		DL Power 9.2.1.21	Minimum allowed power on DPCH	1	
>DL Code Information	C-SF/2		FDD DL Code Information 9.2.2.14A		-	
Transmission Gap Pattern Sequence Information	0		9.2.2.53A		YES	reject

Range Bound	Explanation		
MaxnoofDCHs	Maximum number of DCHs for a UE.		
MaxnoofRLs	Maximum number of RLs for a UE.		

Condition	Explanation
SF/2	The IE shall be present if the Transmission Gap
	Pattern Sequence Information IE is included and the
	indicated Downlink Compressed Mode method for at
	least one of the included Transmission Gap Pattern
	Sequence is set to "SF/2".

9.1.47.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Node B Communication Context ID	М		9.2.1.48	The reserved value "All NBCC" shall not be used.	YES	reject
Transaction ID	M		9.2.1.62		ı	
UL CCTrCH to modify		0 <maxn oofCCTr CHs></maxn 			EACH	notify
>CCTrCH ID	M		9.2.3.3		_	
>TFCS	0		9.2.1.58		_	
>Puncture Limit	0		9.2.1.50		_	
UL CCTrCH to delete		0 <maxn oofCCTr CHs></maxn 			EACH	notify
>CCTrCH ID	М		9.2.3.3			
DL CCTrCH to modify		0 <maxn oofCCTr CHs></maxn 			EACH	notify
>CCTrCH ID	М		9.2.3.3		_	
>TFCS	0		9.2.1.58		_	
>Puncture Limit	0		9.2.1.50		ı	
DL CCTrCH to delete		0 <maxn oofCCTr CHs></maxn 			EACH	notify
>CCTrCH ID	M		9.2.3.3		_	
DCHs to Modify	0		DCHs TDD to Modify 9.2.3.4D		YES	reject
DCHs to Add	0		DCH TDD Information 9.2.3.4C		YES	reject
DCHs to Delete		0 <maxn oofDSCH s></maxn 			GLOBAL	reject
>DCH ID	М		9.2.1.20			
RL Information		01			YES	reject
>RL ID	М		9.2.1.53		_	
>Maximum Downlink Power	0		DL Power 9.2.1.21	Maximum allowed power on DPCH	-	
>Minimum Downlink Power	0		DL Power 9.2.1.21	Minimum allowed power on DPCH	-	

Range bound	Explanation		
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.		

9.1.48 RADIO LINK RECONFIGURATION RESPONSE

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
CRNC Communication Context ID	М		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	ignore
Transaction ID	М		9.2.1.62		_	
RL Information Response		0 <maxn oofRLs></maxn 		Only one RL information response group for one group of combined RLs shall be present	EACH	ignore
>RL ID	М		9.2.1.53		_	
>DCH Information Response	0		9.2.1.20C		YES	ignore
Criticality Diagnostics	0		9.2.1.17		YES	ignore

Range bound	Explanation
MaxnoofRLs	Maximum number of RLs for a UE.

9.1.49 RADIO LINK DELETION REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Node B Communication Context ID	М		9.2.1.48	The reserved value "All NBCC" shall not be used.	YES	reject
CRNC Communication Context ID	М		9.2.1.18		YES	reject
Transaction ID	М		9.2.1.62		_	
RL Information		1 <maxn oofRLs></maxn 			EACH	notify
>RL ID	М		9.2.1.53		_	

Range bound	Explanation		
MaxnoofRLs	Maximum number of radio links for one UE		

9.1.50 RADIO LINK DELETION RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		ı	
Message Type	M		9.2.1.46		YES	reject
CRNC Communication Context ID	M		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	ignore
Transaction ID	М		9.2.1.62		1	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.51 DL POWER CONTROL REQUEST [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	ignore
Node B Communication Context ID	М		9.2.1.48	The reserved value "All NBCC" shall not be used.	YES	ignore
Transaction ID	M		9.2.1.62		_	
Power Adjustment Type	M		9.2.2.27		YES	ignore
DL Reference Power	C- Common		DL power 9.2.1.21	Power on DPCH	YES	Ignore
Inner Loop DL PC Status	0		9.2.2.18B		YES	ignore
DL Reference Power Information	C- Individual	1 <maxnoof RLs></maxnoof 			GLOBAL	ignore
>RL ID	M		9.2.1.53		_	
>DL Reference Power	М		DL power 9.2.1.21	Power on DPCH	_	
Max Adjustment Step	C- CommonO rIndividual		9.2.2.20		YES	ignore
Adjustment Period	C- CommonO rIndividual		9.2.2.B		YES	ignore
Adjustment Ratio	C- CommonO rIndividual		9.2.2.C		YES	ignore

Condition	Explanation
Common	The IE shall be present if the 'Adjustment Type IE is equal to
	"Common".
Individual	The IE shall be present if the Adjustment Type IE is equal to
	"Individual".
CommonOrIndividual	The IE shall be present if the Adjustment Type IE is equal to
	"Common' or 'Individual".

Range Bound	Explanation
MaxnoofRLs	Maximum number of Radio Links for a UE

9.1.52 DEDICATED MEASUREMENT INITIATION REQUEST

IE/Group Name	Presence	Range	IE Type	Semantics	Criticality	Assigned
			and Reference	Description		Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Node B Communication	М		9.2.1.48	The	YES	reject
Context ID				reserved		
				value		
				"All NBCC"		
				shall not be		
				used when		
				the Report		
				characteristi		
				cs type is set to "On-		
				Demand".		
Transaction ID	М		9.2.1.62	Demand :	_	
Measurement ID	M		9.2.1.42		YES	reject
Dedicated Measurement	М		9.2.1.22		YES	reject
Object Type						-
CHOICE Dedicated	M				YES	reject
Measurement Object Type						
>RL					_	
>>RL Information		1 <maxnoofr< td=""><td></td><td></td><td>EACH</td><td>reject</td></maxnoofr<>			EACH	reject
DI ID		Ls>	0.04.50			
>>>RL ID	M		9.2.1.53	TDDl-	_	
>>>DPCH ID >>> PUSCH	0	0	9.2.3.5	TDD only		
Information		0 <maxnoofp USCHs></maxnoofp 		TDD only	EACH	reject
>>>>PUSCH ID	М	0301152	9.2.3.12		_	
>RLS	IVI		9.2.5.12	FDD only	-	
>>RL Set Information		1 <maxnoofr< td=""><td></td><td>1 DD Only</td><td>_</td><td></td></maxnoofr<>		1 DD Only	_	
		LSets>				
>>>RL Set ID	М		9.2.2.39		_	
>ALL RL			NULL		_	
>ALL RLS			NULL	FDD only	_	
Dedicated Measurement	М		9.2.1.23		YES	reject
Type						
Measurement Filter	0		9.2.1.41		YES	reject
Coefficient						
Report Characteristics	M		9.2.1.51		YES	reject
CFN reporting indicator	М		FN		YES	reject
			reporting			
			indicator			
CEN	0		9.2.1.29B		VEC	rojoot
CFN	10		9.2.1.7	1	YES	reject

Range	Explanation
MaxnoofRLs	Maximum number of individual RL's a measurement can be started on.
MaxnoofPUSCHs	Maximum number of PUSCH per RL a measurement can be started on.
MaxnoofRLSets	Maximum number of individual RL Sets a measurement can be started
	on.

9.1.53 DEDICATED MEASUREMENT INITIATION RESPONSE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
CRNC Communication Context ID	М		9.2.1.18		YES	ignore
Transaction ID	M		9.2.1.62		_	
Measurement ID	M		9.2.1.42		YES	ignore
CHOICE Dedicated Measurement Object Type	0			Dedicated Measuremen t Object Type the measuremen t was initiated with	YES	ignore
>RL or ALL RL					_	
>>RL Information		1 <maxnoofr Ls></maxnoofr 			EACH	ignore
>>>RL ID	M		9.2.1.53		_	
>>>DPCH ID	0		9.2.3.5	TDD only	_	
>>>PUSCH Information		0 <maxnoofp USCHs></maxnoofp 		TDD only	EACH	reject
>>>PUSCH ID	M		9.2.3.12		_	
>>>Dedicated Measurement Value	М		9.2.1.24		_	
>>>CFN	0		9.2.1.7	Dedicated Measuremen t Time Reference	_	
>RLS or ALL RLS				FDD only	_	
>>RL Set Information		1 <maxnoofr LSets></maxnoofr 			_	
>>>RL Set ID	М		9.2.2.39		_	
>>>Dedicated Measurement Value	М		9.2.1.24		_	
>>>CFN	0		9.2.1.7	Dedicated Measuremen t Time Reference	-	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

Range	Explanation
MaxnoofRLs	Maximum number of individual RL's the measurement can be started
	on.
MaxnoofPUSCHs	Maximum number of PUSCH per RL a measurement can be started on.
MaxnoofRLSets	Maximum number of individual RL Sets a measurement can be started
	on.

9.1.54 DEDICATED MEASUREMENT INITIATION FAILURE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
CRNC Communication Context ID	М		9.2.1.18		YES	ignore
Transaction ID	М		9.2.1.62		_	
Measurement ID	М		9.2.1.42		YES	ignore
Cause	М		9.2.1.6		YES	ignore
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.55 DEDICATED MEASUREMENT REPORT

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	ignore
CRNC Communication Context ID	М		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	ignore
Transaction ID	M		9.2.1.62		_	
Measurement ID	M		9.2.1.42		YES	ignore
CHOICE Dedicated Measurement Object Type	M			Dedicated Measuremen t Object Type the measuremen t was initiated with	YES	ignore
>RL or ALL RL					_	
>>RL Information		1 <maxnoofr Ls></maxnoofr 			EACH	ignore
>>>RL ID	M		9.2.1.53		_	
>>>DPCH ID	0		9.2.3.5	TDD only	ı	
>>>PUSCH Information		0 <maxnoofp USCHs></maxnoofp 		TDD only	EACH	reject
>>>>PUSCH ID	M		9.2.3.12		_	
>>>Dedicated Measurement Value Information	М		9.2.1.24A		-	
>RLS or ALL RLS				FDD only	_	
>>RL Set Information		1 <maxnoofr LSets></maxnoofr 			EACH	ignore
>>>RL Set ID	М		9.2.1.39		_	
>>>Dedicated Measurement Value Information	М		9.2.1.24A		_	

Range	Explanation
MaxnoofRLs	Maximum number of individual RL's the measurement can be started on.
MaxnoofPUSCHs	Maximum number of PUSCH per RL a measurement can be started on.
MaxnoofRLSets	Maximum number of individual RL Sets a measurement can be started
	on.

9.1.56 DEDICATED MEASUREMENT TERMINATION REQUEST

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	ignore
Node B Communication Context ID	M		9.2.1.48	The reserved value 'All NBCC' shall be used if this value was used when initiating the measuremen t. Otherwise, the reserved value 'All NBCC' shall not be used.	YES	ignore
Transaction ID	M		9.2.1.62		_	
Measurement ID	М		9.2.1.42		YES	ignore

9.1.57 DEDICATED MEASUREMENT FAILURE INDICATION

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		1	
Message Type	М		9.2.1.46		YES	ignore
CRNC Communication Context ID	M		9.2.1.18	The reserved value 'All CRNCC C' shall be used if the Node B Communicati on Context ID was set to 'All NBCC' when initiating the measuremen t. Otherwise, the reserved value 'All CRNCCC' shall not be	YES	ignore
Transaction ID	M		9.2.1.62	used.		
Measurement ID	M		9.2.1.62		YES	ignore
Cause	M		9.2.1.42		YES	ignore

9.1.58 RADIO LINK FAILURE INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	ignore
CRNC Communication Context ID	M		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	ignore
Transaction ID	M		9.2.1.62		-	
CHOICE Reporting Object	M			Object for which the Failure shall be reported.	YES	ignore
>RL					_	
>>RL Information		1 to <maxnoofrl s=""></maxnoofrl>			EACH	ignore
>>>RL ID	М		9.2.1.53		_	
>>>Cause	М		9.2.1.6		_	
>RL Set				FDD only	_	
>>RL Set Information		1 to <maxnoofrl Sets></maxnoofrl 			EACH	ignore
>>>RL Set ID	М		9.2.2.39		_	
>>>Cause	М		9.2.1.6		_	
>CCTrCH				TDD only		
>>RL ID	М		9.2.1.53	•	_	
>>CCTrCH List		1 to <maxnocct rCH></maxnocct 			EACH	ignore
>>>CCTrCH ID	М		CCTrCH ID 9.2.3.3		_	
>>>Cause	М		9.2.1.6		_	

Range bound	Explanation
MaxnoofRLs	Maximum number of RLs for one UE.
MaxnoofRLSets	Maximum number of RL Sets for one UE.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.

9.1.59 RADIO LINK RESTORE INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	ignore
CRNC Communication Context ID	M		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	ignore
Transaction ID	М		9.2.1.62		_	
CHOICE Reporting Object	M			Object for which the Restoration shall be reported.	YES	ignore
>RL					_	
>>Radio Link Information		1 to <maxnoofrl s=""></maxnoofrl>			EACH	ignore
>>>RL ID	М		9.2.1.53		_	
>RL Set				FDD only	_	
>>RL Set Information		1 to <maxnoofrl Sets></maxnoofrl 			EACH	ignore
>>>RL Set ID	М		9.2.2.39		_	
>CCTrCH				TDD only		
>>RL ID	М		9.2.1.53			
>>CCTrCH List		1 to <maxnocct rCH></maxnocct 			EACH	ignore
>>>CCTrCH ID	М		CCTrCH ID 9.2.3.3		_	

Range bound	Explanation
MaxnoofRLs	Maximum number of RLs for one UE.
MaxnoofRLSets	Maximum number of RL Sets for one UE.
MaxnoofCCTrCHs	Maximum number of CCTrCHs for a UE.

9.1.60 COMPRESSED MODE COMMAND [FDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	ignore
Node B communication context ID	М		9.2.1.48	The reserved value "All NBCC" shall not be used.	YES	ignore
Transaction ID	M		9.2.1.62		_	
Active Pattern Sequence Information	M		9.2.2.A		YES	ignore

9.1.61 ERROR INDICATION

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	ignore
CRNC Communication Context ID	0		9.2.1.18	The reserved value "All CRNCC C" shall not be used.	YES	ignore
Node B Communication Context ID	0		9.2.1.48	The reserved value "All NBCC" shall not be used.	YES	ignore
Transaction ID	М		9.2.1.62		_	
Cause	0		9.2.1.6		YES	ignore
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.62 PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST [TDD]

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		-	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		-	
C-ID	М		9.2.1.9		YES	reject
SFN	0		9.2.1.53A		YES	reject
PDSCH Sets to add		0 <maxnoof PDSCHSets ></maxnoof 			GLOBAL	reject
>PDSCH Set ID	М		9.2.3.11		-	
>PDSCH to add Information		01		Mandatory for 3.84Mcps TDD	YES	reject
>>Repetition Period	M		9.2.3.16		_	

. Depotition Length	М		9.2.3.15	T	_	
>>Repetition Length	M	+	9.2.3.13			
>>TDD Physical	IVI		9.2.3.20		_	
Channel Offset	_	1				
>>DL Timeslot Information		<maxnoofdl< td=""><td></td><td></td><td>_</td><td></td></maxnoofdl<>			_	
>>>Time Slot	M	ts>	9.2.3.23		_	
>>>Midamble Shift	M		9.2.3.7		_	
and Burst Type	l vi		0.2.0.7			
>>>TFCI Presence	M		9.2.1.57		_	
>>>DL Code	+***	1	0.2.1.07		_	
Information		<maxnoofp DSCH></maxnoofp 				
>>>PDSCH ID	М		9.2.3.10		ı	
>>>>TDD Channelisation Code	M		9.2.3.19		-	
>PDSCH to add Information LCR		01		Mandatory for 1.28Mcps TDD	YES	reject
>>Repetition Period	M		9.2.3.16		_	
>>Repetition Length	М		9.2.3.15		ı	
>>TDD Physical	М		9.2.3.20		_	
Channel Offset						
>>DL Timeslot Information LCR		1 <maxnoofdl tsLCR></maxnoofdl 			GLOBAL	reject
>>>Time Slot LCR	M		9.2.3.24A		_	
>>>Midamble shift LCR	М		9.2.3.7A		-	
>>>TFCI Presence	М		9.2.1.57		_	
>>>DL Code		1			GLOBAL	reject
Information LCR		<maxnoofp DSCH></maxnoofp 				-
>>>PDSCH ID	М		9.2.3.10		_	
>>>TDD	M		9.2.3.19a		_	
Channelisation						
Code LCR						
PDSCH Sets to Modify		0 <maxnoof PDSCHSets</maxnoof 			GLOBAL	reject
>PDSCH Set ID	M	>	9.2.3.11		-	
>PDSCH to modify	+	01		Mandatory for	YES	reject
Information				3.84Mcps TDD		- 1
>>Repetition Period	0		9.2.3.16		_	
>>Repetition Length	0	1	9.2.3.15		_	
>>TDD Physical	0		9.2.3.20		_	
Channel Offset						
>>DL Timeslot		0			_	
Information		<maxnoofdl ts></maxnoofdl 				
>>>Time Slot	M		9.2.3.23		_	
>>>Midamble Shift	0		9.2.3.7		_	
and Burst Type	<u> </u>					
>>>TFCI Presence	0	1	9.2.1.57		_	
>>>DL Code Information		0 <maxnoofp DSCH></maxnoofp 			-	
>>>>PDSCH ID	M	-	9.2.3.10		_	
>>>>TDD	М		9.2.3.19		_	
		i	1	1		
Channelisation						

>PDSCH to modify Information LCR		01		Mandatory for 1.28 Mcps TDD	YES	reject
>>Repetition Period	0		9.2.3.16	155	_	
>>Repetition Length	0		9.2.3.15		_	
>>TDD Physical Channel Offset	0		9.2.3.20		_	
>>DL Timeslot Information LCR		0 <maxnoofdl tsLCR></maxnoofdl 			GLOBAL	reject
>>>Time Slot LCR	М		9.2.3.24A		_	
>>>Midamble shift LCR	0		9.2.3.7A			
>>>TFCI Presence	0		9.2.1.57		_	
>>>DL Code Information LCR		0 <maxnoofp DSCHLCR></maxnoofp 			GLOBAL	reject
>>>PDSCH ID	М		9.2.3.10		_	
>>>>TDD Channelisation Code LCR	M		9.2.3.19a		_	
PDSCH Sets to Delete		0 <maxnoof PDSCHSets</maxnoof 			GLOBAL	reject
>PDSCH Set ID	М		9.2.3.11		-	
PUSCH Sets to add		0 <maxnoof PUSCHSets</maxnoof 			GLOBAL	reject
>PUSCH Set ID	М		9.2.3.13		-	
>PUSCH to add Information		01		Mandatory for 3.84Mcps TDD	YES	reject
>>Repetition Period	М		9.2.3.16	•	_	
•	M		9.2.3.15		_	
>>Repetition Length >>TDD Physical	M		9.2.3.20		_	
Channel Offset						
>>UL Timeslot Information		1 <maxnooful ts></maxnooful 			_	
>>>Time Slot	М		9.2.3.23		_	
>>>Midamble Shift and Burst Type	M		9.2.3.7		_	
>>>TFCI Presence	М		9.2.1.57		_	
>>> TFCT Presence	IVI	1	3.2.1.37		_	
Information		<maxnoofp USCH></maxnoofp 			_	
>>>PUSCH ID	М		9.2.3.12		_	
>>>>TDD Channelisation	М		9.2.3.19		_	
Code >PUSCH to add Information LCR	0	1		For 1.28Mcps TDD only	YES	reject
>>Repetition Period	М		9.2.3.16		_	
>>Repetition Length	M		9.2.3.15		_	
>>TDD Physical Channel Offset	M		9.2.3.20		_	
>>UL Timeslot Information LCR		1 <maxnooful tsLCR></maxnooful 			GLOBAL	reject
>>>Time Slot LCR	М	1	9.2.3.24A		_	
>>>Midamble shift LCR	M		9.2.3.7A			
>>>TFCI Presence	М		9.2.1.57		_	

III Cada	1	1.4			OL ODAL	!4
>>>UL Code Information LCR		1 <maxnoofp< td=""><td></td><td></td><td>GLOBAL</td><td>reject</td></maxnoofp<>			GLOBAL	reject
511001115	1	USCHLCR>				
>>>PUSCH ID	M		9.2.3.12		_	
>>>>TDD Channelisation Code LCR	M		9.2.3.19a		_	
PUSCH Sets to Modify		0 <maxnoof PUSCHSets ></maxnoof 			GLOBAL	reject
>PUSCH Set ID	М		9.2.3.13		-	
>PUSCH to modify Information		01		For 3.84Mcps TDD only	YES	reject
>>Repetition Period	0		9.2.3.16		_	
>>Repetition Length	0		9.2.3.15		_	
>>TDD Physical Channel Offset	0		9.2.3.20		-	
>>UL Timeslot		0			_	
Information		<maxnooful ts></maxnooful 				
>>>Time Slot	М		9.2.3.23		_	
>>>Midamble Shift and Burst Type	0		9.2.3.7		_	
>>>TFCI Presence	0		9.2.1.57		_	
>>>UL Code Information		0 <maxnoofp DSCH></maxnoofp 			-	
>>>>PUSCH ID	М		9.2.3.12		_	
>>>TDD Channelisation Code	М		9.2.3.19		-	
>PUSCH to modify Information LCR		01		For 1.28Mcps TDD only	YES	reject
>>Repetition Period	0		9.2.3.16		_	
>>Repetition Length	0		9.2.3.15		_	
>>TDD Physical Channel Offset	0		9.2.3.20		_	
>>UL Timeslot Information LCR		0 <maxnooful tsLCR></maxnooful 		For 1.28Mcps TDD only	GLOBAL	reject
>>>Time Slot LCR	M		9.2.3.24A		_	
>>>Midamble shift LCR	0		9.2.3.7A			
>>>TFCI Presence	0		9.2.1.57		-	
>>>UL Code Information LCR		0 <maxnoofp DSCHLCR></maxnoofp 			GLOBAL	reject
>>>PUSCH ID	M		9.2.3.12		_	
>>>>TDD Channelisation Code LCR	М		9.2.3.19a		_	
PUSCH Sets to Delete		0 <maxnoof PUSCHSets ></maxnoof 			GLOBAL	reject
>PUSCH Set ID	M		9.2.3.13		-	

Range bound	Explanation
Maxnoof PDSCH Sets	Maximum number of PDSCH Sets in a cell.
Maxnoof PDSCH	Maximum number of PDSCH in a cell for 3.84Mcps
	TDD only.
MaxnoOfPDSCHLCR	Maximum number of PDSCH in a cell for 1.28Mcps
	TDD only.

Maxnoof PUSCH Sets	Maximum number of PUSCH Sets in a cell.
Maxnoof PUSCH	Maximum number of PUSCH in a cell for 3.84Mcps
	TDD.
Maxnoof PUSCHLCR	Maximum number of PUSCH in a cell for 1.28Mcps TDD.
MaxnoofDLts	Maximum number of Downlink time slots in a cell for 3.84Mcps TDD.
MaxnoofULts	Maximum number of Uplink time slots in a cell for
	3.84Mcps TDD.
MaxnoofULtsLCR	Maximum number of Uplink time slots in a cell for 1.28Mcps TDD

9.1.63 PHYSICAL SHARED CHANNEL RECONFIGURATION RESPONSE [TDD]

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		-	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		-	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.64 PHYSICAL SHARED CHANNEL RECONFIGURATION FAILURE [TDD]

IE/Group Name	Presence	Range	IE Type and	Semantic Descriptio	Criticality	Assigned Criticality
			Reference	n		Criticality
Message Discriminator	M		9.2.1.45		-	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		-	
CHOICE cause level	M				YES	ignore
>General					_	
>>Cause	M		9.2.1.6		_	
> Set specific					_	
>>Unsuccessful DL Shared channel set		0 <maxnoof PDSCHSets</maxnoof 			EACH	ignore
>>>PDSCH Set ID	M	>	9.2.3.13		-	
>>>Cause	М		9.2.1.6		YES	ignore
>>Unsuccessful UL Shared channel set		0 <maxnoof PUSCHSets</maxnoof 			EACH	ignore
>>>PUSCH Set ID	М		9.2.3.13		-	
>>>Cause	М		9.2.1.6		-	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

Range bound	Explanation		
Maxnoof PDSCH Sets	Maximum number of PDSCH Sets in a cell.		
Maxnoof PUSCH Sets	Maximum number of PUSCH Sets in a cell.		

9.1.65 RESET REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantic Descripti on	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	
CHOICE Reset Indicator	М				YES	ignore
>CommunicationContext					_	
>>Communication Context Information		1 <maxco mmunicatio nContext></maxco 			EACH	reject
>>>CHOICE Communication Context Type	M				_	
>>>CRNC Communication Context					_	
>>>>CRNC Communication Context ID	M		9.2.1.18		_	
>>>Node B Communication Context					_	
>>>>Node B Communication Context ID	M		9.2.1.48		_	
>CommunicationControl Port					_	
>>Communication Control Port Information		1 <maxccpi nNodeB></maxccpi 			EACH	reject
>>>Communication Control Port ID	M		9.2.1.15		_	
>Node B			NULL		-	

Range bound	Explanation			
maxCommunicationContext	Maximum number of communication contexts that can exist in the Node-B			
maxCCPinNodeB	Maximum number of communication control ports that can exist in the Node B			

9.1.66 RESET RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.67 DL POWER TIMESLOT CONTROL REQUEST [TDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	ignore
Node B Communication Context ID	M		9.2.1.48	The reserved value "All NBCC" shall not be used.	YES	ignore
Transaction ID	M		9.2.1.62		_	
DL Time Slot ISCP Info	0		9.2.3.4F	Mandatory For 3.84Mcps TDD only	YES	ignore
DL Time Slot ISCP Info LCR	0		9.2.3.40A	Mandatory For 1.28Mcps TDD only	YES	ignore

9.1.68 RADIO LINK PREEMPTION REQUIRED INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Managara Tura	N 4				VEC	:
Message Type	M		9.2.1.46		YES	ignore
Transaction ID	M		9.2.1.62		_	
CRNC Communication	M		9.2.1.18		YES	ignore
Context ID						
RL Information		0 <maxno< td=""><td></td><td></td><td>EACH</td><td>ignore</td></maxno<>			EACH	ignore
		ofRLs>				
>RL ID	M		9.2.1.53		-	

Range bound	Explanation
MaxnoofRLs	Maximum number of radio links for one UE

9.1.69 INFORMATION EXCHANGE INITIATION REQUEST

IE/Group Name	Presence	Range	IE Type and	Semantics Description	Criticality	Assigned Criticality
			Reference	Decompaign		Orthodinty
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
Information Exchange ID	M		9.2.1.36C		YES	reject
Information Exchange Object Type	M		9.2.1.36A		YES	reject
CHOICE Information Exchange Object Type	М				YES	reject
>Cell					-	
>>C-ID	M		9.2.1.9		-	
Information Type	M		9.2.1.36D		YES	reject
Information Report Characteristics	М		9.2.1.36B		YES	reject

9.1.70 INFORMATION EXCHANGE INITIATION RESPONSE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		ı	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		-	
Information Exchange ID	М		9.2.1.36C		YES	ignore
CHOICE Information Exchange Object Type	0				YES	ignore
>Cell					1	
>>Requested Data Value	М		9.2.1.51A		-	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.71 INFORMATION EXCHANGE INITIATION FAILURE

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
Information Exchange ID	M		9.2.1.36C		YES	ignore
Cause	M		9.2.1.6		YES	ignore
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.72 INFORMATION REPORT

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	ignore
Transaction ID	M		9.2.1.62		_	
Information Exchange ID	М		9.2.1.36C		YES	ignore
CHOICE Information Exchange Object Type	М				YES	ignore
>Cell					-	
>>Requested Data Value Information	M		9.2.1.51B			

9.1.73 INFORMATION EXCHANGE TERMINATION REQUEST

IE/Group Name	Presence	Range	IE Type and	Semantics Description	Criticality	Assigned Criticality
			Reference			_
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	ignore
Transaction ID	M		9.2.1.62		-	
Information Exchange ID	M		9.2.1.36C		YES	ignore

9.1.74 INFORMATION EXCHANGE FAILURE INDICATION

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		-	
Message Type	M		9.2.1.46		YES	ignore
Transaction ID	M		9.2.1.62		-	
Information Exchange ID	M		9.2.1.36C		YES	ignore
Cause	М		9.2.1.6		YES	ignore

9.1.75 CELL SYNCHRONISATION INITIATION REQUEST [TDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	
C-ID	М		9.2.1.9		YES	reject
Cell Sync Burst Repetition Period	M		9.2.3.4J		YES	reject
Time Slot Information		115			GLOBAL	reject
>Time Slot	M		9.2.3.23		_	
Cell Sync Burst Transmission Initiation Information		01			GLOBAL	reject
>CSB Transmission ID	М		9.2.3.4N			
>SFN	M		9.2.1.53A		_	
>Cell Sync Burst Code	М		9.2.3.4G		_	
>Cell Sync Burst Code shift	М		9.2.3.4H			
>Initial DL transmission Power	M		DL Power 9.2.1.21		_	
Cell Sync Burst Measurement Initiation Information		01			GLOBAL	reject
>CSB Measurement ID	М		9.2.3.41			
>Cell Sync Burst Code	M		9.2.3.4G		_	
>Cell Sync Burst Code shift	M		9.2.3.4H			
>Synchronisation Report Type	M		9.2.3.18 ^E		_	
>SFN	0		9.2.1.53A		_	
>Synchronisation Report Characteristics	М		9.2.3.18D		_	

9.1.76 CELL SYNCHRONISATION INITIATION RESPONSE [TDD]

IE/Group Name	Presence	Range	IE Type and	Semantics Description	Criticality	Assigned Criticality
			Reference			
Message Discriminator	M		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.77 CELL SYNCHRONISATION INITIATION FAILURE [TDD]

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
Cause	М		9.2.1.6		YES	Ignore
Criticality Diagnostics	0		9.2.1.17		YES	Ignore

9.1.78 CELL SYNCHRONISATION RECONFIGURATION REQUEST [TDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	
C-ID	М		9.2.1.9		YES	reject
Time Slot	M		9.2.3.23		YES	reject
Number of cycles per SFN period	M		9.2.3.7B		YES	reject
Number of repetitions per cycle period	М		9.2.3.7C		YES	reject
Cell Sync Burst Transmission Reconfiguration Information		0 < maxnoofC ellSyncBur sts >			Global	reject
>CSB Transmission ID	М		9.2.3.4N		_	
>Sync Frame number to transmit	M		Sync Frame number 9.2.3.18C		I	
>Cell Sync Burst Code	0		9.2.3.4G		-	
>Cell Sync Burst Code shift	0		9.2.3.4H		_	
>DL transmission Power	0		DL Power 9.2.1.21		ı	
Cell Sync Burst Measurement Reconfiguration Information		01			YES	reject
>Cell Sync Burst Measurement Information		1 <maxnoof CellSyncB ursts></maxnoof 			GLOBAL	reject
>>Sync Frame number to receive	M		Sync Frame number 9.2.3.18C		-	
>>Cell Sync Burst Information		1< maxnoofre ceptionspe rSyncFram e>			_	
>>>CSB Measurement	М		9.2.3.41		-	
>>>Cell Sync Burst Code	М		9.2.3.4G		-	
>>>Cell Sync Burst Code shift	М		9.2.3.4H		-	
>Synchronisation Report Type	0		9.2.3.18E		YES	reject
>Synchronisation Report Characteristics	0		9.2.3.18D		YES	reject

Range bound	Explanation
maxnoofCellSyncBursts	Maximum number of cell sync bursts per cycle
maxnoofreceptionsperSyncFrame	Maximum number of cell sync burst receptions per
	Sync Frame

9.1.79 CELL SYNCHRONISATION RECONFIGURATION RESPONSE [TDD]

IE/Group Name	Presence	Range	IE Type and	Semantics Description	Criticality	Assigned Criticality
			Reference			
Message Discriminator	M		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	M		9.2.1.62		_	
Criticality Diagnostics	0		9.2.1.17		YES	ignore

9.1.80 CELL SYNCHRONISATION RECONFIGURATION FAILURE [TDD]

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	М		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	reject
Transaction ID	М		9.2.1.62		_	
Cause	М		9.2.1.6		YES	Ignore
Criticality Diagnostics	0		9.2.1.17		YES	Ignore

9.1.81 CELL SYNCHRONISATION REPORT [TDD]

IE/Group Name	Presence	Range	IE type and	Semantics description	Criticality	Assigned Criticality
	N 4		reference			
Message Discriminator	M		9.2.1.45		_	
Message Type	М		9.2.1.46		YES	ignore
Transaction ID	M		9.2.1.62		_	
Cell Synchronisation Information		1 <maxcellin NodeB ></maxcellin 			EACH	ignore
>C-ID	M		9.2.1.9		YES	ignore
>CHOICE Synchronisation Report Type					YES	ignore
>>Initial Phase or Steady-State Phase					_	
>>>Cell Sync Burst		1			_	
Measured		<maxnoof< td=""><td></td><td></td><td></td><td></td></maxnoof<>				
Information		CellSyncB ursts>				
>>>SFN	М		9.2.1.53A		_	
>>>Cell Sync Burst Information		1 <maxno ofreception sperSyncF rame></maxno 			-	
>>>>CHOICE Cell Sync Burst Availability Indicator	М				-	
>>>> Cell Sync Burst Available					_	
>>>>Cell	М		9.2.3.4L		_	

Sync Burst Timing				
>>>>Cell	М	9.2.3.4K	_	
Sync Burst SIR				
>>>> Cell Sync		NULL	_	
Burst not				
Available				
>>Late-Entrant Cell		NULL	1	
>>Frequency Acquisition		NULL	_	

Range bound	Explanation
maxCellinNodeB	Maximum number of Cells in a Node B
maxnoofCellSyncBursts	Maximum number of cell sync bursts per cylce
maxnoofreceptionsperSyncFrame	Maximum number of cell sync burst receptions per
·	Sync Frame

9.1.82 CELL SYNCHRONISATION TERMINATION REQUEST [TDD]

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	ignore
Transaction ID	M		9.2.1.62		_	
C-ID	M		9.2.1.9		YES	ignore
CSB Transmission ID	0		9.2.3.4N		YES	ignore
CSB Measurement ID	0	•	9.2.3.41		YES	ignore

9.1.83 CELL SYNCHRONISATION FAILURE INDICATION [TDD]

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		-	
Message Type	M		9.2.1.46		YES	ignore
Transaction ID	M		9.2.1.62		_	
C-ID	M		9.2.1.9		YES	ignore
CSB Transmission ID	0		9.2.3.4N		YES	ignore
CSB Measurement ID	0		9.2.3.41		YES	ignore
Cause	M		9.2.1.6		YES	ignore

9.1.84 CELL SYNCHRONISATION ADJUSTMENT REQUEST [TDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	ignore
Transaction ID	M		9.2.1.62		_	
Cell Adjustment Information		1 <maxcelli nNodeB></maxcelli 			EACH	ignore
>C-ID	M		9.2.1.9		_	
>Frame Adjustment value	0		9.2.3.5C		_	
>Timing Adjustment value	0		9.2.3.22a		_	
>DL Transmission Power	0		9.2.1.21		_	
>SFN	0		9.2.1.53A		_	_

Range bound	Explanation
MaxCellinNodeB	Maximum number of Cells in a Node B

9.1.85 CELL SYNCHRONISATION ADJUSTMENT RESPONSE [TDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	ignore
Transaction ID	М		9.2.1.62		_	
Criticality Diagnostics	0		9.2.1.17		YES	Ignore

9.1.86 CELL SYNCHRONISATION ADJUSTMENT FAILURE [TDD]

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Message Discriminator	M		9.2.1.45		_	
Message Type	M		9.2.1.46		YES	ignore
Transaction ID	M		9.2.1.62		_	
CHOICE cause level	M				YES	ignore
>General					_	
>>Cause	М		9.2.1.6		_	
>Cell specific					_	
>>Unsuccessful Cell Information Response		1 <maxcelli nNodeB></maxcelli 			EACH	ignore
>>>C-ID	М		9.2.1.9		_	-
>>>Cause	М		9.2.1.6		_	
Criticality Diagnostics	0		9.2.1.17		YES	Ignore

Range bound	Explanation
MaxCellinNodeB	Maximum number of Cells in a Node B

9.2 Information Element Functional Definition and Contents

9.2.0 General

Subclause 9.2 presents the NBAP IE definitions in tabular format. The corresponding ASN.1 definition is presented in Subclause 9.3. In case there is contradiction between the tabular format in Subclause 9.2 and the ASN.1 definition, the ASN.1 shall take precedence, except for the definition of conditions for the presence of conditional elements, where the tabular format shall take precedence.

When specifying information elements which are to be represented by bitstrings, if not otherwise specifically stated in the semantics description of the concerned IE or elsewhere, the following principle applies with regards to the ordering of bits:

- The first bit (leftmost bit) contains the most significant bit (MSB);
- The last bit (rightmost bit) contains the least significant bit (LSB);
- When importing bitstrings from other specifications, the first bit of the bitstring contains the first bit of the concerned information;

9.2.1 Common parameters

9.2.1.1 Add/Delete Indicator

The add/delete indicator shall notify the RNC whether the associated resource has been added to or removed from the Node B.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Add/Delete Indicator			ENUMERAT	
			ED(Add,	
			Delete)	

9.2.1.1A Allocation/Retention Priority

This parameter indicates the priority level in the allocation and retention of Node B internal resources. See Annex A.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Priority Level	М		INTEGER {spare (0), highest (1),, lowest (14), no priority (15)} (015)	This IE indicates the priority of the request. Usage: Values between 1 and 14 are ordered in decreasing order of priority, '1' being the highest and '14' the lowest. Value 0 shall be treated as a logical error if received.
Pre-emption Capability	М		ENUMERAT ED(shall not trigger pre- emption, may trigger pre-emption)	
Pre-emption Vulnerability	M		ENUMERAT ED (not pre- emtable, pre-emtable)	

9.2.1.2 Availability Status

The availability status is used to indicate more detailed information of the availability of the resource. In accordance with ref. [6], following values are defined. If the value of this attribute is an empty set, this implies that none of the status conditions described in ref. [6] are present.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Availability Status			ENUMERAT	
			ED (empty,	
			in test,	
			failed, power	
			off, off line,	
			off duty,	
			dependency,	
			degraded,	
			not installed,	
			log full,)	

9.2.1.3 BCCH Modification Time

Indicates the time after which the new system information shall be applied on BCCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
BCCH Modification Time			Integer (0511)	All SFN values in which MIB may be mapped are allowed. The tabular description is presented in [18].

9.2.1.4 Binding ID

The Binding ID is the identifier of a user data stream. It is allocated at Node B and it is unique for each transport bearer under establishment to/from the Node B.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Binding ID			Octetstring (14,)	

9.2.1.5 Blocking Priority Indicator

The Blocking priority indicator shall indicate the immediacy with which a resource should be blocked from use. The following priority classes shall be supported in the Blocking priority indicator.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Blocking Priority Indicator			ENUMERAT ED(High, Normal, Low,)	High priority: Block resource immediately. Normal priority: Block resource when idle or upon timer expiry. Low priority: Block resource when idle.

9.2.1.5A Burst mode parameters

The *Burst mode parameters* IE provides information to be applied for IPDL burst mode.

IE/Group Name	Presence	Range	IE type and	Semantics description	Criticality	Assigned Criticality
			reference	S		
Burst Start	M		INTEGER	See [10] and	_	
			(015)	[21]		
Burst Length	M		INTEGER	See [10] and	_	
_			(1025)	[21]		
Burst freq	M		INTEGER	See [10] and	_	
·			(116)	[21]		

9.2.1.6 Cause

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CHOICE Cause Group				
>Radio Network Layer				
>Radio Network Layer	M		Enumerated	
Cause			(unknown C-ID,	
			Cell not available,	
			Power level not supported,	
			DL radio resources not available.	
			UL radio resources not	
			available,	
			RL Already	
			Activated/allocated,	
			Node B Resources	
			Unavailable,	
			Measurement not supported	
			for the object,	
			Combining Resources not	
			available,	
			Requested configuration not supported,	
			Synchronization failure,	
			Priority transport channel	
			established,	
			SIB Origination in Node B not	
			Supported,	
			Requested Tx Diversity Mode	
			not supported,	
			Unspecified,	
			BCCH scheduling error,	
			Measurement Temporarily not Available,	
			Invalid CM Setting,	
			Reconfiguration CFN not	
			elapsed,	
			Number of DL codes not	
			supported,	
			S-CPICH not supported,	
			Combining not supported,	
			UL SF not supported,	
			DL SF not supported, Common Transport Channel	
			Type not supported,	
			Dedicated Transport Channel	
			Type not supported,	
			Downlink Shared Channel	
			Type not supported,	
			Uplink Shared Channel Type	
			not supported,	
			CM not supported,	
			Tx diversity no longer	
			supported, Unknown Local Cell ID,	
			Number of UL codes not	
			supported,	
			Information temporarily not	
			available,	
			Information Provision not	
			supported for the object,	
			Cell Synchronisation not	
			supported,	
			Cell Synchronisation Adjustment not supported,	
			DPC Mode Change not	
			Supported,	
	i	<u> </u>	Loupported,	<u> </u>

>Transport Layer >Transport Layer Cause	M	IPDL already activated, IPDL not supported, IPDL parameters not available, Frequency Acquisition not supported) Enumerated (Transport resource unavailable, Unspecified,)
>Protocol		
>Protocol Cause		Enumerated (Transfer syntax error, Abstract syntax error (reject), Abstract syntax error (ignore and notify), Message not compatible with receiver state, Semantic error, Unspecified, Abstract syntax error (falsely constructed message),)
>Misc		
>Miscellaneous Cause	M	Enumerated (Control processing overload Hardware failure, O&M intervention, Not enough user plane processing resources, Unspecified,)

The meaning of the different cause values is described in the following table. In general, "not supported" cause values indicate that the concerning capability is missing. On the other hand, "not available" cause values indicate that the concerning capability is present, but insufficient resources were available to perform the requested action.

Radio Network Layer cause	Meaning
BCCH scheduling error	The Node B has detected an illegal BCCH schedule update (see subclause
	8.2.16.3)
Cell not Available,	The concerning cell or local cell is not available
Cell Synchronisation not supported	The concerning cell(s) do not support Cell Synchronisation
Combining not supported	The Node B does not support RL combining for the concerning cells
Combining Resources Not Available	The value of the received <i>Diversity Control Field</i> IE was set to 'Must', but
	the Node B cannot perform the requested combining
CM not supported	The concerning cell(s) do not support Compressed Mode
Common Transport Channel Type not	The concerning cell(s) do not support the RACH and/or FACH and/or
supported	CPCH Common Transport Channel Type
Dedicated Transport Channel Type not	The concerning cell(s) do not support the Dedicated Transport Channel
supported	Type
DL Radio Resources not Available	The Node B does not have sufficient DL radio resources available
DL SF not supported	The concerning cell(s) do not support the requested DL SF
DL Shared Channel Type not	The concerning cell(s) do not support the Downlink Shared Channel
supported	Туре
DPC Mode Change not Supported	The concerning cells do not support DPC mode changes
Frequency Acquisition not supported	The concerning cell(s) do not support Frequency Acquisition
Information Provision not supported	The requested information provision is not supported for the concerned
for the object	object types
Information temporarily not available	The requested information can temporarily not be provided
Invalid CM Settings	The concerning cell(s) consider the requested Compressed Mode settings
	invalid

IPDL already activated	The concerning cell(s) have already active IPDL ongoing
IPDL not supported	The concerning cell(s) do not support the IPDL
IPDL parameters not available	The concerning cell(s) do not have IPDL parameters defining IPDL to be applied
Measurement not Supported For The	At least one of the concerning cell(s) does not support the requested
Object	measurement on the concerning object type
Measurement Temporarily not Available	The Node B can temporarily not provide the requested measurement value
Node B resources unavailable	The Node B does not have sufficient resources available
Number of DL codes not supported	The concerning cell(s) do not support the requested number of DL codes
Number of UL codes not supported	The concerning cell(s) do not support the requested number of UL codes
Power Level not Supported	A DL power level was requested which the concerning cell(s) do not support
Priority transport channel established	The CRNC cannot perform the requested blocking since a transport channel with a high priority is present
Reconfiguration CFN not elapsed	The requested action cannot be performed due to that a COMMIT message was received previously, but the concerning CFN has not yet elapsed
Requested Configuration not	The concerning cell(s) do not support the requested configuration i.e.
Supported	power levels, Transport Formats, physical channel parameters
Requested Tx Diversity mode not supported	The concerning cell(s) do not support the requested transmit diversity mode
RL already Activated/ allocated	The Node B has already allocated an RL with the requested RL-id for this UE context
S-CPICH not supported	The concerning cell(s) do not support S-CPICH
SIB Orgination in Node B not Supported	The Node B does not support the origination of the requested SIB for the concerning cell
Synchronisation Failure	Loss of UL Uu synchronisation
Cell Synchronisation Adjustment not supported	The concerning cell(s) do not support Cell Synchronisation Adjustment
Tx diversity no longer supported	Tx diversity can no longer be supported in the concerning cell.
UL Radio Resources not Available	The Node B does not have sufficient UL radio resources available
UL SF not supported	The concerning cell(s) do not support the requested minimum UL SF
UL Shared Channel Type not supported	The concerning cell(s) do not support the Uplink Shared Channel Type
Unknown C-ID	The Node B is not aware of a cell with the provided C-ID
Unknown Local Cell ID	The Node B is not aware of a local cell with the provided Local Cell ID
Unspecified	Sent when none of the above cause values applies but still the cause is Radio Network layer related

Transport Network Layer cause	Meaning
Transport resource unavailable	The required transport resources are not available
Unspecified	Sent when none of the above cause values applies but still the cause is Transport Network layer related

Protocol cause	Meaning
Abstract Syntax Error (Reject)	The received message included an abstract syntax error and the
	concerning criticality indicated "reject" (see subclause 10.3)
Abstract Syntax Error (Ignore and	The received message included an abstract syntax error and the
Notify)	concerning criticality indicated "ignore and notify" (see subclause 10.3)
Abstract syntax error (falsely	The received message contained IEs in wrong order or with too many
constructed message)	occurrences (see subclause 10.3)
Message not Compatible with	The received message was not compatible with the receiver state (see
Receiver State	subclause 10.4)
Semantic Error	The received message included a semantic error (see subclause 10.4)
Transfer Syntax Error	The received message included a transfer syntax error (see subclause
	10.2)

Unspecified	Sent when none of the above cause values applies but still the cause is
	protocol related

Miscellaneous cause	Meaning
Control Processing Overload	Node B control processing overload
Hardware Failure	Node B hardware failure
Not enough User Plane Processing	Node B has insufficient user plane processing resources available
Resources	
O&M Intervention	Operation and Maintenance intervention related to Node B equipment
Unspecified	Sent when none of the above cause values applies and the cause is not
	related to any of the categories Radio Network Layer, Transport Network
	Layer or Protocol

9.2.1.7 CFN

Connection Frame Number for the radio connection, see ref. [17].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CFN			Integer (0255)	

9.2.1.8 CFN Offset

Void

9.2.1.9 C-ID

The C-ID (Cell identifier) is the identifier of a cell in one RNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
C-ID			INTEGER	
			(065535)	

9.2.1.9A Common Channels Capacity Consumption Law

The capacity consumption law indicates the CRNC how the Capacity Credit is consumed by NBAP set of procedures, depending on the allocated Spreading Factor. [FDD- For the PRACH, the reference spreading factor shall be the minimum possible spreading factor amongst the ones defined by the 'RACH slot format' IE(s) in the Common Transport Channel Setup or Reconfiguration procedures. For the PCPCH, the reference spreading factor shall be the minimum spreading factor computed from the TFCS as described in [8].]

This capacity consumption law indicates the consumption law to be used with the following procedures:

- Common Transport Channel Setup
- Common Transport Channel Deletion
- [FDD- Common Transport Channel Reconfiguration]

For the Common Transport Channel Setup procedure, the cost given in the consumption law shall be debited from the Capacity Credit, whereas it shall be credited to the Capacity Credit for the Common Transport Channel Deletion one.

[FDD- For the Common Transport Channel Reconfiguration procedure, the difference of the consumption cost for the new spreading factor and the consumption cost for the old spreading factor shall be debited from the Capacity Credit (or credited if this difference is negative).]

If the modelling of the internal resource capability of the Node B is modelled independently for the Uplink and Downlink, the "DL cost" shall be applied to the "DL or Global Capacity Credit" and the "UL Cost" shall be applied to the "UL Capacity Credit". If it is modelled as shared resources, both the "DL cost" and the "UL cost" shall be applied to the "DL or Global Capacity Credit".

[FDD- When the Common Transport Channel Setup, Deletion or Reconfiguration procedures are used, the Capacity Credit shall be updated considering all physical channels related in these procedures (S-CCPCH, PICH, PRACH, AICH, PCPCH, CD/CA-ICH and AP-AICH), i.e. one cost shall be credited to or debited from the Capacity Credit per physical channel.]

[FDD- The costs given in the consumption law are the costs per channelization code. When multiple channelization codes are used by a physical channel, the cost credited to or debited from the Capacity Credit for this physical channel shall be taken as N times the cost given in the consumption law, where N is the number of channelization codes.]

[TDD - When the Common Transport Channel Setup, or Deletion procedures are used, the Capacity Credit shall be updated considering all physical channels related in these procedures (S-CCPCH, PICH, PRACH), i.e. one cost shall be credited to or debited from the Capacity Credit per physical channel.]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SF allocation law		<maxnumberofs F></maxnumberofs 		[FDD - For each SF, cost of its allocation: the first instance corresponds to SF = 4, the second to SF = 8, the third to SF = 16 and so on.] [TDD - For each SF, cost of its allocation: the first instance corresponds to SF = 1, the second to SF = 2, the third to SF = 4 and so on.]
>DL cost	М		INTEGER (065535)	
>UL cost	М		INTEGER (065535)	

Range bound	Explanation
MaxNumberOfSF	Maximum number of Spreading Factors

9.2.1.9B Common Measurement Accuracy

The Common Measurement Accuracy IE indicates the accuracy of the common measurement.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CHOICE Common Measurement Accuracy				
> T _{UTRAN-GPS} Measurement Accuracy Class				
>>T _{UTRAN-GPS} Measurement Accuracy Class	М		T _{UTRAN-GPS} Accuracy Class 9.2.1.64C	

9.2.1.10 Common Measurement Object Type

The Common Measurement Object type indicates the type of object that the measurement is to be performed on.

IE/Group Name	Presence	Range	IE Type and	Semantics Description
			Reference	
Common Measurement			ENUMERAT	
Object Type			ED (CELL,	
			RACH,	
			CPCH,)	

9.2.1.11 Common Measurement Type

The Common Measurement Type identifies which measurement that shall be performed.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Common Measurement Type			ENUMERAT ED (Received total wide band power, Transmitted Carrier Power, Acknowledg ed PRACH preambles, UL Timeslot ISCP, Acknowledg ed PCPCH Access Preambles, Detected PCPCH Access Preambles,, UTRAN GPS Timing of Cell Frames for LCS, SFN- SFN Observed Time Difference)	UL Timeslot ISCP is used by TDD only, Acknowledged PRACH preambles, Acknowledged PCPCH Access Preambles, Detected PCPCH Access Preambles are used by FDD only

9.2.1.12 Common Measurement Value

The Common Measurement Value shall be the most recent value for this measurement, for which the reporting criteria were met.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
CHOICE Common				
Measurement Value				
>Transmitted Carrier Power				
>>Transmitted Carrier Power Value	M		INTEGER(0100)	According to mapping in [22] and [23]
>Received Total Wide Band Power				
>>Received total wide band power Value	M		INTEGER(0621)	According to mapping in [22] and [23]
>Acknowledged PRACH Preambles				FDD Only
>>Acknowledged PRACH Preamble Value	M		INTEGER(0240,)	According to mapping in [22]
>UL Timeslot ISCP				TDD Only
>>UL Timeslot ISCP	M		INTEGER(0127)	According to mapping in [23]
>Acknowledged PCPCH Access Preambles				FDD Only
>>Acknowledged PCPCH Access Preambles	M		INTEGER(015,)	According to mapping in [22]
>Detected PCPCH Access Preambles				FDD Only
>>Detected PCPCH Access Preambles	M		INTEGER(0240,)	According to mapping in [22]
>UTRAN GPS Timing of Cell Frames for LCS				
>>T _{UTRAN-GPS} Measurement Value Information	M		9.2.1.64A	
>SFN-SFN Observed Time Difference				
>> SFN-SFN Measurement Value Information	М		9.2.1.53E	

9.2.1.12A Common Measurement Value Information

The *Common Measurement Value Information* IE provides information both on whether or not the Common Measurement Value is provided in the message or not and if provided also the Common Measurement Value itself.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
CHOICE Measurement Availability Indicator	М				_	
>Measurement Available					-	
>>Common Measurement value	М		9.2.1.12		-	
>Measurement not Available			NULL		_	

9.2.1.13 Common Physical Channel ID

Common Physical Channel ID is the unique identifier for one common physical channel within a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Common Physical Channel ID			Integer(0 255)	

9.2.1.13A Common Physical Channel Status Information

IE/Group Name	Presence	Range	IE Type	Semantics	Criticality	Assigned
			and	Description		Criticality
			Reference			
Common Physical	М		9.2.1.13		_	
Channel ID						
Resource Operational	М		9.2.1.52		_	
State						
Availability Status	М		9.2.1.2		_	

9.2.1.14 Common Transport Channel ID

Common Transport Channel ID is the unique identifier for one common transport channel within a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Common Transport Channel ID			Integer(0 255)	

9.2.1.14A Common Transport Channel Information Response

The Common Transport Channel Information Response IE provides information for Common Transport Channels that have been established or modified.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Common Transport Channel ID	М		9.2.1.14		1	
Binding ID	0		9.2.1.4		_	
Transport Layer Address	0		9.2.1.63		_	

9.2.1.14B Common Transport Channel Status Information

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
Common Transport Channel ID	М		9.2.1.14		-	
Resource Operational State	М		9.2.1.52		_	
Availability Status	М		9.2.1.2		1	

9.2.1.15 Communication Control Port ID

A Communication Control Port corresponds to one signalling bearer between the RNC and Node B for the control of Node B Communication Contexts. Node B may have multiple Communication Control Ports (one per Traffic Termination Point). The Communication Control Port is selected at creation of the Node B Communication Context. The Communication Control Port ID is the identifier of the Communication Control Port.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Communication Control Port ID			INTEGER (065535)	

9.2.1.16 Configuration Generation ID

The Configuration Generation ID describes the generation of the configuration of logical resources in a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Configuration Generation ID			Integer(0 255)	Value '0' means "No configuration". At possible wraparound of the ID counter in CRNC the value '0' shall not be used.

9.2.1.17 Criticality Diagnostics

The *Criticality Diagnostics* IE is sent by a Node B or the CRNC when parts of a received message have not been comprehended or are missing, or if the message contained logical errors. When applicable, it contains information about which IEs that were not comprehended or were missing.

For further details on how to use the Criticality Diagnostics IE, see Annex C.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Procedure ID		01		Procedure ID is to be used if Criticality Diagnostics is part of Error Indication procedure, and not within the response message of the same procedure that caused the error
>Procedure Code	M		INTEGER (0255)	
>Ddmode	M		ENUMERAT ED (FDD, TDD, Common)	Common = common to FDD and TDD.
Triggering Message	0		ENUMERAT ED(initiating message, successful outcome, unsuccessful outcome, outcome,	The Triggering Message is used only if the Criticality Diagnostics is part of Error Indication.
Procedure Criticality	0		ENUMERAT ED(reject, ignore, notify)	This Procedure Criticality is used for reporting the Criticality of the Triggering message (Procedure).
Transaction ID	0		Transaction ID 9.2.1.62	
Information Element Criticality Diagnostics		0 to <maxnoof errors=""></maxnoof>		
>IE Criticality	М	difference	ENUMERAT ED(reject, ignore, notify)	The IE Criticality is used for reporting the criticality of the triggering IE. The value 'ignore' shall never be used.
>IE ID	М		INTEGER (065535)	The IE ID of the not understood or missing IE
>Repetition Number	0		INTEGER (0255)	The Repetition Number IE gives In case of a not understood IE: The number of occurrences of the reported IE up to and including the not understood occurrence In case of a missing IE: The number of occurrences up to but not including the missing occurrence. Note: All the counted occurrences of the reported IE must have the same topdown hierachical message structure of IEs with assigned criticality above them.
>Message Structure	0		9.2.1.45A	The Message Structure IE describes the structure where the not understood or missing IE was detected. This IE is included if the not understood IE is not the top

		lev	el of the message.
>Type of Error	M	ENUMERAT	
		ED(not	
		understood,	
		missing,)	ļ

Range bound	Explanation
Maxnooferrors	Maximum no. of IE errors allowed to be reported with a single message.

9.2.1.18 CRNC Communication Context ID

The CRNC Communication Context ID is the identifier of the Communication Context in the CRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CRNC Communication Context ID			INTEGER (02^20 -1)	2^20-1 is reserved value to indicate all the CRNC communication contexts that can be reached by the communication control port (All CRNCCC).

9.2.1.19 DCH Combination Indicator

Void

9.2.1.20 DCH ID

The DCH ID is the identifier of an active dedicated transport channel. It is unique for each active DCH among the active DCHs simultaneously allocated for the same UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DCH ID			INTEGER	
			(0255)	

9.2.1.20A Dedicated Channels Capacity Consumption Law

The capacity consumption law indicates the CRNC how the Capacity Credit is consumed by NBAP set of procedures, depending on the [FDD - allocated Spreading Factor and the RL/RLS situation] [TDD – allocated Spreading Factor on each DPCH and the assigned timeslot]. [FDD- In uplink, the reference spreading factor shall be the minimum spreading factor signalled in the Radio Link Setup Request message (*Min UL Channelisation Code length* IE).].

This capacity consumption law indicates the consumption law to be used with the following procedures:

- Radio Link Setup
- Radio Link Addition
- Radio Link Reconfiguration
- Radio Link Deletion
- [TDD Physical Shared Channel Reconfiguration]

For the Radio Link Setup and Radio Link Addition procedures, the cost given in the consumption law shall be debited from the Capacity Credit, whereas it shall credited to the Capacity Credit for the Radio Link Deletion procedure. For the Radio Link Reconfiguration procedure, the difference of the consumption cost for the new spreading factor and the

consumption cost for the old spreading factor shall be debited from the Capacity Credit (or credited when this difference is negative).

If the modelling of the internal resource capability of the Node B is modelled independently for the Uplink and Downlink, the DL cost shall be applied to the DL or Global Capacity Credit and the UL Cost shall be applied to the UL Capacity Credit. If it is modelled as shared resources, both the DL costs" and the UL costs shall be applied to the DL or Global Capacity Credit.

[FDD - For a Radio Link creating a Radio Link Set (first RL of a RLS), the cost for the RL (cost 2) and RLS (cost 1) shall be taken into account. When adding a Radio Link to a Radio Link Set, only the RL cost (cost 2) shall be taken into account.

In the case of multiple Radio Links are established in one procedure, for every created Radio Link Set the first Radio Link is always the Radio Link with the lowest repetition number.]

[FDD- When a PDSCH is allocated in the Radio Link Setup procedure, the processing cost associated to this PDSCH, equal to the DL cost RL, shall be debited from the Capacity Credit, in addition to the processing cost of the radio links. In a similar way, this cost shall be credited to the Capacity Credit, when a PDSCH is deleted and the difference between the new cost and the old cost shall be debited from the Capacity Credit (or credited if this difference is negative) when a PDSCH is reconfigured.]

[FDD- The costs given in the consumption law are the costs per channelization code. When multiple channelization codes are used by either the radio links or the PDSCH, the cost credited to or debited from the Capacity Credit shall be taken as N times the cost for one code, where N is the number of channelization codes.]

[TDD –The cost for a radio link is a sum of the costs for each DPCH. For the first DPCH assigned to any user in a cell within a timeslot, the initial cost for a DPCH in a timeslot (cost 1) and the cost for a DPCH (cost 2) shall be taken into account. For any DPCH that is not the first DPCH assigned for any user in a cell within a timeslot, only the cost for a DPCH (cost 2) shall be taken into account.

[TDD – The cost for shared channels is a sum of the costs for each PDSCH and PUSCH assigned to a PUSCH or PDSCH set. For the first PDSCH or PUSCH assigned to any user in a cell within a timeslot, the initial cost for a PDSCH/PUSCH in a timeslot (cost 1) and the cost for a PDSCH/PUSCH (cost 2) shall be taken into account. For any PDSCH/PUSCH that is not the first PDSCH/PUSCH assigned to any user in a cell within a timeslot, only the cost for a PDSCH/PUSCH (cost 2) shall be taken into account.

[TDD - In case of Physical Shared Channel Reconfiguration, the sum of the consumption cost of the each PDSCH/PUSCH of the previous configuration shall be credited to the capacity credit, and the sum of the consumption cost of each PDSCH/PUSCH of the new configuration shall be subtracted from the capacity credit.]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SF allocation law		1 <maxnumberof SF></maxnumberof 		[FDD - For each SF, cost of its allocation: the first instance corresponds to SF = 4, the second to SF = 8, the third to SF = 16 and so on.] [TDD - For each SF, cost of its allocation: the first instance corresponds to SF = 1, the second to SF = 2, the third to SF = 4 and so on.]
>DL cost 1	М		INTEGER (065535)	[FDD – This is the cost of a RLS,] [TDD – This is the additional cost of the first DPCH/PDSCH/PUSCH assigned to any user in a cell within a timeslot.]
>DL cost 2	M		INTEGER (065535)	[FDD – This is the cost of a RL,] [TDD – This is the cost of a DPCH/PDSCH/PUSCH]
>UL cost 1	М		INTEGER (065535)	FDD – This is the cost of a RLS,] [TDD – This is the additional cost of the first DPCH/PDSCH/PUSCH assigned to any user in a cell within a timeslot.]
>UL cost 2	М		INTEGER (065535)	[FDD – This is the cost of a RL,] [TDD – This is the cost of a DPCH/PDSCH/PUSCH.]

Range bound	Explanation
MaxNumberOfSF	Maximum number of Spreading Factors

9.2.1.20B DL or Global Capacity Credit

The capacity credit indicates to the CRNC the Downlink or global capacity of a Local Cell or a Local Cell Group.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL or Global Capacity Credit			INTEGER (065535)	

9.2.1.20C DCH Information Response

 $\label{thm:condition} The \textit{DCH Information Response} \ IE \ provides \ information \ for \ DCHs \ that \ have \ been \ established \ or \ modified.$

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
DCH Information Response		1 to <maxnoofdc Hs></maxnoofdc 		Only one DCH per set of coordinated DCH shall be included	T	
>DCH ID	M		9.2.1.20		ı	
>Binding ID	0		9.2.1.4		1	
>Transport Layer Address	0		9.2.1.63		_	

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCH per UE.

9.2.1.21 DL Power

The DL Power IE indicates a power level relative to the [FDD-primary CPICH power] [TDD-primary CCPCH power] configured in a cell [FDD-If referred to a DPCH, it indicates the power of the transmitted DPDCH symbols]. [FDD-If referred to a DL-DPCCH for CPCH, it indicates the power of the transmitted pilot symbols].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL Power			Enumerated(-35+15dB)	Step 0.1dB

9.2.1.22 Dedicated Measurement Object Type

The Dedicated Measurement Object type indicates the type of object that the measurement is to be performed on.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated Measurement Object Type			ENUMERAT ED (RL, RLS,	
			ALL RL, ALL RLS,)	

9.2.1.23 Dedicated Measurement Type

The Dedicated Measurement Type identifies the type of measurement that shall be performed.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated Measurement Type			ENUMERAT ED (SIR, SIR Error, Transmitted Code Power, RSCP, Rx Timing Deviation, Round Trip Time,, Rx Timing Deviation LCR)	RSCP is used by TDD only, Rx Timing Deviation is used by 3.84Mcps TDD only, Rx Timing Deviation LCR is used by 1.28 Mcps TDD only, Round Trip Time, SIR Error are used by FDD only.

Note: For definitions of the measurement types refer to [4] and [5].

9.2.1.24 Dedicated Measurement Value

The Dedicated Measurement Value shall be the most recent value for this measurement, for which the reporting criteria were met.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
CHOICE Dedicated				
Measurement Value				
>SIR Value				
>>SIR value	М		INTEGER(063)	According to mapping in [22] and [23]
>SIR Error Value				FDD only
>>SIR error Value	М		INTEGER(0. .125)	According to mapping in [22]
>Transmitted Code Power Value				
>>Transmitted Code Power Value	M		INTEGER(0. .127)	According to mapping in [22] and [23] Values 0 to 9 and 123 to 127 shall not be used.
>RSCP				TDD only
>>RSCP	М		INTEGER(0. .127)	According to mapping in [23]
>Rx Timing Deviation Value			·	3.84Mcps TDD only
>>Rx Timing Deviation	М		INTEGER(08191)	According to mapping in [23]
>Round Trip Time			,	FDD only
>>Round Trip Time	М		INTEGER(032767)	According to mapping in [22]
>Rx Timing Deviation Value LCR			,	1.28Mcps TDD only
>>Rx Timing Deviation LCR	М		INTEGER(0255)	According to mapping in [23]

9.2.1.24A Dedicated Measurement Value Information

The *Dedicated Measurement Value Information* IE provides information both on whether or not the Dedicated Measurement Value is provided in the message or not and if provided also the Dedicated Measurement Value itself.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
CHOICE Measurement Availability Indicator	М				1	
>Measurement Available					ı	
>>Dedicated Measurement Value	М		9.2.1.24		1	
>>CFN	0		9.2.1.7	Dedicated Measuremen t Time Reference	1	
>Measurement not Available			NULL		-	

9.2.1.24B DGPS Corrections

The DGPS Corrections IE contains DGPS information used by the UE Positioning A-GPS method. For further details on the meaning of parameters, see [28].

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
GPS TOW	М		INTEGER (0604799)	Time in seconds. This field indicates the baseline time for which the corrections are valid
Status/Health	M		ENUMERAT ED (UDRE scale 1.0, UDRE scale 0.75, UDRE scale 0.5, UDRE scale 0.3, UDRE scale 0.1, no data, invalid data)	This field indicates the status of the differential corrections
Satellite Information		1 <maxnosat></maxnosat>		
>SatID	M		INTEGER (063)	Satellite ID
>IODE	M		Bit string(8)	This IE is the sequence number for the ephemeris for the particular satellite. It can be used to determine if new ephemeris is used for calculating the corrections that are provided. This eightbit IE is incremented for each new set of ephemeris for the satellite and may occupy the numerical range of [0, 239] during normal operations.
>UDRE	M		ENUMERAT ED (UDRE ≤1.0m, 1.0m < UDRE ≤ 4.0m, 4.0m < UDRE ≤ 8.0m, 8.0m < UDRE)	User Differential Range Error. This field provides an estimate of the uncertainty (1- o) in the corrections for the particular satellite. The value in this field shall be multiplied by the UDRE Scale Factor in the common Corrections Status/Health field to determine the final UDRE estimate for the particular satellite
>PRC	М		INTEGER (-20472047)	Pseudo Range Correction Scaling factor 0.32 meters
>Range Correction Rate	M		INTEGER (-127 127)	Scaling factor 0.032 m/s

Range Bound	Explanation
MaxNoSat	Maximum number of satellites for which information can be
	provided

9.2.1.25 Diversity Control Field

The Diversity Control Field indicates if the current RL may, must or must not be combined with the already existing RLs.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Control Field			ENUMERAT	
			ED(May,	
			Must, Must	
			not)	

9.2.1.26 Diversity Indication

The Diversity Indication indicates if the RL has been or has not been combined with another RL.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Indication			ENUMERAT ED	
			(Combined,	
			not	
			combined)	

9.2.1.27 DSCH ID

The DSCH ID uniquely identifies a DSCH within a Node B Communication Context.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DSCH ID			INTEGER (0255)	

9.2.1.27A DSCH Information Response

The DSCH Information Response IE provides information for DSCHs that have been established or modified.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
DSCH Information Response		1 to <numof DSCH></numof 			_	
>DSCH ID	М		9.2.1.27		-	
>Binding ID	0		9.2.1.4		_	
>Transport Layer Address	0		9.2.1.63		_	

Range bound	Explanation
MaxnoofDSCHs	Maximum number of DSCHs for one UE.

9.2.1.28 DSCH Transport Format Set

Void

9.2.1.29 DSCH Transport Format Combination Set

Void

9.2.1.29A End Of Audit Sequence Indicator

Indicates if the AUDIT RESPONSE message ends an audit sequence or not.

IE/Group Name	Presence	Range	IE type and	Semantics description
			reference	
End Of Audit Sequence			ENUMERAT	End of audit sequence = all
Indicator			ED(end of	audit information has been
			audit	provided by the Node B;
			sequence,	Not end of audit sequence =
			not end of	more audit information is
			audit	available;
			sequence)	

9.2.1.29B FN reporting indicator

Frame Number reporting indicator.

Indicates if the SFN or CFN shall be included together with the reported measurement value.

IE/Group Name	Presence	Range	IE type and	Semantics description
			reference	
FN reporting indicator			ENUMERAT	
			ED(FN	
			Reporting	
			Required,	
			FN	
			Reporting	
			Not	
			Required)	

9.2.1.30 Frame Handling Priority

This parameter indicates the priority level to be used during the lifetime of the DCH/DSCH for temporary restriction of the allocated resources due overload reason.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Frame Handling Priority			INTEGER (015)	0=lower priority, 15=higher priority

9.2.1.31 Frame Offset

Frame Offset is the required offset between the dedicated channel downlink transmission frames (CFN, Connection Frame Number) and the broadcast channel frame offset (Cell Frame Number). The Frame_offset is used in the translation between Connection Frame Number (CFN) on Iub/Iur and least significant 8 bits of SFN (System Frame Number) on Uu. The Frame Offset is UE and cell specific.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Frame Offset			INTEGER (0255)	Frames

9.2.1.31A IB_OC_ID

The IB OC ID identifies the occurrence of a specific Information Block.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IB OC ID			INTEGER (1 16)	

9.2.1.31B GPS Navigation Model & Time Recovery

This IE contains subframes 1 to 3 of the GPS navigation message. For further details on the meaning of parameters, see [27].

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Navigation Message 1to3		1 <maxnosat></maxnosat>		
>Transmission TOW	М		INTEGER	Time of the Week when the
			(01048575)	message is broadcast.
>SatID	M		INTEGER	Satellite ID of the satellite
			(063)	from which the information is
				obtained
>TLM Message	M		Bit string(14)	
>Tlm Revd (C)	M		Bit string(2)	
>HO-Word	M		Bit string(22)	
>WN	M		Bit string(10)	
>C/A or P on L2	M		Bit string(2)	
>User Range Accuracy	M		Bit string(4)	
Index				
>SV Health	M		Bit string(6)	
>IODC	M		Bit string(10)	
>L2 P Data Flag	M		Bit string(1)	
>SF 1 Reserved	M		Bit string(87)	
>T _{GD}	M		Bit string(8)	
>t _{oc}	M		Bit string(16)	
>af ₂	M		Bit string(8)	
>af ₁	M		Bit string(16)	
>af ₀	M		Bit string(22)	
>C _{rs}	M		Bit string(16)	
>∆n	M		Bit string(16)	
>M ₀	M		Bit string(32)	
>C _{uc}	M		Bit string(16)	
>e	M		Bit string(32)	
>C _{us} >(A) ^{1/2}	M		Bit string(16)	
>(A) ^{1/2}	M		Bit string(32)	
>t _{oe}	M		Bit string(16)	
>Fit Interval Flag	M		Bit string(1)	
>AODO	M		Bit string(5)	
>C _{ic}	M		Bit string(16)	
>OMEGA ₀	M		Bit string(32)	
>C _{is}	М		Bit string(16)	
>i ₀	M		Bit string(32)	
>C _{rc}	М		Bit string(16)	
>ω	M		Bit string(32)	
>OMEGAdot	М		Bit string(24)	
>ldot	М		Bit string(14)	
>Spare/zero fill	М		Bit string(20)	

Range Bound	Explanation
MaxNoSat	Maximum number of satellites for which information can be
	provided

9.2.1.31C GPS Ionospheric Model

This IE provides the information regarding the GPS Ionospheric Model. For further details on the meaning of parameters, see [27].

IE/Group Name	Presence	Range	IE Type and	Semantics Description
			Reference	
α_0	M		Bit string(8)	
α_1	M		Bit string(8)	
α_2	M		Bit string(8)	
α ₃	M		Bit string(8)	
β ₀	M		Bit string(8)	
β ₁	M		Bit string(8)	
β_2	M		Bit string(8)	
β ₃	M		Bit string(8)	

9.2.1.31D GPS UTC Model

This IE provides the information regarding the GPS UTC Model. For further details on the meaning of parameters, see [27].

IE/Group name	Presence	Range	IE Type and	Semantics description
			Reference	
A ₁	M		Bit string(24)	
A ₀	M		Bit string(32)	
t _{ot}	M		Bit string(8)	
Δt_{LS}	M		Bit string(8)	
WN_t	М		Bit string(8)	
WN _{LSF}	M		Bit string(8)	
DN	М		Bit string(8)	
Δt_{LSF}	М		Bit string(8)	

9.2.1.31E GPS Real-Time Integrity

This IE provides the information regarding the status of the GPS constellation. For further details on the meaning of parameters, see [27].

IE/Group name	Presence	Range	IE Type and Reference	Semantics description
CHOICE Bad Satellites Presence	M			
>Bad Satellites				
>>Satellite information		1 <maxn oSat></maxn 		
>>>BadSatID	М		INTEGER (063)	Satellite ID
>No Bad Satellites			NULL	

Range Bound	Explanation			
MaxNoSat	Maximum number of satellites for which information can be			
	provided			

9.2.1.31F GPS Almanac

This IE provides the information regarding the GPS Almanac. For further details on the meaning of parameters, see [27].

IE/Group name	Presence	Range	IE Type and Reference	Semantics description
WNa	М		Bit string(8)	
Satellite information	M	1,, <maxno Sat></maxno 		
>DataID	М		INTEGER (03)	
>SatID	M		INTEGER (063)	Satellite ID
>e	M		Bit string(16)	
>t _{oa}	M		Bit string(8)	
>δί	M		Bit string(16)	
>OMEGADOT	M		Bit string(16)	
>SV Health	М		Bit string(8)	
>A ^{1/2}	М		Bit string(24)	
>OMEGA ₀	M		Bit string(24)	
>M ₀	M		Bit string(24)	
>ω	M		Bit string(24)	
>af ₀	М		Bit string(11)	
>af ₁	M		Bit string(11)	
SV Global Health	0		Bit string(364)	

Range Bound	Explanation			
MaxNoSat	Maximum number of satellites for which information can be			
	provided			

9.2.1.31G GPS Receiver Geographical Position (GPS RX Pos)

The GPS Receiver Geographical Position is used to identify the geographical coordinates of a GPS receiver relevant for a certain Information Exchange Object.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Latitude Sign	М		ENUMERAT ED (North, South)	
Degrees of Latitude	М		INTEGER (02 ²³ -1)	The IE value (N) is derived by this formula: N≤2 ²³ X /90 < N+1 X being the latitude in degree (0° 90°)
Degrees of Longitude	М		INTEGER (-2 ²³ 2 ²³ -1)	The IE value (N) is derived by this formula: N≤2 ²⁴ X /360 < N+1 X being the longitude in degree (-180°+180°)
Direction of Altitude	М		ENUMERAT ED (Height, Depth)	
Altitude	M		INTEGER (02 ¹⁵ -1)	The relation between the value (N) and the altitude (a) in meters it describes is N≤ a <n+1, except="" for="" n="2<sup">15-1 for which the range is extended to include all greater values of (a).</n+1,>

9.2.1.32 IB_SG_DATA

Segment as defined in ref. [18].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IB_SG_DATA			Bit String	Contains "SIB data fixed" or "SIB data variable" in segment as encoded in ref: [18].

9.2.1.33 IB_SG_POS

The lowest position of a specific Information Block segment in the SFN cycle (IB_SG_POS < IB_SG_REP).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IB_SG_POS			INTEGER (0 4094)	Only even positions allowed. See ref. [18]

9.2.1.34 IB SG REP

Repetition distance for an Information Block segment. The segment shall be transmitted when SFN mod IB_SG_REP = IB_SG_POS.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IB_SG_REP			ENUMERAT	Repetition period for the IB
			ED (4, 8, 16,	segment in frames
			32, 64, 128,	
			256, 512,	
			1024, 2048,	
			4096)	

9.2.1.35 IB Type

The IB Type identifies a specific system information block.

IE/Group Name	Presence	Range	IE type and	Semantics description
ID T			reference	
IB Type			Enumerated	
			(MIB, SB1,	
			SB2, SIB1,	
			SIB2	
			SIB3, SIB4,	
			SIB5, SIB6,	
			SIB7, SIB8,	
			SIB9, SIB10,	
			SIB11,	
			SIB12,	
			SIB13,	
			SIB13.1	
			SIB13.2,	
			SIB13.3,	
			SIB13.4,	
			SIB14,	
			SIB15,	
			SIB15.1,	
			SIB15.2,	
			SIB15.3,	
			SIB16,,	
			SIB17,	
			SIB15.4,	
			SIB18)	

9.2.1.36 Indication Type

The indication type shall indicate the category of a failure with respect to its impact on the logical resources supported at Node B.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Indication Type			ENUMERAT ED (No Failure, Service Impacting,)	Service Impacting – The failure has impacted on the logical resources supported at Node B.

9.2.1.36A Information Exchange Object Type

The Information Exchange Object type indicates the type of object that the requested information shall be valid for.

IE/Group Name	Presence	Range	IE Type and	Semantics Description
			Reference	
Information Exchange Object			ENUMERAT	
Туре			ED (Cell,	
)	

9.2.1.36B Information Report Characteristics

The information report characteristics defines how the reporting shall be performed.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
CHOICE Information Report Characteristics Type				
>OnDemand			NULL	
>Periodic				
>>Information Report Periodicity	M		ENUMERAT ED (1min1hr,) step 1min, (1hr24hr,) step 1hr,	The frequency with which the Node B shall send information reports.
>On Modification				
>>Information Threshold	0	•	9.2.1.36E	

9.2.1.36C Information Exchange ID

The Information Exchange ID uniquely identifies any requested information per Node B.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Information Exchange ID	M		INTEGER (0	
			2^20-1)	

9.2.1.36D Information Type

The Information Type indicates which kind of information the Node B shall provide.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Information Type Item	M		ENUMERAT ED (GPS Information, DGPS Corrections, GPS RX Pos,)	
GPS Information	C-GPS	0 <maxnogpsite ms></maxnogpsite 		
> GPS Information Item			ENUMERAT ED (GPS Navigation Model & Time Recovery, GPS Ionospheric Model, GPS UTC Model, GPS Almanac, GPS Real- Time Integrity,)	

Condition	Explanation		
GPS	The IE shall be present if the Information Type Item IE		
	indicates "GPS Information".		

Range Bound	Explanation
MaxNoGPSItems	Maximum number of GPS Information Items supported in one
	Information Exchange

9.2.1.36E Information Threshold

The Information Threshold indicates which kind of information shall trigger the Information Reporting procedure.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
CHOICE Information Type Item	М			
>DGPS				
>>PRC Deviation	M		ENUMERAT ED (1, 2, 5, 10,)	PRC deviation in meters from the previously reported value, which shall trigger a report

9.2.1.36F IPDL Indicator

Indicates if IPDL periods shall be active or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IPDL Indicator			ENUMERAT	
			ED(active,	
			inactive)	

9.2.1.37 Limited Power Increase

Void.

9.2.1.37A Local Cell Group ID

The Local Cell Group ID represents resources in the Node B, which has been pooled from a capacity point of view.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Local Cell Group ID			Local Cell ID	
			9.2.1.38	

9.2.1.38 Local Cell ID

The local cell ID represents resources in Node B that can be used for the configuration of a cell.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Local Cell ID			INTEGER(0 26843545 5)	

9.2.1.39 Maximum DL Power Capability

This parameter indicates the maximum DL power capability for a local cell within Node B. The reference point is the antenna connector.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Maximum DL Power Capability			ENUMERAT ED(0500)	dBm, granularity 0.1 dB 0: 0 dBm 1: 0.1 dBm
				 499: 49.9 dBm 500: 50.0 dBm

9.2.1.40 Maximum Transmission Power

Maximum Transmission Power is maximum power for all downlink channels added together, that is allowed to be used simultaneously in a cell. The reference point is the antenna connector.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Maximum transmission Power			ENUMERAT ED(0,500)	Unit dBm Granularity 0.1 dB 0: 0 dBm 1: 0.1 dBm 499: 49.9 dBm 500: 50.0 dBm

220

9.2.1.40A Measurement Availability Indicator

Indicates if measurement is available or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Measurement Availability Indicator			ENUMERATE D(measureme nt available,	
			measurement not available)	

9.2.1.41 Measurement Filter Coefficient

The Measurement Filter Coefficient determines the amount of filtering to be applied for measurements.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Measurement Filter				
Coefficient			ENUMERAT	
			ED (0, 1, 2,	
			3, 4, 5, 6, 7,	
			8, 9, 11, 13,	
			15, 17, 19,	
)	

9.2.1.42 Measurement ID

The Measurement ID uniquely identifies any measurement per (Node B- or communication) control port.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
Measurement ID			Integer(0	
			2^20-1)	

9.2.1.43 Measurement Increase/Decrease Threshold

The Measurement Increase/Decrease Threshold defines the threshold that shall trigger Event C or D.

Information Element / Group Name	Presence	Range	IE Type and Reference	Semantics Description
CHOICE Measurement Increase/Decrease Threshold				
>Received Total Wide Band Power				
>>Received total wide band power	M		INTEGER(0 620)	0: 0 dB 1: 0.1 dB 2: 0.2 dB
>Transmitted Carrier Power				620: 62dB
>>Transmitted Carrier Power	М		INTEGER(0100)	According to mapping in [22] and [23]
>Acknowledged PRACH Preambles				FDD only
>>Acknowledged PRACH Preambles	М		INTEGER(0240,)	According to mapping in [22]
>UL Timeslot ISCP				TDD only
>>UL Timeslot ISCP	M		INTEGER(0 126)	0: 0 dB 1: 0.5 dB 2: 1 dB
				126: 63 dB, [TDD only]
>SIR	 			0.015
>>SIR	M		INTEGER(0 62)	0: 0 dB 1: 0.5 dB 2: 1 dB
				62: 31dB
>SIR Error				FDD only
>>SIR Error	M		INTEGER(0 124)	0: 0 dB 1: 0.5 dB 2: 1 dB
>Transmitted Code Power				124: 62 dB
>>Transmitted Code Power	M		INTEGER(0	0: 0 dB
>> Transmitted Code i ower			112,)	1: 0.5 dB 2: 1 dB
DOOR				112: 56 dB
>RSCP >>RSCP	M	<u> </u>	INTEGER(0	TDD only 0: 0 dB
>>NOUF	IVI		126)	1: 0.5 dB 2: 1 dB
				126: 63 dB
>Round Trip Time			11 17 0 7 5 7 5	FDD only
>>Round Trip Time	M		INTEGER(0 32766)	0: 0 chips 1: 0.0625 chips 2: 0.1250 chips
				32766: 2047.875 chips
>Acknowledged PCPCH Access Preambles				FDD only
>>Acknowledged PCPCH Access Preambles	М		INTEGER(0 15,)	According to mapping in [22]
>Detected PCPCH Access Preambles			. ,	FDD only
>>Detected PCPCH Access	M		INTEGER(0	According to mapping in [22]
Preambles			240,)	

9.2.1.44 Measurement Threshold

The Measurement Threshold defines which threshold that shall trigger Event A, B, E, F or On Modification.

Information Element / Group Name	Presence	Range	IE Type and Reference	Semantics Description
CHOICE Measurement				
Threshold				
>Received Total Wide Band				
>>Received total wide band	M		INTEGER(0.	According to mapping in [22] and
power			.621)	[23]
>Transmitted Carrier Power				
>>Transmitted Carrier Power	M		INTEGER(0100)	According to mapping in [22] and [23]
>Acknowledged PRACH Preambles				FDD only
>>Acknowledged PRACH Preambles	М		INTEGER(0240,)	According to mapping in [22]
>UL Timeslot ISCP				TDD only
>>UL Timeslot ISCP	М		INTEGER(0127)	According to mapping in [23]
>SIR				
>>SIR	M		INTEGER(063)	According to mapping in [22] and [23]
>SIR Error				FDD only
>>SIR Error	М		INTEGER(0125)	According to mapping in [22]
>Transmitted Code Power				
>>Transmitted Code Power	M		INTEGER(0127)	According to mapping in [22] and [23]
>RSCP				TDD only
>>RSCP	M		INTEGER(0127)	According to mapping in [23]
>Rx Timing Deviation				3.84Mcps TDD only
>>Rx Timing Deviation	M		INTEGER(08191)	According to mapping in [23]
>Round Trip Time				FDD only
>>Round Trip Time	М		INTEGER(032767)	According to mapping in [22]
>Acknowledged PCPCH Access Preambles				FDD only
>>Acknowledged PCPCH Access Preambles	М		INTEGER(015,)	According to mapping in [22]
>Detected PCPCH Access Preambles				FDD only
>>Detected PCPCH Access Preambles	М		INTEGER(0240,)	According to mapping in [22]
>UTRAN GPS Timing of Cell Frames for LCS				
>>T _{UTRAN-GPS} Measurement Threshold Information	М		9.2.1.64B	
>SFN-SFN Observed Time Difference				
>>SFN-SFN Measurement Threshold Information	М		9.2.1.53C	

9.2.1.45 Message Discriminator

This field is used to discriminate between Dedicated NBAP and Common NBAP messages.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator			ENUMERAT	
			ED(Common	
			,Dedicated)	

9.2.1.45A Message Structure

The *Message Structure* IE gives information for each level with assigned criticality in an hierarchical message structure from top level down to the lowest level above the reported level for the occured error (reported in the *Information Element Criticality Diagnostics* IE).

IE/Group Name	Presence	Range	IE type and	Semantics description	Criticality	Assigned Criticality
			reference			
Message structure		1 to <maxnoofle vels></maxnoofle 		The first repetition of the Message Structure IE corresponds to the top level of the message. The last repetition of the Message Structure IE corresponds to the level above the reported level for the occured error of the message.	GLOBAL	ignore
>IE ID	М		INTEGER (065535)	The IE ID of this level's IE containing the not understood or missing IE.	-	
>Repetition Number	0		INTEGER (1256)	The Repetition Number IE gives, if applicable, the number of occurrences of this level's reported IE up to and including the occurrence containing the not understood or missing IE. Note: All the counted occurrences of the reported IE must have the same topdown hierachical message structure of IEs with assigned criticality above them.	-	

Range bound	Explanation
maxnooflevels	Maximum no. of message levels to report. The value for
	maxnooflevels is 256.

9.2.1.46 Message Type

The Message Type uniquely identifies the message being sent.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Procedure ID	М	1		•
>Procedure Code	M		ENUMERATED (COMMON TRANSPORT CHANNEL SETUP, COMMON TRANSPORT CHANNEL RECONFIGURATION, COMMON TRANSPORT CHANNEL DELETION, BLOCK RESOURCE, AUDIT REQUIRED, AUDIT, COMMON MEASUREMENT INITIATION, COMMON MEASUREMENT REPORTING, COMMON MEASUREMENT FAILURE, CELL SETUP, CELL SETUP, CELL RECONFIGURATION, CELL DELETION, RESOURCE STATUS INDICATION, SYSTEM INFORMATION UPDATE, RL SETUP, RL ADDITION, SYNCHRONISED RL RECONFIGURATION PREPARATION, SYNCHRONISED RL RECONFIGURATION CANCELLATION, UNSYNCHRONISED RL RECONFIGURATION CANCELLATION, UNSYNCHRONISED RL RECONFIGURATION, RL DELETION, DL POWER CONTROL, DL POWER CONTROL, DL POWER TIMESLOT CONTROL, DEDICATED MEASUREMENT INITIATION, DEDICATED MEASUREMENT TERMINATION, DEDICATED MEASUREMENT TERMINATION, DEDICATED MEASUREMENT TERMINATION, DEDICATED MEASUREMENT FAILURE, RL FAILURE, RL RESTORATION, COMPRESSED MODE COMMAND, ERROR INDICATION, PHYSICAL SHARED CHANNEL RECONFIGURATION, RESET,	
			INFORMATION EXCHANGE INITIATION, INFORMATION REPORTING, INFORMATION EXCHANGE TERMINATION, INFORMATION EXCHANGE FAILURE, CELL SYNCHRONISATION INITIATION, CELL SYNCHRONISATION RECONFIGURATION, CELL SYNCHRONISATION REPORTING, CELL SYNCHRONISATION TERMINATION, CELL SYNCHRONISATION FAILURE, CELL SYNCHRONISATION ADJUSTMENT)	
>Ddmode	М		ENUMERATED (FDD, TDD, Common,)	Common = common to FDD and TDD.
Type of Message	М		ENUMERATED (Initiating Message, Successful Outcome, Unsuccessful Outcome, Outcome)	

9.2.1.46A Minimum DL Power Capability

This parameter indicates the minimum DL power capability for a local cell within Node B. The reference point is the antenna connector.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Minimum DL Power Capability			ENUMERAT ED(0800)	dBm, granularity 0.1 dB 0: -30.0 dBm 1: -29.9 dBm
				799: 49.9 dBm 800: 50.0 dBm

9.2.1.47 Minimum Spreading Factor

This parameter indicates the minimum spreading factor supported at a cell within the Node B.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Minimum Spreading Factor			Enumerated(4, 8, 16, 32, 64, 128, 256, 512)	

9.2.1.47A N_INSYNC_IND

This parameter defines the number of successive in-sync indications after which the Node B shall trigger the Radio Link Restore procedure (see also ref. [10] and [21]).

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
N_INSYNC_IND			Integer (1, 2,, 256)	

9.2.1.47B N_OUTSYNC_IND

This parameter defines the number of consecutive out-of-sync indications after which the timer T_RLFAILURE shall be started (see also ref. [10] and [21]).

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
N_OUTSYNC_IND			Integer (1, 2,	
			256)	

9.2.1.47C Neighbouring FDD Cell Measurement Information

This IE provides information on the FDD neighbouring cells used for the purpose of measurements.

IE/Group Name	Presence	Range	IE type and	Semantics description
			reference	
UC-ld	М		9.2.1.65B	
UARFCN	М		9.2.1.65	Corresponds to Nd [14]
Primary Scrambling Code	M		9.2.2.34	

9.2.1.47D Neighbouring TDD Cell Measurement Information

This IE provides information on the 3.84Mcps TDD neighbouring cells used for the purpose of measurements.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UC-ld	M		9.2.1.65B	
UARFCN	M		9.2.1.65	Corresponds to Nt [15]
Cell Parameter ID	M		9.2.3.4	
Time slot	0		9.2.3.23	
Midamble shift and burst type	0		9.2.3.7	

9.2.1.48 Node B Communication Context ID

The Node B Communication Context ID is the identifier of the Communication Context in the Node B, it corresponds to the dedicated resources which are necessary for an UE using one or more dedicated channels in a given Node B.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Node B Communication Context ID			INTEGER (02^20-1)	2^20-1 is reserved value to indicate all the existing and future Node B communication contexts that can be reached by the communication control port (All NBCC).

9.2.1.49 Payload CRC Presence Indicator

This parameter indicates whether FP payload 16 bit CRC is used or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Payload CRC Presence			ENUMERAT	
Indicator			ED (CRC Included,	
			CRC not	
			included)	

9.2.1.49A PICH Power

The PICH Power IE indicates a power level relative to the [FDD-primary CPICH power] [TDD-primary CCPCH power] configured in a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PICH Power			Enumerated(-10+5dB)	Step 1dB

9.2.1.50 Puncture Limit

The Puncture limit limits the amount of puncturing that can be applied in order to minimise the number of dedicated physical channels.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Puncture limit			INTEGER (015)	0: 40% 1: 44 %
				 14: 96% 15: 100% (no puncturing)

9.2.1.50A QE-Selector

The QE-Selector indicates from which source the value for the quality estimate (QE) shall be taken.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
QE-Selector			ENUMERAT	
			ED(selected,	
			non-	
			selected)	

9.2.1.51 Report Characteristics

The report characteristics, defines how the reporting shall be performed.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
CHOICE Report Characteristics				
>OnDemand			NULL	
>Periodic			INOLL	
>>Report Periodicity >Event A	M		ENUMERAT ED (10ms1mi n,) step 10ms, (1min1hr,) step 1min,	The frequency with which the Node B shall send measurement reports.
>>Measurement Threshold	N 4		Magaurama	The threehold for which the
	M		Measureme nt Threshold 9.2.1.44	The threshold for which the Node B shall trigger a measurement report.
>>Measurement Hysteresis Time	0		ENUMERAT ED (10ms1mi n,) step 10ms,	
>Event B				
>>Measurement Threshold	M		Measureme nt Threshold 9.2.1.44	The threshold for which the Node B shall trigger a measurement report.
>>Measurement Hysteresis Time	0		ENUMERAT ED (10ms1mi n,) step 10ms,	
>Event C				
>>Measurement Increase/Decrease Threshold	M		Measureme nt Increase/De crease Threshold 9.2.1.43	
>>Measurement Change Time	M		ENUMERAT ED (10ms1mi n,) step 10ms,	The time the measurement entity shall rise on (in ms), in order to trigger a measurement report.
>Event D				
>>Measurement Increase/Decrease Threshold	М		Measureme nt Increase/De crease Threshold 9.2.1.43	
>>Measurement Change Time	М		ENUMERAT ED (10ms1mi n,) step 10ms,	The time the measurement entity shall fall (in ms), in order to trigger a measurement report.
>Event E				
>>Measurement Threshold 1	M		Measureme nt Threshold 9.2.1.44	
>>Measurement Threshold 2	0		Measureme nt Threshold 9.2.1.44	
>>Measurement Hysteresis Time	0		ENUMERAT ED (10ms1mi	The hysteresis time in ms

>>Report Periodicity O			T		
>>Report Periodicity O ENUMERAT ED (10ms1mi n,) step 10ms, (1min1hr,) step 10ms, (1min1mi n,) step 10ms, (1min1mi n,) step 10ms, (1min1hr,) step 10min,					
>>Report Periodicity Separate					
ED (10ms1mi n,) step 10ms, (1min1hr,) step 1min,					
Comparison of the comparison	>>Report Periodicity	0		ENUMERAT	The frequency with which the
Indicate the second content of the second				ED	Node B shall send
Indicate the second content of the second				(10ms1mi	measurement reports.
10ms, (1min1hr,) step 1min,				`	•
Continuous processes Continuous processes					
>Event F >Measurement Threshold 1 >Measurement Threshold 9.2.1.44 >Neasurement Threshold 9.2.1.44 Neasurement Threshold 9.2.1.44 Neasureme				,	
>Event F >Measurement Threshold 1 >Measurement Threshold 9.2.1.44 The hysteresis time in ms Measurement Threshold 9.2.1.44 >Measurement Threshold 9.2.1.44 The hysteresis time in ms Measurement Threshold 9.2.1.44 >Near Measurement Threshold 9.2.1.44 >Near Measurement Threshold 9.2.1.44 >Near Measurement Threshold 9.2.1.44 Near Measurement Threshold 9.2.1.44 Near Measurement Threshold					
> Event F > Measurement Threshold 1 > Measurement Threshold 9.2.1.44 > Measurement Threshold 9.2.1.44 > Measurement Threshold 9.2.1.44 > Measurement Hysteresis O ENUMERAT ED (10ms1mi n,) step 10ms, > Report Periodicity O ENUMERAT ED (10ms1mi n,) step 10ms, The frequency with which the Node B shall send measurement reports. (10ms1mi n,) step 10ms, (1min1hr,) step 10ms, (1min1hr,) step 1min,					
>>Measurement Threshold 1 >>Measurement Threshold 9.2.1.44 >>Neasurement	>Event E			11111111,	
1		M		Measureme	
9,2.1.44		IVI			
>>Measurement Threshold 2 Measurement Threshold 9.2.1.44	l I				
2 nt Threshold 9.2.1.44 >>Measurement Hysteresis Time O ENUMERAT ED (10ms1mi n,) step 10ms, >>Report Periodicity O ENUMERAT ED (10ms1mi n,) step 10ms, (1min1hr,) step 10ms, (1min1hr,) step 1min,	. Magaurament Threehold				
9.2.1.44		U			
>>Measurement Hysteresis Time Second Periodicity Column	2				
Time ED (10ms1mi n,) step 10ms, >>Report Periodicity O ENUMERAT ED (10ms1mi n,) step 10ms, (10ms1mi n,) step 10ms, (1min1hr,) step 1min,					<u> </u>
(10ms1mi n,) step 10ms, >>Report Periodicity O ENUMERAT ED Node B shall send (10ms1mi n,) step 10ms, (1min1hr,) step 1min,		O			The hysteresis time in ms
>>Report Periodicity O ENUMERAT ED (10ms1mi n,) step 10ms, (1min1hr,) step 1min,	Time				
>>Report Periodicity O ENUMERAT ED (10ms1mi n,) step 10ms, (1min1hr,) step 1min,					
>>Report Periodicity O ENUMERAT ED (10ms1mi n,) step 10ms, (1min1hr,) step 1min,					
>>Report Periodicity O ENUMERAT ED (10ms1mi n,) step 10ms, (1min1hr,) step 1min,					
ED (10ms1mi n,) step 10ms, (1min1hr,) step 1min,					
(10ms1mi n,) step 10ms, (1min1hr,) step 1min,	>>Report Periodicity	0		ENUMERAT	The frequency with which the
n,) step 10ms, (1min1hr,) step 1min,				ED	Node B shall send
n,) step 10ms, (1min1hr,) step 1min,				(10ms1mi	measurement reports.
10ms, (1min1hr,) step 1min,				`	'
(1min1hr,) step 1min,					
) step 1min,					
1min,					
2 on mouniculon	>On Modification				
	2011 Wodinidation				
>>Measurement M Measureme		М			
Threshold nt Threshold	Threshold				
9.2.1.44				9.2.1.44	

9.2.1.51A Requested Data Value

The *Requested Data Value* IE contains the relevant data concerning the ongoing information exchange. *Requested Data Value* IE shall include at least one of the following IE.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description
DGPS Corrections	0		9.2.1.24B	
GPS Navigation Model & Time Recovery	0		9.2.1.31B	
GPS Ionospheric Model	0		9.2.1.31C	
GPS UTC Model	0		9.2.1.31D	
GPS Almanac	0		9.2.1.31F	
GPS Real-Time Integrity	0		9.2.1.31E	
GPS RX Pos	0		9.2.1.31G	

9.2.1.51B Requested Data Value Information

The *Requested Data Value Information* IE provides information both on whether or not the Requested Data Value is provided in the message or not and if provided also the Requested Data Value itself. In case of periodic reporting, 'Information Not Available' shall be used when at least one part of the requested information was not available at the moment of initiating the Information Reporting procedure.

IE/Group Name	Presence	Range	IE Type and Reference	Semantics Description	Criticality	Assigned Criticality
CHOICE Information	M				_	
Availability Indicator						
>Information Available					_	
>>Requested Data	M		9.2.1.51A		_	
Value						
>Information not Available			NULL		_	

9.2.1.52 Resource Operational State

The resource operational state is used to indicate the current operational state of the associated resource following a Node B failure.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Resource Operational State			ENUMERAT ED(Enabled, Disabled)	When a resource is marked as disabled, then its child resources are implicitly disabled. Cell Resource hierarchy can be referred to [6].

9.2.1.52A Retention Priority

Void.

9.2.1.53 RL ID

The RL ID is the unique identifier for one RL associated with a UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RL ID			INTEGER	
			(031)	

9.2.1.53a RNC-ld

This is the identifier of one RNC in UTRAN.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RNC-Id			INTEGER (04095)	

9.2.1.53A SFN

System Frame Number of the cell, see ref. [17].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SFN			Integer (04095)	

9.2.1.53B Segment type

Segment type as defined in [18].

IE/Group Name	Presence	Range	IE type and	Semantics description
			reference	
Segment type			Enumerated(
			First	
			segment,	
			First	
			segment	
			short,	
			Subsequent	
			segment,	
			Last	
			segment,	
			Last	
			segment	
			short,	
			Complete	
			SIB,	
			Complete	
			SIB short,)	

9.2.1.53C SFN-SFN Measurement Threshold Information

The SFN-SFN Measurement Threshold Information defines the related thresholds SFN-SFN Observed Time Difference measurements which shall trigger the Event On Modification.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SFN-SFN Change Limit	0		INTEGER(1. .256)	Change of SFN-SFN value compared to previously reported value, which shall trigger a new report. Unit in 1/16 chip.
Predicted SFN-SFN Deviation Limit	0		INTEGER(1. .256)	Deviation of the predicated SFN-SFN from the latest measurement result, which shall trigger a new report. Unit in 1/16 chip.

9.2.1.53D SFN-SFN Measurement Time Stamp

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CHOICE Mode				
>FDD				
>>SFN	M		9.2.1.53A	Indicates the SFN of the reference cell at which the measurement has been performed.
>TDD				
>>SFN	М		9.2.1.53A	Indicates the SFN of the reference cell at which the measurement has been performed.
>>Time Slot	M		9.2.3.23	Indicates the Time Slot of the reference cell at which this measurement has been performed.

9.2.1.53E SFN-SFN Measurement Value Information

The SFN-SFN Measurement Value Information IE indicates the measurement result related to SFN-SFN Observed Time Difference measurements.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Successful Neighbouring cell SFN-SFN Observed Time Difference Measurement Information		1 <maxnomeasn Cell></maxnomeasn 		
>UC-Id	M		9.2.1.65B	
>SFN-SFN Value	М		9.2.1.53F	
>SFN-SFN Quality	0		INTEGER(0. .255)	Indicates the standard deviation of the SFN-SFN otd (observed time difference) measurements in 1/16 chip.
>SFN-SFN Drift Rate	М		INTEGER(- 100+100)	Indicates the SFN-SFN drift rate in 1/256 chip per second. A positive value indicates that the Reference cell clock is running at a greater frequency than the measured neighbouring cell.
>SFN-SFN Drift Rate Quality	М		INTEGER(0. . 100)	Indicates the standard deviation of the SFN-SFN drift rate measurements in 1/256 chip per second.
>SFN-SFN Measurement Time Stamp	M		9.2.1.53D	
Unsuccessful Neighbouring cell SFN- SFN Observed Time Difference Measurement Information		0 <maxnomeasn Cell-1></maxnomeasn 		
>UC-Id	M		9.2.1.65B	

Range bound	Explanation
maxnoMeasNCell	Maximum number of neighbouring cells that can be
	measured on.

9.2.1.53F SFN-SFN Value

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CHOICE Mode				
>FDD				
>>SFN-SFN	М		INTEGER(0. . 614399)	According to mapping in [22].
>TDD				
>>SFN-SFN	M		INTEGER(0. . 40961)	According to mapping in [23].

9.2.1.54 SIB Deletion Indicator

Void.

9.2.1.55 SIB Originator

Indicates if the Node B shall fill in the SIB information or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SIB Originator			Enumerated(
			Node B,	
			CRNC)	

9.2.1.56 Shutdown Timer

The shutdown timer shall indicate the length of time available to the CRNC to perform the block of a resource when a Normal priority block is requested.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Shutdown Timer			INTEGER(1. .3600)	Value in seconds

9.2.1.56A T_RLFAILURE

The Radio Link Failure procedure shall be triggered after a period of time T_RLFAILURE has elapsed with a persisting out-of-sync indication (see also ref. [10] and [21]).

Information Element/Group	Presence	Range	IE type and	Semantics description
Name			reference	
T_RLFAILURE			ENUMERAT	In seconds
			ED (0, 0.1,	
			0.2,, 25.5)	

9.2.1.56B Start Of Audit Sequence Indicator

Indicates if the AUDIT REQUEST message initiates a new audit sequence or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Start Of Audit Sequence Indicator			ENUMERAT ED(start of audit sequence, not start of audit sequence)	

9.2.1.57 TFCI Presence

The TFCI Presence parameter indicates whether the TFCI shall be included. In TDD if it is present in the timeslot, it will be included within the first Channelization code listed.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI presence			ENUMERAT	
-			ED (Present,	
			not present)	

9.2.1.58 TFCS (Transport Format Combination Set)

The Transport Format Combination Set is defined as a set of Transport Format Combinations on a Coded Composite Transport Channel. It is the allowed Transport Format Combinations of the corresponding Transport Channels. The DL Transport Format Combination Set is applicable for DL Transport Channels.

[FDD - Where the UE is assigned access to one or more DSCH transport channels then the UTRAN has the choice of two methods for signalling the mapping between TFCI(field 2) values and the corresponding TFC:

Method #1 - TFCI range

The mapping is described in terms of a number of groups, each group corresponding to a given transport format combination (value of CTFC(field2)). The CTFC(field2) value specified in the first group applies for all values of TFCI(field 2) between 0 and the specified 'Max TFCI(field2) value'. The CTFC(field2) value specified in the second group applies for all values of TFCI(field 2) between the 'Max TFCI(field2) value' specified in the last group plus one and the specified 'Max TFCI(field2) value' in the second group. The process continues in the same way for the following groups with the TFCI(field 2) value used by the UE in constructing its mapping table starting at the largest value reached in the previous group plus one.

Method #2 - Explicit

The mapping between TFCI(field 2) value and CTFC(field2) is spelt out explicitly for each value of TFCI (field2)]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CHOICE DSCH			1010101100	
>No split in TFCI				This choice is made if: a) The TFCS refers to the uplink OR b) The mode is FDD and none of the Radio Links of the concerned UE are assigned any
				DSCH transport channels OR c) The mode is TDD
>>TFCS		1 to <maxnooftfcs></maxnooftfcs>		The first instance of the parameter corresponds to TFCI zero, the second to 1 and so on.
>>>CTFC	М		INTEGER(0. .MaxCTFC)	See Note 1.
>>>CHOICE Gain Factors	C- PhysChan			
>>>Signalled Gain Factors				
>>>>CHOICE Mode >>>>>FDD				
>>>>>Gain Factor βc	M		Integer (015)	For UL DPCCH or control part of PRACH or control part of PCPCH in FDD; mapping in accordance to [9]
>>>>Gain Factor β _D	M		Integer (015)	For UL DPDCH or data part of PRACH or data part of PCPCH in FDD: mapping in accordance to [9]
>>>>TDD				
>>>>>Gain Factor β	М		Integer (015)	For UL DPCH in TDD; mapping in accordance to [20]
>>>>Reference TFC nr	0		Integer (03)	If this TFC is a reference TFC, this IE indicates the reference number
>>>>Computed Gain Factors				
>>>>Reference TFC nr	M		Integer (03)	Indicates the reference TFC to be used to calculate the gain factors for this TFC
>There is a split in the TFCI				This choice is made if: a) The TFCS refers to the downlink AND b) The mode is FDD and one of the Radio Links of the concerned UE assigned one or more DSCH transport channels
>>Transport format combination_DCH		1 to <maxtfci_1_co mbs></maxtfci_1_co 		The first instance of the parameter <i>Transport format combination_DCH</i> corresponds to TFCI (field 1) = 0, the second to TFCI (field 1) = 1 and so on.
>>>CTFC(field1)	М		Integer(0M axCTFC)	See Note 1.
>>Choice Signalling method			,	
>>>TFCI range				
>>>>TFC mapping on DSCH		1 to <maxnotfcigrou ps></maxnotfcigrou 		
>>>>Max TFCI(field2) value	M		Integer(110 23)	This is the Maximum value in the range of TFCI(field2) values for which the specified

				CTFC(field2) applies
>>>>CTFC(field2)	М		Integer(0M axCTFC)	See Note 1.
>>>Explicit				
>>>>Transport format combination_DSCH		1 to <maxtfci_2_co mbs></maxtfci_2_co 		The first instance of the parameter <i>Transport format combination_DSCH</i> corresponds to TFCI (field2) = 0, the second to TFCI (field 2) = 1 and so on.
>>>>CTFC(field2)	М		Integer(0M axCTFC)	See Note 1.

Condition	Explanation		
PhysChan	The IE shall be present if the TFCS concerns a UL DPCH or PRACH		
	channel [FDD – PCPCH channel].		

Range bound	Explanation
MaxnoofTFCs	The maximum number of Transport Format Combinations.
MaxTFCI_1_Combs	Maximum number of TFCI (field 1) combinations (given by 2 raised to the power of the length of the TFCI (field 1))
MaxTFCI_2_Combs	Maximum number of TFCI (field 2) combinations (given by 2 raised to the power of the length of the TFCI (field 2))
MaxNoTFCIGroups	Maximum number of groups, each group described in terms of a range of TFCI(field 2) values for which a single value of CTFC(field2) applies
MaxCTFC	Maximum number of the CTFC value is calculated according to the following: $\sum_{i=1}^{I} (L_i - 1) P_i$
	with the notation according to ref. [18]

Note 1:

The CTFC is an integer number calculated in accordance with [18], subclause 14.10. Regarding the channel ordering, for all transport channels, 'TrCH1' corresponds to the transport channel having the lowest transport channel identity among all configured transport channels on this CCTrCH. 'TrCH2' corresponds to the transport channel having the next lowest transport channel identity, and so on.

9.2.1.59 Transport Format Set

The Transport Format Set is defined as the set of Transport Formats associated to a Transport Channel, e.g. DCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Dynamic Transport Format Information		1 to <maxtfcount></maxtfcount>		The first instance of the parameter corresponds to TFI zero, the second to 1 and so on.
>Number of Transport blocks	M		INTEGER (0512)	
>Transport Block Size	C - Blocks		INTEGER (05000)	Bits
>CHOICE Mode	М			
>>TDD				
>>>Transmission Time interval Information	C- TTIdynami c	1 to <maxttlcount></maxttlcount>		
>>>>Transmission time interval	М		Enumerated(10, 20, 40, 80,)	ms
Semi-static Transport Format Information		1		
>Transmission time interval	M		ENUMERATED (10, 20, 40, 80, dynamic,,5)	ms; Value "dynamic" for TDD only; Value "5" for LCR TDD only
>Type of channel coding	М		ENUMERATED (No codingTDD, Convolutional, Turbo,)	[FDD - The value 'No codingTDD' shall be treated as logical error if received]
>Coding Rate	C – Coding		ENUMERATED (1/2, 1/3,)	
>Rate matching attribute	М		INTEGER (1maxRM)	
>CRC size	M		ENUMERATED (0, 8, 12, 16, 24,)	
>CHOICE Mode	М			
>>TDD				
>>>2 nd interleaving mode	M		Enumerated(Fra me related, Timeslot related,)	

Condition	Explanation
Blocks	The IE shall be present if the Number of Transport Blocks IE is set to
	a value greater than 0.
Coding	The IE shall be present if the Type of channel coding IE is set to
	"Convolutional" or "Turbo".
TTIdynamic	The IE shall be present if the Transmission Time Interval IE in the
	Semi-static Transport Format Information IE is set to "dynamic".

Range bound	Explanation
MaxTFcount	Maximum number of different transport formats that can be included
	in the Transport format set for one transport channel.
MaxRM	Maximum number that could be set as rate matching attribute for a
	transport channel.
MaxTTlcount	The amount of different TTI that are possible for that transport format.

9.2.1.60 ToAWE

TOAWE is the window endpoint. DL data frames are expected to be received before this window endpoint. TOAWE is defined with a positive value relative Latest Time of Arrival (LTOA). A data frame arriving after TOAWE gives a Timing Adjustment Control frame response.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
ToAWE			INTEGER	ms.
			(02559)	

9.2.1.61 ToAWS

TOAWS is the window startpoint. DL data frames are expected to be received after this window startpoint. TOAWS is defined with a positive value relative Time of Arrival Window Endpoint (TOAWE). A data frame arriving before TOAWS gives a Timing Adjustment Control frame response.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
ToAWS			INTEGER (01279)	ms.

9.2.1.62 Transaction ID

The transaction ID is used to associate all the messages belonging to the same procedure Messages belonging to the same procedure shall use the same transaction ID.

The transaction ID is determined by the initiating peer of a procedure. For common procedures the transaction ID shall uniquely identify a procedure within all ongoing parallel procedures initiated by one protocol peer, using the same procedure code and signalled over the same Node B control port. For dedicated procedures the transaction ID shall uniquely identify a procedure within all ongoing parallel procedures initiated by one protocol peer, using the same procedure code and initiated towards the same Node B/CRNC context.

IE/Group Name	Presence	Range	IE type and	Semantics description
			reference	
Transaction ID			CHOICE	The Transaction ID shall be
			INTEGER	interpreted for its integer value,
			(0127) or	not for the type of encoding
			INTEGER	("short" or "long").
			(032767)	

9.2.1.62A Transport Bearer Request Indicator

Indicates whether a new transport bearer needs to be established for carrying the concerning transport channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transport Bearer Request			ENUMERAT	
Indicator			ED(Bearer	
			Requested,	
			Bearer not	
			Requested,	
)	

9.2.1.63 Transport Layer Address

Transport Layer Address defines the transport address of the Node B. For details on the Transport Address used see ref. [2].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transport Layer Address			Bit string(1 160,)	

9.2.1.64 TSTD Indicator

Indicates if TSTD shall be active or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TSTD Indicator			ENUMERAT	
			ED(active,	
			inactive)	

9.2.1.64A T_{UTRAN-GPS} Measurement Value Information

The $T_{UTRAN-GPS}$ Measurement Value Information IE indicates the measurement results related to the UTRAN GPS Timing of Cell Frame for LCS measurements.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
T _{UTRAN-GPS}		1	1010101100	Indicates the UTRAN GPS Timing of Cell Frame for LCS. According to mapping in [22]. Significant values range from 0 to 37158911999999.
>MS	М		INTEGER (016383)	Most Significant Part
>LS	М		INTEGER (04294967 295)	Least Significant Part
T _{UTRAN-GPS} Quality	М		INTEGER(0255)	Indicates the standard deviation of the T _{UTRAN-GPS} measurements in 1/16 chip.
Tutran-gps Drift Rate	M		INTEGER(- 50+50)	Indicates the T _{UTRAN-GPS} drift rate in 1/256 chip per second. A positive value indicates that the UTRAN clock is running at a lower frequency than GPS clock.
T _{UTRAN-GPS} Drift Rate Quality	M		INTEGER(0. .50)	Indicates the standard deviation of the T _{UTRAN-GPS} drift rate measurements in 1/256 chip per second.

9.2.1.64B T_{UTRAN-GPS} Measurement Threshold Information

The $T_{UTRAN-GPS}$ Measurement Threshold Information defines the related thresholds for UTRAN GPS Timing of Cell Frame for LCS measurements shall trigger the event On Modification.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
T _{UTRAN-GPS} Change Limit	0		INTEGER(1. .256)	Change of T _{UTRAN-GPS} value compared to previously reported value, which shall trigger a new report. Unit in 1/16 chip.
Predicted T _{UTRAN-GPS} Deviation Limit	0		INTEGER(1. .256)	Deviation of the predicated T _{UTRAN-GPS} from the latest measurement result, which shall trigger a new report. Unit in 1/16 chip.

9.2.1.64C T_{UTRAN-GPS} Accuracy Class

The $T_{UTRAN\text{-}GPS}$ Accuracy Class IE indicates the accuracy class of the UTRAN GPS Timing of Cell Frame for LCS measurement.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
T _{UTRAN-GPS} Accuracy Class			ENUMERAT	More information about
•			ED(Accuracy	T _{UTRAN-GPS} Measurement
			Class A,	Accuracy Class is included in
			Accuracy	[22].
			Class B,	
			Accuracy	
			Class C,)	

9.2.1.65 UARFCN

Designate the central frequency of the channel number.

Information Element / Group Name	Presence	Range	IE Type and Reference	Semantics Description
UARFCN			INTEGER (016383,)	corresponds to 0.0Hz 3276.6MHz (subclause 5.4.3 in [14] and [15])

9.2.1.65A UL Capacity Credit

The capacity credit indicates to the CRNC the Uplink capacity of a Local Cell or a Local Cell Group.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL Capacity Credit			INTEGER	
_			(065535)	

9.2.1.65B UTRAN Cell Identifier (UC-Id)

The UC-Id (UTRAN Cell identifier) is the identifier of a cell in one UTRAN.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RNC-Id	M		9.2.1.53a	
C-Id	M		9.2.1.9	

9.2.1.66 UL FP Mode

This parameter defines if normal or silent mode of the Frame Protocol shall be used for the UL.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL FP Mode			ENU INACE AT	
			ENUMERAT	
			ED (Normal,	
			Silent,)	

9.2.1.67 UL interference level

Void.

9.2.1.67A UL SIR

The UL SIR indicates a received UL SIR.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL SIR			ENUMERAT ED (-8.2 17.3)	Step 0.1 dB

9.2.2 FDD specific parameters

9.2.2.A Active Pattern Sequence Information

Defines the parameters for the compressed mode gap pattern sequence activation. For details see ref. [18].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CM Configuration Change CFN	М		CFN 9.2.1.7	
Transmission Gap Pattern Sequence Status		0 to <maxtgps></maxtgps>		
>TGPSI Identifier	M		Integer(1< MaxTGPS>)	If the group is not present, none of the pattern sequences are activated. References an already defined sequence.
>TGPRC	M		Integer (0511)	The number of transmission gap patterns within the Transmission Gap Pattern Sequence. 0=Infinity
>TGCFN	M		CFN 9.2.1.7	Connection Frame Number of the first frame of the first pattern 1 within the Transmission Gap Pattern Sequence.

Range bound	Explanation			
MaxTGPS	Maximum number of active pattern sequences. Value 6.			

9.2.2.B Adjustment Period

Adjustment Period IE defines the period to be used for power balancing.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Adjustment Period			INTEGER (1 256)	Frames

9.2.2.C Adjustment Ratio

Adjustment Ratio IE (Radj) defines the convergence rate used for the associated Adjustment Period.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Adjustment Ratio			INTEGER (0 100)	The Adjustment Ratio is given with a granularity of 0.01 0 -> 0.00 1 -> 0.01 100 -> 1.00

9.2.2.D AICH Power

The AICH Power IE indicates a power level (measured as the power per transmitted acquisition indicator when several AIs are transmitted in parallel) relative to the primary CPICH power configured in a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
AICH Power			Integer(- 22+5)	Offset in dB

9.2.2.1 AICH Transmission Timing

IE/Group Name	Presence	Range	IE type and reference	Semantics description
AICH Transmission Timing			ENUMERAT	See parameter
			ED (0, 1)	AICH_Transmission_Timing in
				ref. [7].

9.2.2.1A AP Preamble Signature

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
AP Preamble Signature			INTEGER (015)	Described in ref. [9]

9.2.2.1B AP Sub Channel Number

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
AP Sub Channel Number			INTEGER (011)	Described in ref. [10]

9.2.2.1C CD Sub Channel Numbers

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
CD Sub Channel Numbers			BIT STRING (12)	Each bit indicates availability for a subchannel, where the subchannels are numbered "subchannel 0" to "subchannel 11". The value 1 of a bit indicates that the corresponding subchannel is available and the value 0 indicates that it is not available. The order of bits is to be interpreted according to subclause 9.3.4. See also [10].

9.2.2.1D Channel Assignment Indication

The Channel Assingment Indication indicates whether CA is active or inactive. When CA is active, CPCH is in Versatile Channel Assingment Method (VCAM) mode and when CA is inactive, CPCH is in UE Channel Selection Method (UCSM) mode. In VCAM mode (CA active), CA message in CD/CA-ICH shall be sent.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Channel Assignment			ENUMERAT	
Indication			ED (CA	
			Active, CA	
			Inactive)	

9.2.2.2 Chip Offset

The Chip Offset is defined as the radio timing offset inside a radio frame. The Chip offset is used as offset for the DL DPCH relative to the Primary CPICH timing.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Chip Offset			INTEGER	Chips
			(038399)	

9.2.2.2A Closed Loop Timing Adjustment Mode

Indicates when the phase/amplitude adjustment is performed in the DL in relation to the receipt of the UL feedback command in case of closed loop mode transmit diversity on DPCH.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Closed Loop Timing Adjustment Mode			ENUMERAT ED (Offset1, Offset2,)	According to ref. [10] subclause 7.1: Offset1 = slot(j+1)mod15 Offset2 = slot(j+2)mod15

9.2.2.3 Common Channels Capacity Consumption Law

Void

9.2.2.3A Compressed Mode Deactivation Flag

Compressed Mode Deactivation Flag indicates whether Compressed Mode shall be deactivated or not in the new RL.

IE/Group Name	Presence	Range	IE type and	Semantics description
			reference	
Compressed Mode			ENUMERAT	
Deactivation flag			ED(Deactiva	
_			te,	
			Maintain	
			Active)	

9.2.2.4 Compressed Mode Method

Void.

9.2.2.4A CPCH Allowed Total Rate

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CPCH Allowed Total Rate			ENUMERAT ED (15, 30, 60, 120, 240, 480, 960, 1920, 2880, 3840, 4800, 5760,)	Channel Symbol Rate (ksps)

9.2.2.4B CPCH Scrambling Code Number

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
CPCH Scrambling Code Number			INTEGER (079)	Described in ref. [9]

9.2.2.4C CPCH UL DPCCH Slot Format

Indicates the slot format used in UL CPCH message control part, accordingly to ref. [7]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CPCH UL DPCCH slot			INTEGER	
format			(02,)	

9.2.2.4D DCH FDD Information

The *DCH FDD Information* IE provides information for DCHs to be established.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
DCH FDD Information		1 to <maxnoof DCHs></maxnoof 			-	
>Payload CRC Presence Indicator	M		9.2.1.49		ı	
>UL FP mode	M		9.2.1.66		_	
>ToAWS	M		9.2.1.61		_	
>ToAWE	M		9.2.1.60		_	
>DCH Specific Info		1 <maxno ofDCHs></maxno 			_	
>>DCH ID	M		9.2.1.20		_	
>>Transport Format Set	M		9.2.1.59	For UL	_	
>>Transport Format Set	M		9.2.1.59	For DL	_	
>>Allocation/Retention Priority	М		9.2.1.1A		_	
>>Frame Handling Priority	М		9.2.1.30		_	
>>QE-Selector	M		9.2.1.50A		_	

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for one UE.

9.2.2.4E DCHs FDD to Modify

The DCHs FDD to Modify IE provides information for DCHs to be modified.

IE/Group Name	Presence	Range	IE type and	Semantics description	Criticality	Assigned Criticality
			reference	s		,
DCHs FDD to Modify		1 <max noofDC Hs></max 			_	
>UL FP Mode	0		9.2.1.66		_	
>ToAWS	0		9.2.1.61		_	
>ToAWE	0		9.2.1.60		_	
>Transport Bearer Request Indicator	М		9.2.1.62A		_	
>DCH Specific Info		1 <max noofDC Hs></max 			_	
>>DCH ID	М		9.2.1.20		_	
>>Transport Format Set	0		9.2.1.59	For the UL.	_	
>>Transport Format Set	0		9.2.1.59	For the DL.	_	
>>Allocation/Retention Priority	0		9.2.1.1A		_	
>>Frame Handling Priority	0		9.2.1.20		_	

Range bound	Explanation		
MaxnoofDCHs	Maximum number of DCHs for one UE.		

9.2.2.5 D-Field Length

Void.

9.2.2.6 Dedicated Channels Capacity Consumption Law

Void

9.2.2.7 Diversity Control Field

Void.

9.2.2.8 Diversity Indication

Void.

9.2.2.9 Diversity mode

Define the diversity mode to be applied.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Mode			ENUMERAT	
			ED(None,	
			STTD,	
			Closed loop	
			mode 1,	
			Closed loop	
			mode2,)	

9.2.2.10 DL DPCH Slot Format

Indicates the slot format used in DPCH in DL, accordingly to ref. [7].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL DPCH slot format			INTEGER (016,)	

9.2.2.11 DL frame type

Void.

9.2.2.12 DL or Global Capacity Credit

Void

9.2.2.12A DL_power_averaging_window_size

DL_power_averaging_window_size IE defines the window size when Limited Power Increase is used [10].

IE/Group Name	Presence	Range	IE type and	Semantics description
			reference	
DL_power_averaging_window_size			INTEGER	1-60 inner loop power
			(160)	adjustments, step size 1
				adjustment

9.2.2.13 DL Scrambling Code

DL scrambling code to be used by the RL. One cell may have multiple DL scrambling codes available.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL Scrambling Code			INTEGER (015)	0= Primary scrambling code of the cell 115= Secondary scrambling code

9.2.2.13A DL TPC pattern 01 count

The *DL TPC pattern 01 count* IE contains the value of the parameter n, which is used for determining the DL TPC pattern on Radio Links marked with "first RLS" by the *First RLS indicator* IE before UL synchronisation is achieved.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL TPC pattern 01 count			INTEGER(0.	
			30,)	

9.2.2.13B DSCH FDD Information

The DSCH FDD Information IE provides information for DSCHs to be established.

IE/Group Name	Presence	Range	IE type and reference	Semantics descriptions	Criticalit y	Assigned Criticality
DSCH FDD Information		1 to <maxnoof DSCHs></maxnoof 			_	
>DSCH ID	M		9.2.1.27		_	
>Transport Format Set	M		9.2.1.59	For DSCH	_	
>Allocation/Retention Priority	М		9.2.1.1A		-	
>Frame Handling Priority	M		9.2.1.30		_	
>ToAWS	M		9.2.1.61		_	
>ToAWE	M		9.2.1.60		_	

Range bound	Explanation
MaxnoofDSCHs	Maximum number of DSCHs for one UE.

9.2.2.13C DPC Mode

The DPC Mode IE indicates the DPC mode to be applied [10].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DPC Mode			ENUMERAT TED (Mode0, Mode1,)	Mode0: The Node B shall estimate the UE transmitted TPC command and update the DL power in every slot Mode1: The Node B shall estimate the UE transmitted TPC command over three slots
				and shall update the DL power in every three slots

9.2.2.13D DSCH FDD Common Information

The DSCH Common Information includes common information for all DSCHs for one UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description	Criticality	Assigned Criticality
Enhanced DSCH PC Indicator	0		9.2.2.13G		_	
Enhanced DSCH PC	C- EDSCHPC On		9.2.2.13E		_	

Condition	Explanation
EDSCHPCOn	The IE shall be present if the Enhanced DSCH PC
	Indicator IE is set to "Enhanced DSCH PC Active in
	the UE".

9.2.2.13E Enhanced DSCH PC

The Enhanced DSCH PC includes all the parameters which are needed for DSCH power control improvement during soft handover.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Enhanced DSCH PC Wnd	М		9.2.2.13H	
Enhanced DSCH PC Counter	М		9.2.2.13F	
Enhanced DSCH Power Offset	M		9.2.2.131	

9.2.2.13F Enhanced DSCH PC Counter

The Enhanced DSCH PC Counter parameter gives the number of correct cell ID command to receive in the averaging window, *Enhance DSCH PC Wnd* IE, see ref. [10] subclause 5.2.2.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Enhanced DSCH PC			INTEGER(1.	
Counter			.50)	

9.2.2.13G Enhanced DSCH PC Indicator

The Enhanced DSCH PC Indicator indicates whether Enhanced DSCH PC is in use by the UE or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Enhanced DSCH PC Indicator			ENUMERAT	
			ED(Enhance	
			d DSCH PC	
			Active in the	
			UE,	
			Enhanced	
			DSCH PC	
			not Active in	
			the UE)	

9.2.2.13H Enhanced DSCH PC Wnd

The Enhanced DSCH PC Wnd parameter shows the window size to decide primary or non-primary cell, see ref. [10] subclause 5.2.2.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Enhanced DSCH PC Wnd			INTEGER(1.	
			.10)	

9.2.2.13I Enhanced DSCH Power Offset

The Enhanced DSCH Power Offset parameter gives the power offset to be added on DSCH when cell is decided to be primary.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Enhanced DSCH Power Offset			INTEGER(- 150)	Unit dB, step 1 dB

9.2.2.14 FDD DL Channelisation Code Number

The DL Channelisation Code Number indicates the DL Channelisation Code number for a specific DL physical channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
FDD DL ChannelisationCode Number			INTEGER(0 511)	According to the mapping in [9]. The maximum value is equal to the DL spreading factor –1

9.2.2.14A FDD DL Code Information

The FDD DL Code Information IE provides DL Code information for the RL.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
FDD DL Code Information		1 to <maxnoof- Codes></maxnoof- 			-	
>DL Scrambling Code	М		9.2.2.13		_	
>FDD DL Channelisation Code Number	М		9.2.2.14		_	
>Transmission Gap Pattern Sequence Code Information	0		9.2.2.53B		_	

Range bound	Explanation		
MaxnoofCodes	Maximum number of DL code information.		

9.2.2.15 FDD SCCPCH Offset

The Secondary CCPCH offset is defined as the time offset towards the Primary CCPCH in the cell. The offset is a multiple of 256 chips.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
FDD SCCPCH Offset			INTEGER(0 149)	0: 0 chip 1: 256 chip 2: 512 chip
				149: 38144 chip

9.2.2.16 FDD TPC DL step size

This parameter indicates step size for the DL power adjustment.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
FDD TPC Downlink step size			ENUMERAT	Step: db
			ED (0.5, 1,	
			1.5, 2,)	

9.2.2.16A First RLS Indicator

The First *RLS Indicator* IE indicates if a specific Radio Link and all Radio Links which are part of the same Radio Link Set, shall be considered as the first radio links established towards the UE or not.

IE/Group Name	Presence	Range	IE type and	Semantics description
			reference	
First RLS Indicator			ENUMERAT	
			ED (first	
			RLS, not first	
			RLS)	

9.2.2.17 Gap Period

Void.

9.2.2.18 Gap Position Mode

Void.

9.2.2.18A Limited Power Increase

The parameter is used for a more efficient use of the inner loop DL power control for non real time data.

If the limited power increase is used, Node B shall use the limited power increase algorithm as specified in [10], subclause 5.2.

IE/Group Name	Presence	Range	IE type and	Semantics description
			reference	
Limited Power Increase			ENUMERAT	
			ED(Used,	
			Not used)	

9.2.2.18B Inner Loop DL PC Status

The *Inner Loop DL PC Status* IE indicates whether inner loop DL control shall be active or inactive for all radio links associated with the context identified by the *Node B Communication Context Id* IE.

IE/Group Name	Presence	Range	IE type and	Semantics description
			reference	
Inner Loop DL PC Status			ENUMERAT	
			ED(Active,	
			Inactive)	

9.2.2.18C IPDL FDD Parameters

The IPDL FDD Parameters IE provides information about IPDL to be applied for FDD when activated.

IE/Group Name	Presence	Range	IE type and	Semantics description	Criticality	Assigned Criticality
			reference	S		
IP spacingFDD	M		ENUMERA TED (5,7,10,15, 20,30,40,5 0)	See [10]	-	
IP length	M		ENUMERA TED (5,10)	See [10]	-	
Seed	M		INTEGER (063)	See [10]	1	
Burst mode parameters	0		9.2.1.5A			

9.2.2.19 Max Adjustment Period

Void.

9.2.2.20 Max Adjustment Step

Defines the maximum allowed value for the change of DL power level during a certain number of slots that can be utilised by the downlink power balancing algorithm. *Max Adjustment Step* IE defines a time period, in terms of number of slots, in which the accumulated power adjustment shall be maximum 1dB. This value does not include the DL inner loop PC adjustment.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Max Adjustment Step			INTEGER (1 10)	Slots
			(110)	

9.2.2.20A Max Number of PCPCHes

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Max Number of PCPCHes			INTEGER(164,)	

9.2.2.21 Maximum Number of UL DPDCHs

Maximum number of uplink DPDCHs to be used during the connection. Needed by the rate matching algorithm.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Max Number of UL DPDCHs			INTEGER (16)	

9.2.2.22 Minimum UL Channelisation Code Length

Minimum UL channelisation code length (spreading factor) of a DPDCH which is used during the connection. Needed by rate matching algorithm.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Min UL Channelisation Code			ENUMERAT	
length			ED(4,8,16,	
			32,64,128,	
			256)	

9.2.2.23 Multiplexing Position

Multiplexing Position specifies whether fixed or flexible positions of transport channels shall be used in the physical channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Multiplexing Position			ENUMERAT	
			ED(Fixed,	
			Flexible)	

9.2.2.23A N_EOT

The N_EOT is defined as number of End of Transmission for release of PCPCH transmission.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
N_EOT			INTEGER	TTI
			(08)	Value 8 is never used in this release.

9.2.2.23B NF_max

The NF_max is defined as maximum number of Frame in a PCPCH message data part.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
NF_max			INTEGER	
			(164,)	

9.2.2.23C N_Start_Message

The N_Start_Message is defined as number of Frames for start message of DL DPDCHes for a CPCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
N_Start_Message			INTEGER	
			(18)	

9.2.2.24 Pattern Duration (PD)

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PD			INTEGER(02047,)	Frames If the value is set to '0', the Pattern Duration shall be interpreted as 'infinite'

9.2.2.24A PCP Length

Indicates CPCH power control preamble length.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PCP Length			ENUMERAT ED(0,8)	

9.2.2.25 PDSCH code mapping

This IE indicates the association between each possible value of TFCI(field 2) and the corresponding PDSCH channelisation code(s). There are three fundamentally different ways that the UTRAN must choose between in order to signal the mapping information, these are described below. The signalling capacity consumed by the different methods will vary depending on the way in which the UTRAN configures usage of the DSCH. A fourth option is also provided which allows the UTRAN to replace individual entries in the TFCI(field 2) to PDSCH code mapping table with new PDSCH code values.

Method #1 - Using code range

The mapping is described in terms of a number of groups, each group associated with a given spreading factor. Each TFCI(field2) value corresponds to a given PDSCH channelisation code or set of PDSCH codes for multi-code. The Node B maps TFCI(field2) values to PDSCH codes in the following way:

- The PDSCH codes used for TFCI(field 2) = 0 are given by the SF of the Code Group 1 (i.e. first instance in *PDSCH code mapping*) and the code numbers between CodeNumber₀ (where CodeNumber₀ = "Start code number" of Code Group 1) and CodeNumber₀ + "multi-code info" 1.
- This continues with unit increments in the value of TFCI (Field2) mapped to either unit increments in code numbers or groups of contiguous code numbers in case of multi-code, this until "Stop code number" is reached: So the PDSCH codes used for TFCI(field 2) = k (for k > 0 and k < ("Stop code number" "Start code number" + 1) DIV k) are given by the SF of the Code Group 1 and the code numbers between CodeNumber $_k =$ CodeNumber $_{k-1} +$ "multi-code info" and CodeNumber $_k +$ "multi-code info" 1. If "Stop code number" = "Start code number" + "multi-code info" 1 then this is to be interpreted as defining the mapping between the channelisation code(s) and a single TFCI.
- The Node B constructs its mapping table by repeating this process for all the Code Groups in the order they are instantiated in *PDSCH code mapping*. The first TFCI(field 2) value used in each group is the largest TFCI(field 2) value reached in the previous group incremented by one.

Note: This imposes that "Stop code number" – "Start code number" + 1 is a multiple of the value "multi-code info" for each instance of *PDSCH code mapping*. Furthermore, in the case where multi-code is not used, then "multi-code info" = 1 and the process above also applies.

Method #2 - Using TFCI range

The mapping is described in terms of a number of groups, each group corresponding to a given PDSCH channelisation code or codes for multicode.

- The set of PDSCH codes specified in the first instance applies for all values of TFCI(field 2) between 0 and the specified "Max TFCI(field2)".

- The process continues in the same way for the following groups with the TFCI(field 2) value starting at the largest value reached in the previous instance incremented by one. So the set of PDSCH codes specified in a given instance apply for all the values of TFCI(field 2) between the "Max TFCI(field2) value" specified in the previous instance incremented by one and the specified "Max TFCI(field2)" of the considered instance.

A set of PDSCH codes is composed of all the codes between "Code Number" and "Code Number" + "multicode" – 1. So if multi-code is not used, the set of PDSCH codes is reduced to one element indicated by the *Code Number* IE.

Method #3 - Explicit

The mapping between TFCI(field 2) value and PDSCH channelisation code (or a set of PDSCH codes for multicode) is spelt out explicitly for each value of TFCI (field2).

A set of PDSCH codes is composed of all the codes between "Code Number" and "Code Number" + "multicode" - 1. So if multi-code is not used, the set of PDSCH codes is reduced to one element indicated by the *Code Number* IE.

Method #4 - Replace

The "TFCI (field2)" value(s) for which the mapping to PDSCH channelisation code (or a set of PDSCH codes for multicode) is changed are explicitly signalled. Furthermore, the new mapping between TFCI(field 2) value and PDSCH channelisation code(s) is spelt out explicitly for each value of TFCI (field2).

A set of PDSCH codes is composed of all the codes between "Code Number" and "Code Number" + "multicode" – 1. So if multi-code is not used, the set of PDSCH codes is reduced to one element indicated by the *Code Number* IE.

Information Element/Group name	Presence	Range	IE type and reference	Semantics description
DL Scrambling Code	M		INTEGER (015)	Scrambling code on which PDSCH is transmitted. 0= Primary scrambling code of the cell 115 = Secondary scrambling code

CHOICE Signalling Method				
>Code Range				
>>PDSCH code mapping		1 <maxno CodeGrou</maxno 		
>>>Spreading factor	M	ps>	Enumerated(4, 8, 16, 32, 64, 128,	
>>>multi-code info	M		256) Integer(116	
>>>Start code number	М		Integer(0m axCodeNum Comp-1)	PDSCH code start, Numbering as described in [18]
>>>Stop code number	M		Integer(0m axCodeNum Comp-1)	PDSCH code stop, Numbering as described in [18]
>TFCI range				
>>DSCH mapping		1 <maxno TFCIGroup s></maxno 		
>>>Max TFCI(field2) value	M		Integer(110 23)	This is the maximum value in the range of TFCI(field 2) values for which the specified PDSCH code applies
>>>Spreading factor	M		Enumerated(4, 8, 16, 32, 64, 128, 256)	SF of PDSCH code
>>>multi-code info	M		Integer(116	
>>>Code number	M		Integer(0m axCodeNum Comp-1)	Code number of PDSCH code. Numbering as described in [18]
>Explicit				
>>PDSCH code		1 <maxtf CI_2_Com bs></maxtf 		The first instance of the parameter PDSCH code corresponds to TFCI (field2) = 0, the second to TFCI(field 2) = 1 and so on.
>>>Spreading factor	M		Enumerated(4, 8, 16, 32, 64, 128, 256)	SF of PDSCH code
>>>multi-code info	M		Integer(116	
>>>Code number	М		Integer(0m axCodeNum Comp-1)	Code number of PDSCH code. Numbering as described in [18]
>Replace				
>>Replaced PDSCH code		1 <maxtf CI_2_Com bs></maxtf 		
>>>TFCI (field2)	М		Integer (01023)	Value of TFCI(field 2) for which PDSCH code mapping will be changed
>>>Spreading factor	M		Enumerated(4, 8, 16, 32, 64, 128, 256)	SF of PDSCH code
>>>multi-code info	М		Integer(116	
>>>Code number	M		Integer(0m axCodeNum Comp-1)	Code number of PDSCH code. Numbering as described in [18]

Range Bound	Explanation
MaxCodeNumComp	Maximum number of codes at the defined spreading factor, within the complete code tree.
MaxTFCI_2_Combs	Maximum number of TFCI (field 2) combinations (given by 2 raised to the power of the length of the TFCI field 2)
MaxNoTFCIGroups	Maximum number of groups, each group described in terms of a range of TFCI(field 2) values for which a single PDSCH code applies.
MaxNoCodeGroups	Maximum number of groups, each group described in terms of a range of PDSCH channelisation code values for which a single spreading factor applies.

9.2.2.26 PICH Mode

The number of paging indicators (PIs) in a PICH frame.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PICH Mode			Enumerated(18, 36, 72, 144)	Number of PI per frame

9.2.2.27 Power Adjustment Type

Defines the characteristic of the power adjustment.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Adjustment Type			ENUMERAT	
			ED (None,	
			Common,	
			Individual)	

9.2.2.28 Power Control Mode

Void.

9.2.2.29 Power Offset

This IE defines a power offset relative to the Downlink transmission power of a DPDCH or a Secondary CCPCH data field or a DL-DPCCH for CPCH pilot field..

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Offset			INTEGER	Step 0.25 dB, range 0-6 dB
			(024)	

9.2.2.29A Power_Raise_Limit

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power_Raise_Limit			INTEGER (010)	0-10 dB, step size 1 dB

9.2.2.30 Power Resume Mode

Void.

9.2.2.31 Preamble Signature

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Preamble Signatures			BIT STRING (16)	Each bit indicates availability for a signature, where the signatures are numbered "signature 0" up to "signature 15". The value 1 of a bit indicates that the corresponding signature is available and the value 0 that it is not available. The order of bits is to be interpreted according to subclause 9.3.4. See also [9].

9.2.2.32 Preamble Threshold

The IE sets the threshold for preamble detection. The ratio between received preamble power during the preamble period and interference level shall be above this threshold in order to be acknowledged.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Preamble Threshold			INTEGER (0 , 1,,72)	0: - 36.0 dB 1: - 35.5 dB 2: - 35.0 dB 72: 0.0 dB

9.2.2.33 Primary CPICH Power

Primary CPICH power is the power that shall be used for transmitting the P-CPICH in a cell. The reference point is the antenna connector.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Primary CPICH power			Enumerated (-10,, 50)	Unit dBm
			(10,, 00)	Granularity 0.1 dB

9.2.2.34 Primary Scrambling code

The Primary scrambling code to be used in the cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Primary Scrambling Code			Integer (0 511)	

9.2.2.35 Propagation Delay

Propagation delay is the one-way propagation delay of the radio signal from the MS to the Node B.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Propagation Delay			INTEGER	Chips. Step size is 3 chips.
			(0255)	0=0 chips,
				1=3 chips,

9.2.2.36 QE-Selector

Void.

9.2.2.37 RACH Slot Format

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RACH Slot Format			ENUMERAT ED(03,)	See ref. [7].

9.2.2.38 RACH sub Channel numbers

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RACH Sub Channel Numbers			BIT STRING (12)	Each bit indicates availability for a subchannel, where the subchannels are numbered "subchannel 0" to "subchannel 11". The value 1 of a bit indicates that the corresponding subchannel is available and the value 0 indicates that it is not available. The order of bits is to be interpreted according to subclause 9.3.4.

9.2.2.39 RL Set ID

The RL Set ID uniquely identifies one RL Set within a Node B Communication Context.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RL Set ID			INTEGER (031)	

9.2.2.39A Received total wide band power

The Received total wide band power indicates the UL interference at a certain cell under CRNC, see ref. [4].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Received total wide band			INTEGER(0.	According to mapping in [22].
power			.621)	

9.2.2.40 S-Field Length

The UE uses the S Field of the UL DPCCH slot to send the SSDT Cell ID to the network.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
S Field Length			ENUMERAT	
			ED (1, 2,)	

9.2.2.41 Scrambling Code Change

Void.

9.2.2.42 Scrambling Code Number

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Scrambling Code Word Number			INTEGER (015)	Identification of scrambling code see ref. [9].

9.2.2.43 Secondary CCPCH Slot Format

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Secondary CCPCH Slot Format			INTEGER(017,)	

9.2.2.44 SSDT Cell Identity

The SSDT Cell ID is a temporary ID for SSDT assigned to a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSDT Cell Identity			ENUMERAT	
			ED (a, b, h)	

9.2.2.44A SSDT Cell Identity for EDSCHPC

The SSDT Cell Identity for EDSCHPC is a temporary ID for enhanced DSCH power control assigned to a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSDT Cell Identity for			SSDT Cell	
EDSCHPC			Identity	
			9.2.2.44	

9.2.2.45 SSDT Cell ID Length

The SSDT Cell ID Length parameter shows the length of the SSDT Cell ID.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell ID Length			ENUMERAT	
			ED(Short,	
			Medium,	
			Long)	

9.2.2.46 SSDT Support Indicator

The SSDT Support Indicator indicates whether a RL supports SSDT or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSDT Support Indicator			ENUMERAT ED (SSDT Supported,	
			SSDT not supported).	

9.2.2.47 SSDT Indication

The SSDT Indication indicates whether SSDT is in use by the UE or not.

IE/Group name	Presence	Range	IE type and reference	Semantics description
SSDT Indication			ENUMERAT ED(SSDT Active in the UE, SSDT not Active in the UE)	

9.2.2.48 STTD Indicator

Indicates if STTD shall be active or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
STTD Indicator			ENUMERAT ED(active, inactive)	

9.2.2.49 T Cell

Timing delay used for defining start of SCH, CPICH and the DL scrambling code(s) in a cell relative BFN. Resolution 256 chips.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
T Cell			Enumerated	0: 0 chip
			(0 , 1,,9)	1: 256 chip
				9: 2304 chip
				[17]

9.2.2.49A TFCI2 Bearer Information Response

The *TFCI2 Bearer Information Response* IE provides information for TFCI2 bearer that have been established or modified.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
Binding ID	M		9.2.1.4		-	
Transport Layer Address	M		9.2.1.63		-	

9.2.2.50 TFCI signalling mode

This parameter indicates if the normal or split mode is used for the TFCI. In the event that the split mode is to be used then the IE indicates whether the split is 'Hard' or 'Logical', and in the event that the split is 'Logical' the IE indicates the number of bits in TFCI (field 2).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI signalling option	M		ENUMERAT ED (Normal, Split)	'Normal' : meaning no split in the TFCI field (either 'Logical' or 'Hard') 'Split' : meaning there is a split in the TFCI field (either 'Logical' or 'Hard')
Split type	C-lfSplit		Enumerated (Hard, Logical)	'Hard': meaning that TFCI (field 1) and TFCI (field 2) are each 5 bits long and each field is block coded separately. 'Logical': meaning that on the physical layer TFCI (field 1) and TFCI (field 2) are concatenated, field 1 taking the most significant bits and field 2 taking the least significant bits). The whole is then encoded with a single block code.
Length of TFCI2	C- SplitType		Integer (110)	This IE indicates the length measured in number of bits of TFCI (field2).

Condition	Explanation
IfSplit	The IE shall be present if the TFCI signalling option IE is set to
	"Split".
SplitType	The IE shall be present if the Split type IE is set to "Logical".

9.2.2.51 TGD

Void.

9.2.2.52 TGL

Void.

9.2.2.53 Transmit Diversity Indicator

The Transmit Diversity Indicator indicates whether transmit diversity shall be active or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transmit Diversity Indicator			ENUMERAT ED(active, inactive)	

9.2.2.53A Transmission Gap Pattern Sequence Information

Defines the parameters for the compressed mode gap pattern sequence. For details see ref. [18].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transmission gap pattern Sequence Information		1 to <maxtgps></maxtgps>		
>TGPSI Identifier	М		Integer(1< MaxTGPS>)	Transmission Gap Pattern Sequence Identifier Establish a reference to the compressed mode pattern sequence. Up to <maxtgps> simultaneous compressed mode pattern sequences can be used.</maxtgps>
>TGSN	М		Integer (014)	Transmission Gap Starting Slot Number The slot number of the first transmission gap slot within the TGCFN.
>TGL1	M		Integer(114)	The length of the first Transmission Gap within the transmission gap pattern expressed in number of slots.
>TGL2	0		Integer (114)	The length of the second Transmission Gap within the transmission gap pattern. If omitted, then TGL2=TGL1.
>TGD	M		Integer (0, 15 269)	Transmission gap distance indicates the number of slots between the starting slots of two consecutive transmission gaps within a transmission gap pattern. If there is only one transmission gap in the transmission gap pattern, this parameter shall be set to 0 (0 = undefined).
>TGPL1	М		Integer (1144,)	The duration of transmission gap pattern 1 in frames.
>TGPL2	0		Integer (1144,)	The duration of transmission gap pattern 2 in frames. If omitted, then TGPL2=TGPL1.
>UL/DL mode	М		Enumerated (UL only, DL only, UL/DL)	Defines whether only DL, only UL, or combined UL/DL compressed mode is used.
>Downlink compressed mode method	C-DL		Enumerated (puncturing, SF/2, higher layer scheduling,)	Method for generating downlink compressed mode gap None means that compressed mode pattern is stopped.
>Uplink compressed mode method	C-UL		Enumerated (SF/2, higher layer scheduling,)	Method for generating uplink compressed mode gap.
>Downlink frame type	М		Enumerated (A, B,)	Defines if frame structure type 'A' or 'B' shall be used in downlink compressed mode.
>DeltaSIR1	М		Integer (030)	Delta in SIR target value to be set in the Node B during the frame containing the start of the first transmission gap in the transmission gap pattern (without including the effect of the bit-rate increase)
>DeltaSIRafter1	M		Integer	Step 0.1 dB, Range 0-3dB Delta in SIR target value to be

		(030	set in the Node B one frame after the frame containing the start of the first transmission gap in the transmission gap pattern,. Step 0.1 dB, Range 0-3dB
>DeltaSIR2	0	Intege (030	9
>DeltaSIRafter2	0	Intege (030	er Delta in SIR target value to be

Condition	Explanation
UL	The IE shall be present if the UL/DL mode IE is set to "UL only" or
	"UL/DL".
DL	The IE shall be present if the <i>UL/DL mode</i> IE is set to "DL only" or
	"UL/DL".

Range bound	Explanation
MaxTGPS	Maximum number of transmission gap pattern sequences.

9.2.2.53B Transmission Gap Pattern Sequence Code Information

This IE indicates whether the alternative scrambling code shall used for the Downlink compressed mode method or not in the Transmission Gap Pattern Sequence. For details see [18].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Scrambling code change			Enumerated (Code Change, No Code Change)	Indicates whether the alternative scrambling code is used for compressed mode method 'SF/2'.

9.2.2.54 UL/DL compressed mode selection:

Void.

9.2.2.55 UL delta SIR

Void.

9.2.2.56 UL delta SIR after

Void.

9.2.2.57 UL DPCCH Slot Format

Indicates the slot format used in DPCCH in UL, accordingly to ref. [7].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL DPCCH slot format			INTEGER (05,)	

9.2.2.58 UL SIR

Void

9.2.2.59 UL Scrambling Code

The UL Scrambling Code is the scrambling code used by UE. Every UE has its specific UL Scrambling Code.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL scrambling code number	М		INTEGER (0 2 ²⁴ -1)	
UL scrambling code length	М		ENUMERAT ED(Short, Long)	

9.2.2.60 UL Capacity Credit

Void

9.2.3 TDD specific Parameters

9.2.3.1 Block STTD Indicator

Void.

9.2.3.2 Burst Type

Void.

9.2.3.3 CCTrCH ID

The CCTrCH ID for dedicated and shared channels identifies unambiguously an uplink or downlink CCTrCH inside a Radio Link,. for S-CCPCH it identifies unambiguously a downlink CCTrCH within a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CCTrCH ID			INTEGER (015)	

9.2.3.4 Cell Parameter ID

The Cell Parameter ID identifies unambiguously the [3.84 Mcps TDD - Code Groups, Scrambling Codes, Midambles and Toffset] [1.28 Mcps TDD - SYNC-DL and SYNC-UL sequences, the scrambling codes and the midamble codes] (see ref. [20]).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell Parameter ID			INTEGER	
			(0127,)	

9.2.3.4A Constant Value

The Constant Value is the power margin used by a UE to set the proper uplink power for a DCH, USCH, or a RACH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Constant Value			INTEGER	Unit dB
			(-1010,)	Granularity 1 dB.

9.2.3.4B DL Timeslot ISCP

DL Timeslot ISCP is the measured interference in a downlink timeslot at the UE, see ref. [5].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL Timeslot ISCP			INTEGER (091)	According to mapping in ref. [5].

9.2.3.4C DCH TDD Information

The DCH TDD Information IE provides information for DCHs to be established.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
DCH TDD Information		1 to <maxnoof DCHs></maxnoof 			1	
>Payload CRC Presence Indicator	M		9.2.1.49		_	
>UL FP mode	M		9.2.1.66		_	
>ToAWS	M		9.2.1.61		_	
>ToAWE	M		9.2.1.60		_	
>DCH Specific Info		1 <maxno ofDCHs></maxno 			_	
>>DCH ID	M		9.2.1.20		_	
>>CCTrCH ID	М		9.2.3.3	UL CCTrCH in which the DCH is mapped	_	
>>CCTrCH ID	М		9.2.3.3	DL CCTrCH in which the DCH is mapped	_	
>>Transport Format Set	M		9.2.1.59	For UL	_	
>>Transport Format Set	М		9.2.1.59	For DL		
>>Allocation/Retention Priority	М		9.2.1.1A		_	
>>Frame Handling Priority	М		9.2.1.30		_	
>>QE-Selector	C- CoorDCH		9.2.1.50A		_	

Condition	Explanation
CoorDCH	The IE shall be present if this DCH is part of a set of coordinated
	DCHs (number of instances of the DCH Specific Info IE is greater
	than 1).

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for one UE

9.2.3.4D DCHs TDD to Modify

The DCHs TDD to Modify IE provides information for DCHs to be modified.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
DCHs TDD to Modify		1 <maxn oofDCHs ></maxn 			GLOBAL	reject
>UL FP Mode	0		9.2.1.66		-	
>ToAWS	0		9.2.1.61		-	
>ToAWE	0		9.2.1.60		-	
>Transport Bearer Request Indicator	М		9.2.1.62A		_	
>DCH Specific Info		1 <maxn oofDCHs ></maxn 			_	
>>DCH ID	M		9.2.1.20		_	
>>CCTrCH ID	0		9.2.3.3	UL CCTrCH in which the DCH is mapped.	_	
>>CCTrCH ID	0		9.2.3.3	DL CCTrCH in which the DCH is mapped	_	
>>Transport Format Set	0		9.2.1.59	For the UL.	_	
>>Transport Format Set	0		9.2.1.59	For the DL.	_	
>>Allocation/Retention Priority	0		9.2.1.1A		_	
>>Frame Handling Priority	0		9.2.1.30		_	

\Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for one UE

9.2.3.4E DL Timeslot Information

The *DL Timeslot Information* IE provides information for DL Time slot to be established.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
DL Timeslot Information		1 <maxnoof DLts></maxnoof 			_	
>Time Slot	М		9.2.3.23		-	
>Midamble Shift and Burst Type	М		9.2.3.7		_	
>TFCI Presence	М		9.2.1.57		-	
>DL Code Information	М		TDD DL Code Information 9.2.3.19B		_	

Range bound	Explanation
MaxnoofDLts	Maximum number of Downlink time slots per Radio Link

9.2.3.4F DL Time Slot ISCP Info

The DL Time Slot ISCP Info IE provides information for DL Interference level for each time slot within the Radio Link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
DL Time Slot ISCP Info		1 <maxnoofdl ts></maxnoofdl 			_	
>Time Slot	M		9.2.3.23		_	
>DL Timeslot ISCP	M		9.2.3.4B		_	

Range bound	Explanation
MaxnoofDLts	Maximum number of Downlink time slots per Radio Link for
	3.84Mcps TDD.

9.2.3.4G Cell Sync Burst Code

The Cell Sync Burst Code IE indicates which Code is used for a given Cell Sync Burst.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell Sync Burst Code			INTEGER (07,)	

9.2.3.4H Cell Sync Burst Code Shift

The Cell Sync Burst Code Shift IE indicates the number of code shifts used for a given Cell Sync Burst.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell Sync Burst Code Shift			INTEGER (07)	

9.2.3.4I CSB Measurement ID

The Cell Sync Burst Measurement ID IE uniquely identifies any cell sync burst measurement per Node B - control port.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CSB Measurement ID			Integer(0	
			65535)	

9.2.3.4J Cell Sync Burst Repetition Period

The *Cell Sync Burst Repetition Period* IE represents the number of consecutive Radio Frames after which the cell sync burst transmission/measurement is repeated. This means that if the Time Slot K is assigned to the cell sync burst transmission/measurements in the Radio Frame J, the cell sync burst transmission/measurement is also in all the Radio Frames J+n*Repetition Period.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell Sync Burst Repetition			INTEGER	
Period			(04095)	

9.2.3.4K Cell Sync Burst SIR

Indicates the Signal to Interference Ratio of the cell sync burst measurement according definition in [5].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell Sync Burst SIR			INTEGER	According to mapping in [23]
			(031)	

9.2.3.4L Cell Sync Burst Timing

The *Cell sync burst timing* IE defines the time of start (defined by the first detected path in time) of the cell sync burst of a neighbouring cell see [5].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell Sync Burst Timing			CHOICE INTEGER (0255) or INTEGER (01048575)	According to mapping in [23]

9.2.3.4M Cell Sync Burst Timing Threshold

The *Cell Sync Burst Timing Threshold* IE defines the threshold that shall trigger a Cell Synchronisation Report message.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell Sync Burst Timing Threshold			INTEGER (0254)	0: 0 chips 1: 0.125 chips 2: 0.250 chips 254: 31.75 chips

9.2.3.4N CSB Transmission ID

The Cell Sync Burst Transmisson ID IE uniquely identifies any cell sync burst transmission per Node B-control port.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CSB Transmission ID			Integer(0	
			65535)	

9.2.3.40 DL Timeslot Information LCR

The DL Timeslot Information LCR IE provides information for DL Time slot to be established.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
DL Timeslot Information LCR		1 <maxnoof DLtsLCR></maxnoof 			-	
>Time Slot LCR	М		9.2.3.24A		_	
>Midamble Shift LCR	М		9.2.3.7A		_	
>TFCI Presence	М		9.2.1.57		_	
>DL Code Information	М		TDD DL Code Information LCR 9.2.3.19C		_	

Range bound	Explanation
MaxnoofDLtsLCR	Maximum number of Downlink time slots per Radio Link for
	1.28Mcps TDD.

9.2.3.40A DL Time Slot ISCP Info LCR

The *DL Time Slot ISCP Info LCR* IE provides information for DL Interference level for each time slot within the Radio Link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
DL Time Slot ISCP Info LCR		1 <maxnoofdl LCRs></maxnoofdl 			_	
>Time Slot LCR	M		9.2.3.24A		-	
>DL Timeslot ISCP	M		9.2.3.4B		_	

Range bound	Explanation
MaxnoofDLLCRs	Maximum number of Downlink time slots per Radio Link for
	1.28Mcps TDD.

9.2.3.5 DPCH ID

The DPCH ID identifies unambiguously a DPCH inside a Radio Link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DPCH ID			INTEGER (0239)	

9.2.3.5A DSCH TDD Information

The DSCH TDD Information IE provides information for DSCHs to be established.

IE/Group Name	Presence	Range	IE type and reference	Semantics descriptions	Criticality	Assigned Criticality
DSCH TDD Information		1 to <maxnoof DSCHs></maxnoof 			_	
>DSCH ID	M		9.2.1.27		_	
>CCTrCH ID	M		9.2.3.2	DL CCTrCH in which the DSCH is mapped	_	
>Transport Format Set	M		9.2.1.59	For DSCH	_	
>Allocation/Retention Priority	M		9.2.1.1A		_	
>Frame handling Priority	М		9.2.1.30		_	
>ToAWS	М		9.2.1.61		_	
>ToAWE	M		9.2.1.60		_	

Range bound	Explanation
MaxnoofDSCHs	Maximum number of DSCH for one UE

9.2.3.5B DwPCH Power

DwPCH Power is the power that shall be used for transmitting the DwPCH in a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DwPCH Power			INTEGER(-	Unit dBm
			15+40,)	Granularity 0.1 dB

9.2.3.5C Frame Adjustment value

The Frame Adjustment value IE represents the frame number correction within the initial synchronisation phase.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Frame Adjustment value			INTEGER (04095)	SFN _{new} =(SFN _{old} +Frame Adjustment value) mod 4096

9.2.3.5D IPDL TDD Parameter

The IPDL TDD Parameter IE provides information about IPDL to be applied for TDD when activated.

IE/Group Name	Presence	Range	IE type and	Semantics description	Criticality	Assigned Criticality
			reference	S		
IP spacingTDD	M		ENUMERA	See [21]	_	
			TED(30,			
			40, 50, 70,			
			100,)			
IP Start	M		Integer(0	See [21]	_	
			4095)			
IP Slot	M		Integer(0	See [21]	_	
			14)			
IP PCCPCH	M		ENUMERA	See [21]	_	
			TED(Switc			
			h off 1			
			frame,			
			Switch off			
			2 frames)			
Burst mode parameters	0		9.2.1.5A			

9.2.3.5E Max FPACH Power

Max FPACH Power is the maximum power that shall be used for transmitting the FPACH in a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
FPACH Power			INTEGER(- 15+40,)	Unit dBm Granularity 0.1 dB

9.2.3.6 Max PRACH Midamble shift

Indicates the maximum number of Midamble shifts to be used in a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Max PRACH Midamble Shifts			ENUMERAT ED (4, 8,)	

9.2.3.7 Midamble shift and burst type

This information element indicates burst type and midamble allocation.

The 256 chip midamble supports 3 different time shifts, the 512 chips midamble may support 8 or even 16 time shifts.

Three different midamble allocation schemes exist:

Default midamble: the midamble shift is selected by layer 1 depending on the associated channelisation code (DL and UL)

Common midamble: the midamble shift is chosen by layer 1 depending on the number of channelisation codes (possible in DL only)

UE specific midamble: a UE specific midamble is explicitly assigned (DL and UL)

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CHOICE Burst Type				
>Type1				
>>Midamble Allocation Mode	M		Enumerated (Default midamble, Common midamble, UE specific midamble)	
>> Midamble Configuration Burst Type 1 And 3	M		Integer(4, 8, 16)	As defined in [19]
>>Midamble Shift	C-UE		Integer(015)	
>Type2				
>>Midamble Allocation Mode	M		Enumerated (Default midamble, Common midamble, UE specific midamble)	
>> Midamble Configuration Burst Type 2	M		Integer(3,6)	As defined in [19]
>>Midamble Shift	C-UE		INTEGER (05)	
>Type3				UL only
>>Midamble Allocation Mode	M		Enumerated (Default midamble, UE specific midamble)	
>> Midamble Configuration Burst Type 1 And 3	М		Integer(4, 8, 16)	As defined in [19]
>>Midamble Shift	C-UE		Integer(015)	

Condition	Explanation
UE	The IE shall be present if the Midamble Allocation
	Mode IE is set to "UE-specific midamble".

9.2.3.7A Midamble shift LCR

This information element indicates midamble allocation in 1.28Mcps TDD.

IE/Group name	Presence	Range	IE type and reference	Semantics description
Midamble Allocation Mode	М		Enumerated (Default midamble, Common midamble, UE specific midamble)	
Midamble Shift LCR	C-UE		Integer(015	

Condition	Explanation			
UE	The IE shall be present if the Midamble Allocation			
	Mode IE is set to "UE-specific midamble".			

9.2.3.7B Number of cycles per SFN period

The *Number of cycles per SFN period* IE indicates the number of repetitions per SFN period where the same schedule shall apply.

IE/Group Name	Presence	Range	IE type and	Semantics description
			reference	
Number of cycles per SFN			ENUMERAT	
period			ED (1, 2, 4,	
			8,)	

9.2.3.7C Number of repetitions per cycle period

The *Number of repetitions per cycle period* IE indicates the number of Sync frames per Cycle Length where the cell sync bursts shall be transmitted or the cell sync bursts from the neighbouring cells shall be measured.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Number of repetitions per			INTEGER	
cycle period			(210)	

9.2.3.8 Paging Indicator Length

The Paging Indicator Length indicates the number of symbols for Page Indication transmitted in one timeslot (see ref [19]).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Paging Indicator Length			ENUMERAT ED (2, 4, 8,)	

9.2.3.9 PCCPCH Power

Primary CCPCH power is the power that shall be used for transmitting the P CCPCH in a cell. The P CCPCH power is the reference power in a TDD-cell. The reference point is the antenna connector.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PCCPCH Power			INTEGER(-	Unit dBm
			15+40,)	Granularity 0.1 dB

9.2.3.10 PDSCH ID

The PDSCH ID identifies unambiguously a PDSCH inside a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PDSCH ID			INTEGER	
			(0255)	

9.2.3.11 PDSCH Set ID

The PDSCH Set Id identifies unambiguously a PDSCH Set inside a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PDSCH Set ID			INTEGER	See ref. [6]
			(0255)	

9.2.3.12 PUSCH ID

The PUSCH ID identifies unambiguously a PUSCH inside a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PUSCH ID			INTEGER (0255)	

9.2.3.13 PUSCH Set ID

The PUSCH Set ID identifies unambiguously a PUSCH Set inside a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PUSCH Set ID			INTEGER (0255)	See ref. [6]

9.2.3.14 PRACH Midamble

The PRACH Midamble indicates if only the Basic Midamble Sequence or also the time-inverted Midamble Sequence is used.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PRACH Midamble			ENUMERAT ED (Inverted, Direct)	

9.2.3.14A Reference Clock availability

The *Reference Clock availability* IE is used to indicate the presence and operating of a Reference Clock connected to a TDD cell for cell synchronisation purpose.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Reference Clock availability			ENUMERAT	
_			ED(Available	
			, Not	
			Available)	

9.2.3.14B Reference SFN offset

The *Reference SFN offset* IE indicates the number of frames the reference SFN shall be shifted compared to the SFN derived from the synchronisation port.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Reference SFN offset			INTEGER(0 255)	

9.2.3.15 Repetition Length

The Repetition Length represents the number of consecutive Radio Frames inside a Repetition Period in which the same Time Slot is assigned to the same Physical Channel see ref. [18].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Repetition Length			INTEGER(1.	
			.63)	

9.2.3.16 Repetition Period

The Repetition Period represents the number of consecutive Radio Frames after which the same assignment scheme of Time Slots to a Physical Channel is repeated. This means that if the Time Slot K is assigned to a physical channel in the Radio Frame J, it is assigned to the same physical channel also in all the Radio Frames J+n*Repetition Period (where n is an integer) see ref. [18].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Repetition Period			ENUMERAT	
			ED(1, 2, 4,	
			8, 16, 32,	
			64)	

9.2.3.17 SCH Time Slot

The SCH Time Slot IE represents the first time slot (k) of a pair of time slots inside a Radio Frame that shall be assigned to the Physical Channel SCH. The SCH Time Slot IE is only applicable if the value of Sync Case IE is Case 2 since in this case the SCH is allocated in TS#k and TS#k+8.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SCH Time Slot				
			INTEGER(0.	
			.6)	ļ

9.2.3.18 Sync case

The SCH and PCCPCH are mapped on one or two downlink slots per frame. There are two cases of SCH and PCCPCH allocation as follows:

- Case 1) SCH and PCCPCH allocated in a single TS#k
- Case 2) SCH allocated in two TS: TS#k and TS#k+8 PCCPCH allocated in TS#k

[1.28Mcps TDD - There is no Sync Case indication needed for 1.28Mcps TDD. If the *Sync Case* IE must be included in a message from CRNC to Node B used for 1.28Mcps TDD, the CRNC should indicate Sync Case 1 and the Node B shall ignore it.]

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Sync Case			Integer (12,)	

9.2.3.18A Special Burst Scheduling

The number of frames between special burst transmissions during DTX.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Special Burst Scheduling			Integer (1, 2,, 256)	Number of frames between special burst transmission during DTX

9.2.3.18B SYNC DL Code ID

The SYNC_DL Code ID identifies the SYNC_DL Code which used by DwPCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SYNC_DL Code ID			INTEGER (132,)	

9.2.3.18C Sync Frame number

The *Sync Frame Number* IE indicates the number of the Sync frame per Cycle Length where the cell sync bursts shall be transmitted or the cell sync bursts from the neighbouring cells shall be measured.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Sync Frame number			INTEGER	
			(110)	

9.2.3.18D Synchronisation Report Characteristics

The Synchronisation Report Characteristics IE defines how the reporting on measured cell sync bursts shall be performed

Different methods shall apply for the measured cell sync burst reports. In the frequency acquisition phase the measurement report shall be sent when the frequency locking is completed. In the initial phase and for the measurement on late-entrant cells an immediate report after the measured frame is expected.

In the steady-state phase measurement reports may be given after every measured frame, after every SFN period, after every cycle length or only when the requested threshold is exceeded.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Synchronisation Report	M		ENUMERAT	
characteristics type			ED (Frame	
			related, SFN	
			period	

			related, Cycle length related, Threshold exceeding, Frequency Acquisition completed,)	
Threshold exceeding	C- Threshold exceeding			Applies only to the Steady State Phase
>Cell Sync Burst Threshold Information		1 <maxnoofcellsyn cBursts></maxnoofcellsyn 		
>>Sync Frame number to receive	M		Sync Frame number 9.2.3.18C	
>>Cell Sync Burst Information		1 <maxnoofrecep e="" tionspersyncfram=""></maxnoofrecep>		
>>>Cell Sync Burst Code	М		9.2.3.4G	
>>>Cell Sync Burst Code shift	М		9.2.3.4H	
>>>Cell Sync Burst Arrival Time	0		Cell Sync Burst Timing 9.2.3.4L	
>>>Cell Sync Burst Timing Threshold	0		9.2.3.4M	

Range bound	Explanation
maxnoofCellSyncBursts	Maximum number of cell sync burst per cycle
maxnoofreceptionsperSyncFrame	Maximum number of cell sync burst receptions per
	Sync Frame

9.2.3.18E Synchronisation Report Type

The *Synchronisationt Report Type* IE represents the individual types of synchronisation reports that shall apply within the individual synchronisation phases. (see [17]).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Synchronisation Report Type			ENUMERAT	
			ED (Initial	
			Phase,	
			Steady-State	
			Phase, Late-	
			Entrant Cell,	
			Frequency	
			Acquisition,	
)	

9.2.3.19 TDD Channelisation Code

The Channelisation Code Number indicates which Channelisation Code is used for a given Physical Channel. In TDD the Channelisation Code is an Orthogonal Variable Spreading Factor code, that can have a spreading factor of 1, 2, 4, 8 or 16.

IE/Group Name	Presence	Range	IE type and	Semantics description
			reference	
TDD Channelisation Code			ENUMERAT	
			ED ((1/1),	
			(2/1), (2/2),	
			(4/1), (4/4),	
			(8/1), (8/8),	
			(16/1),	
			(16/16) ,)	

9.2.3.19a TDD Channelisation Code LCR

The Channelisation Code Number indicates which Channelisation Code is used for a given Physical Channel. In 1.28Mcps TDD the Channelisation Code is an Orthogonal Variable Spreading Factor code, that can have a spreading factor of 1, 2, 4, 8 or 16 and there is a choice between QPSK and 8PSK modulation.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TDD Channelisation Code			ENUMERAT	
			ED ((1/1),	
			(2/1), (2/2),	
			(4/1),(4/4),	
			(8/1), (8/8),	
			(16/1)	
			(16/16) ,)	
Modulation			ENUMERAT	Modulation options for
			ED (QPSK,	1.28Mcps TDD in contrast to
			8PSK,)	3.84Mcps TDD

9.2.3.19A TDD DPCH Offset

The Offset represents the phase information for the allocation of a group of dedicated physical channels. The first range is used when a starting offset is not required and the TDD Physical channel offset for each DPCH in the CCTrCH shall be directly determined from the TDD DPCH Offset. The second range is used when a starting offset is required. The TDD DPCH Offset shall map to the CFN and the TDD Physical Channel Offet for each DPCH in this CCTrCH shall calculated by TDD DPCH Offset *mod* Repetition period, see ref. [18].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TDD DPCH Offset			CHOICE INTEGER (063) or	
			INTEGER (0255)	

9.2.3.19B TDD DL Code Information

The TDD DL Code Information IE provides DL Code information for the RL.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
TDD DL Code Information		1 <maxnoof DPCH></maxnoof 			_	
>DPCH ID	М		9.2.3.5		_	
>TDD Channelisation Code	М		9.2.3.19		_	

Range bound	Explanation
maxnoOfDPCH	Maximum number of DPCH in one CCTrCH

9.2.3.19C TDD DL Code Information LCR

The TDD DL Code Information LCR IE provides DL Code information for the RL.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
TDD DL Code Information LCR		1 <maxnoof DPCHLCR ></maxnoof 			_	
>DPCH ID	М		9.2.3.5		_	
>TDD Channelisation Code LCR	М		9.2.3.19a		_	

Range bound	Explanation
maxnoOfDPCHLCR	Maximum number of DPCH in one CCTrCH for 1.28Mcps TDD

9.2.3.20 TDD Physical Channel Offset

The Offset represents the phase information for the allocation of a physical channel. (SFN mod Repetition Period = Offset) see ref. [18].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TDD Physical Channel			INTEGER	
Offset			(063)	

9.2.3.21 TDD TPC DL step size

This parameter indicates step size for the DL power adjustment.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TDD TPC Downlink step size			ENUMERAT ED (1, 2,	
			3,)	

9.2.3.21A TDD UL Code Information

The TDD UL Code Information IE provides information for UL Code to be established.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
TDD UL Code Information		1 <maxno OfDPCH ></maxno 			_	
>DPCH ID	M		9.2.3.5		_	
>TDD Channelisation Code	M		9.2.3.19		_	

Range bound	Explanation
MaxnoOfDPCH	Maximum number of DPCH in one CCTrCH

9.2.3.21B TDD UL Code Information LCR

The TDD UL Code Information LCR IE provides information for UL Code to be established.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
TDD UL Code Information LCR		1 <maxno OfDPCH LCR></maxno 			-	
>DPCH ID	M		9.2.3.5		_	
>TDD Channelisation Code LCR	М		9.2.3.19a		_	

Range bound	Explanation
MaxnoOfDPCHLCR	Maximum number of DPCH in one CCTrCH for 1.28Mcps TDD.

9.2.3.22 TFCI Coding

The TFCI Coding describes the way how the TFCI bits are coded. By default 1 TFCI bit is coded with 4 bits, 2 TFCI bits are coded with 8 bits, 3-5 TFCI bits are coded with 16 bits and 6-10 TFCI bits are coded with 32 bits.

IE/Group Name	Presence	Range	IE type and	Semantics description
			reference	
TFCI Coding			Enumerated	
			(4, 8, 16,	
			32,)	

9.2.3.22a Timing Adjustment value

The *Timing Adjustment value* IE indicates the timing correction within a Frame. Type 1 is used for the initial phase of Node B synchronisation. Type 2 is used for the steady-state phase of Node B synchronisation.

IE/Group Name	Presence	Range	IE type and	Semantics description
			reference	
Timing Adjustment value			CHOICE	According to mapping in [23]
			INTEGER	
			(0255) or	
			INTEGÉR	
			(01048575)	

9.2.3.22A Timing Advance Applied

Defines the need for Rx Timing Deviation measurement results to be reported in a particular cell.

For 1.28Mcps TDD this IE must be set "No"

IE/Group Name	Presence	Range	IE type and	Semantics description
			reference	
Timing Advance Applied			ENUMERAT	
			ED (Yes,	
			No)	

9.2.3.23 Time Slot

The Time Slot represents the minimum time interval inside a Radio Frame that can be assigned to a Physical Channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Time Slot			INTEGER (014)	

9.2.3.24 Time Slot Direction

This parameter indicates whether the TS in the cell is used in Uplink or Downlink direction.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Time Slot Direction			Enumerated (UL, DL,)	

9.2.3.24A Time Slot LCR

The Time Slot LCR is the number of the traffic time slot within a 5 ms subframe of LCR TDD.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Time Slot LCR			INTEGER	
			(06)	

9.2.3.25 Time Slot Status

This parameter indicates whether the TS in the cell is active or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Time Slot Status			Enumerated	
			(active,	
			notActive,)	

9.2.3.26 Transmission Diversity Applied

Defines if Transmission Diversity on DCHs to be applied in a cell (see ref. [19]).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transmission Diversity Applied			Boolean	

9.2.3.26A UL Timeslot ISCP

UL Timeslot ISCP is the measured interference in a uplink timeslot at the Node B, see ref. [5].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL Timeslot ISCP			INTEGER (0127)	According to mapping in [23].

9.2.3.26B UL PhysCH SF Variation

Indicates whether variation of SF in UL is supported by Radio Link or not.

IE/Group Name	Presence	Range	IE type and	Semantics description
			reference	
UL PhysCH SF Variation			ENUMERAT	
			ED	
			(SF_Variatio	
			n_supported,	
			SF_Variation	
			_NOT_supp	
			orted)	

9.2.3.26C UL Timeslot Information

The UL Timeslot Information IE provides information on the time slot allocation for an UL DPCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics descriptions	Criticality	Assigned Criticality
UL Timeslot Information		1 <maxn oofULts</maxn 			-	
>Time Slot	М		9.2.3.23		_	
>Midamble Shift and Burst Type	М		9.2.3.7		_	
>TFCI Presence	М		9.2.1.57		_	
> UL Code Information	M		TDD UL Code Information 9.2.3.21A			

ĺ	Range bound	Explanation
	MaxnoofULts	Maximum number of Uplink time slots per Radio Link

9.2.3.26D UL Time Slot ISCP Info

The UL Time Slot ISCP Info IE provides information for UL Interfernce level for each time slot within the Radio Link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
UL Time Slot ISCP Info		1 <maxnooful ts></maxnooful 				
>Time Slot	М		9.2.3.23			
>UL Timeslot ISCP	М		9.2.3.26A			

Range bound	Explanation
MaxnoofULts	Maximum number of Uplink time slots per Radio Link

9.2.3.26E UL Timeslot Information LCR

The UL Timeslot Information IE provides information on the time slot allocation for an UL DPCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics descriptions	Criticality	Assigned Criticality
UL Timeslot Information LCR		1 <maxn oofULts LCR></maxn 			-	
>Time Slot LCR	M		9.2.3.24A		_	
>Midamble Shift LCR	M		9.2.3.7A		_	
>TFCI Presence	M		9.2.1.57		_	
> UL Code Information	M		TDD UL Code Information LCR 9.2.3.21B			

Range bound	Explanation
MaxnoofULtsLCR	Maximum number of Uplink time slots per Radio Link for 1.28Mcps
	TDD.

9.2.3.26F UL Time Slot ISCP Info LCR

The *UL Time Slot ISCP Info LCR* IE provides information for UL Interfernce level for each time slot within the Radio Link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
UL Time Slot ISCP Info LCR		1 <maxnooful tsLCR></maxnooful 			1	
>Time Slot LCR	М		9.2.3.24A		_	
>UL Timeslot ISCP	М		9.2.3.26A		_	

Range bound	Explanation			
MaxnoofULtsLCR	Maximum number of Uplink time slots per Radio Link for 1.28Mcps			
	TDD			

9.2.3.27 USCH ID

The USCH ID uniquely identifies a USCH within a Node B Communication Context.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
USCH ID			INTEGER (0255)	

9.2.3.28 USCH Information

The USCH Information IE provides information for USCHs to be established.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
USCH Information		1 to <maxnoof USCHs></maxnoof 			-	
>USCH ID	М		9.2.3.27		_	
>CCTrCH ID	М		9.2.3.3	UL CCTrCH in which the USCH is mapped	-	
>Transport Format Set	М		9.2.1.59	For USCH	_	
>Allocation/Retention Priority	М		9.2.1.1A		_	

Range bound	Explanation		
MaxnoofUSCHs	Maximum number of USCH for one UE		

9.2.3.29 USCH Information Response

The USCH Information Response IE provides information for USCHs that have been established or modified.

IE/Group Name	Presence	Range	IE type and reference	Semantics description s	Criticality	Assigned Criticality
USCH Information Response		1 <maxnoof USCHs></maxnoof 			_	
>USCH ID	M		9.2.3.27		_	
>Binding ID	0		9.2.1.4		_	
>Transport Layer Address	0		9.2.1.63		_	

Range bound	Explanation
MaxnoofUSCHs	Maximum number of USCHs for one UE

9.2.3.30 SCTD Indicator

Indicates if SCTD antenna diversity is applied or not to the PCCPCH and PICH [3.84Mcps TDD].

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
SCTD Indicator			ENUMERAT ED(active, inactive)	

9.3 Message and Information element abstract syntax (with ASN.1)

9.3.0 General

Subclause 9.3 presents the Abstract Syntax of NBAP protocol with ASN.1. In case there is contradiction between the ASN.1 definition in this subclause and the tabular format in subclauses 9.1 and 9.2, the ASN.1 shall take precedence, except for the definition of conditions for the presence of conditional elements, where the tabular format shall take precedence.

The ASN.1 definition specifies the structure and content of NBAP messages. NBAP messages can contain any IEs specified in the object set definitions for that message without the order or number of occurrence being restricted by ASN.1. However, for this version of the standard, a sending entity shall construct a NBAP message according to the PDU definitions module and with the following additional rules (Note that in the following IE means an IE in the object set with an explicit id. If one IE needed to appear more than once in one object set, then the different occurrences have different IE ids):

- IEs shall be ordered (in an IE container) in the order they appear in object set definitions.
- Object set definitions specify how many times IEs may appear. An IE shall appear exactly once if the presence field in an object has value "mandatory". An IE may appear at most once if the presence field in an object has value "optional" or "conditional". If in a tabular format there is multiplicity specified for an IE (i.e. an IE list) then in the corresponding ASN.1 definition the list definition is separated into two parts. The first part defines an IE container list where the list elements reside. The second part defines list elements. The IE container list appears as an IE of its own. For this version of the standard an IE container list may contain only one kind of list elements.

If a NBAP message that is not constructed as defined above is received, this shall be considered as Abstract Syntax Error, and the message shall be handled as defined for Abstract Syntax Error in subclause 10.3.6.

9.3.1 Usage of Private Message mechanism for non-standard use

The private message mechanism for non-standard use may be used

- For special operator- (and/or vendor) specific features considered not to be part of the basic functionality, i.e. the functionality required for a complete and high-quality specification in order to guarantee multi-vendor inter-operability.
- By vendors for research purposes, e.g. to implement and evaluate new algorithms/features before such features are proposed for standardisation

The private message mechanism shall not be used for basic functionality. Such functionality shall be standardised.

9.3.2 Elementary Procedure Definitions

CellDeletionResponse,

```
itu-t (0) identified-organization (4) etsi (0) mobileDomain (0)
umts-Access (20) modules (3) nbap (2) version1 (1) nbap-PDU-Descriptions (0) }
DEFINITIONS AUTOMATIC TAGS ::=
BEGIN
  ****************
-- IE parameter types from other modules.
__ *******************
IMPORTS
    Criticality,
    ProcedureID,
   MessageDiscriminator,
    TransactionID
FROM NBAP-CommonDataTypes
    CommonTransportChannelSetupRequestFDD,
    CommonTransportChannelSetupRequestTDD,
    CommonTransportChannelSetupResponse,
    CommonTransportChannelSetupFailure,
    CommonTransportChannelReconfigurationRequestFDD,
    CommonTransportChannelReconfigurationRequestTDD,
    CommonTransportChannelReconfigurationResponse,
    CommonTransportChannelReconfigurationFailure,
    CommonTransportChannelDeletionRequest,
    CommonTransportChannelDeletionResponse,
    BlockResourceRequest,
    BlockResourceResponse,
    BlockResourceFailure,
    UnblockResourceIndication,
    AuditFailure,
    AuditRequiredIndication,
    AuditRequest,
    AuditResponse,
    CommonMeasurementInitiationRequest,
    CommonMeasurementInitiationResponse,
    CommonMeasurementInitiationFailure,
    CommonMeasurementReport,
    CommonMeasurementTerminationRequest,
    CommonMeasurementFailureIndication,
    CellSetupRequestFDD,
    CellSetupRequestTDD,
    CellSetupResponse,
    CellSetupFailure,
    CellReconfigurationRequestFDD,
    CellReconfigurationRequestTDD,
    CellReconfigurationResponse,
    CellReconfigurationFailure,
    CellDeletionRequest,
```

```
InformationExchangeInitiationRequest,
InformationExchangeInitiationResponse,
InformationExchangeInitiationFailure,
InformationReport,
InformationExchangeTerminationRequest,
InformationExchangeFailureIndication,
ResourceStatusIndication.
SystemInformationUpdateRequest,
SystemInformationUpdateResponse,
SystemInformationUpdateFailure,
ResetRequest,
ResetResponse,
RadioLinkPreemptionRequiredIndication,
RadioLinkSetupRequestFDD,
RadioLinkSetupRequestTDD,
RadioLinkSetupResponseFDD,
RadioLinkSetupResponseTDD,
RadioLinkSetupFailureFDD,
RadioLinkSetupFailureTDD,
RadioLinkAdditionRequestFDD,
RadioLinkAdditionRequestTDD,
RadioLinkAdditionResponseFDD,
RadioLinkAdditionResponseTDD,
RadioLinkAdditionFailureFDD,
RadioLinkAdditionFailureTDD,
RadioLinkReconfigurationPrepareFDD,
RadioLinkReconfigurationPrepareTDD,
RadioLinkReconfigurationReady,
RadioLinkReconfigurationFailure,
RadioLinkReconfigurationCommit,
RadioLinkReconfigurationCancel,
RadioLinkReconfigurationRequestFDD,
RadioLinkReconfigurationRequestTDD,
RadioLinkReconfigurationResponse,
RadioLinkDeletionRequest,
RadioLinkDeletionResponse,
DL-PowerControlRequest,
DL-PowerTimeslotControlRequest,
DedicatedMeasurementInitiationRequest,
DedicatedMeasurementInitiationResponse,
DedicatedMeasurementInitiationFailure,
DedicatedMeasurementReport,
DedicatedMeasurementTerminationRequest,
DedicatedMeasurementFailureIndication.
RadioLinkFailureIndication,
RadioLinkRestoreIndication,
CompressedModeCommand,
ErrorIndication,
PrivateMessage,
PhysicalSharedChannelReconfigurationRequestTDD,
PhysicalSharedChannelReconfigurationResponseTDD,
PhysicalSharedChannelReconfigurationFailureTDD,
CellSynchronisationInitiationRequestTDD,
CellSynchronisationInitiationResponseTDD,
```

```
CellSynchronisationInitiationFailureTDD,
    CellSynchronisationReconfigurationRequestTDD,
    CellSynchronisationReconfigurationResponseTDD,
    CellSynchronisationReconfigurationFailureTDD,
    CellSynchronisationAdjustmentRequestTDD,
    CellSynchronisationAdjustmentResponseTDD,
    CellSynchronisationAdjustmentFailureTDD,
    CellSynchronisationReportTDD,
    CellSynchronisationTerminationRequestTDD,
    CellSynchronisationFailureIndicationTDD
FROM NBAP-PDU-Contents
    id-audit,
    id-auditRequired,
    id-blockResource,
    id-cellDeletion.
    id-cellReconfiguration,
    id-cellSetup,
    id-cellSynchronisationInitiation,
    id-cellSynchronisationReconfiguration,
    id-cellSynchronisationReporting,
    id-cellSynchronisationTermination,
    id-cellSynchronisationFailure,
    id-commonMeasurementFailure,
    id-commonMeasurementInitiation,
    id-commonMeasurementReport,
    id-commonMeasurementTermination,
    id-commonTransportChannelDelete,
    id-commonTransportChannelReconfigure,
    id-commonTransportChannelSetup,
    id-compressedModeCommand,
    id-dedicatedMeasurementFailure,
    id-dedicatedMeasurementInitiation.
    id-dedicatedMeasurementReport,
    id-dedicatedMeasurementTermination.
    id-downlinkPowerControl,
    id-downlinkPowerTimeslotControl,
    id-errorIndicationForDedicated,
    id-errorIndicationForCommon,
    id-informationExchangeFailure,
    id-informationExchangeInitiation,
    id-informationReporting,
    id-informationExchangeTermination,
    id-physicalSharedChannelReconfiguration,
    id-privateMessageForDedicated.
    id-privateMessageForCommon,
    id-radioLinkAddition,
    id-radioLinkDeletion,
    id-radioLinkFailure,
    id-radioLinkPreemption,
    id-radioLinkRestoration,
    id-radioLinkSetup,
    id-reset.
    id-resourceStatusIndication,
```

```
id-cellSynchronisationAdjustment,
   id-synchronisedRadioLinkReconfigurationCancellation,
   id-synchronisedRadioLinkReconfigurationCommit,
   id-synchronisedRadioLinkReconfigurationPreparation,
   id-systemInformationUpdate,
   id-unblockResource,
   id-unSynchronisedRadioLinkReconfiguration
FROM NBAP-Constants;
    ****************
  Interface Elementary Procedure Class
      NBAP-ELEMENTARY-PROCEDURE ::= CLASS {
   &InitiatingMessage
   &SuccessfulOutcome
                                    OPTIONAL,
   &UnsuccessfulOutcome
                                    OPTIONAL,
   &Out.come
                                    OPTIONAL,
   &messageDiscriminator
                                    MessageDiscriminator,
   &procedureID
                                    ProcedureID
                                                   UNIQUE,
   &criticality
                                                   DEFAULT ignore
                                    Criticality
WITH SYNTAX {
                                     &InitiatingMessage
   INITIATING MESSAGE
   [SUCCESSFUL OUTCOME
                                     &SuccessfulOutcome]
                                     &UnsuccessfulOutcome]
   [UNSUCCESSFUL OUTCOME
                                     &Outcome]
   [OUTCOME
   MESSAGE DISCRIMINATOR
                                    &messageDiscriminator
   PROCEDURE ID
                                     &procedureID
   [CRITICALITY
                                    &criticality]
    ******************
  Interface PDU Definition
NBAP-PDU ::= CHOICE {
   initiatingMessage
                         InitiatingMessage,
   succesfulOutcome
                         SuccessfulOutcome,
   unsuccesfulOutcome
                         UnsuccessfulOutcome.
   outcome
                         Outcome,
   . . .
InitiatingMessage ::= SEQUENCE {
   procedureID
                         NBAP-ELEMENTARY-PROCEDURE. &procedureID ({NBAP-ELEMENTARY-PROCEDURES}),
   criticality
                         NBAP-ELEMENTARY-PROCEDURE.&criticality ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID}),
   messageDiscriminator
                         NBAP-ELEMENTARY-PROCEDURE.&messageDiscriminator({NBAP-ELEMENTARY-PROCEDURES}{@procedureID}),
   transactionID
                         TransactionID,
```

291

```
NBAP-ELEMENTARY-PROCEDURE.&InitiatingMessage({NBAP-ELEMENTARY-PROCEDURES}{@procedureID})
    value
SuccessfulOutcome ::= SEOUENCE
   procedureID
                          NBAP-ELEMENTARY-PROCEDURE.&procedureID
                                                                ({NBAP-ELEMENTARY-PROCEDURES}).
                          NBAP-ELEMENTARY-PROCEDURE.&criticality ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID}),
   criticality
   messageDiscriminator
                          NBAP-ELEMENTARY-PROCEDURE. & messageDiscriminator({NBAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    transactionID
                          TransactionID,
    value
                          NBAP-ELEMENTARY-PROCEDURE. & SuccessfulOutcome( { NBAP-ELEMENTARY-PROCEDURES } { @procedureID})
UnsuccessfulOutcome ::= SEOUENCE
                          NBAP-ELEMENTARY-PROCEDURE. &procedureID ({NBAP-ELEMENTARY-PROCEDURES}),
   procedureID
   criticality
                          NBAP-ELEMENTARY-PROCEDURE.&criticality ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID}).
   messageDiscriminator
                          NBAP-ELEMENTARY-PROCEDURE. & messageDiscriminator({NBAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    transactionID
                          TransactionID.
                          NBAP-ELEMENTARY-PROCEDURE: &UnsuccessfulOutcome({NBAP-ELEMENTARY-PROCEDURES}{@procedureID})
    value
Outcome ::= SEOUENCE {
   procedureID
                          NBAP-ELEMENTARY-PROCEDURE. & procedureID ({NBAP-ELEMENTARY-PROCEDURES}),
                          NBAP-ELEMENTARY-PROCEDURE.&criticality ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID}),
   criticality
                          NBAP-ELEMENTARY-PROCEDURE.&messageDiscriminator({NBAP-ELEMENTARY-PROCEDURES}{@procedureID}),
   messageDiscriminator
    transactionID
                          TransactionID,
                          NBAP-ELEMENTARY-PROCEDURE. &Outcome ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID})
    value
      Interface Elementary Procedure List
  NBAP-ELEMENTARY-PROCEDURES NBAP-ELEMENTARY-PROCEDURE ::= {
   NBAP-ELEMENTARY-PROCEDURES-CLASS-1
   NBAP-ELEMENTARY-PROCEDURES-CLASS-2
NBAP-ELEMENTARY-PROCEDURES-CLASS-1 NBAP-ELEMENTARY-PROCEDURE ::=
    cellSetupFDD
    cellSetupTDD
    cellReconfigurationFDD
    cellReconfigurationTDD
    cellDeletion
    commonTransportChannelSetupFDD
    commonTransportChannelSetupTDD
    commonTransportChannelReconfigureFDD
    commonTransportChannelReconfigureTDD
    commonTransportChannelDelete
    audit
   blockResource
    radioLinkSetupFDD
    radioLinkSetupTDD
```

```
systemInformationUpdate
    commonMeasurementInitiation
    radioLinkAdditionFDD
    radioLinkAdditionTDD
    radioLinkDeletion
    reset.
    synchronisedRadioLinkReconfigurationPreparationFDD
    synchronisedRadioLinkReconfigurationPreparationTDD
    unSynchronisedRadioLinkReconfigurationFDD
    unSynchronisedRadioLinkReconfigurationTDD
    dedicatedMeasurementInitiation
    physicalSharedChannelReconfiguration
    informationExchangeInitiation
    cellSynchronisationInitiationTDD
    cellSynchronisationReconfigurationTDD
    cellSynchronisationAdjustmentTDD
NBAP-ELEMENTARY-PROCEDURES-CLASS-2 NBAP-ELEMENTARY-PROCEDURE ::= {
    resourceStatusIndication
    auditRequired
    commonMeasurementReport
    commonMeasurementTermination
    commonMeasurementFailure
    synchronisedRadioLinkReconfigurationCommit
    synchronisedRadioLinkReconfigurationCancellation
    radioLinkFailure
    radioLinkPreemption
    radioLinkRestoration
    dedicatedMeasurementReport
    dedicatedMeasurementTermination
    dedicatedMeasurementFailure
    downlinkPowerControlFDD
    downlinkPowerTimeslotControl
    compressedModeCommand
    unblockResource
    errorIndicationForDedicated
    errorIndicationForCommon
    privateMessageForDedicated
    privateMessageForCommon
    informationReporting
    informationExchangeTermination
    informationExchangeFailure
    cellSynchronisationReportingTDD
    cellSynchronisationTerminationTDD
    cellSynchronisationFailureTDD
-- Interface Elementary Procedures
```

```
-- Class 1
-- *** CellSetup (FDD) ***
cellSetupFDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            CellSetupRequestFDD
                            CellSetupResponse
    SUCCESSFUL OUTCOME
    UNSUCCESSFUL OUTCOME
                            CellSetupFailure
    MESSAGE DISCRIMINATOR
                            { procedureCode id-cellSetup, ddMode fdd }
    PROCEDURE ID
    CRITICALITY
                            reject
-- *** CellSetup (TDD) ***
cellSetupTDD NBAP-ELEMENTARY-PROCEDURE ::= {
                            CellSetupRequestTDD
    INITIATING MESSAGE
                            CellSetupResponse
    SUCCESSFUL OUTCOME
                            CellSetupFailure
    UNSUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
                            common
    PROCEDURE ID
                            { procedureCode id-cellSetup, ddMode tdd }
    CRITICALITY
                            reject
-- *** CellReconfiguration(FDD) ***
cellReconfigurationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
                            CellReconfigurationRequestFDD
    INITIATING MESSAGE
    SUCCESSFUL OUTCOME
                            CellReconfigurationResponse
                            CellReconfigurationFailure
    UNSUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
                            common
                            { procedureCode id-cellReconfiguration, ddMode fdd }
    PROCEDURE ID
    CRITICALITY
                            reject
-- *** CellReconfiguration(TDD) ***
cellReconfigurationTDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            CellReconfigurationRequestTDD
                            CellReconfigurationResponse
    SUCCESSFUL OUTCOME
                            CellReconfigurationFailure
    UNSUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
                            { procedureCode id-cellReconfiguration, ddMode tdd }
    PROCEDURE ID
    CRITICALITY
                            reject
-- *** CellDeletion ***
cellDeletion NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            CellDeletionRequest
    SUCCESSFUL OUTCOME
                            CellDeletionResponse
   MESSAGE DISCRIMINATOR
                            { procedureCode id-cellDeletion, ddMode common }
    PROCEDURE ID
    CRITICALITY
                            reject
-- *** CommonTransportChannelSetup (FDD) ***
```

```
commonTransportChannelSetupFDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            CommonTransportChannelSetupRequestFDD
    SUCCESSFUL OUTCOME
                            CommonTransportChannelSetupResponse
    UNSUCCESSFUL OUTCOME
                            CommonTransportChannelSetupFailure
    MESSAGE DISCRIMINATOR
                            { procedureCode id-commonTransportChannelSetup, ddMode fdd }
    PROCEDURE ID
    CRITICALITY
                            reject
-- *** CommonTransportChannelSetup (TDD) ***
commonTransportChannelSetupTDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            CommonTransportChannelSetupRequestTDD
                            CommonTransportChannelSetupResponse
    SUCCESSFUL OUTCOME
    UNSUCCESSFUL OUTCOME
                            CommonTransportChannelSetupFailure
    MESSAGE DISCRIMINATOR
    PROCEDURE ID
                            { procedureCode id-commonTransportChannelSetup, ddMode tdd }
    CRITICALITY
                            reject
-- *** CommonTransportChannelReconfigure (FDD) ***
commonTransportChannelReconfigureFDD NBAP-ELEMENTARY-PROCEDURE ::= {
                            CommonTransportChannelReconfigurationRequestFDD
    INITIATING MESSAGE
                            CommonTransportChannelReconfigurationResponse
    SUCCESSFUL OUTCOME
    UNSUCCESSFUL OUTCOME
                            CommonTransportChannelReconfigurationFailure
    MESSAGE DISCRIMINATOR
    PROCEDURE ID
                            { procedureCode id-commonTransportChannelReconfigure, ddMode fdd }
    CRITICALITY
                            reject
-- *** CommonTransportChannelReconfigure (TDD) ***
commonTransportChannelReconfigureTDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            CommonTransportChannelReconfigurationRequestTDD
    SUCCESSFUL OUTCOME
                            CommonTransportChannelReconfigurationResponse
                            CommonTransportChannelReconfigurationFailure
    UNSUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
    PROCEDURE ID
                            { procedureCode id-commonTransportChannelReconfigure, ddMode tdd }
    CRITICALITY
                            reject
-- *** CommonTransportChannelDelete ***
commonTransportChannelDelete NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            CommonTransportChannelDeletionRequest
                            CommonTransportChannelDeletionResponse
    SUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
                            common
                            { procedureCode id-commonTransportChannelDelete, ddMode common }
    PROCEDURE ID
    CRITICALITY
                            reject
-- *** Audit ***
audit NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            AuditRequest
    SUCCESSFUL OUTCOME
                            AuditResponse
                            AuditFailure
    UNSUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
                            common
```

```
{ procedureCode id-audit, ddMode common }
    PROCEDURE ID
    CRITICALITY
-- *** BlockResourceRequest ***
blockResource NBAP-ELEMENTARY-PROCEDURE ::= {
                            BlockResourceRequest
    INITIATING MESSAGE
                            BlockResourceResponse
    SUCCESSFUL OUTCOME
    UNSUCCESSFUL OUTCOME
                            BlockResourceFailure
    MESSAGE DISCRIMINATOR
                            { procedureCode id-blockResource, ddMode common }
    PROCEDURE ID
    CRITICALITY
                            reject
-- *** RadioLinkSetup (FDD) ***
radioLinkSetupFDD NBAP-ELEMENTARY-PROCEDURE ::= {
                            RadioLinkSetupRequestFDD
    INITIATING MESSAGE
                            RadioLinkSetupResponseFDD
    SUCCESSFUL OUTCOME
                            RadioLinkSetupFailureFDD
    UNSUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
                            common
    PROCEDURE ID
                            { procedureCode id-radioLinkSetup, ddMode fdd }
    CRITICALITY
-- *** RadioLinkSetup (TDD) ***
radioLinkSetupTDD NBAP-ELEMENTARY-PROCEDURE ::= {
                            RadioLinkSetupRequestTDD
    INITIATING MESSAGE
    SUCCESSFUL OUTCOME
                            RadioLinkSetupResponseTDD
                            RadioLinkSetupFailureTDD
    UNSUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
                            common
    PROCEDURE ID
                            { procedureCode id-radioLinkSetup, ddMode tdd }
    CRITICALITY
                            reject
-- *** SystemInformationUpdate ***
systemInformationUpdate NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            {\tt SystemInformationUpdateRequest}
                            SystemInformationUpdateResponse
    SUCCESSFUL OUTCOME
                            SystemInformationUpdateFailure
    UNSUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
                            { procedureCode id-systemInformationUpdate, ddMode common }
    PROCEDURE ID
    CRITICALITY
                            reject
-- *** Reset ***
reset NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            ResetRequest
    SUCCESSFUL OUTCOME
                            ResetResponse
    MESSAGE DISCRIMINATOR
                            common
    PROCEDURE ID
                            { procedureCode id-reset, ddMode common }
    CRITICALITY
                            reject
```

```
-- *** CommonMeasurementInitiation ***
commonMeasurementInitiation NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            CommonMeasurementInitiationRequest
                            CommonMeasurementInitiationResponse
    SUCCESSFUL OUTCOME
                            CommonMeasurementInitiationFailure
    UNSUCCESSFUL OUTCOME
   MESSAGE DISCRIMINATOR
                            { procedureCode id-commonMeasurementInitiation, ddMode common }
    PROCEDURE ID
    CRITICALITY
-- *** RadioLinkAddition (FDD) ***
radioLinkAdditionFDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            RadioLinkAdditionRequestFDD
                            RadioLinkAdditionResponseFDD
    SUCCESSFUL OUTCOME
    UNSUCCESSFUL OUTCOME
                            RadioLinkAdditionFailureFDD
    MESSAGE DISCRIMINATOR
                            dedicated
                            { procedureCode id-radioLinkAddition, ddMode fdd }
    PROCEDURE ID
    CRITICALITY
                            reject
-- *** RadioLinkAddition (TDD) ***
radioLinkAdditionTDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            RadioLinkAdditionRequestTDD
    SUCCESSFUL OUTCOME
                            RadioLinkAdditionResponseTDD
                            RadioLinkAdditionFailureTDD
    UNSUCCESSFUL OUTCOME
                            dedicated
    MESSAGE DISCRIMINATOR
    PROCEDURE ID
                            { procedureCode id-radioLinkAddition, ddMode tdd }
    CRITICALITY
                            reject
-- *** RadioLinkDeletion
radioLinkDeletion NBAP-ELEMENTARY-PROCEDURE ::= {
                            RadioLinkDeletionRequest
    INITIATING MESSAGE
    SUCCESSFUL OUTCOME
                            RadioLinkDeletionResponse
   MESSAGE DISCRIMINATOR
                            dedicated
    PROCEDURE ID
                            { procedureCode id-radioLinkDeletion, ddMode common }
    CRITICALITY
                            reject
-- *** SynchronisedRadioLinkReconfigurationPreparation (FDD) ***
synchronisedRadioLinkReconfigurationPreparationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
                            RadioLinkReconfigurationPrepareFDD
    INITIATING MESSAGE
                            RadioLinkReconfigurationReady
    SUCCESSFUL OUTCOME
                            RadioLinkReconfigurationFailure
    UNSUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
                            dedicated
    PROCEDURE ID
                            { procedureCode id-synchronisedRadioLinkReconfigurationPreparation, ddMode fdd }
    CRITICALITY
                            reject
-- *** SynchronisedRadioLinkReconfigurationPreparation (TDD) ***
synchronisedRadioLinkReconfigurationPreparationTDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            RadioLinkReconfigurationPrepareTDD
                            RadioLinkReconfigurationReady
    SUCCESSFUL OUTCOME
```

```
RadioLinkReconfigurationFailure
    UNSUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
                            dedicated
    PROCEDURE ID
                            { procedureCode id-synchronisedRadioLinkReconfigurationPreparation, ddMode tdd }
    CRITICALITY
-- *** UnSynchronisedRadioLinkReconfiguration (FDD) ***
unSynchronisedRadioLinkReconfigurationFDD NBAP-ELEMENTARY-PROCEDURE ::=
    INITIATING MESSAGE
                            RadioLinkReconfigurationRequestFDD
                            RadioLinkReconfigurationResponse
    SUCCESSFUL OUTCOME
                            RadioLinkReconfigurationFailure
    UNSUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
                            dedicated
                            { procedureCode id-unSynchronisedRadioLinkReconfiguration, ddMode fdd }
    PROCEDURE ID
    CRITICALITY
                            reject
-- *** UnSynchronisedRadioLinkReconfiguration (TDD) ***
unSynchronisedRadioLinkReconfigurationTDD NBAP-ELEMENTARY-PROCEDURE ::=
                            RadioLinkReconfigurationRequestTDD
    INITIATING MESSAGE
    SUCCESSFUL OUTCOME
                            RadioLinkReconfigurationResponse
    UNSUCCESSFUL OUTCOME
                            RadioLinkReconfigurationFailure
                            dedicated
    MESSAGE DISCRIMINATOR
                            { procedureCode id-unSynchronisedRadioLinkReconfiguration, ddMode tdd }
    PROCEDURE ID
    CRITICALITY
                            reject
-- *** DedicatedMeasurementInitiation ***
dedicatedMeasurementInitiation NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            DedicatedMeasurementInitiationRequest
                            DedicatedMeasurementInitiationResponse
    SUCCESSFUL OUTCOME
    UNSUCCESSFUL OUTCOME
                            DedicatedMeasurementInitiationFailure
                           dedicated
    MESSAGE DISCRIMINATOR
    PROCEDURE ID
                            { procedureCode id-dedicatedMeasurementInitiation, ddMode common }
    CRITICALITY
                            reject
-- *** PhysicalSharedChannelReconfiguration (TDD only) ***
physicalSharedChannelReconfiguration NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE PhysicalSharedChannelReconfigurationRequestTDD
    SUCCESSFUL OUTCOME PhysicalSharedChannelReconfigurationResponseTDD
                            PhysicalSharedChannelReconfigurationFailureTDD
    UNSUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
                        { procedureCode id-physicalSharedChannelReconfiguration, ddMode tdd }
    PROCEDURE ID
    CRITICALITY
                        reject
--*** InformationExchangeInitiation ***
informationExchangeInitiation NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            InformationExchangeInitiationRequest
                            InformationExchangeInitiationResponse
    SUCCESSFUL OUTCOME
                            InformationExchangeInitiationFailure
    UNSUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
                            { procedureCode id-informationExchangeInitiation,
                                                                                ddMode common }
    PROCEDURE ID
    CRITICALITY
                            reject
```

```
-- *** CellSynchronisationInitiation (TDD only) ***
cellSynchronisationInitiationTDD NBAP-ELEMENTARY-PROCEDURE ::=
    INITIATING MESSAGE CellSynchronisationInitiationRequestTDD
    SUCCESSFUL OUTCOME CellSynchronisationInitiationResponseTDD
                            CellSynchronisationInitiationFailureTDD
    UNSUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
    PROCEDURE ID
                        { procedureCode id-cellSynchronisationInitiation, ddMode tdd }
    CRITICALITY
                        reject
-- *** CellSynchronisationReconfiguration (TDD only) ***
cellSynchronisationReconfigurationTDD NBAP-ELEMENTARY-PROCEDURE ::=
    INITIATING MESSAGE CellSynchronisationReconfigurationRequestTDD
    SUCCESSFUL OUTCOME CellSynchronisationReconfigurationResponseTDD
                           CellSynchronisationReconfigurationFailureTDD
    UNSUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
                        { procedureCode id-cellSynchronisationReconfiguration, ddMode tdd }
    PROCEDURE ID
    CRITICALITY
                        reject
-- *** CellSynchronisationAdjustment (TDD only) ***
cellSynchronisationAdjustmentTDD NBAP-ELEMENTARY-PROCEDURE ::=
    INITIATING MESSAGE CellSynchronisationAdjustmentRequestTDD
    SUCCESSFUL OUTCOME CellSynchronisationAdjustmentResponseTDD
                           CellSynchronisationAdjustmentFailureTDD
    UNSUCCESSFUL OUTCOME
    MESSAGE DISCRIMINATOR
                           common
                        { procedureCode id-cellSynchronisationAdjustment, ddMode tdd }
    PROCEDURE ID
    CRITICALITY
                        reject
-- Class 2
-- *** ResourceStatusIndication ***
resourceStatusIndication NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                           ResourceStatusIndication
    MESSAGE DISCRIMINATOR
                            { procedureCode id-resourceStatusIndication, ddMode common }
    PROCEDURE ID
    CRITICALITY
                            ignore
-- *** AuditRequired ***
auditRequired NBAP-ELEMENTARY-PROCEDURE ::= {
                           AuditRequiredIndication
    INITIATING MESSAGE
   MESSAGE DISCRIMINATOR
                           common
    PROCEDURE ID
                            { procedureCode id-auditRequired, ddMode common }
    CRITICALITY
                            ignore
-- *** CommonMeasurementReport ***
commonMeasurementReport NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                           CommonMeasurementReport
    MESSAGE DISCRIMINATOR common
```

```
PROCEDURE ID
                            { procedureCode id-commonMeasurementReport, ddMode common }
    CRITICALITY
                            ignore
-- *** CommonMeasurementTermination ***
commonMeasurementTermination NBAP-ELEMENTARY-PROCEDURE ::= {
                            CommonMeasurementTerminationRequest
    INITIATING MESSAGE
   MESSAGE DISCRIMINATOR
                           common
    PROCEDURE ID
                            { procedureCode id-commonMeasurementTermination, ddMode common }
    CRITICALITY
                            ignore
-- *** CommonMeasurementFailure ***
commonMeasurementFailure NBAP-ELEMENTARY-PROCEDURE ::= {
                            CommonMeasurementFailureIndication
    INITIATING MESSAGE
   MESSAGE DISCRIMINATOR
                           common
    PROCEDURE ID
                             procedureCode id-commonMeasurementFailure, ddMode common }
    CRITICALITY
-- *** SynchronisedRadioLinkReconfirurationCommit ***
synchronisedRadioLinkReconfigurationCommit NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            RadioLinkReconfigurationCommit
    MESSAGE DISCRIMINATOR
                           dedicated
    PROCEDURE ID
                            { procedureCode id-synchronisedRadioLinkReconfigurationCommit, ddMode common }
    CRITICALITY
                            ignore
-- *** SynchronisedRadioReconfigurationCancellation ***
synchronisedRadioLinkReconfigurationCancellation NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            RadioLinkReconfigurationCancel
   MESSAGE DISCRIMINATOR
                            dedicated
    PROCEDURE ID
                            { procedureCode id-synchronisedRadioLinkReconfigurationCancellation, ddMode common
    CRITICALITY
                            ignore
-- *** RadioLinkFailure ***
radioLinkFailure NBAP-ELEMENTARY-PROCEDURE ::= {
                            RadioLinkFailureIndication
    INITIATING MESSAGE
    MESSAGE DISCRIMINATOR
                            dedicated
                            { procedureCode id-radioLinkFailure, ddMode common }
    PROCEDURE ID
    CRITICALITY
                            ignore
-- *** RadioLinkPreemption ***
radioLinkPreemption NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkPreemptionRequiredIndication
   MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID
                        { procedureCode id-radioLinkPreemption, ddMode common }
    CRITICALITY
                    ignore
-- *** RadioLinkRestoration ***
radioLinkRestoration NBAP-ELEMENTARY-PROCEDURE ::=
```

```
RadioLinkRestoreIndication
    INITIATING MESSAGE
   MESSAGE DISCRIMINATOR
                           dedicated
    PROCEDURE ID
                            { procedureCode id-radioLinkRestoration, ddMode common }
    CRITICALITY
-- *** DedicatedMeasurementReport ***
dedicatedMeasurementReport NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            DedicatedMeasurementReport
    MESSAGE DISCRIMINATOR
                           dedicated
                            { procedureCode id-dedicatedMeasurementReport, ddMode common }
    PROCEDURE ID
    CRITICALITY
                            ignore
-- *** DedicatedMeasurementTermination ***
dedicatedMeasurementTermination NBAP-ELEMENTARY-PROCEDURE ::= {
                            DedicatedMeasurementTerminationRequest
    INITIATING MESSAGE
                           dedicated
   MESSAGE DISCRIMINATOR
                            { procedureCode id-dedicatedMeasurementTermination, ddMode common }
    PROCEDURE ID
    CRITICALITY
                            ignore
-- *** DedicatedMeasurementFailure ***
dedicatedMeasurementFailure NBAP-ELEMENTARY-PROCEDURE ::=
                            DedicatedMeasurementFailureIndication
    INITIATING MESSAGE
    MESSAGE DISCRIMINATOR
                           dedicated
                            { procedureCode id-dedicatedMeasurementFailure, ddMode common }
    PROCEDURE ID
    CRITICALITY
                            ignore
-- *** DLPowerControl (FDD only) ***
downlinkPowerControlFDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            DL-PowerControlRequest
   MESSAGE DISCRIMINATOR
                           dedicated
   PROCEDURE ID
                            { procedureCode id-downlinkPowerControl, ddMode fdd }
    CRITICALITY
                            ignore
-- *** DLPowerTimeslotControl (TDD only) ***
downlinkPowerTimeslotControl NBAP-ELEMENTARY-PROCEDURE ::= {
                            DL-PowerTimeslotControlRequest
    INITIATING MESSAGE
   MESSAGE DISCRIMINATOR
                           dedicated
                            { procedureCode id-downlinkPowerTimeslotControl, ddMode tdd }
    PROCEDURE ID
    CRITICALITY
                            ignore
-- *** CompressedModeCommand (FDD only) ***
compressedModeCommand NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            CompressedModeCommand
   MESSAGE DISCRIMINATOR
                           dedicated
                            { procedureCode id-compressedModeCommand, ddMode fdd }
    PROCEDURE ID
    CRITICALITY
                            ignore
```

301

```
-- *** UnblockResourceIndication ***
unblockResource NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            UnblockResourceIndication
   MESSAGE DISCRIMINATOR common
    PROCEDURE ID
                            { procedureCode id-unblockResource, ddMode common }
    CRITICALITY
                            ignore
-- *** ErrorIndication for Dedicated procedures ***
errorIndicationForDedicated NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            ErrorIndication
    MESSAGE DISCRIMINATOR
                            dedicated
                            { procedureCode id-errorIndicationForDedicated, ddMode common }
    PROCEDURE ID
    CRITICALITY
                            ignore
-- *** ErrorIndication for Common procedures ***
errorIndicationForCommon NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            ErrorIndication
    MESSAGE DISCRIMINATOR
                           common
    PROCEDURE ID
                            { procedureCode id-errorIndicationForCommon, ddMode common }
    CRITICALITY
                            ignore
-- *** CellSynchronisationReporting (TDD only) ***
cellSynchronisationReportingTDD NBAP-ELEMENTARY-PROCEDURE ::= {
                            CellSynchronisationReportTDD
    INITIATING MESSAGE
   MESSAGE DISCRIMINATOR
                            common
                            { procedureCode id-cellSynchronisationReporting, ddMode tdd }
    PROCEDURE ID
    CRITICALITY
-- *** CellSynchronisationTermination (TDD only) ***
cellSynchronisationTerminationTDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            CellSynchronisationTerminationRequestTDD
   MESSAGE DISCRIMINATOR
    PROCEDURE ID
                            { procedureCode id-cellSynchronisationTermination, ddMode tdd }
    CRITICALITY
                            ignore
-- *** CellSynchronisationFailure (TDD only) ***
cellSynchronisationFailureTDD NBAP-ELEMENTARY-PROCEDURE ::= {
                            {\tt CellSynchronisationFailureIndicationTDD}
    INITIATING MESSAGE
    MESSAGE DISCRIMINATOR
                            common
                              procedureCode id-cellSynchronisationFailure, ddMode tdd
    PROCEDURE ID
    CRITICALITY
                            ignore
-- *** PrivateMessage for Dedicated procedures ***
privateMessageForDedicated NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            PrivateMessage
    MESSAGE DISCRIMINATOR
                            dedicated
    PROCEDURE ID
                            { procedureCode id-privateMessageForDedicated, ddMode common }
    CRITICALITY
                            ignore
```

```
-- *** PrivateMessage for Common procedures ***
privateMessageForCommon NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            PrivateMessage
   MESSAGE DISCRIMINATOR
                           common
   PROCEDURE ID
                            { procedureCode id-privateMessageForCommon, ddMode common }
                            ignore
    CRITICALITY
-- *** InformationReporting ***
informationReporting NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            InformationReport
   MESSAGE DISCRIMINATOR common
                           { procedureCode id-informationReporting, ddMode common }
    PROCEDURE ID
    CRITICALITY
-- *** InformationExchangeTermination ***
informationExchangeTermination NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE
                            InformationExchangeTerminationRequest
   MESSAGE DISCRIMINATOR
                            { procedureCode id-informationExchangeTermination, ddMode common }
    PROCEDURE ID
    CRITICALITY
                            ignore
-- *** InformationExchangeFailure ***
informationExchangeFailure NBAP-ELEMENTARY-PROCEDURE ::= {
                           InformationExchangeFailureIndication
    INITIATING MESSAGE
   MESSAGE DISCRIMINATOR
                            { procedureCode id-informationExchangeFailure, ddMode common }
    PROCEDURE ID
    CRITICALITY
                            ignore
END
```

9.3.3 PDU Definitions

```
__ *******************
-- IE parameter types from other modules.
__ ********************
IMPORTS
   Active-Pattern-Sequence-Information,
   AddorDeleteIndicator,
   AICH-Power,
   AICH-TransmissionTiming,
   AllocationRetentionPriority,
   APPreambleSignature,
   APSubChannelNumber,
   AvailabilityStatus,
   BCCH-ModificationTime,
   BindingID,
   BlockingPriorityIndicator,
   SCTD-Indicator,
   Cause,
   CCTrCH-ID,
   CDSubChannelNumbers,
   CellParameterID,
   CellSyncBurstAvailabilityIndicator,
   CellSyncBurstCode,
   CellSyncBurstCodeShift,
   CellSyncBurstRepetitionPeriod,
   CellSyncBurstSIR,
   CellSyncBurstTiming,
   CellSyncBurstTimingThreshold,
   Channel-Assignment-Indication,
   ChipOffset,
   C-ID,
   Closedlooptimingadjustmentmode,
   CommonChannelsCapacityConsumptionLaw,
   Compressed-Mode-Deactivation-Flag,
    CommonMeasurementAccuracy,
   CommonMeasurementType,
   CommonMeasurementValue,
   CommonMeasurementValueInformation,
   CommonPhysicalChannelID,
   Common-PhysicalChannel-Status-Information,
   Common-TransportChannel-Status-Information,
   CommonTransportChannelID,
   CommonTransportChannel-InformationResponse,
   CommunicationControlPortID,
   ConfigurationGenerationID,
   ConstantValue,
   CriticalityDiagnostics,
   CPCH-Allowed-Total-Rate,
   CPCHScramblingCodeNumber,
   CPCH-UL-DPCCH-SlotFormat,
   CRNC-CommunicationContextID,
```

```
CSBMeasurementID,
CSBTransmissionID.
DCH-FDD-Information.
DCH-InformationResponse,
DCH-ID.
FDD-DCHs-to-Modify,
TDD-DCHs-to-Modify,
DCH-TDD-Information,
DedicatedChannelsCapacityConsumptionLaw,
DedicatedMeasurementType,
DedicatedMeasurementValue,
DedicatedMeasurementValueInformation,
DiversityControlField,
DiversityMode,
DL-DPCH-SlotFormat,
DL-or-Global-CapacityCredit,
DL-Power,
DLPowerAveragingWindowSize,
DL-ScramblingCode,
DL-TimeslotISCP,
DL-Timeslot-Information,
DL-TimeslotLCR-Information,
DL-TimeslotISCPInfo.
DL-TimeslotISCPInfoLCR.
DL-TPC-Pattern01Count,
DPC-Mode,
DPCH-ID,
DSCH-ID,
DSCH-FDD-Common-Information,
DSCH-FDD-Information,
DSCH-InformationResponse,
DSCH-TDD-Information,
DwPCH-Power,
End-Of-Audit-Sequence-Indicator,
EnhancedDSCHPC,
EnhancedDSCHPCCounter,
EnhancedDSCHPCIndicator,
EnhancedDSCHPCWnd,
EnhancedDSCHPowerOffset,
FDD-DL-ChannelisationCodeNumber,
FDD-DL-CodeInformation,
FDD-S-CCPCH-Offset,
FDD-TPC-DownlinkStepSize,
FirstRLS-Indicator,
FNReportingIndicator,
FPACH-Power,
FrameAdjustmentValue,
FrameHandlingPriority,
FrameOffset,
IB-OC-ID,
IB-SG-DATA,
IB-SG-POS,
IB-SG-REP,
IB-Type,
```

```
IndicationType,
InformationExchangeID,
InformationReportCharacteristics,
InformationType,
InnerLoopDLPCStatus,
IPDL-FDD-Parameters,
IPDL-TDD-Parameters,
IPDL-Indicator,
LimitedPowerIncrease,
Local-Cell-ID,
MaximumDL-PowerCapability,
MaximumTransmissionPower,
Max-Number-of-PCPCHes,
MaxNrOfUL-DPDCHs,
MaxPRACH-MidambleShifts,
MeasurementFilterCoefficient,
MeasurementID,
MidambleAllocationMode,
MidambleShiftAndBurstType,
MidambleShiftLCR,
MinimumDL-PowerCapability,
MinSpreadingFactor,
MinUL-ChannelisationCodeLength,
MultiplexingPosition,
NEOT,
NCyclesPerSFNperiod,
NFmax,
NRepetitionsPerCyclePeriod,
N-INSYNC-IND,
N-OUTSYNC-IND,
NeighbouringCellMeasurementInformation,
NeighbouringFDDCellMeasurementInformation,
NeighbouringTDDCellMeasurementInformation,
NodeB-CommunicationContextID,
NStartMessage,
PagingIndicatorLength,
PayloadCRC-PresenceIndicator,
PCCPCH-Power,
PCP-Length,
PDSCH-CodeMapping,
PDSCHSet-ID,
PDSCH-ID,
PICH-Mode,
PICH-Power,
PowerAdjustmentType,
PowerOffset,
PowerRaiseLimit,
PRACH-Midamble,
PreambleSignatures,
PreambleThreshold,
PredictedSFNSFNDeviationLimit,
PredictedTUTRANGPSDeviationLimit,
PrimaryCPICH-Power,
PrimaryScramblingCode,
```

```
PropagationDelay,
SCH-TimeSlot,
PunctureLimit.
PUSCHSet-ID,
PUSCH-ID,
OE-Selector,
RACH-SlotFormat,
RACH-SubChannelNumbers,
ReferenceClockAvailability,
ReferenceSFNoffset,
RepetitionLength,
RepetitionPeriod,
ReportCharacteristics,
RequestedDataValue,
RequestedDataValueInformation,
ResourceOperationalState,
RL-Set-ID,
RL-ID,
Received-total-wide-band-power-Value,
AdjustmentPeriod,
ScaledAdjustmentRatio,
MaxAdjustmentStep,
RNC-ID,
ScramblingCodeNumber,
SecondaryCCPCH-SlotFormat,
Segment-Type,
S-FieldLength,
SFN,
SFNSFNChangeLimit,
SFNSFNDriftRate,
SFNSFNDriftRateQuality,
SFNSFNQuality,
ShutdownTimer,
SIB-Originator,
SpecialBurstScheduling,
SSDT-Cell-Identity,
SSDT-CellID-Length,
SSDT-Indication,
Start-Of-Audit-Sequence-Indicator,
STTD-Indicator,
SSDT-SupportIndicator,
SyncCase,
SYNCDlCodeId,
SyncFrameNumber,
SynchronisationReportCharacteristics,
SynchronisationReportType,
T-Cell,
T-RLFAILURE,
TDD-ChannelisationCode,
TDD-ChannelisationCodeLCR,
TDD-DL-Code-LCR-Information,
TDD-DPCHOffset,
TDD-TPC-DownlinkStepSize,
TDD-PhysicalChannelOffset,
```

```
TDD-UL-Code-LCR-Information,
   TFCI2-BearerInformationResponse,
    TFCI-Coding.
    TFCI-Presence,
    TFCI-SignallingMode,
   TFCS,
    TimeSlot,
   TimeSlotLCR,
   TimeSlotDirection,
    TimeSlotStatus,
    TimingAdjustmentValue,
   TimingAdvanceApplied,
    TOAWE,
    ToAWS,
    TransmissionDiversityApplied,
    TransmitDiversityIndicator,
    TransmissionGapPatternSequenceCodeInformation,
    Transmission-Gap-Pattern-Sequence-Information,
    TransportBearerRequestIndicator,
    TransportFormatSet,
    TransportLayerAddress,
    TSTD-Indicator,
    TUTRANGPS,
    TUTRANGPSChangeLimit,
    TUTRANGPSDriftRate,
    TUTRANGPSDriftRateQuality,
    TUTRANGPSOuality,
    UARFCN,
    UC-Id,
    USCH-Information,
    USCH-InformationResponse,
    UL-CapacityCredit,
    UL-DPCCH-SlotFormat,
    UL-SIR,
    UL-FP-Mode,
    UL-PhysCH-SF-Variation,
    UL-ScramblingCode,
    UL-Timeslot-Information,
    UL-TimeslotLCR-Information,
    UL-TimeSlot-ISCP-Info,
    UL-TimeSlot-ISCP-LCR-Info,
    UL-TimeslotISCP-Value,
    UL-TimeslotISCP-Value-IncrDecrThres,
    USCH-ID
FROM NBAP-IEs
    PrivateIE-Container{},
    ProtocolExtensionContainer{},
    ProtocolIE-Container{},
    ProtocolIE-Single-Container{},
    ProtocolIE-ContainerList{},
    NBAP-PRIVATE-IES,
    NBAP-PROTOCOL-IES,
    NBAP-PROTOCOL-EXTENSION
```

FROM NBAP-Containers

```
id-Active-Pattern-Sequence-Information,
id-AdjustmentRatio,
id-AICH-Information.
id-AICH-ParametersListIE-CTCH-ReconfRqstFDD,
id-AP-AICH-Information.
id-AP-AICH-ParametersListIE-CTCH-ReconfRqstFDD,
id-BCH-Information.
id-BCCH-ModificationTime,
id-BlockingPriorityIndicator,
id-Cause,
id-CauseLevel-PSCH-ReconfFailureTDD,
id-CauseLevel-RL-AdditionFailureFDD,
id-CauseLevel-RL-AdditionFailureTDD.
id-CauseLevel-RL-ReconfFailure.
id-CauseLevel-RL-SetupFailureFDD,
id-CauseLevel-RL-SetupFailureTDD,
id-CauseLevel-SyncAdjustmntFailureTDD,
id-CCP-InformationItem-AuditRsp,
id-CCP-InformationList-AuditRsp,
id-CCP-InformationItem-ResourceStatusInd,
id-CCTrCH-InformationItem-RL-FailureInd,
id-CCTrCH-InformationItem-RL-RestoreInd,
id-CDCA-ICH-Information,
id-CDCA-ICH-ParametersListIE-CTCH-ReconfRqstFDD,
id-CellAdjustmentInfo-SyncAdjustmntRqstTDD,
id-CellAdjustmentInfoItem-SyncAdjustmentRgstTDD,
id-Cell-InformationItem-AuditRsp,
id-Cell-InformationItem-ResourceStatusInd,
id-Cell-InformationList-AuditRsp,
id-CellParameterID,
id-CellSyncBurstTransInit-CellSyncInitiationRqstTDD,
id-CellSyncBurstMeasureInit-CellSyncInitiationRgstTDD,
id-cellSyncBurstRepetitionPeriod.
id-CellSyncBurstTransReconfiguration-CellSyncReconfRqstTDD,
id-CellSyncBurstTransReconfInfo-CellSyncReconfRqstTDD,
id-CellSyncBurstMeasReconfiguration-CellSyncReconfRgstTDD,
id-CellSyncBurstMeasInfoList-CellSyncReconfRgstTDD,
id-CellSyncBurstInfoList-CellSyncReconfRgstTDD,
id-CellSyncInfo-CellSyncReprtTDD,
id-CFN.
id-CFNReportingIndicator,
id-C-ID,
id-Closed-Loop-Timing-Adjustment-Mode,
id-CommonMeasurementAccuracy,
id-CommonMeasurementObjectType-CM-Rprt,
id-CommonMeasurementObjectType-CM-Rqst,
id-CommonMeasurementObjectType-CM-Rsp,
id-CommonMeasurementType,
id-CommonPhysicalChannelID,
id-CommonPhysicalChannelType-CTCH-ReconfRgstFDD,
id-CommonPhysicalChannelType-CTCH-SetupRqstFDD,
id-CommonPhysicalChannelType-CTCH-SetupRqstTDD,
```

```
id-CommunicationContextInfoItem-Reset,
id-CommunicationControlPortID.
id-CommunicationControlPortInfoItem-Reset.
id-Compressed-Mode-Deactivation-Flag,
id-ConfigurationGenerationID.
id-CPCH-Information.
id-CPCH-Parameters-CTCH-SetupRsp,
id-CPCH-ParametersListIE-CTCH-ReconfRqstFDD,
id-CRNC-CommunicationContextID,
id-CriticalityDiagnostics,
id-CSBTransmissionID,
id-CSBMeasurementID,
id-DCHs-to-Add-FDD,
id-DCHs-to-Add-TDD,
id-DCH-AddList-RL-ReconfPrepTDD,
id-DCH-DeleteList-RL-ReconfPrepFDD,
id-DCH-DeleteList-RL-ReconfPrepTDD,
id-DCH-DeleteList-RL-ReconfRqstFDD,
id-DCH-DeleteList-RL-ReconfRgstTDD,
id-DCH-FDD-Information.
id-DCH-TDD-Information,
id-DCH-InformationResponse,
id-FDD-DCHs-to-Modify,
id-TDD-DCHs-to-Modify,
id-DedicatedMeasurementObjectType-DM-Rprt,
id-DedicatedMeasurementObjectType-DM-Rqst,
id-DedicatedMeasurementObjectType-DM-Rsp,
id-DedicatedMeasurementType,
id-DL-CCTrCH-InformationAddList-RL-ReconfPrepTDD,
id-DL-CCTrCH-InformationDeleteItem-RL-ReconfRqstTDD,
id-DL-CCTrCH-InformationDeleteList-RL-ReconfPrepTDD,
id-DL-CCTrCH-InformationDeleteList-RL-ReconfRqstTDD,
id-DL-CCTrCH-InformationItem-RL-SetupRgstTDD,
id-DL-CCTrCH-InformationList-RL-AdditionRqstTDD,
id-DL-CCTrCH-InformationList-RL-SetupRgstTDD,
id-DL-CCTrCH-InformationModifyItem-RL-ReconfRqstTDD,
id-DL-CCTrCH-InformationModifyList-RL-ReconfPrepTDD,
id-DL-CCTrCH-InformationModifyList-RL-ReconfRqstTDD,
id-DL-DPCH-InformationAddListIE-RL-ReconfPrepTDD,
id-DL-DPCH-InformationItem-RL-AdditionRgstTDD,
id-DL-DPCH-InformationList-RL-SetupRgstTDD,
id-DL-DPCH-InformationModify-AddListIE-RL-ReconfPrepTDD,
id-DL-DPCH-InformationModify-DeleteListIE-RL-ReconfPrepTDD,
id-DL-DPCH-InformationModify-ModifyListIE-RL-ReconfPrepTDD,
id-DL-DPCH-Information-RL-ReconfPrepFDD,
id-DL-DPCH-Information-RL-ReconfRgstFDD,
id-DL-DPCH-Information-RL-SetupRgstFDD,
id-DL-ReferencePowerInformationItem-DL-PC-Rgst,
id-DLReferencePower,
id-DLReferencePowerList-DL-PC-Rqst,
id-DL-TPC-Pattern01Count,
id-DPC-Mode,
id-DPCHConstant,
id-DSCH-AddItem-RL-ReconfPrepFDD,
```

```
id-DSCHs-to-Add-FDD,
id-DSCH-DeleteItem-RL-ReconfPrepFDD.
id-DSCH-DeleteList-RL-ReconfPrepFDD.
id-DSCHs-to-Add-TDD.
id-DSCH-Information-DeleteList-RL-ReconfPrepTDD,
id-DSCH-Information-ModifyList-RL-ReconfPrepTDD,
id-DSCH-InformationResponse,
id-DSCH-FDD-Information,
id-DSCH-FDD-Common-Information.
id-DSCH-TDD-Information,
id-DSCH-ModifyItem-RL-ReconfPrepFDD,
id-DSCH-ModifyList-RL-ReconfPrepFDD,
id-End-Of-Audit-Sequence-Indicator,
id-EnhancedDSCHPC,
id-EnhancedDSCHPCIndicator.
id-FACH-Information.
id-FACH-ParametersList-CTCH-ReconfRgstTDD,
id-FACH-ParametersList-CTCH-SetupRsp,
id-FACH-ParametersListIE-CTCH-ReconfRgstFDD,
id-FACH-ParametersListIE-CTCH-SetupRqstFDD,
id-FACH-ParametersListIE-CTCH-SetupRqstTDD,
id-IndicationType-ResourceStatusInd,
id-InformationExchangeID,
id-InformationExchangeObjectType-InfEx-Rgst,
id-InformationExchangeObjectType-InfEx-Rsp,
id-InformationExchangeObjectType-InfEx-Rprt,
id-InformationReportCharacteristics,
id-InformationType,
id-InitDL-Power,
id-InnerLoopDLPCStatus,
id-IntStdPhCellSyncInfoItem-CellSyncReprtTDD,
id-IPDLParameter-Information-Cell-ReconfRqstFDD,
id-IPDLParameter-Information-Cell-SetupRqstFDD,
id-IPDLParameter-Information-Cell-ReconfRqstTDD,
id-IPDLParameter-Information-Cell-SetupRgstTDD,
id-LateEntranceCellSyncInfoItem-CellSyncReprtTDD,
id-Limited-power-increase-information-Cell-SetupRgstFDD.
id-Local-Cell-ID,
id-Local-Cell-Group-InformationItem-AuditRsp,
id-Local-Cell-Group-InformationItem-ResourceStatusInd,
id-Local-Cell-Group-InformationItem2-ResourceStatusInd,
id-Local-Cell-Group-InformationList-AuditRsp,
id-Local-Cell-InformationItem-AuditRsp,
id-Local-Cell-InformationItem-ResourceStatusInd,
id-Local-Cell-InformationItem2-ResourceStatusInd.
id-Local-Cell-InformationList-AuditRsp.
id-AdjustmentPeriod,
id-MaxAdjustmentStep,
id-MaximumTransmissionPower,
id-MeasurementFilterCoefficient,
id-MeasurementID.
id-MIB-SB-SIB-InformationList-SystemInfoUpdateRgst,
id-NCyclesPerSFNperiod,
id-NeighbouringCellMeasurementInformation,
```

```
id-NodeB-CommunicationContextID,
id-NRepetitionsPerCyclePeriod,
id-P-CCPCH-Information.
id-P-CPICH-Information.
id-P-SCH-Information.
id-PCCPCH-Information-Cell-ReconfRgstTDD,
id-PCCPCH-Information-Cell-SetupRgstTDD,
id-PCH-Parameters-CTCH-ReconfRgstTDD,
id-PCH-Parameters-CTCH-SetupRsp.
id-PCH-ParametersItem-CTCH-ReconfRgstFDD,
id-PCH-ParametersItem-CTCH-SetupRqstFDD,
id-PCH-ParametersItem-CTCH-SetupRgstTDD,
id-PCH-Information,
id-PCPCH-Information,
id-PICH-ParametersItem-CTCH-ReconfRqstFDD,
id-PDSCH-Information-AddListIE-PSCH-ReconfRgst,
id-PDSCH-Information-ModifyListIE-PSCH-ReconfRqst,
id-PDSCHSets-AddList-PSCH-ReconfRqst,
id-PDSCHSets-DeleteList-PSCH-ReconfRqst,
id-PDSCHSets-ModifyList-PSCH-ReconfRqst,
id-PICH-Information.
id-PICH-Parameters-CTCH-ReconfRqstTDD,
id-PICH-ParametersItem-CTCH-SetupRqstTDD,
id-PowerAdjustmentType,
id-PRACH-Information,
id-PRACHConstant.
id-PRACH-ParametersItem-CTCH-SetupRgstTDD,
id-PRACH-ParametersListIE-CTCH-ReconfRqstFDD,
id-PrimaryCCPCH-Information-Cell-ReconfRgstFDD,
id-PrimaryCCPCH-Information-Cell-SetupRgstFDD,
id-PrimaryCPICH-Information-Cell-ReconfRgstFDD,
id-PrimaryCPICH-Information-Cell-SetupRqstFDD,
id-PrimarySCH-Information-Cell-ReconfRqstFDD,
id-PrimarySCH-Information-Cell-SetupRqstFDD,
id-PrimaryScramblingCode,
id-SCH-Information-Cell-ReconfRqstTDD,
id-SCH-Information-Cell-SetupRqstTDD,
id-PUSCH-Information-AddListIE-PSCH-ReconfRqst,
id-PUSCH-Information-ModifyListIE-PSCH-ReconfRqst,
id-PUSCHConstant,
id-PUSCHSets-AddList-PSCH-ReconfRqst,
id-PUSCHSets-DeleteList-PSCH-ReconfRqst,
id-PUSCHSets-ModifyList-PSCH-ReconfRqst,
id-RACH-Information,
id-RACH-Parameters-CTCH-SetupRsp.
id-RACH-ParametersItem-CTCH-SetupRqstFDD,
id-RACH-ParameterItem-CTCH-SetupRgstTDD,
id-ReferenceClockAvailability,
id-ReferenceSFNoffset,
id-ReportCharacteristics,
id-Reporting-Object-RL-FailureInd,
id-Reporting-Object-RL-RestoreInd,
id-ResetIndicator,
id-RL-InformationItem-DM-Rprt,
```

```
id-RL-InformationItem-DM-Rqst,
id-RL-InformationItem-DM-Rsp.
id-RL-InformationItem-RL-AdditionRgstFDD.
id-RL-informationItem-RL-DeletionRgst.
id-RL-InformationItem-RL-FailureInd.
id-RL-InformationItem-RL-PreemptRequiredInd,
id-RL-InformationItem-RL-ReconfPrepFDD,
id-RL-InformationItem-RL-ReconfRgstFDD,
id-RL-InformationItem-RL-RestoreInd,
id-RL-InformationItem-RL-SetupRgstFDD,
id-RL-InformationList-RL-AdditionRqstFDD,
id-RL-informationList-RL-DeletionRgst,
id-RL-InformationList-RL-PreemptRequiredInd.
id-RL-InformationList-RL-ReconfPrepFDD.
id-RL-InformationList-RL-ReconfRgstFDD,
id-RL-InformationList-RL-SetupRgstFDD,
id-RL-InformationResponseItem-RL-AdditionRspFDD,
id-RL-InformationResponseItem-RL-ReconfReady,
id-RL-InformationResponseItem-RL-ReconfRsp,
id-RL-InformationResponseItem-RL-SetupRspFDD,
id-RL-InformationResponseList-RL-AdditionRspFDD,
id-RL-InformationResponseList-RL-ReconfReady,
id-RL-InformationResponseList-RL-ReconfRsp,
id-RL-InformationResponseList-RL-SetupRspFDD,
id-RL-InformationResponse-RL-AdditionRspTDD,
id-RL-InformationResponse-RL-SetupRspTDD,
id-RL-Information-RL-AdditionRgstTDD,
id-RL-Information-RL-ReconfRgstTDD,
id-RL-Information-RL-ReconfPrepTDD,
id-RL-Information-RL-SetupRgstTDD,
id-RL-ReconfigurationFailureItem-RL-ReconfFailure,
id-RL-Set-InformationItem-DM-Rprt,
id-RL-Set-InformationItem-DM-Rsp.
id-RL-Set-InformationItem-RL-FailureInd,
id-RL-Set-InformationItem-RL-RestoreInd,
id-S-CCPCH-Information,
id-S-CPICH-Information,
id-SCH-Information,
id-S-SCH-Information,
id-Secondary-CCPCHListIE-CTCH-ReconfRqstTDD,
id-Secondary-CCPCH-parameterListIE-CTCH-SetupRqstTDD,
id-Secondary-CCPCH-Parameters-CTCH-ReconfRgstTDD,
id-SecondaryCPICH-InformationItem-Cell-ReconfRqstFDD,
id-SecondaryCPICH-InformationItem-Cell-SetupRqstFDD,
id-SecondaryCPICH-InformationList-Cell-ReconfRgstFDD,
id-SecondaryCPICH-InformationList-Cell-SetupRgstFDD,
id-SecondarySCH-Information-Cell-ReconfRgstFDD.
id-SecondarySCH-Information-Cell-SetupRqstFDD,
id-SegmentInformationListIE-SystemInfoUpdate,
id-SFN,
id-SFNReportingIndicator,
id-ShutdownTimer,
id-SSDT-CellIDforEDSCHPC,
id-Start-Of-Audit-Sequence-Indicator,
```

```
id-Successful-RL-InformationRespItem-RL-AdditionFailureFDD,
id-Successful-RL-InformationRespItem-RL-SetupFailureFDD.
id-Synchronisation-Configuration-Cell-ReconfRast.
id-Synchronisation-Configuration-Cell-SetupRost.
id-SyncCase.
id-SyncCaseIndicatorItem-Cell-SetupRgstTDD-PSCH,
id-SyncFrameNumber,
id-SynchronisationReportType,
id-SynchronisationReportCharacteristics.
id-SyncReportType-CellSyncReprtTDD,
id-T-Cell.
id-TFCI2-Bearer-Information-RL-SetupRgstFDD,
id-TFCI2-BearerInformationResponse,
id-TFCI2-BearerSpecificInformation-RL-ReconfPrepFDD,
id-Transmission-Gap-Pattern-Sequence-Information,
id-TimeSlotConfigurationList-Cell-ReconfRgstTDD,
id-TimeSlotConfigurationList-Cell-SetupRqstTDD,
id-timeslotInfo-CellSyncInitiationRgstTDD,
id-TimeslotISCPInfo,
id-TimingAdvanceApplied,
id-TransmissionDiversityApplied.
id-UARFCNforNt,
id-UARFCNforNd.
id-UARFCNforNu,
id-UL-CCTrCH-InformationAddList-RL-ReconfPrepTDD,
id-UL-CCTrCH-InformationDeleteItem-RL-ReconfRqstTDD,
id-UL-CCTrCH-InformationDeleteList-RL-ReconfPrepTDD,
id-UL-CCTrCH-InformationDeleteList-RL-ReconfRqstTDD,
id-UL-CCTrCH-InformationItem-RL-SetupRgstTDD,
id-UL-CCTrCH-InformationList-RL-AdditionRgstTDD,
id-UL-CCTrCH-InformationList-RL-SetupRgstTDD,
id-UL-CCTrCH-InformationModifyItem-RL-ReconfRqstTDD,
id-UL-CCTrCH-InformationModifyList-RL-ReconfPrepTDD.
id-UL-CCTrCH-InformationModifyList-RL-ReconfRqstTDD,
id-UL-DPCH-InformationAddListIE-RL-ReconfPrepTDD.
id-UL-DPCH-InformationItem-RL-AdditionRgstTDD,
id-UL-DPCH-InformationList-RL-SetupRqstTDD,
id-UL-DPCH-InformationModify-AddListIE-RL-ReconfPrepTDD,
id-UL-DPCH-InformationModify-DeleteListIE-RL-ReconfPrepTDD,
id-UL-DPCH-InformationModify-ModifyListIE-RL-ReconfPrepTDD,
id-UL-DPCH-Information-RL-ReconfPrepFDD,
id-UL-DPCH-Information-RL-ReconfRgstFDD,
id-UL-DPCH-Information-RL-SetupRgstFDD,
id-Unsuccessful-cell-InformationRespItem-SyncAdjustmntFailureTDD,
id-Unsuccessful-PDSCHSetItem-PSCH-ReconfFailureTDD,
id-Unsuccessful-PUSCHSetItem-PSCH-ReconfFailureTDD,
id-Unsuccessful-RL-InformationRespItem-RL-AdditionFailureFDD.
id-Unsuccessful-RL-InformationRespItem-RL-SetupFailureFDD,
id-Unsuccessful-RL-InformationResp-RL-AdditionFailureTDD,
id-Unsuccessful-RL-InformationResp-RL-SetupFailureTDD,
id-USCH-Information-Add,
id-USCH-Information-DeleteList-RL-ReconfPrepTDD,
id-USCH-Information-ModifyList-RL-ReconfPrepTDD,
id-USCH-InformationResponse,
```

```
id-USCH-Information,
id-DL-DPCH-LCR-Information-RL-SetupRgstTDD.
id-DL-DPCH-LCR-InformationList-RL-SetupRgstTDD.
id-DwPCH-LCR-Information.
id-DwPCH-LCR-Information-AuditRsp.
id-DwPCH-LCR-InformationList-AuditRsp,
id-DwPCH-LCR-Information-Cell-SetupRgstTDD,
id-DwPCH-LCR-Information-Cell-ReconfRgstTDD,
id-DwPCH-LCR-Information-ResourceStatusInd,
id-maxFACH-Power-LCR-CTCH-SetupRgstTDD,
id-maxFACH-Power-LCR-CTCH-ReconfRqstTDD,
id-FPACH-LCR-Information,
id-FPACH-LCR-Information-AuditRsp.
id-FPACH-LCR-InformationList-AuditRsp.
id-FPACH-LCR-InformationList-ResourceStatusInd,
id-FPACH-LCR-Parameters-CTCH-SetupRgstTDD,
id-FPACH-LCR-ParametersItem-CTCH-SetupRqstTDD,
id-FPACH-LCR-Parameters-CTCH-ReconfRgstTDD,
id-PCCPCH-LCR-Information-Cell-SetupRgstTDD,
id-PCH-Power-LCR-CTCH-SetupRgstTDD,
id-PCH-Power-LCR-CTCH-ReconfRgstTDD,
id-PICH-LCR-Parameters-CTCH-SetupRqstTDD,
id-PICH-LCR-ParametersItem-CTCH-SetupRqstTDD,
id-PRACH-LCR-ParametersList-CTCH-SetupRgstTDD,
id-PRACH-LCR-ParametersListIE-CTCH-SetupRgstTDD,
id-RL-InformationResponse-LCR-RL-SetupRspTDD,
id-Secondary-CCPCH-LCR-parameterListIE-CTCH-SetupRqstTDD,
id-Secondary-CCPCH-LCR-parameterList-CTCH-SetupRqstTDD,
id-TimeSlot,
id-TimeSlotConfigurationList-LCR-Cell-ReconfRgstTDD,
id-TimeSlotConfigurationList-LCR-Cell-SetupRgstTDD,
id-TimeslotISCP-LCR-InfoList-RL-SetupRgstTDD,
id-TimeSlotLCR-CM-Rast,
id-UL-DPCH-LCR-Information-RL-SetupRqstTDD,
id-UL-DPCH-LCR-InformationList-RL-SetupRgstTDD,
id-DL-DPCH-InformationItem-LCR-RL-AdditionRgstTDD,
id-UL-DPCH-InformationItem-LCR-RL-AdditionRgstTDD,
id-TimeslotISCP-InformationList-LCR-RL-AdditionRgstTDD,
id-DL-DPCH-LCR-InformationAddList-RL-ReconfPrepTDD,
id-DL-DPCH-LCR-InformationAddListIE-RL-ReconfPrepTDD,
id-DL-DPCH-LCR-InformationModify-AddList-RL-ReconfPrepTDD,
id-DL-DPCH-LCR-InformationModify-AddListIE-RL-ReconfPrepTDD,
id-DL-Timeslot-LCR-InformationModify-ModifyList-RL-ReconfPrepTDD,
id-TimeslotISCPInfoList-LCR-DL-PC-RgstTDD,
id-UL-DPCH-LCR-InformationAddListIE-RL-ReconfPrepTDD.
id-UL-DPCH-LCR-InformationModify-AddList,
id-UL-DPCH-LCR-InformationModify-AddListIE-RL-ReconfPrepTDD,
id-UL-TimeslotLCR-Information-RL-ReconfPrepTDD,
id-UL-SIRTarget,
id-PDSCH-AddInformation-LCR-PSCH-ReconfRqst,
id-PDSCH-AddInformation-LCR-AddListIE-PSCH-ReconfRqst,
id-PDSCH-ModifyInformation-LCR-PSCH-ReconfRqst,
id-PDSCH-ModifyInformation-LCR-ModifyListIE-PSCH-ReconfRqst,
id-PUSCH-AddInformation-LCR-PSCH-ReconfRqst,
```

```
id-PUSCH-AddInformation-LCR-AddListIE-PSCH-ReconfRqst,
    id-PUSCH-ModifyInformation-LCR-PSCH-ReconfRqst,
    id-PUSCH-ModifyInformation-LCR-ModifyListIE-PSCH-ReconfRqst,
    id-PUSCH-Info-DM-Rgst,
    id-PUSCH-Info-DM-Rsp,
    id-PUSCH-Info-DM-Rprt,
    id-RL-InformationResponse-LCR-RL-AdditionRspTDD,
    maxNrOfCCTrCHs,
    maxNrOfCellSyncBursts,
    maxNrOfCodes,
    maxNrOfCPCHs,
    maxNrOfDCHs,
    maxNrOfDLTSs.
    maxNrOfDLTSLCRs,
    maxNrOfDPCHs,
    maxNrOfDSCHs,
    maxNrOfFACHs,
    maxNrOfRLs,
    maxNrOfRLs-1,
    maxNrOfRLs-2,
    maxNrOfRLSets,
    maxNrOfPCPCHs,
    maxNrOfPDSCHs,
    maxNrOfPUSCHs,
    maxNrOfPRACHLCRs,
    maxNrOfPDSCHSets,
    maxNrOfPUSCHSets,
    maxNrOfReceptsPerSyncFrame,
    maxNrOfSCCPCHs,
    maxNrOfSCCPCHLCRs,
    maxNrOfULTSs,
    maxNrOfULTSLCRs,
    maxNrOfUSCHs,
    maxAPSiqNum,
    maxCPCHCell,
    maxFACHCell,
    maxFPACHCell,
    maxNoofLen,
    maxRACHCell,
    maxPCPCHCell,
    maxPRACHCell,
    maxSCCPCHCell,
    maxSCPICHCell,
    maxCellinNodeB,
    maxCCPinNodeB,
    maxCommunicationContext,
    maxLocalCellinNodeB,
    maxNrOfSlotFormatsPRACH,
    maxNrOfCellSyncBursts,
    maxNrOfReceptsPerSyncFrame,
    maxIB,
    maxIBSEG
FROM NBAP-Constants;
```

```
*******************
-- COMMON TRANSPORT CHANNEL SETUP REQUEST FDD
__ **********************
CommonTransportChannelSetupRequestFDD ::= SEQUENCE {
   protocolIEs
                          ProtocolIE-Container
                                                  {{CommonTransportChannelSetupRequestFDD-IEs}},
                          ProtocolExtensionContainer {{CommonTransportChannelSetupRequestFDD-Extensions}}
   protocolExtensions
                                                                                                            OPTIONAL,
CommonTransportChannelSetupRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CommonTransportChannelSetupRequestFDD-IEs NBAP-PROTOCOL-IES ::=
          id-C-ID
                                                             CRITICALITY
                                                                             reject
                                                                                        TYPE
                                                                                                               C-ID
       PRESENCE mandatory } |
           id-ConfigurationGenerationID
                                                             CRITICALITY
                                                                            reject
                                                                                        TYPE
                                                                                                               ConfigurationGenerationID
               PRESENCE mandatory }
           id-CommonPhysicalChannelType-CTCH-SetupRqstFDD
    { ID
                                                             CRITICALITY
                                                                             ignore
                                                                                        TYPE
                                                                                                               CommonPhysicalChannelType-CTCH-
SetupRastFDD
                   PRESENCE mandatory },
CommonPhysicalChannelType-CTCH-SetupRqstFDD ::= CHOICE {
    secondary-CCPCH-parameters
                                  Secondary-CCPCH-CTCH-SetupRgstFDD,
   pRACH-parameters
                                  PRACH-CTCH-SetupRqstFDD,
   pCPCHes-parameters
                                  PCPCH-CTCH-SetupRqstFDD,
Secondary-CCPCH-CTCH-SetupRqstFDD ::= SEQUENCE {
   commonPhysicalChannelID
                                          CommonPhysicalChannelID,
    fdd-S-CCPCH-Offset
                                          FDD-S-CCPCH-Offset,
                                          DL-ScramblingCode OPTIONAL,
    dl-ScramblingCode
    -- This IE shall be present if the PCH parameters IE is not present
    fdd-DL-ChannelisationCodeNumber
                                          FDD-DL-ChannelisationCodeNumber,
    tFCS
                   TFCS,
    secondary-CCPCH-SlotFormat
                                          SecondaryCCPCH-SlotFormat,
    tFCI-Presence
                                          TFCI-Presence OPTIONAL,
    -- This IE shall be present if the Secondary CCPCH Slot Format is set to any of the values from 8 to 17
                                          MultiplexingPosition,
   multiplexingPosition
   powerOffsetInformation
                                          PowerOffsetInformation-CTCH-SetupRqstFDD,
    sTTD-Indicator
                                          STTD-Indicator,
    fACH-Parameters
                                          FACH-ParametersList-CTCH-SetupRqstFDD
                                                                                    OPTIONAL,
                                          PCH-Parameters-CTCH-SetupRqstFDD
                                                                                    OPTIONAL,
    pCH-Parameters
                                          ProtocolExtensionContainer { { Secondary-CCPCHItem-CTCH-SetupRgstFDD-ExtIEs} }
                                                                                                                          OPTIONAL,
   iE-Extensions
Secondary-CCPCHItem-CTCH-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
PowerOffsetInformation-CTCH-SetupRqstFDD ::= SEQUENCE {
   pO1-ForTFCI-Bits
                                     PowerOffset.
   pO3-ForPilotBits
                                     PowerOffset,
   iE-Extensions
                                     ProtocolExtensionContainer { { PowerOffsetInformation-CTCH-SetupRqstFDD-ExtIEs} } OPTIONAL,
PowerOffsetInformation-CTCH-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
FACH-ParametersList-CTCH-SetupRqstFDD ::= ProtocolIE-Single-Container {{ FACH-ParametersListIEs-CTCH-SetupRqstFDD }}
FACH-ParametersListIEs-CTCH-SetupRqstFDD NBAP-PROTOCOL-IES ::= {
   FACH-ParametersListIE-CTCH-SetupRqstFDD ::= SEQUENCE (SIZE (1..maxNrOfFACHs)) OF FACH-ParametersItem-CTCH-SetupRqstFDD
FACH-ParametersItem-CTCH-SetupRqstFDD ::= SEQUENCE {
   commonTransportChannelID
                                  CommonTransportChannelID,
   transportFormatSet
                                  TransportFormatSet,
                                  ToAWS,
   t.oAWS
                                  TOAWE,
   toAWE
   maxFACH-Power
                                  DL-Power,
                                  ProtocolExtensionContainer { { FACH-ParametersItem-CTCH-SetupRqstFDD-ExtIEs} }
   iE-Extensions
                                                                                                          OPTIONAL,
FACH-ParametersItem-CTCH-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PCH-Parameters-CTCH-SetupRqstFDD ::= ProtocolIE-Single-Container {{ PCH-ParametersIE-CTCH-SetupRqstFDD }}
PCH-ParametersIE-CTCH-SetupRqstFDD NBAP-PROTOCOL-IES ::= {
   PCH-ParametersItem-CTCH-SetupRqstFDD ::= SEQUENCE {
   commonTransportChannelID
                                  CommonTransportChannelID,
   transportFormatSet
                                  TransportFormatSet,
   toAWS
                                  ToAWS,
   toAWE
                                  TOAWE.
                                  DL-Power,
   pCH-Power
                                     PICH-Parameters-CTCH-SetupRqstFDD,
   pICH-Parameters
                                  ProtocolExtensionContainer { { PCH-ParametersItem-CTCH-SetupRqstFDD-ExtIEs} }
   iE-Extensions
                                                                                                       OPTIONAL,
   . . .
```

```
PCH-ParametersItem-CTCH-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PICH-Parameters-CTCH-SetupRgstFDD ::= SEQUENCE {
    commonPhysicalChannelID
                                                 CommonPhysicalChannelID,
    fdd-dl-ChannelisationCodeNumber
                                                 FDD-DL-ChannelisationCodeNumber,
                                                 PICH-Power,
   pICH-Power
   pICH-Mode
                                                 PICH-Mode,
    sTTD-Indicator
                                                 STTD-Indicator,
                                                 ProtocolExtensionContainer { { PICH-Parameters-CTCH-SetupRqstFDD-ExtIEs} } 
    iE-Extensions
                                                                                                                                 OPTIONAL,
    . . .
PICH-Parameters-CTCH-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PRACH-CTCH-SetupRgstFDD ::= SEQUENCE {
    commonPhysicalChannelID
                                                 CommonPhysicalChannelID,
    scramblingCodeNumber
                                            ScramblingCodeNumber,
    tFCS
                                                TFCS.
    preambleSignatures
                                                 PreambleSignatures,
    allowedSlotFormatInformation
                                                 AllowedSlotFormatInformationList-CTCH-SetupRgstFDD.
    rACH-SubChannelNumbers
                                                 RACH-SubChannelNumbers.
    ul-punctureLimit
                                                 PunctureLimit.
    preambleThreshold
                                                 PreambleThreshold,
    rACH-Parameters
                                                 RACH-Parameters-CTCH-SetupRqstFDD,
    aICH-Parameters
                                                 AICH-Parameters-CTCH-SetupRqstFDD,
                                                 ProtocolExtensionContainer { { PRACHItem-CTCH-SetupRqstFDD-ExtIEs} }
    iE-Extensions
                                                                                                                           OPTIONAL,
    . . .
PRACHITEM-CTCH-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
AllowedSlotFormatInformationList-CTCH-SetupRqstFDD ::= SEOUENCE (SIZE (1.. maxNrOfSlotFormatsPRACH)) OF AllowedSlotFormatInformationItem-CTCH-
SetupRastFDD
AllowedSlotFormatInformationItem-CTCH-SetupRqstFDD ::= SEOUENCE {
    rACHSlotFormat
                                                 RACH-SlotFormat,
    iE-Extensions
                                                 ProtocolExtensionContainer { { AllowedSlotFormatInformationItem-CTCH-SetupRqstFDD-ExtIEs} }
    OPTIONAL,
    . . .
AllowedSlotFormatInformationItem-CTCH-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RACH-Parameters-CTCH-SetupRqstFDD ::= ProtocolIE-Single-Container {{ RACH-ParametersIE-CTCH-SetupRqstFDD }}
RACH-ParametersIE-CTCH-SetupRqstFDD NBAP-PROTOCOL-IES ::= {
```

```
{ ID id-RACH-ParametersItem-CTCH-SetupRqstFDD
                                                  CRITICALITY reject TYPE RACH-ParametersItem-CTCH-SetupRqstFDD PRESENCE mandatory }
RACH-ParametersItem-CTCH-SetupRqstFDD ::= SEQUENCE
    commonTransportChannelID
                                              CommonTransportChannelID,
   transportFormatSet
                                              TransportFormatSet,
   iE-Extensions
                                              ProtocolExtensionContainer { RACH-ParametersItem-CTCH-SetupRgstFDD-ExtIEs} }
                                                                                                                               OPTIONAL.
RACH-ParametersItem-CTCH-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
AICH-Parameters-CTCH-SetupRgstFDD ::= SEQUENCE {
    commonPhysicalChannelID
                                              CommonPhysicalChannelID,
    aICH-TransmissionTiming
                                              AICH-TransmissionTiming,
    fdd-dl-ChannelisationCodeNumber
                                              FDD-DL-ChannelisationCodeNumber,
   aICH-Power
                                              AICH-Power,
   sTTD-Indicator
                                              STTD-Indicator,
   iE-Extensions
                                              ProtocolExtensionContainer { { AICH-Parameters-CTCH-SetupRqstFDD-ExtIEs} }
                                                                                                                            OPTIONAL,
    . . .
AICH-Parameters-CTCH-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PCPCH-CTCH-SetupRgstFDD ::= SEQUENCE
   cPCH-Parameters
                                   CPCH-Parameters-CTCH-SetupRqstFDD,
                                   iE-Extensions
                                                                                                                   OPTIONAL,
PCPCHItem-CTCH-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CPCH-Parameters-CTCH-SetupRqstFDD ::= SEQUENCE {
    commonTransportChannelID
                                   CommonTransportChannelID,
    transportFormatSet
                                   TransportFormatSet,
    aPPreambleScramblingCode
                                   CPCHScramblingCodeNumber,
   cDPreambleScramblingCode
                                   CPCHScramblingCodeNumber,
    tFCS
                                   TFCS,
    cDSignatures
                                   PreambleSignatures
                                                              OPTIONAL.
    cDSubChannelNumbers
                                   CDSubChannelNumbers
                                                              OPTIONAL.
   punctureLimit
                                   PunctureLimit,
   cPCH-UL-DPCCH-SlotFormat
                                   CPCH-UL-DPCCH-SlotFormat,
   uL-SIR
                                   UL-SIR,
   initialDL-transmissionPower
                                   DL-Power,
   maximumDLPower
                                   DL-Power,
   minimumDLPower
                                   DL-Power,
   pO2-ForTPC-Bits
                                   PowerOffset,
                                   FDD-TPC-DownlinkStepSize,
    fDD-TPC-DownlinkStepSize
```

```
nStartMessage
                                   NStartMessage,
   nEOT
                                   NEOT.
    channel-Assignment-Indication
                                   Channel-Assignment-Indication,
    cPCH-Allowed-Total-Rate
                                   CPCH-Allowed-Total-Rate,
   pCPCHChannelInfomation
                                   PCPCHChannelInformationList-CTCH-SetupRqstFDD,
   vCAMMapping-Information
                                   VCAMMapping-InformationList-CTCH-SetupRqstFDD
                                                                                     OPTIONAL.
    -- this IE shall be present if the Channel Assignment Indication is set to "CA Active" --
    aP-AICH-Parameters
                                   AP-AICH-Parameters-CTCH-SetupRgstFDD,
    cDCA-ICH-Parameters
                                   CDCA-ICH-Parameters-CTCH-SetupRqstFDD,
                                   ProtocolExtensionContainer { { CPCH-Parameters-CTCH-SetupRqstFDD-ExtIEs} }
   iE-Extensions
                                                                                                                   OPTIONAL,
CPCH-Parameters-CTCH-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PCPCHChannelInformationList-CTCH-SetupRgstFDD ::= SEOUENCE (SIZE (1..maxNrOfPCPCHs)) OF PCPCHChannelInformationItem-CTCH-SetupRgstFDD
PCPCHChannelInformationItem-CTCH-SetupRqstFDD ::= SEQUENCE {
    commonPhysicalChannelID
                                       CommonPhysicalChannelID,
    cPCHScramblingCodeNumber
                                      CPCHScramblingCodeNumber,
   dL-ScramblingCode
                                      DL-ScramblingCode,
    fdd-dl-ChannelisationCodeNumber
                                      FDD-DL-ChannelisationCodeNumber,
   pCP-Length
                                      PCP-Length,
   uCSM-Information
                                      UCSM-Information-CTCH-SetupRqstFDD
    -- this IE shall be present if the Channel Assignment Indication is equal to "CA Inactive" --
   iE-Extensions
                                       OPTIONAL,
PCPCHChannelInformationItem-CTCH-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UCSM-Information-CTCH-SetupRqstFDD ::= SEQUENCE {
   minUL-ChannelisationCodeLength
                                      MinUL-ChannelisationCodeLength,
   nFmax
                                      NFmax,
    channelRequestParameters
                                      ChannelRequestParametersList-CTCH-SetupRqstFDD
                                                                                         OPTIONAL,
   iE-Extensions
                                       ProtocolExtensionContainer { { UCSM-InformationItem-CTCH-SetupRgstFDD-ExtIEs} }
                                                                                                                         OPTIONAL,
    . . .
UCSM-InformationItem-CTCH-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    . . .
ChannelRequestParametersList-CTCH-SetupRqstFDD ::= SEQUENCE (SIZE (1..maxAPSiqNum)) OF ChannelRequestParametersItem-CTCH-SetupRqstFDD
ChannelRequestParametersItem-CTCH-SetupRgstFDD ::= SEQUENCE {
   aPPreambleSignature
                               APPreambleSignature,
   aPSubChannelNumber
                               APSubChannelNumber
    iE-Extensions
                               ProtocolExtensionContainer { { ChannelRequestParametersItem-CTCH-SetupRqstFDD-ExtIEs} }
                                                                                                                         OPTIONAL,
    . . .
```

```
ChannelRequestParametersItem-CTCH-SetupRgstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
VCAMMapping-InformationList-CTCH-SetupRgstFDD ::= SEQUENCE (SIZE (1..maxNoofLen)) OF VCAMMapping-InformationItem-CTCH-SetupRgstFDD
VCAMMapping-InformationItem-CTCH-SetupRqstFDD ::= SEQUENCE {
   minUL-ChannelisationCodeLength
                                      MinUL-ChannelisationCodeLength,
   nFmax
                                      NFmax,
   max-Number-of-PCPCHes
                                      Max-Number-of-PCPCHes,
                                      SFRequestParametersList-CTCH-SetupRqstFDD,
   sFRequestParameters
   iE-Extensions
                                      ProtocolExtensionContainer { { VCAMMapping-InformationItem-CTCH-SetupRqstFDD-ExtIEs} }
                                                                                                                             OPTIONAL,
VCAMMapping-InformationItem-CTCH-SetupRgstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
SFRequestParametersList-CTCH-SetupRqstFDD ::= SEQUENCE (SIZE (1..maxAPSiqNum)) OF SFRequestParametersItem-CTCH-SetupRqstFDD
SFRequestParametersItem-CTCH-SetupRqstFDD ::= SEQUENCE {
   aPPreambleSignature
                              APPreambleSignature,
   aPSubChannelNumber
                              APSubChannelNumber
                                                      OPTIONAL.
                              ProtocolExtensionContainer { { SFRequestParametersItem-CTCH-SetupRqstFDD-ExtIEs} }
   iE-Extensions
                                                                                                                  OPTIONAL,
SFRequestParametersItem-CTCH-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION::= {
AP-AICH-Parameters-CTCH-SetupRqstFDD ::= SEQUENCE {
    commonPhysicalChannelID
                                              CommonPhysicalChannelID,
    fdd-dl-ChannelisationCodeNumber
                                              FDD-DL-ChannelisationCodeNumber,
   aP-AICH-Power
                                              AICH-Power,
   cSICH-Power
                                              AICH-Power,
    sTTD-Indicator
                                              STTD-Indicator,
   iE-Extensions
                                              ProtocolExtensionContainer { { AP-AICH-Parameters-CTCH-SetupRqstFDD-ExtIEs} }
                                                                                                                             OPTIONAL,
AP-AICH-Parameters-CTCH-SetupRgstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CDCA-ICH-Parameters-CTCH-SetupRqstFDD ::= SEQUENCE {
    commonPhysicalChannelID
                                              CommonPhysicalChannelID,
                                              FDD-DL-ChannelisationCodeNumber,
    fdd-dl-ChannelisationCodeNumber
   cDCA-ICH-Power
                                              AICH-Power,
    sTTD-Indicator
                                              STTD-Indicator,
                                              iE-Extensions
```

```
CDCA-ICH-Parameters-CTCH-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
-- COMMON TRANSPORT CHANNEL SETUP REQUEST TDD
  *****************
CommonTransportChannelSetupRequestTDD ::= SEQUENCE {
   protocolIEs
                          ProtocolIE-Container
                                                  {{CommonTransportChannelSetupRequestTDD-IEs}},
   protocolExtensions
                           ProtocolExtensionContainer {{CommonTransportChannelSetupRequestTDD-Extensions}}
                                                                                                                   OPTIONAL,
CommonTransportChannelSetupRequestTDD-IES NBAP-PROTOCOL-IES ::= {
    ( TD
          id-C-ID
                                                                  CRITICALITY reject
                                                                                         TYPE
                                                                                                                C-TD
       PRESENCE mandatory } |
          id-ConfigurationGenerationID
                                                                  CRITICALITY reject
                                                                                         TYPE
                                                                                                                ConfigurationGenerationID
               PRESENCE mandatory } |
           id-CommonPhysicalChannelType-CTCH-SetupRqstTDD
    { ID
                                                                  CRITICALITY ignore
                                                                                         TYPE
                                                                                                                CommonPhysicalChannelType-CTCH-
                   PRESENCE
                             mandatory },
SetupRqstTDD
CommonTransportChannelSetupRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    . . .
CommonPhysicalChannelType-CTCH-SetupRqstTDD ::= CHOICE {
    secondary-CCPCH-parameters
                                              Secondary-CCPCH-CTCH-SetupRqstTDD,
   pRACH-parameters
                                              PRACH-CTCH-SetupRqstTDD,
Secondary-CCPCH-CTCH-SetupRgstTDD ::= SEQUENCE
    sCCPCH-CCTrCH-ID
                                              CCTrCH-ID,
   t.FCS
                                              TFCS.
   tFCI-Coding
                                              TFCI-Coding,
   punctureLimit
                                              PunctureLimit,
                                              Secondary-CCPCH-parameterList-CTCH-SetupRqstTDD,
    secondaryCCPCH-parameterList
    fACH-ParametersList
                                              FACH-ParametersList-CTCH-SetupRqstTDD
                                                                                         OPTIONAL,
   pCH-Parameters
                                              PCH-Parameters-CTCH-SetupRqstTDD
                                                                                         OPTIONAL,
   iE-Extensions
                                              ProtocolExtensionContainer {{Secondary-CCPCHItem-CTCH-SetupRqstTDD-ExtIEs}}
Secondary-CCPCHItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    { ID id-Secondary-CCPCH-LCR-parameterList-CTCH-SetupRqstTDD
                                                                          CRITICALITY reject
                                                                                                                EXTENSION Secondary-CCPCH-LCR-
parameterList-CTCH-SetupRqstTDD
                                  PRESENCE
                                              optional
```

```
Secondary-CCPCH-parameterList-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ Secondary-CCPCH-parameterListIEs-CTCH-SetupRqstTDD }}
Secondary-CCPCH-parameterListIEs-CTCH-SetupRgstTDD NBAP-PROTOCOL-IES ::= {
   mandatory } -- Mandatory for 3.84Mcps TDD only
Secondary-CCPCH-parameterListIE-CTCH-SetupRqstTDD ::= SEQUENCE (SIZE (1..maxNrofSCCPCHs)) OF Secondary-CCPCH-parameterItem-CTCH-SetupRqstTDD
Secondary-CCPCH-parameterItem-CTCH-SetupRqstTDD ::= SEQUENCE {
   commonPhysicalChannelID
                                         CommonPhysicalChannelID,
   tdd-ChannelisationCode
                                         TDD-ChannelisationCode,
   timeslot
                                         TimeSlot,
   midambleShiftandBurstType
                                         MidambleShiftAndBurstType,
   tdd-PhysicalChannelOffset
                                         TDD-PhysicalChannelOffset,
   repetitionPeriod
                                         RepetitionPeriod,
   repetitionLength
                                         RepetitionLength,
   s-CCPCH-Power
                                         DL-Power,
                                         ProtocolExtensionContainer { { Secondary-CCPCH-parameterItem-CTCH-SetupRqstTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
   . . .
Secondary-CCPCH-parameterItem-CTCH-SetupRgstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
FACH-ParametersList-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ FACH-ParametersListIEs-CTCH-SetupRqstTDD }}
FACH-ParametersListIEs-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
   FACH-ParametersListIE-CTCH-SetupRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfFACHs)) OF FACH-ParametersItem-CTCH-SetupRqstTDD
FACH-ParametersItem-CTCH-SetupRgstTDD ::= SEQUENCE {
   commonTransportChannelID
                                      CommonTransportChannelID,
   fACH-CCTrCH-ID
                                      CCTrCH-ID,
   dl-TransportFormatSet
                                      TransportFormatSet,
   toAWS
                                      ToAWS,
   toawe.
                                      TOAWE,
                                      ProtocolExtensionContainer { FACH-ParametersItem-CTCH-SetupRgstTDD-ExtIEs} }
   iE-Extensions
                                                                                                              OPTIONAL,
FACH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
   { ID id-maxFACH-Power-LCR-CTCH-SetupRqstTDD
                                                   CRITICALITY reject
                                                                         EXTENSION DL-Power
                                                                                                       PRESENCE
                                                                                                                 optional },
   -- For 1.28Mcps TDD only
   . . .
```

3GPP TS 25.433 version 4.4.0 Release 4

```
PCH-Parameters-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ PCH-ParametersIE-CTCH-SetupRqstTDD }}
PCH-ParametersIE-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
   PCH-ParametersItem-CTCH-SetupRgstTDD ::= SEQUENCE {
   commonTransportChannelID
                                    CommonTransportChannelID,
   pCH-CCTrCH-ID
                                    CCTrCH-ID,
   dl-TransportFormatSet
                                    TransportFormatSet,
   toAWS
                                    ToAWS,
   toAWE
                                    TOAWE,
   pICH-Parameters
                                    PICH-Parameters-CTCH-SetupRqstTDD,
   iE-Extensions
                                    ProtocolExtensionContainer { { PCH-ParametersItem-CTCH-SetupRgstTDD-ExtIEs} }
                                                                                                         OPTIONAL,
PCH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
         id-PCH-Power-LCR-CTCH-SetupRgstTDD
                                             CRITICALITY reject
                                                                  EXTENSION DL-Power
                                                                                                 PRESENCE
                                                                                                           optional }
   -- For 1.28Mcps TDD only
        id-PICH-LCR-Parameters-CTCH-SetupRqstTDD
                                                    CRITICALITY reject
                                                                        EXTENSION
                                                                                               PTCH-LCR-Parameters-CTCH-
                         optional }, -- Mandatory for 1.28Mcps TDD only
SetupRqstTDD
                PRESENCE
PICH-Parameters-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ PICH-ParametersIE-CTCH-SetupRqstTDD }}
PICH-ParametersIE-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
   } -- Mandatory for 3.84Mcps TDD only
PICH-ParametersItem-CTCH-SetupRqstTDD ::= SEQUENCE
   commonPhysicalChannelID
                                    CommonPhysicalChannelID,
   tdd-ChannelisationCode
                                    TDD-ChannelisationCode,
   timeSlot
                                    TimeSlot,
   midambleshiftAndBurstType
                                    MidambleShiftAndBurstType,
   tdd-PhysicalChannelOffset
                                    TDD-PhysicalChannelOffset,
                                    RepetitionPeriod,
   repetitionPeriod
   repetitionLength
                                    RepetitionLength,
   pagingIndicatorLength
                                    PagingIndicatorLength,
   pICH-Power
                                    PICH-Power,
                                    ProtocolExtensionContainer { { PICH-ParametersItem-CTCH-SetupRgstTDD-ExtIEs} }
   iE-Extensions
                                                                                                         OPTIONAL.
PICH-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PICH-LCR-Parameters-CTCH-SetupRgstTDD ::= ProtocolIE-Single-Container {{ PICH-LCR-ParametersIE-CTCH-SetupRgstTDD }}
PICH-LCR-ParametersIE-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
   } -- Mandatory for 1.28Mcps TDD
```

```
PICH-LCR-ParametersItem-CTCH-SetupRgstTDD ::= SEQUENCE {
   commonPhysicalChannelID
                                       CommonPhysicalChannelID.
   tdd-ChannelisationCodeLCR
                                       TDD-ChannelisationCodeLCR,
   timeSlotLCR
                                       TimeSlotLCR.
   midambleShiftLCR
                                       MidambleShiftLCR,
   tdd-PhysicalChannelOffset
                                       TDD-PhysicalChannelOffset,
   repetitionPeriod
                                       RepetitionPeriod,
   repetitionLength
                                       RepetitionLength,
   pagingIndicatorLength
                                       PagingIndicatorLength,
   pICH-Power
                                       PICH-Power,
                                       ProtocolExtensionContainer { { PICH-LCR-ParametersItem-CTCH-SetupRqstTDD-ExtIEs} }
   iE-Extensions
PICH-LCR-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
Secondary-CCPCH-LCR-parameterList-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ Secondary-CCPCH-LCR-parameterListIEs-CTCH-SetupRqstTDD }}
Secondary-CCPCH-LCR-parameterListIEs-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
   PRESENCE optional \ -- Mandatory for 1.28Mcps TDD only
Secondary-CCPCH-LCR-parameterListIE-CTCH-SetupRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHLCRs)) OF Secondary-CCPCH-LCR-parameterItem-CTCH-
SetupRastTDD
Secondary-CCPCH-LCR-parameterItem-CTCH-SetupRqstTDD ::= SEQUENCE {
   commonPhysicalChannelID
                                           CommonPhysicalChannelID,
   tdd-ChannelisationCodeLCR
                                           TDD-ChannelisationCodeLCR,
   timeslotLCR
                                           TimeSlotLCR,
   midambleShiftLCR
                                           MidambleShiftLCR,
   tdd-PhysicalChannelOffset
                                           TDD-PhysicalChannelOffset,
   repetitionPeriod
                                           RepetitionPeriod,
   repetitionLength
                                           RepetitionLength,
   s-CCPCH-Power
                                           DL-Power,
                                           ProtocolExtensionContainer { { Secondary-CCPCH-LCR-parameterItem-CTCH-SetupRgstTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
Secondary-CCPCH-LCR-parameterItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
   . . .
PRACH-CTCH-SetupRqstTDD ::= SEQUENCE
   pRACH-Parameters-CTCH-SetupRqstTDD
                                           PRACH-Parameters-CTCH-SetupRqstTDD,
                                           iE-Extensions
                                                                                                           OPTIONAL,
PRACH-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::=
```

```
id-PRACH-LCR-ParametersList-CTCH-SetupRqstTDD
                                                                                             PRACH-LCR-ParametersList-CTCH-
                                                      CRITICALITY reject
                                                                         EXTENSION
SetupRastTDD
               PRESENCE
                         optional
                                 } -- Mandatory for 1.28Mcps TDD only
   { ID id-FPACH-LCR-Parameters-CTCH-SetupRgstTDD
                                                   CRITICALITY reject
                                                                      EXTENSION
                                                                                             FPACH-LCR-Parameters-CTCH-
SetupRqstTDD
               PRESENCE
                         optional
                                   }, -- Mandatory for 1.28Mcps TDD only
PRACH-Parameters-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ PRACH-ParametersIE-CTCH-SetupRqstTDD }}
PRACH-ParametersIE-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
   } -- Mandatory for 3.84Mcps TDD only
PRACH-ParametersItem-CTCH-SetupRgstTDD ::= SEQUENCE {
   commonPhysicalChannelID
                                      CommonPhysicalChannelID,
   tFCS
                                      TFCS,
   timeslot
                                      TimeSlot,
   tdd-ChannelisationCode
                                      TDD-ChannelisationCode,
   maxPRACH-MidambleShifts
                                      MaxPRACH-MidambleShifts,
   pRACH-Midamble
                                      PRACH-Midamble,
                                      RACH-Parameter-CTCH-SetupRqstTDD,
   rACH
                                      iE-Extensions
                                                                                                           OPTIONAL,
   . . .
PRACH-ParametersItem-CTCH-SetupRgstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RACH-Parameter-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ RACH-ParameterIE-CTCH-SetupRqstTDD }}
RACH-ParameterIE-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
   RACH-ParameterItem-CTCH-SetupRqstTDD ::= SEQUENCE {
   commonTransportChannelID
                                      CommonTransportChannelID,
   uL-TransportFormatSet
                                      TransportFormatSet,
   iE-Extensions
                                      OPTIONAL,
RACH-ParameterItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
   . . .
PRACH-LCR-ParametersList-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ PRACH-LCR-ParametersListIEs-CTCH-SetupRqstTDD }}
PRACH-LCR-ParametersListIEs-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
   { ID id-PRACH-LCR-ParametersListIE-CTCH-SetupRqstTDD CRITICALITY reject TYPE PRACH-LCR-ParametersListIE-CTCH-SetupRqstTDD PRESENCE optional
```

```
PRACH-LCR-ParametersListIE-CTCH-SetupRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfPRACHLCRs)) OF PRACH-LCR-ParametersItem-CTCH-SetupRqstTDD
PRACH-LCR-ParametersItem-CTCH-SetupRqstTDD ::= SEQUENCE {
   commonPhysicalChannelID
                                          CommonPhysicalChannelID,
   t.FCS
                                          TFCS.
   timeslotLCR
                                          TimeSlotLCR,
   tdd-ChannelisationCodeLCR
                                          TDD-ChannelisationCodeLCR.
   maxPRACH-MidambleShifts
                                          MaxPRACH-MidambleShifts,
   pRACH-Midamble
                                          PRACH-Midamble,
   rACH
                                          RACH-Parameter-CTCH-SetupRqstTDD,
   iE-Extensions
                                          ProtocolExtensionContainer { { PRACH-LCR-ParametersItem-CTCH-SetupRqstTDD-ExtIEs} }
                                                                                                                        OPTIONAL,
   . . .
PRACH-LCR-ParametersItem-CTCH-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
FPACH-LCR-Parameters-CTCH-SetupRqstTDD ::= ProtocolIE-Single-Container {{ FPACH-LCR-ParametersIE-CTCH-SetupRqstTDD }}
FPACH-LCR-ParametersIE-CTCH-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
   FPACH-LCR-ParametersItem-CTCH-SetupRqstTDD ::= SEQUENCE {
   commonPhysicalChannelID
                                          CommonPhysicalChannelID,
   tdd-ChannelisationCodeLCR
                                          TDD-ChannelisationCodeLCR,
   timeslotLCR
                                          TimeSlotLCR,
   midambleShiftLCR
                                          MidambleShiftLCR,
   fPACH-Power
                                       FPACH-Power,
   iE-Extensions
                                          ProtocolExtensionContainer { { FPACH-LCR-ParametersItem-CTCH-SetupRqstTDD-ExtIEs} }
                                                                                                                        OPTIONAL,
FPACH-LCR-ParametersItem-CTCH-SetupRgstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
     COMMON TRANSPORT CHANNEL SETUP RESPONSE
  ******************
CommonTransportChannelSetupResponse ::= SEOUENCE {
   protocolIEs
                        ProtocolIE-Container
                                              {{CommonTransportChannelSetupResponse-IEs}},
   protocolExtensions
                        ProtocolExtensionContainer {{CommonTransportChannelSetupResponse-Extensions}}
                                                                                                 OPTIONAL,
CommonTransportChannelSetupResponse-IEs NBAP-PROTOCOL-IES ::= {
   { ID
         id-FACH-ParametersList-CTCH-SetupRsp CRITICALITY ignore
                                                                   TYPE
                                                                          FACH-CommonTransportChannel-InformationResponse
                                                                                                                        PRESENCE
   optional
             } |
```

```
id-PCH-Parameters-CTCH-SetupRsp
                                               CRITICALITY ignore
                                                                     TYPE
                                                                            CommonTransportChannel-InformationResponse
                                                                                                                           PRESENCE
   optional
   { ID
          id-RACH-Parameters-CTCH-SetupRsp
                                               CRITICALITY ignore
                                                                     TYPE
                                                                            CommonTransportChannel-InformationResponse
                                                                                                                         PRESENCE
   optional
   { ID
          id-CPCH-Parameters-CTCH-SetupRsp
                                               CRITICALITY ignore
                                                                                   CommonTransportChannel-InformationResponse
                                                                            TYPE
   PRESENCE
              optional }|
          id-CriticalityDiagnostics
                                                      CRITICALITY
                                                                                       CriticalityDiagnostics
                                                                                                                           PRESENCE
   { ID
                                                                     ignore
                                                                                TYPE
   optional
CommonTransportChannelSetupResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
FACH-CommonTransportChannel-InformationResponse ::= SEOUENCE (SIZE (1..maxNrOfFACHs)) OF CommonTransportChannel-InformationResponse
  *****************
  COMMON TRANSPORT CHANNEL SETUP FAILURE
__ *********************
CommonTransportChannelSetupFailure ::= SEOUENCE {
   protocolIEs
                         ProtocolIE-Container
                                               {{CommonTransportChannelSetupFailure-IEs}},
   protocolExtensions
                         ProtocolExtensionContainer {{CommonTransportChannelSetupFailure-Extensions}}
                                                                                                    OPTIONAL,
CommonTransportChannelSetupFailure-IEs NBAP-PROTOCOL-IES ::= {
     ID
          id-Cause
                                    CRITICALITY ignore
                                                          TYPE
                                                                 Cause
                                                                                                         PRESENCE mandatory
   { ID
          id-CriticalityDiagnostics CRITICALITY ignore
                                                          TYPE
                                                                 CriticalityDiagnostics
                                                                                                         PRESENCE optional
   . . .
CommonTransportChannelSetupFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    *******************
  COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST FDD
  CommonTransportChannelReconfigurationRequestFDD ::= SEQUENCE {
   protocolIEs
                         ProtocolIE-Container
                                               {{CommonTransportChannelReconfigurationRequestFDD-IEs}},
                         ProtocolExtensionContainer {{CommonTransportChannelReconfigurationRequestFDD-Extensions}}
   protocolExtensions
                                                                                                              OPTIONAL,
CommonTransportChannelReconfigurationRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
   { ID
          id-C-ID
                                                  CRITICALITY reject
                                                                        TYPE
                                                                               C-ID
   PRESENCE mandatory } |
```

```
id-ConfigurationGenerationID
                                                                                   ConfigurationGenerationID
                                                    CRITICALITY reject
                                                                           TYPE
                                                                                                                     PRESENCE mandatory
     ID
           id-CommonPhysicalChannelType-CTCH-ReconfRgstFDD CRITICALITY reject TYPE
                                                                                   CommonPhysicalChannelType-CTCH-ReconfRgstFDD PRESENCE
   mandatory },
CommonTransportChannelReconfigurationRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CommonPhysicalChannelType-CTCH-ReconfRqstFDD ::= CHOICE
   secondary-CCPCH-parameters
                                 Secondary-CCPCHList-CTCH-ReconfRqstFDD,
                                 PRACHList-CTCH-ReconfRqstFDD,
   pRACH-parameters
   cPCH-parameters
                                 CPCHList-CTCH-ReconfRqstFDD,
Secondary-CCPCHList-CTCH-ReconfRgstFDD ::= SEQUENCE {
   fACH-ParametersList-CTCH-ReconfRgstFDD
                                             FACH-ParametersList-CTCH-ReconfRqstFDD OPTIONAL,
   pCH-Parameters-CTCH-ReconfRqstFDD
                                             PCH-Parameters-CTCH-ReconfRqstFDD
                                                                                  OPTIONAL,
   pICH-Parameters-CTCH-ReconfRqstFDD
                                             PICH-Parameters-CTCH-ReconfRqstFDD
                                                                                   OPTIONAL,
                                             ProtocolExtensionContainer { { Secondary-CCPCH-CTCH-ReconfRqstFDD-ExtIEs} } OPTIONAL,
   iE-Extensions
Secondary-CCPCH-CTCH-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::=
FACH-ParametersList-CTCH-ReconfRgstFDD ::= ProtocolIE-Single-Container {{ FACH-ParametersListIEs-CTCH-ReconfRgstFDD }}
FACH-ParametersListIEs-CTCH-ReconfRqstFDD NBAP-PROTOCOL-IES ::= {
    { ID id-FACH-ParametersListIE-CTCH-ReconfRqstFDD
                                                   CRITICALITY reject TYPE FACH-ParametersListIE-CTCH-ReconfRqstFDD
                                                                                                                     PRESENCE mandatory
FACH-ParametersListIE-CTCH-ReconfRqstFDD ::= SEQUENCE (SIZE (1..maxFACHCell)) OF FACH-ParametersItem-CTCH-ReconfRqstFDD
FACH-ParametersItem-CTCH-ReconfRqstFDD ::= SEOUENCE {
   commonTransportChannelID
                                         CommonTransportChannelID,
   maxFACH-Power
                                         DL-Power
                                                        OPTIONAL,
   toAWS
                                         ToAWS
                                                        OPTIONAL,
   t.oAWE
                                         TOAWE
                                                        OPTIONAL,
                                         ProtocolExtensionContainer { { FACH-ParametersItem-CTCH-ReconfRqstFDD-ExtIEs} }
   iE-Extensions
                                                                                                                       OPTIONAL,
FACH-ParametersItem-CTCH-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PCH-Parameters-CTCH-ReconfRqstFDD ::= ProtocolIE-Single-Container {{ PCH-ParametersIE-CTCH-ReconfRqstFDD }}
PCH-ParametersIE-CTCH-ReconfRqstFDD NBAP-PROTOCOL-IES ::= {
```

```
PCH-ParametersItem-CTCH-ReconfRqstFDD ::= SEQUENCE
   commonTransportChannelID
                                     CommonTransportChannelID,
   pCH-Power
                                     DL-Power
                                                   OPTIONAL.
   toAWS
                                     ToAWS
                                                   OPTIONAL,
                                                   OPTIONAL.
   t.oAWE
                                     TOAWE
                                     iE-Extensions
                                                                                                               OPTIONAL.
PCH-ParametersItem-CTCH-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PICH-Parameters-CTCH-ReconfRgstFDD ::= ProtocolIE-Single-Container {{ PICH-ParametersIE-CTCH-ReconfRgstFDD }}
PICH-ParametersIE-CTCH-ReconfRqstFDD NBAP-PROTOCOL-IES ::= {
   { ID id-PICH-ParametersItem-CTCH-ReconfRqstFDD CRITICALITY reject TYPE PICH-ParametersItem-CTCH-ReconfRqstFDD
                                                                                                     PRESENCE mandatory
PICH-ParametersItem-CTCH-ReconfRqstFDD ::= SEQUENCE {
   commonPhysicalChannelID
                                 CommonPhysicalChannelID,
   pICH-Power
                                     PICH-Power
                                                   OPTIONAL,
   iE-Extensions
                                     ProtocolExtensionContainer { { PICH-ParametersItem-CTCH-ReconfRqstFDD-ExtIEs} }
                                                                                                            OPTIONAL,
PICH-ParametersItem-CTCH-ReconfRgstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PRACHList-CTCH-ReconfRqstFDD ::= SEQUENCE
   pRACH-ParametersList-CTCH-ReconfRqstFDD
                                         PRACH-ParametersList-CTCH-ReconfRqstFDD OPTIONAL,
   aICH-ParametersList-CTCH-ReconfRgstFDD
                                         AICH-ParametersList-CTCH-ReconfRgstFDD OPTIONAL,
   iE-Extensions
                                         PRACH-CTCH-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PRACH-ParametersList-CTCH-ReconfRqstFDD ::= ProtocolIE-Single-Container {{ PRACH-ParametersListIEs-CTCH-ReconfRqstFDD }}
PRACH-ParametersListIEs-CTCH-ReconfRqstFDD NBAP-PROTOCOL-IES ::= {
   PRACH-ParametersListIE-CTCH-ReconfRgstFDD ::= SEQUENCE (SIZE (1..maxPRACHCell)) OF PRACH-ParametersItem-CTCH-ReconfRgstFDD
PRACH-ParametersItem-CTCH-ReconfRqstFDD ::= SEQUENCE {
   commonPhysicalChannelID
                                 CommonPhysicalChannelID,
                                     PreambleSignatures
   preambleSignatures
                                                          OPTIONAL,
```

```
allowedSlotFormatInformation
                                     AllowedSlotFormatInformationList-CTCH-ReconfRqstFDD
                                                                                                   OPTIONAL,
   rACH-SubChannelNumbers
                                     RACH-SubChannelNumbers
                                                              OPTIONAL.
   iE-Extensions
                                     ProtocolExtensionContainer
                                                             OPTIONAL.
PRACH-ParametersItem-CTCH-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
AllowedSlotFormatInformationList-CTCH-ReconfRgstFDD ::= SEQUENCE (SIZE (1.. maxNrOfSlotFormatsPRACH)) OF AllowedSlotFormatInformationItem-CTCH-
ReconfRqstFDD
AllowedSlotFormatInformationItem-CTCH-ReconfRqstFDD ::= SEQUENCE {
   rACH-SlotFormat
                                     RACH-SlotFormat,
   iE-Extensions
                                     OPTIONAL,
AllowedSlotFormatInformationItem-CTCH-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
AICH-ParametersList-CTCH-ReconfRqstFDD ::= ProtocolIE-Single-Container {{ AICH-ParametersListIEs-CTCH-ReconfRqstFDD }}
AICH-ParametersListIEs-CTCH-ReconfRgstFDD NBAP-PROTOCOL-IES ::= {
   { ID id-AICH-ParametersListIE-CTCH-ReconfRqstFDD
                                              CRITICALITY reject TYPE AICH-ParametersListIE-CTCH-ReconfRqstFDD
                                                                                                          PRESENCE mandatory }
AICH-ParametersListIE-CTCH-ReconfRgstFDD ::= SEQUENCE (SIZE (1..maxPRACHCell)) OF AICH-ParametersItem-CTCH-ReconfRgstFDD
AICH-ParametersItem-CTCH-ReconfRqstFDD ::= SEQUENCE {
   commonPhysicalChannelID
                                  CommonPhysicalChannelID,
   aICH-Power
                                     AICH-Power
                                                   OPTIONAL,
   iE-Extensions
                                     OPTIONAL,
AICH-ParametersItemIE-CTCH-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CPCHList-CTCH-ReconfRqstFDD ::= SEQUENCE {
   cPCH-ParametersList-CTCH-ReconfRgstFDD
                                            CPCH-ParametersList-CTCH-ReconfRgstFDD
                                                                                                        OPTIONAL
   aP-AICH-ParametersList-CTCH-ReconfRqstFDD
                                            AP-AICH-ParametersList-CTCH-ReconfRqstFDD
                                                                                                   OPTIONAL,
   cDCA-ICH-ParametersList-CTCH-ReconfRgstFDD
                                            CDCA-ICH-ParametersList-CTCH-ReconfRgstFDD
                                                                                                   OPTIONAL,
   iE-Extensions
                                            OPTIONAL,
   . . .
CPCHListItem-CTCH-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
CPCH-ParametersList-CTCH-ReconfRgstFDD ::= ProtocolIE-Single-Container {{ CPCH-ParametersListIEs-CTCH-ReconfRgstFDD }}
CPCH-ParametersListIEs-CTCH-ReconfRqstFDD NBAP-PROTOCOL-IES ::= {
    { ID id-CPCH-ParametersListIE-CTCH-ReconfRqstFDD
                                                   CRITICALITY reject TYPE CPCH-ParametersListIE-CTCH-ReconfRqstFDD
                                                                                                                     PRESENCE mandatory
CPCH-ParametersListIE-CTCH-ReconfRgstFDD ::= SEQUENCE (SIZE (1..maxNrOfCPCHs)) OF CPCH-ParametersItem-CTCH-ReconfRgstFDD
CPCH-ParametersItem-CTCH-ReconfRqstFDD ::= SEQUENCE {
   commonTransportChannelID
                                 CommonTransportChannelID,
   uL-SIR
                                 UL-SIR
                                                 OPTIONAL,
   initialDL-transmissionPower
                                 DL-Power
                                                 OPTIONAL,
  maximumDLPower
                                 DL-Power
                                                 OPTIONAL,
   minimumDLPower
                                 DL-Power
                                                 OPTIONAL,
   iE-Extensions
                                 ProtocolExtensionContainer { { CPCH-ParametersItem-CTCH-ReconfRqstFDD-ExtIEs} }
                                                                                                                  OPTIONAL,
CPCH-ParametersItem-CTCH-ReconfRgstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
AP-AICH-ParametersList-CTCH-ReconfRgstFDD ::= ProtocolIE-Single-Container {{ AP-AICH-ParametersListIEs-CTCH-ReconfRgstFDD }}
AP-AICH-ParametersListIEs-CTCH-ReconfRqstFDD NBAP-PROTOCOL-IES ::= {
   { ID id-AP-AICH-ParametersListIE-CTCH-ReconfRgstFDD CRITICALITY reject TYPE AP-AICH-ParametersListIE-CTCH-ReconfRgstFDD
                                                                                                                       PRESENCE mandatory }
AP-AICH-ParametersListIE-CTCH-ReconfRgstFDD ::= SEQUENCE (SIZE (1..maxNrOfCPCHs)) OF AP-AICH-ParametersItem-CTCH-ReconfRgstFDD
AP-AICH-ParametersItem-CTCH-ReconfRqstFDD ::= SEQUENCE {
   commonPhysicalChannelID
                                     CommonPhysicalChannelID,
   aP-AICH-Power
                                         AICH-Power
                                                        OPTIONAL,
   cSICH-Power
                                         AICH-Power
                                                        OPTIONAL,
   iE-Extensions
                                         ProtocolExtensionContainer { { AP-AICH-ParametersItemIE-CTCH-ReconfRqstFDD-ExtIEs} }
                                                                                                                             OPTIONAL,
AP-AICH-ParametersItemIE-CTCH-ReconfRgstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CDCA-ICH-ParametersList-CTCH-ReconfRqstFDD ::= ProtocolIE-Single-Container {{ CDCA-ICH-ParametersListIEs-CTCH-ReconfRqstFDD }}
CDCA-ICH-ParametersListIEs-CTCH-ReconfRqstFDD NBAP-PROTOCOL-IES ::= {
   mandatory }
CDCA-ICH-ParametersListIE-CTCH-ReconfRqstFDD ::= SEQUENCE (SIZE (1..maxNrOfCPCHs)) OF CDCA-ICH-ParametersItem-CTCH-ReconfRqstFDD
CDCA-ICH-ParametersItem-CTCH-ReconfRqstFDD ::= SEQUENCE {
   commonPhysicalChannelID
                                     CommonPhysicalChannelID,
```

```
cDCA-ICH-Power
                                         AICH-Power
                                                        OPTIONAL,
   iE-Extensions
                                         ProtocolExtensionContainer
                                                                   { CDCA-ICH-ParametersItemIE-CTCH-ReconfRqstFDD-ExtIEs} }
                                                                                                                             OPTIONAL.
CDCA-ICH-ParametersItemIE-CTCH-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST TDD
  ····
CommonTransportChannelReconfigurationRequestTDD ::= SEQUENCE {
                                                {{CommonTransportChannelReconfigurationRequestTDD-IEs}},
   protocolIEs
                          ProtocolIE-Container
                          ProtocolExtensionContainer {{CommonTransportChannelReconfigurationRequestTDD-Extensions}}
   protocolExtensions
                                                                                                                 OPTIONAL,
   . . .
CommonTransportChannelReconfigurationRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID
          id-C-ID
                                                            CRITICALITY reject
                                                                                  TYPE
                                                                                          C-ID
              mandatory }|
   PRESENCE
   { ID id-ConfigurationGenerationID
                                                            CRITICALITY reject
                                                                                  TYPE
                                                                                          ConfigurationGenerationID
                                                                                                                                PRESENCE
   mandatory } |
   { ID id-Secondary-CCPCH-Parameters-CTCH-ReconfRqstTDD
                                                                CRITICALITY reject TYPE
                                                                                           Secondary-CCPCH-Parameters-CTCH-ReconfRqstTDD
       PRESENCE optional }|
     ID id-PICH-Parameters-CTCH-ReconfRqstTDD
                                                 CRITICALITY reject TYPE
                                                                         PICH-Parameters-CTCH-ReconfRqstTDD
                                                                                                                  PRESENCE optional }
     ID id-FACH-ParametersList-CTCH-ReconfRqstTDD CRITICALITY reject TYPE FACH-ParametersList-CTCH-ReconfRqstTDD PRESENCE optional }
    { ID id-PCH-Parameters-CTCH-ReconfRqstTDD
                                                 CRITICALITY reject TYPE
                                                                        PCH-Parameters-CTCH-ReconfRqstTDD
                                                                                                                  PRESENCE optional },
CommonTransportChannelReconfigurationRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
   { ID id-FPACH-LCR-Parameters-CTCH-ReconfRqstTDD
                                                    CRITICALITY reject EXTENSION FPACH-LCR-Parameters-CTCH-ReconfRqstTDD
                                                                                                                             PRESENCE
optional }, -- Mandatory For 3.84Mcps TDD only
   . . .
Secondary-CCPCH-Parameters-CTCH-ReconfRqstTDD::= SEQUENCE {
   cCTrCH-ID
                                 CCTrCH-ID,
                                 Secondary-CCPCHList-CTCH-ReconfRqstTDD
   secondaryCCPCHList
                                 ProtocolExtensionContainer { { Secondary-CCPCH-CTCH-ReconfRqstTDD-ExtIEs} }
   iE-Extensions
                                                                                                               OPTIONAL,
   . . .
Secondary-CCPCH-CTCH-ReconfRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
Secondary-CCPCHList-CTCH-ReconfRgstTDD ::= ProtocolIE-Single-Container {{ Secondary-CCPCHListIEs-CTCH-ReconfRgstTDD }}
Secondary-CCPCHListIEs-CTCH-ReconfRqstTDD NBAP-PROTOCOL-IES ::= {
```

```
{ ID id-Secondary-CCPCHListIE-CTCH-ReconfRqstTDD
                                                        CRITICALITY reject TYPE Secondary-CCPCHListIE-CTCH-ReconfRqstTDD
                                                                                                                            PRESENCE mandatory }
Secondary-CCPCHListIE-CTCH-ReconfRgstTDD ::= SEQUENCE (SIZE (1..maxNrOfSCCPCHs)) OF Secondary-CCPCHItem-CTCH-ReconfRgstTDD
Secondary-CCPCHItem-CTCH-ReconfRgstTDD ::= SEQUENCE {
    commonPhysicalChannelID
                                        CommonPhysicalChannelID,
    sCCPCH-Power
                                        DL-Power
                                                        OPTIONAL,
    iE-Extensions
                                        ProtocolExtensionContainer { { Secondary-CCPCHItem-CTCH-ReconfRqstTDD-ExtIEs} }
                                                                                                                             OPTIONAL,
Secondary-CCPCHItem-CTCH-ReconfRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PICH-Parameters-CTCH-ReconfRqstTDD
                                   ::= SEOUENCE
    commonPhysicalChannelID
                                        CommonPhysicalChannelID,
    pICH-Power
                                        PICH-Power
                                                        OPTIONAL,
                                        ProtocolExtensionContainer { { PICH-Parameters-CTCH-ReconfRgstTDD-ExtIEs} }
                                                                                                                          OPTIONAL.
    iE-Extensions
PICH-Parameters-CTCH-ReconfRgstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
FACH-ParametersList-CTCH-ReconfRgstTDD ::= SEQUENCE (SIZE (0..maxNrOfFACHs)) OF FACH-ParametersItem-CTCH-ReconfRgstTDD
FACH-ParametersItem-CTCH-ReconfRqstTDD ::= SEQUENCE {
    commonTransportChannelID
                                    CommonTransportChannelID,
                                    ToAWS
                                                    OPTIONAL,
    toAWS
    toAWE
                                    ToAWE
                                                    OPTIONAL,
                                    ProtocolExtensionContainer { { FACH-ParametersItem-CTCH-ReconfRqstTDD-ExtIEs} }
                                                                                                                          OPTIONAL,
    iE-Extensions
FACH-ParametersItem-CTCH-ReconfRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::=
           id-maxFACH-Power-LCR-CTCH-ReconfRqstTDD
                                                                                                                                   optional },
                                                            CRITICALITY reject
                                                                                    EXTENSION DL-Power
                                                                                                                       PRESENCE
    -- For 3.84Mcps TDD only
    . . .
PCH-Parameters-CTCH-ReconfRqstTDD ::= SEQUENCE {
                                    CommonTransportChannelID,
    commonTransportChannelID
    toAWS
                                    ToAWS
                                                    OPTIONAL,
    toAWE
                                    ToAWE
                                                    OPTIONAL,
    iE-Extensions
                                    ProtocolExtensionContainer { { PCH-Parameters-CTCH-ReconfRqstTDD-ExtIEs} }
                                                                                                                       OPTIONAL,
PCH-Parameters-CTCH-ReconfRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
          id-PCH-Power-LCR-CTCH-ReconfRqstTDD
                                                        CRITICALITY reject
                                                                                                                                   optional },
                                                                                EXTENSION DL-Power
                                                                                                                       PRESENCE
    ... -- For 3.84Mcps TDD only
```

```
FPACH-LCR-Parameters-CTCH-ReconfRqstTDD ::= SEQUENCE {
   commonPhysicalChannelId
                               CommonPhysicalChannelID,
   fPACHPower
                            FPACH-Power
                                          OPTIONAL,
                               ProtocolExtensionContainer { { FPACH-LCR-Parameters-CTCH-ReconfRqstTDD-ExtIEs} }
   iE-Extensions
                                                                                                           OPTIONAL,
FPACH-LCR-Parameters-CTCH-ReconfRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE
  ****************
CommonTransportChannelReconfigurationResponse ::= SEQUENCE {
   protocolIEs
                        ProtocolIE-Container
                                              {{CommonTransportChannelReconfigurationResponse-IEs}},
                        ProtocolExtensionContainer {{CommonTransportChannelReconfigurationResponse-Extensions}}
                                                                                                           OPTIONAL,
   protocolExtensions
CommonTransportChannelReconfigurationResponse-IES NBAP-PROTOCOL-IES ::= {
          id-CriticalityDiagnostics
                                                                          CriticalityDiagnostics
                                                                                                         PRESENCE optional },
   { ID
                                      CRITICALITY
                                                                   TYPE
                                                     ignore
   . . .
CommonTransportChannelReconfigurationResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
   -- COMMON TRANSPORT CHANNEL RECONFIGURATION FAILURE
  ****************
CommonTransportChannelReconfigurationFailure ::= SEQUENCE {
   protocolIEs
                        ProtocolIE-Container
                                              {{CommonTransportChannelReconfigurationFailure-IEs}},
                        ProtocolExtensionContainer {{CommonTransportChannelReconfigurationFailure-Extensions}}
   protocolExtensions
                                                                                                               OPTIONAL,
CommonTransportChannelReconfigurationFailure-IEs NBAP-PROTOCOL-IES ::= {
          id-Cause
                                      CRITICALITY ignore
                                                               TYPE
                                                                                                           PRESENCE mandatory } |
                                                                       Cause
    ID
          id-CriticalityDiagnostics
                                      CRITICALITY ignore
                                                               TYPE
                                                                       CriticalityDiagnostics
                                                                                                         PRESENCE optional },
   . . .
CommonTransportChannelReconfigurationFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
   . . .
```

```
*****************
  COMMON TRANSPORT CHANNEL DELETION REQUEST
  *******************
CommonTransportChannelDeletionRequest ::= SEQUENCE {
                                                  {{CommonTransportChannelDeletionRequest-IEs}},
   protocolIEs
                            ProtocolIE-Container
                            ProtocolExtensionContainer {{CommonTransportChannelDeletionRequest-Extensions}}
   protocolExtensions
                                                                                                            OPTIONAL,
   . . .
CommonTransportChannelDeletionRequest-IEs NBAP-PROTOCOL-IES ::= {
     ID
          id-C-ID
                                          CRITICALITY reject
                                                                TYPE
                                                                       C-ID
                                                                                                            PRESENCE
                                                                                                                      mandatory}
     ID
          id-CommonPhysicalChannelID
                                                                                                          PRESENCE mandatory } |
                                          CRITICALITY reject
                                                                TYPE
                                                                       CommonPhysicalChannelID
     ID
          id-ConfigurationGenerationID
                                          CRITICALITY reject
                                                                TYPE
                                                                       ConfigurationGenerationID
                                                                                                       PRESENCE mandatory },
   . . .
CommonTransportChannelDeletionRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
-- COMMON TRANSPORT CHANNEL DELETION RESPONSE
        CommonTransportChannelDeletionResponse ::= SEQUENCE
   protocolIEs
                        ProtocolIE-Container
                                              {{CommonTransportChannelDeletionResponse-IEs}},
                        ProtocolExtensionContainer {{CommonTransportChannelDeletionResponse-Extensions}}
   protocolExtensions
                                                                                                         OPTIONAL,
CommonTransportChannelDeletionResponse-IEs NBAP-PROTOCOL-IES ::= {
   { ID
          id-CriticalityDiagnostics
                                                                       CriticalityDiagnostics
                                       CRITICALITY
                                                     ignore
                                                                TYPE
                                                                                                          PRESENCE optional },
   . . .
CommonTransportChannelDeletionResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
-- BLOCK RESOURCE REQUEST
  ******************
BlockResourceRequest ::= SEQUENCE {
                        ProtocolIE-Container
                                                 {{BlockResourceRequest-IEs}},
   protocolIEs
```

```
ProtocolExtensionContainer {{BlockResourceRequest-Extensions}}
   protocolExtensions
                                                                                                  OPTIONAL,
BlockResourceRequest-IEs NBAP-PROTOCOL-IES ::= {
          id-C-ID
                                          CRITICALITY reject
                                                                                                               PRESENCE mandatory } |
                                                                       C-ID
     ID
          id-BlockingPriorityIndicator
                                          CRITICALITY reject
                                                                TYPE
                                                                       BlockingPriorityIndicator
                                                                                                          PRESENCE mandatory } |
         id-ShutdownTimer
                                          CRITICALITY reject
                                                                TYPE
                                                                       ShutdownTimer
                                                                                                               PRESENCE conditional },
   { ID
   -- The IE shall be present if the Blocking Priority Indicator IE indicates 'Normal Priority'--
BlockResourceRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    *****************
  BLOCK RESOURCE RESPONSE
  BlockResourceResponse ::= SEQUENCE {
   protocolIEs
                            ProtocolIE-Container
                                                     {{BlockResourceResponse-IEs}},
                            ProtocolExtensionContainer {{BlockResourceResponse-Extensions}}
   protocolExtensions
                                                                                                          OPTIONAL,
   . . .
BlockResourceResponse-IEs NBAP-PROTOCOL-IES ::= {
                                                                                                         PRESENCE optional },
          id-CriticalityDiagnostics
                                                                       CriticalityDiagnostics
   { ID
                                      CRITICALITY
                                                     ignore
                                                                TYPE
   . . .
BlockResourceResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ***********************
-- BLOCK RESOURCE FAILURE
     ****************
BlockResourceFailure ::= SEQUENCE {
                                                 {{BlockResourceFailure-IEs}},
   protocolIEs
                        ProtocolIE-Container
   protocolExtensions
                        ProtocolExtensionContainer {{BlockResourceFailure-Extensions}}
                                                                                     OPTIONAL,
   . . .
BlockResourceFailure-IEs NBAP-PROTOCOL-IES ::= {
          id-Cause
     ID
                                       CRITICALITY
                                                     ignore
                                                                TYPE
                                                                       Cause
                                                                                                            PRESENCE mandatory } |
    ID
          id-CriticalityDiagnostics
                                       CRITICALITY
                                                     ignore
                                                                TYPE
                                                                       CriticalityDiagnostics
                                                                                                          PRESENCE optional },
```

337

```
BlockResourceFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    *****************
-- UNBLOCK RESOURCE INDICATION
*****************
UnblockResourceIndication ::= SEQUENCE {
                                               {{UnblockResourceIndication-IEs}},
   protocolIEs
                  ProtocolIE-Container
   protocolExtensions ProtocolExtensionContainer {{UnblockResourceIndication-Extensions}}
                                                                                          OPTIONAL,
UnblockResourceIndication-IES NBAP-PROTOCOL-IES ::= {
   { ID
          id-C-ID
                        CRITICALITY
                                                         C-ID
                                                                    PRESENCE
                                                                               mandatory },
UnblockResourceIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
-- AUDIT REQUIRED INDICATION
AuditRequiredIndication ::= SEQUENCE {
                                              {{AuditRequiredIndication-IEs}},
   protocolIEs
                        ProtocolIE-Container
                      ProtocolExtensionContainer {{AuditRequiredIndication-Extensions}}
   protocolExtensions
                                                                                                        OPTIONAL,
AuditRequiredIndication-IEs NBAP-PROTOCOL-IES ::= {
AuditRequiredIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
-- AUDIT REOUEST
AuditRequest ::= SEQUENCE {
                                                  {{AuditRequest-IEs}},
   protocolIEs
                            ProtocolIE-Container
```

```
ProtocolExtensionContainer {{AuditRequest-Extensions}}
                                                                                        OPTIONAL,
   protocolExtensions
AuditRequest-IEs NBAP-PROTOCOL-IES ::= {
    { ID
           id-Start-Of-Audit-Sequence-Indicator
                                                     CRITICALITY
                                                                     reject TYPE Start-Of-Audit-Sequence-Indicator PRESENCE mandatory },
    . . .
AuditRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  -- AUDIT RESPONSE
__ ********************************
AuditResponse ::= SEQUENCE {
   protocolIEs
                              ProtocolIE-Container
                                                     {{AuditResponse-IEs}},
                              ProtocolExtensionContainer {{AuditResponse-Extensions}}
   protocolExtensions
                                                                                           OPTIONAL,
AuditResponse-IEs NBAP-PROTOCOL-IES ::= {
           id-End-Of-Audit-Sequence-Indicator
                                                     CRITICALITY
                                                                     ignore TYPE
                                                                                    End-Of-Audit-Sequence-Indicator
                                                                                                                       PRESENCE mandatory } |
     ID
           id-Cell-InformationList-AuditRsp
                                                     CRITICALITY
                                                                     ignore
                                                                                    TYPE
                                                                                           Cell-InformationList-AuditRsp
                                                                                                                               PRESENCE
    optional }|
     ID
          id-CCP-InformationList-AuditRsp
                                                     CRITICALITY
                                                                     ignore
                                                                                    TYPE
                                                                                           CCP-InformationList-AuditRsp
                                                                                                                            PRESENCE optional
    -- CCP (Communication Control Port) --
           id-Local-Cell-InformationList-AuditRsp
                                                     CRITICALITY
                                                                                    TYPE
                                                                                           Local-Cell-InformationList-AuditRsp
                                                                                                                                  PRESENCE
    { ID
                                                                     ignore
    optional }
    { ID
          id-Local-Cell-Group-InformationList-AuditRsp
                                                         CRITICALITY
                                                                        ignore
                                                                                    TYPE
                                                                                           Local-Cell-Group-InformationList-AuditRsp PRESENCE
    optional
           id-CriticalityDiagnostics
    { ID
                                                     CRITICALITY
                                                                     ignore
                                                                                    TYPE
                                                                                           CriticalityDiagnostics
                                                                                                                            PRESENCE optional
    },
AuditResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    . . .
Cell-InformationList-AuditRsp ::= SEQUENCE (SIZE (1..maxCellinNodeB)) OF ProtocolIE-Single-Container {{ Cell-InformationItemIE-AuditRsp}}
Cell-InformationItemIE-AuditRsp NBAP-PROTOCOL-IES ::= {
          id-Cell-InformationItem-AuditRsp
                                                                            TYPE
                                                                                    Cell-InformationItem-AuditRsp
                                                                                                                       PRESENCE
                                                                                                                                  optional }
                                                 CRITICALITY
                                                                 ignore
Cell-InformationItem-AuditRsp ::= SEQUENCE {
                                          C-ID,
                                          ConfigurationGenerationID,
    configurationGenerationID
```

```
resourceOperationalState
                                           ResourceOperationalState,
    availabilityStatus
                                           AvailabilityStatus,
    local-Cell-ID
                                           Local-Cell-ID.
   primary-SCH-Information
                                           P-SCH-Information-AuditRsp
                                                                                      OPTIONAL,
    secondary-SCH-Information
                                           S-SCH-Information-AuditRsp
                                                                                      OPTIONAL.
                                           P-CPICH-Information-AuditRsp
   primary-CPICH-Information
                                                                                      OPTIONAL,
    secondary-CPICH-InformationList
                                           S-CPICH-InformationList-AuditRsp
                                                                                      OPTIONAL,
    primary-CCPCH-Information
                                           P-CCPCH-Information-AuditRsp
                                                                                      OPTIONAL,
    bCH-Information
                                           BCH-Information-AuditRsp
                                                                                      OPTIONAL,
    secondary-CCPCH-InformationList
                                           S-CCPCH-InformationList-AuditRsp
                                                                                      OPTIONAL,
    pCH-Information
                                           PCH-Information-AuditRsp
                                                                                      OPTIONAL,
   pICH-Information
                                           PICH-Information-AuditRsp
                                                                                      OPTIONAL,
    fACH-InformationList
                                           FACH-InformationList-AuditRsp
                                                                                      OPTIONAL,
    pRACH-InformationList
                                           PRACH-InformationList-AuditRsp
                                                                                      OPTIONAL,
                                           RACH-InformationList-AuditRsp
    rACH-InformationList
                                                                                      OPTIONAL,
    aICH-InformationList
                                           AICH-InformationList-AuditRsp
                                                                                      OPTIONAL,
                                           PCPCH-InformationList-AuditRsp
    pCPCH-InformationList
                                                                                      OPTIONAL,
                                           CPCH-InformationList-AuditRsp
    cPCH-InformationList
                                                                                      OPTIONAL,
    aP-AICH-InformationList
                                           AP-AICH-InformationList-AuditRsp
                                                                                      OPTIONAL,
    cDCA-ICH-InformationList
                                           CDCA-ICH-InformationList-AuditRsp
                                                                                      OPTIONAL,
   sCH-Information
                                           SCH-Information-AuditRsp
                                                                                      OPTIONAL,
                                           ProtocolExtensionContainer { { Cell-InformationItem-AuditRsp-ExtIEs} } 
   iE-Extensions
                                                                                                                   OPTIONAL,
Cell-InformationItem-AuditRsp-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    { ID id-FPACH-LCR-InformationList-AuditRsp
                                                                                                                         PRESENCE optional } |
                                                   CRITICALITY ignore EXTENSION
                                                                                  FPACH-LCR-InformationList-AuditRsp
   -- For 1.28Mcps TDD only
                                                                                                                         PRESENCE optional },
   { ID id-DwPCH-LCR-InformationList-AuditRsp
                                                   CRITICALITY ignore EXTENSION
                                                                                  DwPCH-LCR-InformationList-AuditRsp
    -- For 1.28Mcps TDD only
    . . .
P-SCH-Information-AuditRsp ::= ProtocolIE-Single-Container {{ P-SCH-InformationIE-AuditRsp }}
P-SCH-InformationIE-AuditRsp NBAP-PROTOCOL-IES ::= {
    PRESENCE mandatory }
S-SCH-Information-AuditRsp ::= ProtocolIE-Single-Container {{ S-SCH-InformationIE-AuditRsp }}
S-SCH-InformationIE-AuditRsp NBAP-PROTOCOL-IES ::= {
    { ID id-S-SCH-Information CRITICALITY ignore TYPE Common-PhysicalChannel-Status-Information
                                                                                                                 PRESENCE mandatory }
P-CPICH-Information-AuditRsp ::= ProtocolIE-Single-Container {{ P-CPICH-InformationIE-AuditRsp }}
P-CPICH-InformationIE-AuditRsp NBAP-PROTOCOL-IES ::= {
    { ID id-P-CPICH-Information CRITICALITY ignore TYPE Common-PhysicalChannel-Status-Information
                                                                                                                 PRESENCE mandatory }
S-CPICH-InformationList-AuditRsp ::= SEQUENCE (SIZE (1..maxSCPICHCell)) OF ProtocolIE-Single-Container {{ S-CPICH-InformationItemIE-AuditRsp }}
S-CPICH-InformationItemIE-AuditRsp NBAP-PROTOCOL-IES ::= {
```

```
{ ID id-S-CPICH-Information CRITICALITY ignore TYPE Common-PhysicalChannel-Status-Information
                                                                                             PRESENCE mandatory }
P-CCPCH-Information-AuditRsp ::= ProtocolIE-Single-Container {{ P-CCPCH-InformationIE-AuditRsp }}
P-CCPCH-InformationIE-AuditRsp NBAP-PROTOCOL-IES ::= {
   { ID id-P-CCPCH-Information CRITICALITY ignore
                                           TYPE Common-PhysicalChannel-Status-Information
                                                                                             PRESENCE mandatory }
BCH-Information-AuditRsp ::= ProtocolIE-Single-Container {{ BCH-InformationIE-AuditRsp }}
BCH-InformationIE-AuditRsp NBAP-PROTOCOL-IES ::= {
   { ID id-BCH-Information CRITICALITY ignore
                                      TYPE Common-TransportChannel-Status-Information
                                                                                             PRESENCE mandatory }
S-CCPCH-InformationList-AuditRsp ::= SEQUENCE (SIZE (1..maxSCCPCHCell)) OF ProtocolIE-Single-Container {{ S-CCPCH-InformationItemIE-AuditRsp }}
S-CCPCH-InformationItemIE-AuditRsp NBAP-PROTOCOL-IES ::= {
   { ID id-S-CCPCH-Information CRITICALITY ignore
                                          TYPE Common-PhysicalChannel-Status-Information
                                                                                             PRESENCE mandatory }
PCH-Information-AuditRsp ::= ProtocolIE-Single-Container {{ PCH-InformationIE-AuditRsp }}
PCH-InformationIE-AuditRsp NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
PICH-Information-AuditRsp ::= ProtocolIE-Single-Container {{ PICH-InformationIE-AuditRsp }}
PICH-InformationIE-AuditRsp NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
FACH-InformationList-AuditRsp ::= SEQUENCE (SIZE (1..maxFACHCell)) OF ProtocolIE-Single-Container {{ FACH-InformationItemIE-AuditRsp }}
FACH-InformationItemIE-AuditRsp NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
PRACH-InformationList-AuditRsp ::= SEOUENCE (SIZE (1..maxPRACHCell)) OF ProtocolIE-Single-Container {{ PRACH-InformationItemIE-AuditRsp }}
PRACH-InformationItemIE-AuditRsp NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
RACH-InformationList-AuditRsp ::= SEOUENCE (SIZE (1..maxRACHCell)) OF ProtocolIE-Single-Container {{ RACH-InformationItemIE-AuditRsp }}
RACH-InformationItemIE-AuditRsp NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
AICH-InformationList-AuditRsp ::= SEQUENCE (SIZE (1..maxPRACHCell)) OF ProtocolIE-Single-Container {{ AICH-InformationItemIE-AuditRsp }}
AICH-InformationItemIE-AuditRsp NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
```

```
PCPCH-InformationList-AuditRsp ::= SEOUENCE (SIZE (1..maxPCPCHCell)) OF ProtocolIE-Single-Container {{ PCPCH-InformationItemIE-AuditRsp }}
PCPCH-InformationItemIE-AuditRsp NBAP-PROTOCOL-IES ::= {
   PRESENCE optional }
CPCH-InformationList-AuditRsp ::= SEQUENCE (SIZE (1..maxCPCHCell)) OF ProtocolIE-Single-Container {{ CPCH-InformationItemIE-AuditRsp }}
CPCH-InformationItemIE-AuditRsp NBAP-PROTOCOL-IES ::= {
   PRESENCE optional }
AP-AICH-InformationList-AuditRsp ::= SEQUENCE (SIZE (1..maxCPCHCell)) OF ProtocolIE-Single-Container {{ AP-AICH-InformationItemIE-AuditRsp }}
AP-AICH-InformationItemIE-AuditRsp NBAP-PROTOCOL-IES ::= {
   TYPE Common-PhysicalChannel-Status-Information
                                                                                                      PRESENCE mandatory }
CDCA-ICH-InformationList-AuditRsp ::= SEQUENCE (SIZE (1..maxCPCHCell)) OF ProtocolIE-Single-Container {{ CDCA-ICH-InformationItemIE-AuditRsp }}
CDCA-ICH-InformationItemIE-AuditRsp NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
SCH-Information-AuditRsp ::= ProtocolIE-Single-Container {{ SCH-InformationIE-AuditRsp }}
SCH-InformationIE-AuditRsp NBAP-PROTOCOL-IES ::= {
   { ID id-SCH-Information CRITICALITY ignore
                                            TYPE Common-PhysicalChannel-Status-Information
                                                                                                      PRESENCE mandatory }
CCP-InformationList-AuditRsp ::=SEQUENCE (SIZE (1..maxCCPinNodeB)) OF ProtocolIE-Single-Container {{ CCP-InformationItemIE-AuditRsp }}
CCP-InformationItemIE-AuditRsp NBAP-PROTOCOL-IES ::= {
   {ID id-CCP-InformationItem-AuditRsp
                                         CRITICALITY
                                                                     TYPE
                                                                            CCP-InformationItem-AuditRsp
                                                                                                            PRESENCE mandatory }
                                                       ignore
CCP-InformationItem-AuditRsp ::= SEQUENCE {
   communicationControlPortID
                                  CommunicationControlPortID,
   resourceOperationalState
                                  ResourceOperationalState,
   availabilityStatus
                                  AvailabilityStatus,
                                  ProtocolExtensionContainer {{ CCP-InformationItem-AuditRsp-ExtIEs }}
   iE-Extensions
                                                                                                      OPTIONAL,
CCP-InformationItem-AuditRsp-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
FPACH-LCR-InformationList-AuditRsp ::= SEQUENCE (SIZE (1..maxFPACHCell)) OF ProtocolIE-Single-Container {{ FPACH-LCR-InformationItemIE-AuditRsp }}
FPACH-LCR-InformationItemIE-AuditRsp NBAP-PROTOCOL-IES ::= {
   { ID id-FPACH-LCR-Information-AuditRsp CRITICALITY ignore TYPE Common-PhysicalChannel-Status-Information
                                                                                                      PRESENCE mandatory }
```

```
DwPCH-LCR-InformationList-AuditRsp ::= ProtocolIE-Single-Container {{ DwPCH-LCR-InformationIE-AuditRsp }}
DwPCH-LCR-InformationIE-AuditRsp NBAP-PROTOCOL-IES ::= {
    { ID id-DwPCH-LCR-Information-AuditRsp CRITICALITY ignore TYPE Common-PhysicalChannel-Status-Information
                                                                                                                        PRESENCE mandatory }
Local-Cell-InformationList-AuditRsp ::=SEQUENCE (SIZE (1..maxLocalCellinNodeB)) OF ProtocolIE-Single-Container {{ Local-Cell-InformationItemIE-
AuditRsp }}
Local-Cell-InformationItemIE-AuditRsp NBAP-PROTOCOL-IES ::= {
            id-Local-Cell-InformationItem-AuditRsp
                                                            CRITICALITY
                                                                             ignore
                                                                                             TYPE
                                                                                                                     Local-Cell-InformationItem-
                PRESENCE
                            mandatory}
AuditRsp
Local-Cell-InformationItem-AuditRsp ::= SEQUENCE
    local-Cell-ID
                                                Local-Cell-ID,
    dl-or-global-capacityCredit
                                                DL-or-Global-CapacityCredit,
    ul-capacityCredit
                                                UL-CapacityCredit
                                                                         OPTIONAL,
    commnonChannelsCapacityConsumptionLaw
                                                CommonChannelsCapacityConsumptionLaw,
    dedicatedChannelsCapacityConsumptionLaw
                                                DedicatedChannelsCapacityConsumptionLaw,
    maximumDL-PowerCapability
                                                MaximumDL-PowerCapability
                                                                                 OPTIONAL,
    minSpreadingFactor
                                                MinSpreadingFactor
                                                                                 OPTIONAL,
    minimumDL-PowerCapability
                                                MinimumDL-PowerCapability
                                                                                 OPTIONAL,
    local-Cell-Group-ID
                                                Local-Cell-ID
                                                                                 OPTIONAL,
    iE-Extensions
                                                ProtocolExtensionContainer {{ Local-Cell-InformationItem-AuditRsp-ExtIEs}}
                                                                                                                                 OPTIONAL,
Local-Cell-InformationItem-AuditRsp-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    { ID
           id-ReferenceClockAvailability
                                                CRITICALITY
                                                                 ignore
                                                                                 EXTENSION ReferenceClockAvailability
                                                                                                                              PRESENCE optional },
    . . .
Local-Cell-Group-InformationList-AuditRsp
                                             ::= SEQUENCE (SIZE (1..maxLocalCellinNodeB)) OF ProtocolIE-Single-Container {{ Local-Cell-Group-
InformationItemIE-AuditRsp }}
Local-Cell-Group-InformationItemIE-AuditRsp NBAP-PROTOCOL-IES ::= {
           id-Local-Cell-Group-InformationItem-AuditRsp
                                                                     CRITICALITY
                                                                                     ignore
                                                                                                                     TYPE Local-Cell-Group-
InformationItem-AuditRsp
                                PRESENCE
                                            mandatory}
Local-Cell-Group-InformationItem-AuditRsp ::= SEQUENCE {
    local-Cell-Group-ID
                                                Local-Cell-ID,
    dl-or-global-capacityCredit
                                                DL-or-Global-CapacityCredit,
    ul-capacityCredit
                                                UL-CapacityCredit
                                                                                         OPTIONAL,
    commnonChannelsCapacityConsumptionLaw
                                                CommonChannelsCapacityConsumptionLaw,
    dedicatedChannelsCapacityConsumptionLaw
                                                DedicatedChannelsCapacityConsumptionLaw,
                                                ProtocolExtensionContainer {{ Local-Cell-Group-InformationItem-AuditRsp-ExtIEs}}
    iE-Extensions
                                                                                                                                       OPTIONAL,
    . . .
```

```
Local-Cell-Group-InformationItem-AuditRsp-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  *****************
-- AUDIT FAILURE
AuditFailure ::= SEQUENCE {
                                                 {{AuditFailure-IEs}},
   protocolIEs
                          ProtocolIE-Container
                          ProtocolExtensionContainer {{AuditFailure-Extensions}}
   protocolExtensions
                                                                                       OPTIONAL,
AuditFailure-IEs NBAP-PROTOCOL-IES ::= {
     ID
          id-Cause
                                             CRITICALITY
                                                             ignore
                                                                            TYPE
                                                                                    Cause
                                                                                                                         PRESENCE mandatory
           id-CriticalityDiagnostics
                                                                                                                 PRESENCE optional },
    { ID
                                             CRITICALITY
                                                             ignore
                                                                            TYPE
                                                                                    CriticalityDiagnostics
AuditFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
-- COMMON MEASUREMENT INITIATION REQUEST
__ *******************
CommonMeasurementInitiationRequest ::= SEQUENCE {
   protocolIEs
                          ProtocolIE-Container
                                                 {{CommonMeasurementInitiationRequest-IEs}},
                          ProtocolExtensionContainer {{CommonMeasurementInitiationRequest-Extensions}}
   protocolExtensions
                                                                                                                 OPTIONAL,
CommonMeasurementInitiationRequest-IEs NBAP-PROTOCOL-IES ::= {
    { ID
           id-MeasurementID
                                                         CRITICALITY reject
                                                                                    TYPE
                                                                                           MeasurementID
                                                                                                                               PRESENCE
   mandatory } |
   { ID
           id-CommonMeasurementObjectType-CM-Rqst
                                                         CRITICALITY reject
                                                                                    TYPE
                                                                                           CommonMeasurementObjectType-CM-Rqst
                                                                                                                                  PRESENCE
   mandatory } |
    -- This IE represents both the Common Measurement Object Type IE and the choice based on the Common Measurement Object Type
    -- as described in the tabular message format in subclause 9.1.
    { ID
          id-CommonMeasurementType
                                                         CRITICALITY reject
                                                                                           CommonMeasurementType
                                                                                                                            PRESENCE
    mandatory } |
   { ID
           id-MeasurementFilterCoefficient
                                                         CRITICALITY reject
                                                                                    TYPE
                                                                                           MeasurementFilterCoefficient
                                                                                                                               PRESENCE
    optional }|
          id-ReportCharacteristics
    { ID
                                                         CRITICALITY reject
                                                                                   TYPE
                                                                                           ReportCharacteristics
                                                                                                                            PRESENCE
   mandatory }
   { ID
           id-SFNReportingIndicator
                                                         CRITICALITY reject
                                                                                    TYPE
                                                                                           FNReportingIndicator
                                                                                                                            PRESENCE
   mandatory
```

```
ID
          id-SFN
                                                       CRITICALITY reject
                                                                                 TYPE
                                                                                         SFN
                                                                                                                         PRESENCE optional
CommonMeasurementInitiationRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
   {ID id-CommonMeasurementAccuracy
                                                       CRITICALITY reject
                                                                                  EXTENSION CommonMeasurementAccuracy
                                                                                                                         PRESENCE
optional}
CommonMeasurementObjectType-CM-Rqst ::= CHOICE {
                                 Cell-CM-Rqst,
   rACH
                                 RACH-CM-Rast,
   cPCH
                                 CPCH-CM-Rast,
   . . .
Cell-CM-Rast ::= SEQUENCE {
   c-ID
                                 C-ID,
   timeSlot
                                 TimeSlot
                                            OPTIONAL, -- For 3.84Mcps TDD only
                                 ProtocolExtensionContainer { { CellItem-CM-Rqst-ExtIEs} }
   iE-Extensions
                                                                                                           OPTIONAL,
   . . .
CellItem-CM-Rgst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
     ID id-TimeSlotLCR-CM-Rgst
                                 CRITICALITY reject
                                                       EXTENSION TimeSlotLCR
                                                                                     PRESENCE optional
                                                                                                           } | -- For 1.28Mcps TDD only
    {ID id-NeighbouringCellMeasurementInformation
                                                                             EXTENSION NeighbouringCellMeasurementInformation
                                                   CRITICALITY ignore
                                                                                                                                 PRESENCE
optional},
   . . .
RACH-CM-Rqst ::= SEQUENCE {
   c-ID
                                 C-ID,
   commonTransportChannelID
                                 CommonTransportChannelID,
   iE-Extensions
                                 OPTIONAL,
RACHItem-CM-Rqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CPCH-CM-Rqst ::= SEQUENCE {
   c-ID
                                 C-ID,
   commonTransportChannelID
                                 CommonTransportChannelID,
   spreadingfactor
                                 MinUL-ChannelisationCodeLength
                                                                  OPTIONAL,
   iE-Extensions
                                 OPTIONAL,
CPCHItem-CM-Rqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
*****************
  COMMON MEASUREMENT INITIATION RESPONSE
  ******************
CommonMeasurementInitiationResponse ::= SEQUENCE {
                                                 {{CommonMeasurementInitiationResponse-IEs}},
   protocolIEs
                          ProtocolIE-Container
   protocolExtensions
                          ProtocolExtensionContainer {{CommonMeasurementInitiationResponse-Extensions}}
                                                                                                                OPTIONAL,
   . . .
CommonMeasurementInitiationResponse-IEs NBAP-PROTOCOL-IES ::= {
          id-MeasurementID
                                                     CRITICALITY ignore
                                                                               TYPE
                                                                                       Measurement.ID
                                                                                                                              PRESENCE
   mandatory } |
     ID
           id-CommonMeasurementObjectType-CM-Rsp
                                                                               TYPE
                                                                                       CommonMeasurementObjectType-CM-Rsp
                                                     CRITICALITY ignore
                                                                                                                           PRESENCE optional
                                                                               TYPE
                                                                                                                                    PRESENCE
    { ID
           id-SFN
                                                     CRITICALITY ignore
    optional }|
          id-CriticalityDiagnostics
   { ID
                                                     CRITICALITY ignore
                                                                               TYPE
                                                                                       CriticalityDiagnostics
                                                                                                                         PRESENCE optional },
CommonMeasurementInitiationResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    {ID id-CommonMeasurementAccuracy
                                         CRITICALITY ignore
                                                                EXTENSION CommonMeasurementAccuracy
                                                                                                              PRESENCE optional}
CommonMeasurementObjectType-CM-Rsp ::= CHOICE {
   cell
                              Cell-CM-Rsp,
   rACH
                              RACH-CM-Rsp,
   cPCH
                              CPCH-CM-Rsp,
Cell-CM-Rsp ::= SEOUENCE {
   commonMeasurementValue
                                  CommonMeasurementValue,
   iE-Extensions
                                  ProtocolExtensionContainer { { CellItem-CM-Rsp-ExtIEs} }
                                                                                                              OPTIONAL,
Cellitem-CM-Rsp-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    . . .
RACH-CM-Rsp ::= SEQUENCE {
   commonMeasurementValue
                                  CommonMeasurementValue,
                                  ProtocolExtensionContainer { { RACHItem-CM-Rsp-ExtIEs} }
   iE-Extensions
                                                                                                              OPTIONAL,
RACHItem-CM-Rsp-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
CPCH-CM-Rsp ::= SEQUENCE {
   commonMeasurement.Value
                               CommonMeasurementValue,
                               ProtocolExtensionContainer { { CPCHItem-CM-Rsp-ExtIEs} }
   iE-Extensions
                                                                                                     OPTIONAL,
CPCHItem-CM-Rsp-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  -- COMMON MEASUREMENT INITIATION FAILURE
  ****************
CommonMeasurementInitiationFailure ::= SEQUENCE {
   protocolIEs
                        ProtocolIE-Container
                                             {{CommonMeasurementInitiationFailure-IEs}},
                        ProtocolExtensionContainer {{CommonMeasurementInitiationFailure-Extensions}}
   protocolExtensions
                                                                                                       OPTIONAL,
CommonMeasurementInitiationFailure-IEs NBAP-PROTOCOL-IES ::= {
          id-MeasurementID
                                                    ignore
                                                                  TYPE
                                                                         MeasurementID
                                                                                                             PRESENCE mandatory
                                      CRITICALITY
     ID
          id-Cause
                                      CRITICALITY
                                                    ignore
                                                                  TYPE
                                                                         Cause
                                                                                                            PRESENCE mandatory
          id-CriticalityDiagnostics
                                                                         CriticalityDiagnostics
                                                                                                       PRESENCE optional },
   { ID
                                      CRITICALITY
                                                    ignore
                                                                  TYPE
CommonMeasurementInitiationFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  -- COMMON MEASUREMENT REPORT
__ ********************************
CommonMeasurementReport ::= SEQUENCE {
                                            {{CommonMeasurementReport-IEs}},
   protocolIEs
                        ProtocolIE-Container
                     ProtocolExtensionContainer {{CommonMeasurementReport-Extensions}}
   protocolExtensions
                                                                                                     OPTIONAL,
CommonMeasurementReport-IEs NBAP-PROTOCOL-IES ::= {
   { ID
          id-MeasurementID
                                                 CRITICALITY ignore
                                                                         TYPE
                                                                                MeasurementID
                                                                                                                    PRESENCE
   mandatory } |
          id-CommonMeasurementObjectType-CM-Rprt
                                                CRITICALITY ignore
                                                                         TYPE
                                                                                CommonMeasurementObjectType-CM-Rprt
   mandatory } |
```

PRESENCE

```
{ ID id-SFN
                                                  CRITICALITY ignore
                                                                           TYPE
                                                                                  SFN
   optional },
CommonMeasurementReport-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CommonMeasurementObjectType-CM-Rprt ::= CHOICE {
                                Cell-CM-Rprt,
   rACH
                                RACH-CM-Rprt,
   cPCH
                                CPCH-CM-Rprt,
Cell-CM-Rprt ::= SEQUENCE {
   \verb|commonMeasurementValueInformation| CommonMeasurementValueInformation|,
                                ProtocolExtensionContainer {{ CellItem-CM-Rprt-ExtIEs }}
   iE-Extensions
                                                                                                        OPTIONAL,
   . . .
Cellitem-CM-Rprt-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RACH-CM-Rprt ::= SEOUENCE {
   \verb|commonMeasurementValueInformation| CommonMeasurementValueInformation|,
                                iE-Extensions
                                                                                                          OPTIONAL,
RACHItem-CM-Rprt-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CPCH-CM-Rprt ::= SEQUENCE {
   commonMeasurementValueInformation CommonMeasurementValueInformation,
                                ProtocolExtensionContainer {{    CPCHItem-CM-Rprt-ExtIEs }}
   iE-Extensions
                                                                                                          OPTIONAL,
CPCHItem-CM-Rprt-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ******************
-- COMMON MEASUREMENT TERMINATION REQUEST
__ **********************************
```

```
CommonMeasurementTerminationRequest ::= SEQUENCE {
   protocolIEs
                       ProtocolIE-Container
                                             {{CommonMeasurementTerminationRequest-IEs}},
   protocolExtensions
                        ProtocolExtensionContainer {{CommonMeasurementTerminationRequest-Extensions}}
                                                                                                       OPTIONAL.
CommonMeasurementTerminationRequest-IEs NBAP-PROTOCOL-IES ::= {
          id-MeasurementID
                           CRITICALITY
                                                                 TYPE
                                                                         MeasurementID
                                                                                                         PRESENCE mandatory },
CommonMeasurementTerminationRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
     -- COMMON MEASUREMENT FAILURE INDICATION
__ *********************
CommonMeasurementFailureIndication ::= SEQUENCE {
                      ProtocolIE-Container
                                             {{CommonMeasurementFailureIndication-IEs}},
   protocolIEs
                           ProtocolExtensionContainer {{CommonMeasurementFailureIndication-Extensions}}
   protocolExtensions
                                                                                                            OPTIONAL,
CommonMeasurementFailureIndication-IEs NBAP-PROTOCOL-IES ::= {
                                  CRITICALITY ignore
          id-MeasurementID
                                                           TYPE
                                                                  MeasurementID
                                                                                                     PRESENCE mandatory
          id-Cause
                                  CRITICALITY ignore
                                                           TYPE
   { ID
                                                                  Cause
                                                                                                     PRESENCE mandatory
   . . .
CommonMeasurementFailureIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    CELL SETUP REQUEST FDD
  ******************
CellSetupRequestFDD ::= SEQUENCE {
                       ProtocolIE-Container
                                             {{CellSetupRequestFDD-IEs}},
   protocolIEs
                       ProtocolExtensionContainer {{CellSetupRequestFDD-Extensions}}
   protocolExtensions
                                                                                   OPTIONAL,
CellSetupRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
   { ID
         id-Local-Cell-ID
                                                           CRITICALITY
                                                                         reject
                                                                                                    TYPE Local-Cell-ID
                 PRESENCE
                           mandatory
   { ID
          id-C-ID
                                                                         reject
                                                                                                    TYPE C-ID
                                                           CRITICALITY
             PRESENCE
                       mandatory }|
```

```
{ ID
            id-ConfigurationGenerationID
                                                                    CRITICALITY
                                                                                     reject
                                                                                                                     TYPE ConfigurationGenerationID
                        PRESENCE
                                    mandatory
    { ID
            id-T-Cell
                                                                     CRITICALITY
                                                                                     reject
                                                                                                                     TYPE T-Cell
                    PRESENCE
                                mandatory
    { ID
            id-UARFCNforNu
                                                                     CRITICALITY
                                                                                     reject
                                                                                                                     TYPE UARFON
                                mandatory
                    PRESENCE
    { ID
            id-UARFCNforNd
                                                                     CRITICALITY
                                                                                     reject
                                                                                                                     TYPE UARFON
                    PRESENCE
                                mandatory
    { ID
            id-MaximumTransmissionPower
                                                                     CRITICALITY
                                                                                     reject
                                                                                                                     TYPE MaximumTransmissionPower
                        PRESENCE
                                    mandatory
    ( TD
            id-Closed-Loop-Timing-Adjustment-Mode
                                                                    CRITICALITY
                                                                                                                     TYPE
                                                                                     reject
    Closedlooptimingadjustmentmode
                                                    PRESENCE
                                                                optional
            id-PrimaryScramblingCode
                                                                     CRITICALITY
                                                                                                                     TYPE PrimaryScramblingCode
    { ID
                                                                                     reject
                        PRESENCE
                                    mandatory } |
            id-Synchronisation-Configuration-Cell-SetupRqst
                                                                     CRITICALITY
                                                                                     reject
                                                                                                                     TYPE Synchronisation-
    { ID
Configuration-Cell-SetupRqst
                                        PRESENCE
                                                    mandatory
                                                                } |
           id-DL-TPC-Pattern01Count
    { ID
                                                                     CRITICALITY
                                                                                     reject
                                                                                                                       TYPE DL-TPC-Pattern01Count
                            PRESENCE
                                        mandatory
            id-PrimarySCH-Information-Cell-SetupRgstFDD
    { ID
                                                                     CRITICALITY
                                                                                     reject
                                                                                                                     TYPE PrimarySCH-Information-
Cell-SetupRqstFDD
                            PRESENCE
                                        mandatory }
    { ID
           id-SecondarySCH-Information-Cell-SetupRqstFDD
                                                                     CRITICALITY
                                                                                     reject
                                                                                                                     TYPE SecondarySCH-Information-
                                    mandatory } |
Cell-SetupRqstFDD
                        PRESENCE
           id-PrimaryCPICH-Information-Cell-SetupRqstFDD
    { ID
                                                                     CRITICALITY
                                                                                     reject
                                                                                                                     TYPE PrimaryCPICH-Information-
Cell-SetupRastFDD
                        PRESENCE
                                    mandatory } |
    { ID
           id-SecondaryCPICH-InformationList-Cell-SetupRqstFDD
                                                                     CRITICALITY
                                                                                     reject
                                                                                                                     TYPE SecondaryCPICH-
InformationList-Cell-SetupRgstFDD
                                        PRESENCE
                                                    optional
                                                               } |
           id-PrimaryCCPCH-Information-Cell-SetupRgstFDD
                                                                                     reject
                                                                                                                     TYPE PrimaryCCPCH-Information-
    { ID
                                                                     CRITICALITY
                                    mandatory } |
Cell-SetupRqstFDD
                        PRESENCE
           id-Limited-power-increase-information-Cell-SetupRgstFDD CRITICALITY
                                                                                                                     TYPE Limited-power-increase-
                                                                                     reject
information-Cell-SetupRgstFDD
                                                mandatory },
                                    PRESENCE
    . . .
CellSetupRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    {ID id-IPDLParameter-Information-Cell-SetupRgstFDD
                                                                     CRITICALITY
                                                                                     reject
                                                                                                 EXTENSION
                                                                                                                        IPDLParameter-Information-
                                    optional
Cell-SetupRastFDD
                        PRESENCE
                                               },
    . . .
Synchronisation-Configuration-Cell-SetupRqst ::= SEQUENCE {
    n-INSYNC-IND
                            N-INSYNC-IND
    n-OUTSYNC-IND
                            N-OUTSYNC-IND,
    t-RLFAILURE
                            T-RLFAILURE,
                            ProtocolExtensionContainer { { Synchronisation-Configuration-Cell-SetupRqst-ExtIEs} }
    iE-Extensions
                                                                                                                        OPTIONAL,
    . . .
Synchronisation-Configuration-Cell-SetupRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PrimarySCH-Information-Cell-SetupRqstFDD ::= SEOUENCE
    commonPhysicalChannelID
                                            CommonPhysicalChannelID,
    primarySCH-Power
                                            DL-Power,
```

```
tSTD-Indicator
                                            TSTD-Indicator,
    iE-Extensions
                                            ProtocolExtensionContainer { { PrimarySCH-Information-Cell-SetupRqstFDD-ExtIEs} }
                                                                                                                                   OPTIONAL.
PrimarySCH-Information-Cell-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
SecondarySCH-Information-Cell-SetupRqstFDD ::= SEOUENCE {
    commonPhysicalChannelID
                                            CommonPhysicalChannelID,
    secondarySCH-Power
                                            DL-Power,
    tSTD-Indicator
                                            TSTD-Indicator,
    iE-Extensions
                                            ProtocolExtensionContainer { { SecondarySCH-Information-Cell-SetupRgstFDD-ExtIEs} }
                                                                                                                                   OPTIONAL,
SecondarySCH-Information-Cell-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PrimaryCPICH-Information-Cell-SetupRqstFDD ::= SEQUENCE {
    commonPhysicalChannelID
                                            CommonPhysicalChannelID,
    primaryCPICH-Power
                                            PrimaryCPICH-Power,
    transmitDiversityIndicator
                                            TransmitDiversityIndicator,
    iE-Extensions
                                            ProtocolExtensionContainer { { PrimaryCPICH-Information-Cell-SetupRqstFDD-ExtIEs} }
PrimaryCPICH-Information-Cell-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    . . .
SecondaryCPICH-InformationList-Cell-SetupRqstFDD ::= SEQUENCE (SIZE (1..maxSCPICHCell)) OF ProtocolIE-Single-Container{{ SecondaryCPICH-
InformationItemIE-Cell-SetupRgstFDD }}
SecondaryCPICH-InformationItemIE-Cell-SetupRqstFDD NBAP-PROTOCOL-IES ::= {
         id-SecondaryCPICH-InformationItem-Cell-SetupRgstFDD
                                                                    CRITICALITY
                                                                                    reject
                                                                                                                    TYPE SecondaryCPICH-
InformationItem-Cell-SetupRqstFDD
                                        PRESENCE
                                                    mandatory}
SecondaryCPICH-InformationItem-Cell-SetupRqstFDD ::= SEQUENCE {
    commonPhysicalChannelID
                                            CommonPhysicalChannelID,
    dl-ScramblingCode
                                            DL-ScramblingCode,
    fDD-DL-ChannelisationCodeNumber
                                            FDD-DL-ChannelisationCodeNumber,
                                            DL-Power,
    secondaryCPICH-Power
    transmitDiversityIndicator
                                            TransmitDiversitvIndicator,
                                            ProtocolExtensionContainer { { SecondaryCPICH-InformationItem-Cell-SetupRqstFDD-ExtIEs} } OPTIONAL,
    iE-Extensions
SecondaryCPICH-InformationItem-Cell-SetupRgstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
PrimaryCCPCH-Information-Cell-SetupRqstFDD ::= SEQUENCE {
   commonPhysicalChannelID
                                        CommonPhysicalChannelID,
   bCH-information
                                        BCH-Information-Cell-SetupRgstFDD,
   sTTD-Indicator
                                        STTD-Indicator,
                                        ProtocolExtensionContainer { { PrimaryCCPCH-Information-Cell-SetupRqstFDD-ExtIEs} }
   iE-Extensions
PrimaryCCPCH-Information-Cell-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
BCH-Information-Cell-SetupRqstFDD ::= SEQUENCE {
   commonTransportChannelID
                                        CommonTransportChannelID,
   bCH-Power
                                        DL-Power,
                                        iE-Extensions
BCH-Information-Cell-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
Limited-power-increase-information-Cell-SetupRqstFDD ::= SEQUENCE {
   powerRaiseLimit
                                        PowerRaiseLimit,
   dLPowerAveragingWindowSize
                                        DLPowerAveragingWindowSize,
   iE-Extensions
                                        ProtocolExtensionContainer { { Limited-power-increase-information-Cell-SetupRqstFDD-ExtIEs} }
   OPTIONAL,
Limited-power-increase-information-Cell-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
IPDLParameter-Information-Cell-SetupRqstFDD::= SEQUENCE {
   iPDL-FDD-Parameters
                                           IPDL-FDD-Parameters,
   iPDL-Indicator
                                           IPDL-Indicator,
   iE-Extensions
                                        ProtocolExtensionContainer { { IPDLParameter-Information-Cell-SetupRqstFDD-ExtIEs} }
                                                                                                                         OPTIONAL,
IPDLParameter-Information-Cell-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ******************
-- CELL SETUP REQUEST TDD
__ ********************************
CellSetupRequestTDD ::= SEQUENCE {
```

```
{{CellSetupRequestTDD-IEs}},
    protocolIEs
                           ProtocolIE-Container
    protocolExtensions
                           ProtocolExtensionContainer {{CellSetupRequestTDD-Extensions}}
                                                                                               OPTIONAL.
CellSetupRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-Local-Cell-ID
                                                               CRITICALITY
                                                                               reject
                                                                                           TYPE
                                                                                                                  Local-Cell-ID
           PRESENCE
                    mandatory }|
              id-C-ID
        ( TD
                                                                   CRITICALITY
                                                                                   reject
                                                                                               TYPE
                                                                                                                  C-TD
       PRESENCE mandatory } |
           id-ConfigurationGenerationID
                                                               CRITICALITY
                                                                                           TYPE
                                                                                                                  ConfigurationGenerationID
                                                                               reject
               PRESENCE
                           mandatory }|
           id-UARFCNforNt
                                                                                                                  UARFCN
    { ID
                                                                   CRITICALITY
                                                                                   reject
                                                                                               TYPE
           PRESENCE
                       mandatory }
           id-CellParameterID
                                                               CRITICALITY
                                                                               reject
                                                                                                                  CellParameterID
    { ID
                                                                                           TYPE
               PRESENCE
                           mandatory }|
           id-MaximumTransmissionPower
                                                                                                                  MaximumTransmissionPower
    { ID
                                                               CRITICALITY
                                                                               reject
                                                                                           TYPE
               PRESENCE
                           mandatory } |
           id-TransmissionDiversityApplied
                                                                                                                  TransmissionDiversityApplied
                                                               CRITICALITY
                                                                               reject
                                                                                           TYPE
               PRESENCE
                           mandatory }|
    { ID
           id-SyncCase
                                                               CRITICALITY
                                                                               reject
                                                                                           TYPE
                                                                                                                  SyncCase
       PRESENCE mandatory } |
           id-Synchronisation-Configuration-Cell-SetupRqst
                                                               CRITICALITY
                                                                               reject
                                                                                           TYPE
                                                                                                                  Synchronisation-Configuration-
                   PRESENCE
Cell-SetupRast
                               mandatory }|
    { ID
           id-DPCHConstant
                                                               CRITICALITY
                                                                               reject
                                                                                           TYPE
                                                                                                                  ConstantValue
               PRESENCE
                           mandatory
                                                                               reject
                                                                                                                  Constant Value
    { ID
           id-PUSCHConstant
                                                               CRITICALITY
                                                                                           TYPE
               PRESENCE
                           mandatory
    { ID
           id-PRACHConstant
                                                               CRITICALITY
                                                                               reject
                                                                                           TYPE
                                                                                                                  ConstantValue
               PRESENCE
                           mandatory
    { ID
           id-TimingAdvanceApplied
                                                               CRITICALITY
                                                                               reject
                                                                                           TYPE
                                                                                                                  TimingAdvanceApplied
               PRESENCE
                           mandatory } |
    { ID
           id-SCH-Information-Cell-SetupRqstTDD
                                                               CRITICALITY
                                                                               reject
                                                                                           TYPE
                                                                                                                  SCH-Information-Cell-
                           PRESENCE
                                                   } -- Mandatory for 3.84Mcps TDD only
SetupRqstTDD
                                       optional
                                                               CRITICALITY
    { ID
           id-PCCPCH-Information-Cell-SetupRqstTDD
                                                                               reject
                                                                                           TYPE
                                                                                                                  PCCPCH-Information-Cell-
                                                 } | -- Mandatory for 3.84Mcps TDD only
SetupRastTDD
                           PRESENCE
                                       optional
           id-TimeSlotConfigurationList-Cell-SetupRqstTDD
                                                               CRITICALITY
                                                                                           TYPE
                                                                                                                  TimeSlotConfigurationList-Cell-
                   PRESENCE
                               optional }, -- Mandatory for 3.84Mcps TDD only
SetupRastTDD
CellSetupRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
          id-TimeSlotConfigurationList-LCR-Cell-SetupRqstTDD
                                                                                                                  TimeSlotConfigurationList-LCR-
                                                                   CRITICALITY
                                                                                   reject
                                                                                               EXTENSION
                       PRESENCE
                                 optional } | -- Mandatory for 1.28Mcps TDD only
Cell-SetupRqstTDD
    { ID id-PCCPCH-LCR-Information-Cell-SetupRgstTDD
                                                                   CRITICALITY
                                                                                                                  PCCPCH-LCR-Information-Cell-
                                                                                   reject
                                                                                               EXTENSION
SetupRastTDD
                           PRESENCE
                                       optional
                                                  } -- Mandatory for 1.28Mcps TDD only
          id-DwPCH-LCR-Information-Cell-SetupRqstTDD
                                                                   CRITICALITY
                                                                                   reject
                                                                                               EXTENSION
                                                                                                                  DwPCH-LCR-Information-Cell-
SetupRqstTDD
                           PRESENCE
                                       optional
                                                   } -- Mandatory for 1.28Mcps TDD only
                                                                       EXTENSION ReferenceSFNoffset
                                                                                                                        PRESENCE optional } |
     ID id-ReferenceSFNoffset
                                       CRITICALITY
                                                       ignore
          id-IPDLParameter-Information-Cell-SetupRgstTDD
                                                                   CRITICALITY
                                                                                  reject
                                                                                               EXTENSION
                                                                                                                     IPDLParameter-Information-
Cell-SetupRgstTDD PRESENCE
                              optional },
    . . .
```

```
SCH-Information-Cell-SetupRgstTDD ::= SEQUENCE {
   commonPhysicalChannelID
                                    CommonPhysicalChannelID,
   syncCaseIndicator
                                    SyncCaseIndicator-Cell-SetupRqstTDD-PSCH,
   sCH-Power
                                    DL-Power.
                                    TSTD-Indicator,
   tSTD-Indicator
   iE-Extensions
                                    ProtocolExtensionContainer { { SCH-Information-Cell-SetupRgstTDD-ExtIEs} } }
                                                                                                     OPTIONAL.
SCH-Information-Cell-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
SyncCaseIndicator-Cell-SetupRqstTDD-PSCH ::= ProtocolIE-Single-Container {{ SyncCaseIndicatorIE-Cell-SetupRqstTDD-PSCH }}
SyncCaseIndicatorIE-Cell-SetupRqstTDD-PSCH NBAP-PROTOCOL-IES ::= {
   PRESENCE
mandatory }
SyncCaseIndicatorItem-Cell-SetupRqstTDD-PSCH ::= CHOICE {
   case1
                                 Case1-Cell-SetupRqstTDD,
   case2
                                 Case2-Cell-SetupRgstTDD,
Case1-Cell-SetupRgstTDD ::= SEQUENCE {
   timeSlot
   iE-Extensions
                                 OPTIONAL,
   . . .
CaselItem-Cell-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
Case2-Cell-SetupRgstTDD ::= SEQUENCE -
   sCH-TimeSlot
                                 SCH-TimeSlot,
   iE-Extensions
                                 OPTIONAL,
Case2Item-Cell-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PCCPCH-Information-Cell-SetupRqstTDD ::= SEQUENCE
   commonPhysicalChannelID
                                    CommonPhysicalChannelID,
   tdd-PhysicalChannelOffset
                                    TDD-PhysicalChannelOffset,
   repetitionPeriod
                                    RepetitionPeriod,
   repetitionLength
                                    RepetitionLength,
   pCCPCH-Power
                                    PCCPCH-Power,
```

```
sCTD-Indicator
                                        SCTD-Indicator,
    iE-Extensions
                                            ProtocolExtensionContainer { { PCCPCH-Information-Cell-SetupRqstTDD-ExtIEs} }
                                                                                                                             OPTIONAL.
PCCPCH-Information-Cell-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TimeSlotConfigurationList-Cell-SetupRqstTDD ::= SEQUENCE (SIZE (1..15)) OF TimeSlotConfigurationItem-Cell-SetupRqstTDD
TimeSlotConfigurationItem-Cell-SetupRqstTDD ::= SEQUENCE {
    timeSlot
                                            TimeSlot,
    timeSlotStatus
                                            TimeSlotStatus,
    timeSlotDirection
                                            TimeSlotDirection,
    iE-Extensions
                                            ProtocolExtensionContainer { { TimeSlotConfigurationItem-Cell-SetupRgstTDD-ExtIEs} }
                                                                                                                                       OPTIONAL,
    . . .
TimeSlotConfigurationItem-Cell-SetupRgstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TimeSlotConfigurationList-LCR-Cell-SetupRqstTDD ::= SEQUENCE (SIZE (1..7)) OF TimeSlotConfigurationItem-LCR-Cell-SetupRqstTDD
TimeSlotConfigurationItem-LCR-Cell-SetupRqstTDD ::= SEQUENCE {
    timeSlotLCR
                                            TimeSlotLCR,
    timeSlotStatus
                                            TimeSlotStatus,
    timeSlotDirection
                                            TimeSlotDirection,
                                            ProtocolExtensionContainer { TimeSlotConfigurationItem-LCR-Cell-SetupRqstTDD-ExtIEs} }
    iE-Extensions
                                                                                                                                          OPTIONAL,
    . . .
TimeSlotConfigurationItem-LCR-Cell-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PCCPCH-LCR-Information-Cell-SetupRgstTDD ::= SEQUENCE
    commonPhysicalChannelID
                                            CommonPhysicalChannelID,
    tdd-PhysicalChannelOffset
                                            TDD-PhysicalChannelOffset,
    repetitionPeriod
                                            RepetitionPeriod,
    repetitionLength
                                            RepetitionLength,
                                            PCCPCH-Power,
    pCCPCH-Power
    sCTD-Indicator
                                        SCTD-Indicator,
    tSTD-Indicator
                                            TSTD-Indicator,
    iE-Extensions
                                            ProtocolExtensionContainer { { PCCPCH-LCR-Information-Cell-SetupRqstTDD-ExtIEs} }
                                                                                                                                   OPTIONAL,
PCCPCH-LCR-Information-Cell-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DwPCH-LCR-Information-Cell-SetupRqstTDD ::= SEQUENCE {
```

```
commonPhysicalChannelId
                               CommonPhysicalChannelID,
   tSTD-Indicator
                               TSTD-Indicator,
   sYNCDlCodeId
                                SYNCDlCodeId.
   dwPCH-Power
                               DwPCH-Power,
   iE-Extensions
                                ProtocolExtensionContainer { { DwPCH-LCR-Information-Cell-SetupRqstTDD-ExtIEs} }
                                                                                                           OPTIONAL.
DwPCH-LCR-Information-Cell-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
IPDLParameter-Information-Cell-SetupRqstTDD ::= SEQUENCE {
   iPDL-TDD-Parameters
                                          IPDL-TDD-Parameters,
   iPDL-Indicator
                                          IPDL-Indicator,
   iE-Extensions
                                      ProtocolExtensionContainer { { IPDLParameter-Information-Cell-SetupRqstTDD-ExtIEs} }
                                                                                                                      OPTIONAL,
   . . .
IPDLParameter-Information-Cell-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ******************
-- CELL SETUP RESPONSE
  ******************
CellSetupResponse ::= SEQUENCE {
   protocolIEs
                            ProtocolIE-Container
                                                 {{CellSetupResponse-IEs}},
                            ProtocolExtensionContainer {{CellSetupResponse-Extensions}}
   protocolExtensions
                                                                                                      OPTIONAL,
   . . .
CellSetupResponse-IEs NBAP-PROTOCOL-IES ::= {
   { ID
         id-CriticalityDiagnostics
                                      CRITICALITY
                                                     ignore
                                                                   TYPE
                                                                          CriticalityDiagnostics
                                                                                                         PRESENCE optional },
   . . .
CellSetupResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  -- CELL SETUP FAILURE
  ****************
CellSetupFailure ::= SEQUENCE {
   protocolIEs
                        ProtocolIE-Container
                                              {{CellSetupFailure-IEs}},
   protocolExtensions
                        ProtocolExtensionContainer {{CellSetupFailure-Extensions}}
                                                                                     OPTIONAL,
   . . .
```

```
CellSetupFailure-IEs NBAP-PROTOCOL-IES ::= {
                                             CRITICALITY
     ID
          id-Cause
                                                             ignore
                                                                            TYPE
                                                                                    Cause
                                                                                                                         PRESENCE mandatory
           id-CriticalityDiagnostics
                                                                                                                 PRESENCE optional },
                                                             ignore
                                                                                    CriticalityDiagnostics
    { ID
                                             CRITICALITY
                                                                            TYPE
CellSetupFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  -- CELL RECONFIGURATION REQUEST FDD
__ **********************
CellReconfigurationRequestFDD ::= SEQUENCE {
   protocolIEs
                          ProtocolIE-Container
                                                 {{CellReconfigurationRequestFDD-IEs}},
                          ProtocolExtensionContainer {{CellReconfigurationRequestFDD-Extensions}}
   protocolExtensions
                                                                                                                 OPTIONAL,
CellReconfigurationRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
           id-C-ID
                                                                                                              C-ID
    { ID
                                                                 CRITICALITY reject
                                                                                           TYPE
           PRESENCE
                    mandatory }|
    { ID
           id-ConfigurationGenerationID
                                                                 CRITICALITY reject
                                                                                           TYPE
                                                                                                              ConfigurationGenerationID
                   PRESENCE
                              mandatory
    { ID
           id-MaximumTransmissionPower
                                                                 CRITICALITY reject
                                                                                           TYPE
                                                                                                              MaximumTransmissionPower
                   PRESENCE
                              optional
           id-Synchronisation-Configuration-Cell-ReconfRqst
                                                                 CRITICALITY
                                                                                reject
                                                                                                               Synchronisation-Configuration-
    { ID
                                                                                           TYPE
                   PRESENCE
                              optional
Cell-ReconfRqst
    { ID
           id-PrimarySCH-Information-Cell-ReconfRqstFDD
                                                                 CRITICALITY reject
                                                                                           TYPE
                                                                                                               PrimarySCH-Information-Cell-
ReconfRastFDD
                      PRESENCE
                                  optional }|
    { ID id-SecondarySCH-Information-Cell-ReconfRqstFDD
                                                                 CRITICALITY reject
                                                                                           TYPE
                                                                                                               SecondarySCH-Information-Cell-
ReconfRqstFDD
                      PRESENCE
                                  optional
   { ID
                                                                                                               PrimaryCPICH-Information-Cell-
           id-PrimaryCPICH-Information-Cell-ReconfRqstFDD
                                                                 CRITICALITY reject
                                                                                           TYPE
ReconfRastFDD
                      PRESENCE
                                  optional
    { ID
           id-SecondaryCPICH-InformationList-Cell-ReconfRqstFDD
                                                                 CRITICALITY reject
                                                                                           TYPE
                                                                                                               SecondaryCPICH-InformationList-
Cell-ReconfRqstFDD
                      PRESENCE
                                  optional
                                             } |
           id-PrimaryCCPCH-Information-Cell-ReconfRqstFDD
                                                                                                              PrimaryCCPCH-Information-Cell-
                                                                 CRITICALITY reject
                                                                                           TYPE
ReconfRqstFDD
                      PRESENCE
                                  optional
    . . .
CellReconfigurationRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    {ID id-IPDLParameter-Information-Cell-ReconfRqstFDD
                                                                 CRITICALITY
                                                                                reject
                                                                                            EXTENSION
                                                                                                                 IPDLParameter-Information-
Cell-ReconfRqstFDD
                      PRESENCE
                                  optional
Synchronisation-Configuration-Cell-ReconfRqst ::= SEQUENCE {
```

```
N-INSYNC-IND,
    n-INSYNC-IND
   n-OUTSYNC-IND
                           N-OUTSYNC-IND,
    t-RLFAILURE
                           T-RLFAILURE.
    iE-Extensions
                           ProtocolExtensionContainer { { Synchronisation-Configuration-Cell-ReconfRqst-ExtIEs} }
                                                                                                                       OPTIONAL,
Synchronisation-Configuration-Cell-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PrimarySCH-Information-Cell-ReconfRqstFDD ::= SEQUENCE {
    commonPhysicalChannelID
                                            CommonPhysicalChannelID,
    primarySCH-Power
                                            DL-Power,
   iE-Extensions
                                            ProtocolExtensionContainer { { PrimarySCH-Information-Cell-ReconfRgstFDD-ExtIEs} }
                                                                                                                                  OPTIONAL,
PrimarySCH-Information-Cell-ReconfRgstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
SecondarySCH-Information-Cell-ReconfRqstFDD ::= SEQUENCE {
    commonPhysicalChannelID
                                            CommonPhysicalChannelID,
    secondarySCH-Power
                                            DL-Power,
    iE-Extensions
                                            ProtocolExtensionContainer { { SecondarySCH-Information-Cell-ReconfRqstFDD-ExtIEs} }
                                                                                                                                     OPTIONAL,
    . . .
SecondarySCH-Information-Cell-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    . . .
PrimaryCPICH-Information-Cell-ReconfRqstFDD ::= SEQUENCE {
    commonPhysicalChannelID
                                            CommonPhysicalChannelID,
    primaryCPICH-Power
                                            PrimaryCPICH-Power,
   iE-Extensions
                                            ProtocolExtensionContainer { { PrimaryCPICH-Information-Cell-ReconfRqstFDD-ExtIEs} }
                                                                                                                                     OPTIONAL,
PrimaryCPICH-Information-Cell-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
SecondaryCPICH-InformationList-Cell-ReconfRqstFDD ::= SEQUENCE (SIZE (1..maxSCPICHCell)) OF ProtocolIE-Single-Container {{
InformationItemIE-Cell-ReconfRqstFDD }}
SecondaryCPICH-InformationItemIE-Cell-ReconfRqstFDD NBAP-PROTOCOL-IES ::= {
          id-SecondaryCPICH-InformationItem-Cell-ReconfRqstFDD
                                                                        CRITICALITY
                                                                                        reject
                                                                                                                       TYPE SecondaryCPICH-
InformationItem-Cell-ReconfRqstFDD
                                        PRESENCE
                                                    mandatory}
SecondaryCPICH-InformationItem-Cell-ReconfRqstFDD ::= SEQUENCE {
                                                CommonPhysicalChannelID,
    commonPhysicalChannelID
```

```
secondaryCPICH-Power
                                          DL-Power,
   iE-Extensions
                                          ProtocolExtensionContainer { { SecondaryCPICH-InformationItem-Cell-ReconfRqstFDD-ExtIEs} }
   OPTIONAL.
SecondaryCPICH-InformationItem-Cell-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PrimaryCCPCH-Information-Cell-ReconfRqstFDD ::= SEQUENCE {
   bCH-information
                                       BCH-information-Cell-ReconfRqstFDD,
   iE-Extensions
                                       ProtocolExtensionContainer { { PrimaryCCPCH-Information-Cell-ReconfRqstFDD-ExtIEs} }
                                                                                                                      OPTIONAL,
   . . .
PrimaryCCPCH-Information-Cell-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
BCH-information-Cell-ReconfRqstFDD ::= SEQUENCE {
   commonTransportChannelID
                                       CommonTransportChannelID,
   bCH-Power
                                       DL-Power,
                                       iE-Extensions
                                                                                                              OPTIONAL,
BCH-information-Cell-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
IPDLParameter-Information-Cell-ReconfRqstFDD::= SEQUENCE {
   iPDL-FDD-Parameters
                                          IPDL-FDD-Parameters
                                                                OPTIONAL,
   iPDL-Indicator
                                          IPDL-Indicator,
   iE-Extensions
                                       ProtocolExtensionContainer { { IPDLParameter-Information-Cell-ReconfRgstFDD-ExtIEs} }
                                                                                                                      OPTIONAL,
IPDLParameter-Information-Cell-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    -- CELL RECONFIGURATION REQUEST TDD
  *****************
CellReconfigurationRequestTDD ::= SEQUENCE {
                                             {{CellReconfigurationRequestTDD-IEs}},
   protocolIEs
                        ProtocolIE-Container
                        ProtocolExtensionContainer {{CellReconfigurationRequestTDD-Extensions}}
   protocolExtensions
                                                                                                         OPTIONAL,
```

```
CellReconfigurationRequestTDD-IES NBAP-PROTOCOL-IES ::= {
    { ID
          id-C-ID
                                                           CRITICALITY
                                                                          reject
                                                                                     TYPE
                                                                                                           C-ID
       PRESENCE mandatory } |
          id-ConfigurationGenerationID
                                                           CRITICALITY
                                                                          reject
                                                                                     TYPE
                                                                                                           ConfigurationGenerationID
              PRESENCE
                       mandatory }|
          id-Synchronisation-Configuration-Cell-ReconfRqst
                                                                                                           Synchronisation-Configuration-
                                                                          reject
    { ID
                                                           CRITICALITY
                                                                                     TYPE
Cell-ReconfRqst PRESENCE
                         optional }|
          id-TimingAdvanceApplied
    { ID
                                                                                                           TimingAdvanceApplied
                                                           CRITICALITY
                                                                          reject
                                                                                     TYPE
           PRESENCE optional } | -- For 3.84Mcps TDD only
          id-SCH-Information-Cell-ReconfRqstTDD
                                                                                                           SCH-Information-Cell-
    { ID
                                                           CRITICALITY
                                                                          reject
                                                                                     TYPE
                         PRESENCE
                                    optional
ReconfRqstTDD
                                               } -- For 3.84Mcps TDD only
                                                                                                           PCCPCH-Information-Cell-
   { ID
          id-PCCPCH-Information-Cell-ReconfRqstTDD
                                                           CRITICALITY
                                                                          reject
                                                                                     TYPE
ReconfRastTDD
                      PRESENCE
                                 optional
          id-MaximumTransmissionPower
                                                           CRITICALITY
                                                                          reject
                                                                                     TYPE
                                                                                                           MaximumTransmissionPower
              PRESENCE
                         optional
    { ID
          id-DPCHConstant
                                                           CRITICALITY
                                                                          reject
                                                                                     TYPE
                                                                                                           Constant Value
              PRESENCE
                         optional
   { ID
                                                                          reject
                                                                                                           ConstantValue
          id-PUSCHConstant
                                                           CRITICALITY
                                                                                     TYPE
              PRESENCE
                             optional
    { ID
          id-PRACHConstant
                                                           CRITICALITY
                                                                          reject
                                                                                     TYPE
                                                                                                           ConstantValue
              PRESENCE
                         optional }|
   { ID
          id-TimeSlotConfigurationList-Cell-ReconfRqstTDD
                                                           CRITICALITY
                                                                          reject
                                                                                     TYPE
                                                                                                           TimeSlotConfigurationList-Cell-
                             optional }, -- For 3.84Mcps TDD only
ReconfRqstTDD
                  PRESENCE
   . . .
CellReconfigurationRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
          id-TimeSlotConfigurationList-LCR-Cell-ReconfRqstTDD
                                                               CRITICALITY
                                                                              reject
                                                                                         EXTENSION
                                                                                                           TimeSlotConfigurationList-LCR-
Cell-ReconfRqstTDD PRESENCE optional \ -- Mandatory for 1.28Mcps TDD only
    { ID id-DwPCH-LCR-Information-Cell-ReconfRqstTDD
                                                                                                           DwPCH-LCR-Information-Cell-
                                                       CRITICALITY
                                                                      reject
                                                                                  EXTENSION
                  PRESENCE optional | -- Mandatory for 1.28Mcps TDD only
ReconfRqstTDD
   { ID id-IPDLParameter-Information-Cell-ReconfRqstTDD
                                                               CRITICALITY
                                                                                                              IPDLParameter-Information-
                                                                              reject
                                                                                         EXTENSION
Cell-ReconfRqstTDD PRESENCE optional },
SCH-Information-Cell-ReconfRqstTDD ::= SEQUENCE {
                                        CommonPhysicalChannelID,
   commonPhysicalChannelID
   sCH-Power
                                        DL-Power,
   iE-Extensions
                                        OPTIONAL,
PSCH-Information-Cell-ReconfRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
   . . .
PCCPCH-Information-Cell-ReconfRqstTDD ::= SEQUENCE {
   commonPhysicalChannelID
                                        CommonPhysicalChannelID,
   pCCPCH-Power
                                        DL-Power,
                                        iE-Extensions
                                                                                                                      OPTIONAL,
   . . .
```

```
PCCPCH-Information-Cell-ReconfRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TimeSlotConfigurationList-Cell-ReconfRgstTDD ::= SEOUENCE (SIZE (1..15)) OF TimeSlotConfigurationItem-Cell-ReconfRgstTDD
TimeSlotConfigurationItem-Cell-ReconfRqstTDD ::= SEQUENCE {
    timeSlot
                                            TimeSlot,
    t.imeSlotStatus
                                            TimeSlotStatus,
    timeSlotDirection
                                            TimeSlotDirection,
    iE-Extensions
                                            ProtocolExtensionContainer { { TimeSlotConfigurationItem-Cell-ReconfRqstTDD-ExtIEs} }
                                                                                                                                      OPTIONAL,
    . . .
TimeSlotConfigurationItem-Cell-ReconfRgstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TimeSlotConfigurationList-LCR-Cell-ReconfRqstTDD ::= SEOUENCE (SIZE (1..7)) OF TimeSlotConfigurationItem-LCR-Cell-ReconfRqstTDD
TimeSlotConfigurationItem-LCR-Cell-ReconfRqstTDD ::= SEQUENCE {
    timeSlotLCR
                                            TimeSlotLCR,
    timeSlotStatus
                                            TimeSlotStatus,
    timeSlotDirection
                                            TimeSlotDirection,
                                            ProtocolExtensionContainer { { TimeSlotConfigurationItem-LCR-Cell-ReconfRqstTDD-ExtIEs} } OPTIONAL,
    iE-Extensions
TimeSlotConfigurationItem-LCR-Cell-ReconfRgstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DwPCH-LCR-Information-Cell-ReconfRqstTDD ::= SEQUENCE
    commonPhysicalChannelId
                                            CommonPhysicalChannelID,
    dwPCH-Power
                                            DwPCH-Power,
                                            ProtocolExtensionContainer { { DwPCH-LCR-Information-Cell-ReconfRqstTDD-ExtIEs} }
   iE-Extensions
                                                                                                                                   OPTIONAL,
DwPCH-LCR-Information-Cell-ReconfRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
IPDLParameter-Information-Cell-ReconfRqstTDD ::= SEQUENCE {
                                                IPDL-TDD-Parameters
   iPDL-TDD-Parameters
                                                                        OPTIONAL,
   iPDL-Indicator
                                                IPDL-Indicator,
                                            ProtocolExtensionContainer { { IPDLParameter-Information-Cell-ReconfRqstTDD-ExtIEs} }
   iE-Extensions
IPDLParameter-Information-Cell-ReconfRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
__ ********************
-- CELL RECONFIGURATION RESPONSE
  *****************
CellReconfigurationResponse ::= SEQUENCE {
   protocolIEs
                                              {{CellReconfigurationResponse-IEs}},
                          ProtocolIE-Container
   protocolExtensions
                          ProtocolExtensionContainer {{CellReconfigurationResponse-Extensions}}
                                                                                                   OPTIONAL,
CellReconfigurationResponse-IEs NBAP-PROTOCOL-IES ::= {
         id-CriticalityDiagnostics
                                    CRITICALITY
                                                  ignore
                                                               TYPE
                                                                      CriticalityDiagnostics
                                                                                                   PRESENCE optional },
   . . .
CellReconfigurationResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  *****************
  CELL RECONFIGURATION FAILURE
    **************
CellReconfigurationFailure ::= SEQUENCE {
                       ProtocolIE-Container
                                          {{CellReconfigurationFailure-IEs}},
   protocolIEs
                       ProtocolExtensionContainer {{CellReconfigurationFailure-Extensions}}
   protocolExtensions
                                                                                                   OPTIONAL,
CellReconfigurationFailure-IEs NBAP-PROTOCOL-IES ::= {
   { ID
         id-Cause
                                    CRITICALITY
                                                  ignore
                                                               TYPE
                                                                      Cause
                                                                                                           PRESENCE
   mandatory } |
   { ID
         id-CriticalityDiagnostics
                                    CRITICALITY
                                                  ignore
                                                               TYPE
                                                                      CriticalityDiagnostics
                                                                                                     PRESENCE optional },
   . . .
CellReconfigurationFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ****************
-- CELL DELETION REQUEST
  ****************
CellDeletionRequest ::= SEQUENCE {
   protocolIEs
                       ProtocolIE-Container
                                           {{CellDeletionRequest-IEs}},
   protocolExtensions
                       ProtocolExtensionContainer {{CellDeletionRequest-Extensions}}
                                                                                OPTIONAL,
   . . .
```

```
CellDeletionRequest-IEs NBAP-PROTOCOL-IES ::= {
   { ID
         id-C-ID
                        CRITICALITY
                                      reject
                                                    TYPE
                                                           C-ID
                                                                      PRESENCE
                                                                                 mandatory },
   . . .
CellDeletionRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
__ ********************
-- CELL DELETION RESPONSE
  *****************
CellDeletionResponse ::= SEQUENCE {
                                             {{CellDeletionResponse-IEs}},
   protocolIEs
                        ProtocolIE-Container
                        ProtocolExtensionContainer {{CellDeletionResponse-Extensions}}
   protocolExtensions
                                                                                    OPTIONAL,
CellDeletionResponse-IEs NBAP-PROTOCOL-IES ::= {
         id-CriticalityDiagnostics
   { ID
                                      CRITICALITY
                                                    ignore
                                                                  TYPE
                                                                         CriticalityDiagnostics
                                                                                                        PRESENCE optional },
   . . .
CellDeletionResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  *****************
-- RESOURCE STATUS INDICATION
  *****************
ResourceStatusIndication ::= SEQUENCE {
   protocolIEs
                        ProtocolIE-Container
                                              {{ResourceStatusIndication-IEs}},
                        ProtocolExtensionContainer {{ResourceStatusIndication-Extensions}}
   protocolExtensions
                                                                                                      OPTIONAL,
ResourceStatusIndication-IEs NBAP-PROTOCOL-IES ::= {
   { ID id-IndicationType-ResourceStatusInd
                                                 CRITICALITY
                                                               ignore
                                                                             TYPE
                                                                                    IndicationType-ResourceStatusInd
                                                                                                                     PRESENCE
   mandatory } |
   -- This IE represents both the Indication Type IE and the choice based on the indication type as described in the tabular message format in
subclause 9.1.
   { ID
        id-Cause
                                                 CRITICALITY
                                                               ignore
                                                                             TYPE
                                                                                    Cause
                                                                                                                          PRESENCE
   optional },
   . . .
```

```
ResourceStatusIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
IndicationType-ResourceStatusInd ::= CHOICE
   no-Failure
                                          No-Failure-ResourceStatusInd,
   serviceImpacting
                                          ServiceImpacting-ResourceStatusInd,
No-Failure-ResourceStatusInd ::= SEQUENCE {
                                          Local-Cell-InformationList-ResourceStatusInd,
   local-Cell-InformationList
   local-Cell-Group-InformationList
                                          Local-Cell-Group-InformationList-ResourceStatusInd OPTIONAL.
   iE-Extensions
                                          ProtocolExtensionContainer { { No-FailureItem-ResourceStatusInd-ExtIEs} } OPTIONAL,
No-FailureItem-ResourceStatusInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
Local-Cell-InformationList-ResourceStatusInd ::= SEQUENCE(SIZE (1..maxLocalCellinNodeB)) OF ProtocolIE-Single-Container {{ Local-Cell-
InformationItemIE-ResourceStatusInd }}
Local-Cell-InformationItemIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE
mandatory }
Local-Cell-InformationItem-ResourceStatusInd ::= SEOUENCE {
   local-CellID
                                              Local-Cell-ID,
   addorDeleteIndicator
                                              AddorDeleteIndicator,
    dl-or-global-capacityCredit
                                             DL-or-Global-CapacityCredit
                                                                            OPTIONAL,
    -- This IE shall be present if AddorDeleteIndicator IE is set to "add"
    ul-capacityCredit
                                              UL-CapacityCredit
                                                                     OPTIONAL,
    commnonChannelsCapacityConsumptionLaw
                                              CommonChannelsCapacityConsumptionLaw
                                                                                    OPTIONAL,
    -- This IE shall be present if AddorDeleteIndicator IE is set to "add"
    dedicatedChannelsCapacityConsumptionLaw
                                              DedicatedChannelsCapacityConsumptionLaw
                                                                                        OPTIONAL,
    -- This IE shall be present if AddorDeleteIndicator IE is set to "add"
    maximumDL-PowerCapability
                                              MaximumDL-PowerCapability
                                                                            OPTIONAL,
    -- This IE shall be present if AddorDeleteIndicator IE is set to "add"
   minSpreadingFactor
                                             MinSpreadingFactor
                                                                                OPTIONAL,
    -- This IE shall be present if AddorDeleteIndicator IE is set to "add"
   minimumDL-PowerCapability
                                             MinimumDL-PowerCapability
                                                                            OPTIONAL,
    -- This IE shall be present if AddorDeleteIndicator IE is set to "add"
   local-Cell-Group-ID
                                             Local-Cell-ID
                                                                            OPTIONAL,
   iE-Extensions
                                              ProtocolExtensionContainer { { Local-Cell-InformationItem-ResourceStatusInd-ExtIEs} }OPTIONAL,
Local-Cell-InformationItem-ResourceStatusInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    { ID id-FPACH-LCR-InformationList-ResourceStatusInd
                                                         CRITICALITY ignore
                                                                                EXTENSION
                                                                                           FPACH-LCR-InformationList-ResourceStatusInd
    PRESENCE optional } | -- for 1.28Mcps TDD only
```

```
ID id-DwPCH-LCR-Information-ResourceStatusInd CRITICALITY ignore
                                                                              DwPCH-LCR-Information-ResourceStatusInd PRESENCE optional
    } -- for 1.28Mcps TDD only
   { ID id-ReferenceClockAvailability
                                          CRITICALITY
                                                         ignore
                                                                       EXTENSION ReferenceClockAvailability
                                                                                                               PRESENCE optional }.
   -- This IE shall be present if AddorDeleteIndicator IE is set to "add" and the Local Cell is related to a TDD cell
Local-Cell-Group-InformationList-ResourceStatusInd ::= SEOUENCE(SIZE (1..maxLocalCellinNodeB)) OF ProtocolIE-Single-Container {{ Local-Cell-Group-
InformationItemIE-ResourceStatusInd }}
Local-Cell-Group-InformationItemIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
Local-Cell-Group-InformationItem-ResourceStatusInd::= SEQUENCE
   local-Cell-Group-ID
                                          Local-Cell-ID,
   dl-or-global-capacityCredit
                                          DL-or-Global-CapacityCredit,
   ul-capacityCredit
                                          UL-CapacityCredit
                                                                OPTIONAL,
   commnonChannelsCapacityConsumptionLaw
                                          CommonChannelsCapacityConsumptionLaw,
   dedicatedChannelsCapacityConsumptionLaw
                                          DedicatedChannelsCapacityConsumptionLaw,
   iE-Extensions
                                          ProtocolExtensionContainer { { Local-Cell-Group-InformationItem-ResourceStatusInd-ExtIEs} }
   OPTIONAL,
   . . .
Local-Cell-Group-InformationItem-ResourceStatusInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
ServiceImpacting-ResourceStatusInd ::= SEQUENCE
   local-Cell-InformationList
                                       Local-Cell-InformationList2-ResourceStatusInd OPTIONAL,
   local-Cell-Group-InformationList
                                       Local-Cell-Group-InformationList2-ResourceStatusInd OPTIONAL,
                                       CCP-InformationList-ResourceStatusInd
   cCP-InformationList
                                                                                  OPTIONAL,
   cell-InformationList
                                       Cell-InformationList-ResourceStatusInd
                                                                                  OPTIONAL,
   iE-Extensions
                                       ProtocolExtensionContainer { { ServiceImpactingItem-ResourceStatusInd-ExtIEs} }
                                                                                                                 OPTIONAL,
ServiceImpactingItem-ResourceStatusInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
Local-Cell-InformationList2-ResourceStatusInd ::= SEQUENCE(SIZE (1..maxLocalCellinNodeB)) OF ProtocolIE-Single-Container {{ Local-Cell-
InformationItemIE2-ResourceStatusInd }}
Local-Cell-InformationItemIE2-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   mandatory }
Local-Cell-InformationItem2-ResourceStatusInd ::= SEQUENCE {
   local-Cell-ID
                                       Local-Cell-ID,
   dl-or-global-capacityCredit
                                       DL-or-Global-CapacityCredit
                                                                    OPTIONAL,
```

```
ul-capacityCredit
                                          UL-CapacityCredit
                                                                         OPTIONAL,
    commnonChannelsCapacityConsumptionLaw
                                              CommonChannelsCapacityConsumptionLaw
                                                                                     OPTIONAL.
    dedicatedChannelsCapacityConsumptionLaw
                                              DedicatedChannelsCapacityConsumptionLaw OPTIONAL,
    maximum-DL-PowerCapability
                                          MaximumDL-PowerCapability
                                                                         OPTIONAL,
    minSpreadingFactor
                                          MinSpreadingFactor
                                                                         OPTIONAL.
   minimumDL-PowerCapability
                                          MinimumDL-PowerCapability
                                                                         OPTIONAL,
    iE-Extensions
                                          ProtocolExtensionContainer { { Local-Cell-InformationItem2-ResourceStatusInd-ExtIEs} }
                                                                                                                                OPTIONAL.
Local-Cell-InformationItem2-ResourceStatusInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
           id-ReferenceClockAvailability
                                              CRITICALITY
                                                                             EXTENSION ReferenceClockAvailability
                                                                                                                        PRESENCE optional },
    { ID
                                                              ignore
    . . .
Local-Cell-Group-InformationList2-ResourceStatusInd ::= SEOUENCE(SIZE (1..maxLocalCellinNodeB)) OF ProtocolIE-Single-Container {{ Local-Cell-Group-
InformationItemIE2-ResourceStatusInd }}
Local-Cell-Group-InformationItemIE2-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
    { ID id-Local-Cell-Group-InformationItem2-ResourceStatusInd CRITICALITY ignore
                                                                                     TYPE Local-Cell-Group-InformationItem2-ResourceStatusInd
    PRESENCE mandatory }
Local-Cell-Group-InformationItem2-ResourceStatusInd ::= SEQUENCE
   local-Cell-Group-ID
                                          Local-Cell-ID,
    dl-or-global-capacityCredit
                                          DL-or-Global-CapacityCredit
                                                                         OPTIONAL,
    ul-capacityCredit
                                          UL-CapacityCredit
                                                                         OPTIONAL,
    commnonChannelsCapacityConsumptionLaw
                                              CommonChannelsCapacityConsumptionLaw
                                                                                     OPTIONAL,
    dedicatedChannelsCapacityConsumptionLaw
                                              DedicatedChannelsCapacityConsumptionLaw OPTIONAL,
                                          ProtocolExtensionContainer { { Local-Cell-Group-InformationItem2-ResourceStatusInd-ExtIEs} }
    iE-Extensions
   OPTIONAL,
Local-Cell-Group-InformationItem2-ResourceStatusInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CCP-InformationList-ResourceStatusInd ::= SEOUENCE (SIZE (1..maxCCPinNodeB)) OF ProtocolIE-Single-Container {{ CCP-InformationItemIE-
ResourceStatusInd }}
CCP-InformationItemIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
    PRESENCE mandatory }
CCP-InformationItem-ResourceStatusInd ::= SEQUENCE {
    communicationControlPortID
                                          CommunicationControlPortID,
   resourceOperationalState
                                          ResourceOperationalState,
    availabilityStatus
                                          AvailabilityStatus,
   iE-Extensions
                                          ProtocolExtensionContainer { { CCP-InformationItem-ResourceStatusInd-ExtIEs} }
                                                                                                                           OPTIONAL,
CCP-InformationItem-ResourceStatusInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::=
```

```
Cell-InformationList-ResourceStatusInd ::= SEQUENCE (SIZE (1..maxCellinNodeB)) OF ProtocolIE-Single-Container {{ Cell-InformationItemIE-
ResourceStatusInd }}
Cell-InformationItemIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   Cell-InformationItem-ResourceStatusInd ::= SEQUENCE {
                                       ResourceOperationalState
   resourceOperationalState
                                                                                  OPTIONAL,
   availabilityStatus
                                       AvailabilityStatus
                                                                                  OPTIONAL,
   primary-SCH-Information
                                       P-SCH-Information-ResourceStatusInd
                                                                                  OPTIONAL, --FDD only
   secondary-SCH-Information
                                       S-SCH-Information-ResourceStatusInd
                                                                                  OPTIONAL, --FDD only
                                                                                  OPTIONAL, --FDD only
   primary-CPICH-Information
                                       P-CPICH-Information-ResourceStatusInd
                                                                                  OPTIONAL, --FDD only
   secondary-CPICH-Information
                                       S-CPICH-InformationList-ResourceStatusInd
   primary-CCPCH-Information
                                       P-CCPCH-Information-ResourceStatusInd
                                                                                  OPTIONAL,
   bCH-Information
                                       BCH-Information-ResourceStatusInd
                                                                                  OPTIONAL,
   secondary-CCPCH-InformationList
                                       S-CCPCH-InformationList-ResourceStatusInd
                                                                                  OPTIONAL,
   pCH-Information
                                       PCH-Information-ResourceStatusInd
                                                                                  OPTIONAL,
   pICH-Information
                                       PICH-Information-ResourceStatusInd
                                                                                  OPTIONAL,
   fACH-InformationList
                                       FACH-InformationList-ResourceStatusInd
                                                                                  OPTIONAL,
   pRACH-InformationList
                                       PRACH-InformationList-ResourceStatusInd
                                                                                  OPTIONAL,
   rACH-InformationList
                                       RACH-InformationList-ResourceStatusInd
                                                                                  OPTIONAL,
                                                                                  OPTIONAL, --FDD only
   aICH-InformationList
                                       AICH-InformationList-ResourceStatusInd
   pCPCH-InformationList
                                       PCPCH-InformationList-ResourceStatusInd
                                                                                  OPTIONAL, --FDD only
   cPCH-InformationList
                                       CPCH-InformationList-ResourceStatusInd
                                                                                  OPTIONAL, --FDD only
   aP-AICH-InformationList
                                       AP-AICH-InformationList-ResourceStatusInd
                                                                                  OPTIONAL, --FDD only
   cDCA-ICH-InformationList
                                       CDCA-ICH-InformationList-ResourceStatusInd
                                                                                  OPTIONAL, --FDD only
   sCH-Information
                                                                                  OPTIONAL, --3.84Mcps TDD only
                                       SCH-Information-ResourceStatusInd
                                       ProtocolExtensionContainer { { Cell-InformationItem-ResourceStatusInd-ExtIEs} } OPTIONAL,
   iE-Extensions
Cell-InformationItem-ResourceStatusInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
   . . .
P-SCH-Information-ResourceStatusInd ::= ProtocolIE-Single-Container {{ P-SCH-InformationIE-ResourceStatusInd }}
P-SCH-InformationIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
S-SCH-Information-ResourceStatusInd ::= ProtocolIE-Single-Container {{ S-SCH-InformationIE-ResourceStatusInd }}
S-SCH-InformationIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
P-CPICH-Information-ResourceStatusInd ::= ProtocolIE-Single-Container {{ P-CPICH-InformationIE-ResourceStatusInd }}
```

```
P-CPICH-InformationIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
S-CPICH-InformationList-ResourceStatusInd ::= SEOUENCE (SIZE (1..maxSCPICHCell)) OF ProtocolIE-Single-Container {{ S-CPICH-InformationItemIE-
ResourceStatusInd }}
S-CPICH-InformationItemIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   { ID id-S-CPICH-Information CRITICALITY ignore
                                      TYPE Common-PhysicalChannel-Status-Information
                                                                                    PRESENCE mandatory }
P-CCPCH-Information-ResourceStatusInd ::= ProtocolIE-Single-Container {{ P-CCPCH-InformationIE-ResourceStatusInd }}
P-CCPCH-InformationIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
BCH-Information-ResourceStatusInd ::= ProtocolIE-Single-Container {{ BCH-InformationIE-ResourceStatusInd }}
BCH-InformationIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
S-CCPCH-InformationList-ResourceStatusInd ::= SEOUENCE (SIZE (1..maxSCCPCHCell)) OF ProtocolIE-Single-Container {{ S-CCPCH-InformationItemIE-
ResourceStatusInd }}
S-CCPCH-InformationItemIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
PCH-Information-ResourceStatusInd ::= ProtocolIE-Single-Container {{ PCH-InformationIE-ResourceStatusInd }}
PCH-InformationIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
PICH-Information-ResourceStatusInd ::= ProtocolIE-Single-Container {{ PICH-InformationIE-ResourceStatusInd }}
PICH-InformationIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
FACH-InformationList-ResourceStatusInd ::= SEQUENCE (SIZE (1..maxFACHCell)) OF ProtocolIE-Single-Container {{ FACH-InformationItemIE-
ResourceStatusInd }}
FACH-InformationItemIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory
PRACH-InformationList-ResourceStatusInd ::= SEOUENCE (SIZE (1..maxPRACHCell)) OF ProtocolIE-Single-Container {{ PRACH-InformationItemIE-
ResourceStatusInd }}
PRACH-InformationItemIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
```

```
RACH-InformationList-ResourceStatusInd ::= SEQUENCE (SIZE (1..maxPRACHCell)) OF ProtocolIE-Single-Container {{ RACH-InformationItemIE-
ResourceStatusInd }}
RACH-InformationItemIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
AICH-InformationList-ResourceStatusInd ::= SEQUENCE (SIZE (1..maxPRACHCell)) OF ProtocolIE-Single-Container {{ AICH-InformationItemIE-
ResourceStatusInd }}
AICH-InformationItemIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
PCPCH-InformationList-ResourceStatusInd ::= SEOUENCE (SIZE (1..maxPCPCHCell)) OF ProtocolIE-Single-Container {{ PCPCH-InformationItemIE-
ResourceStatusInd }}
PCPCH-InformationItemIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE optional }
CPCH-InformationList-ResourceStatusInd ::= SEOUENCE (SIZE (1..maxCPCHCell)) OF ProtocolIE-Single-Container {{ CPCH-InformationItemIE-
ResourceStatusInd }}
CPCH-InformationItemIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE optional }
AP-AICH-InformationList-ResourceStatusInd ::= SEOUENCE (SIZE (1..maxCPCHCell)) OF ProtocolIE-Single-Container {{ AP-AICH-InformationItemIE-
ResourceStatusInd }}
AP-AICH-InformationItemIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
  PRESENCE optional }
CDCA-ICH-InformationList-ResourceStatusInd ::= SEQUENCE (SIZE (1..maxCPCHCell)) OF ProtocolIE-Single-Container {{ CDCA-ICH-InformationItemIE-
ResourceStatusInd }}
CDCA-ICH-InformationItemIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE optional }
SCH-Information-ResourceStatusInd ::= ProtocolIE-Single-Container {{ SCH-InformationIE-ResourceStatusInd }}
SCH-InformationIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
FPACH-LCR-InformationList-ResourceStatusInd ::= SEQUENCE (SIZE (0..maxFPACHCell)) OF ProtocolIE-Single-Container {{ FPACH-LCR-InformationItemIE-
ResourceStatusInd }}
FPACH-LCR-InformationItemIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
```

```
{ ID id-FPACH-LCR-Information CRITICALITY ignore TYPE Common-PhysicalChannel-Status-Information
                                                                                                         PRESENCE mandatory }
DwPCH-LCR-Information-ResourceStatusInd ::= ProtocolIE-Single-Container {{ DwPCH-LCR-InformationIE-ResourceStatusInd }}
DwPCH-LCR-InformationIE-ResourceStatusInd NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
  ****************
  SYSTEM INFORMATION UPDATE REQUEST
  ····
SystemInformationUpdateRequest ::= SEQUENCE
                                              {{SystemInformationUpdateRequest-IEs}},
   protocolIEs
                        ProtocolIE-Container
                        ProtocolExtensionContainer {{SystemInformationUpdateRequest-Extensions}}
   protocolExtensions
                                                                                                         OPTIONAL,
   . . .
SystemInformationUpdateRequest-IES NBAP-PROTOCOL-IES ::= {
   { ID id-C-ID
                                                         CRITICALITY reject
                                                                              TYPE
                                                                                     C-ID
   PRESENCE mandatory } |
   { ID id-BCCH-ModificationTime
                                                        CRITICALITY reject
                                                                              TYPE
                                                                                     BCCH-ModificationTime
                                                                                                                   PRESENCE optional
          id-MIB-SB-SIB-InformationList-SystemInfoUpdateRqst
   { ID
                                                            CRITICALITY reject
                                                                                 TYPE
                                                                                                       MIB-SB-SIB-InformationList-
SystemInfoUpdateRqst
                        PRESENCE
                                   mandatory },
SystemInformationUpdateRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
MIB-SB-SIB-InformationList-SystemInfoUpdateRqst ::= SEQUENCE (SIZE (1..maxIB)) OF MIB-SB-SIB-InformationItem-SystemInfoUpdateRqst
MIB-SB-SIB-InformationItem-SystemInfoUpdateRgst ::= SEQUENCE {
   iB-Type
                                   IB-Type,
   iB-OC-ID
                                   IB-OC-ID,
   deletionIndicator
                                   DeletionIndicator-SystemInfoUpdate,
                                   ProtocolExtensionContainer { { MIB-SB-SIB-InformationItem-SystemInfoUpdateRqst-ExtIEs} }
   iE-Extensions
                                                                                                                      OPTIONAL,
MIB-SB-SIB-InformationItem-SystemInfoUpdateRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DeletionIndicator-SystemInfoUpdate ::= CHOICE {
   no-Deletion
                                   No-Deletion-SystemInfoUpdate,
   yes-Deletion
                                   NULL
```

```
No-Deletion-SystemInfoUpdate ::= SEOUENCE {
   sIB-Originator
                                       SIB-Originator
                                                                 OPTIONAL.
   -- This IE shall be present if the IB-Type IE is set to "SIB"
   iB-SG-REP
                                       IB-SG-REP
                                                                 OPTIONAL.
                                       SegmentInformationList-SystemInfoUpdate,
   segmentInformationList
   iE-Extensions
                                       ProtocolExtensionContainer { { No-DeletionItem-SystemInfoUpdate-ExtIEs} } 
                                                                                                             OPTIONAL.
No-DeletionItem-SystemInfoUpdate-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
SegmentInformationList-SystemInfoUpdate ::= ProtocolIE-Single-Container {{ SegmentInformationListIEs-SystemInfoUpdate }}
SegmentInformationListIEs-SystemInfoUpdate NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory
SegmentInformationListIE-SystemInfoUpdate ::= SEQUENCE (SIZE (1..maxIBSEG)) OF SegmentInformationItem-SystemInfoUpdate
SegmentInformationItem-SystemInfoUpdate ::= SEQUENCE {
   iB-SG-POS
                                       IB-SG-POS
                                                         OPTIONAL.
   segment-Type
                                       Segment-Type
                                                         OPTIONAL,
   -- This IE shall be present if the SIB Originator IE is set to "CRNC" or the IB-Type IE is set to "MIB", "SB1" or "SB2"
                                       IB-SG-DATA
                                                         OPTIONAL,
   -- This IE shall be present if the SIB Originator IE is set to "CRNC" or the IB-Type IE is set to "MIB", "SB1" or "SB2"
   iE-Extensions
                                       ProtocolExtensionContainer { { SegmentInformationItem-SystemInfoUpdate-ExtIEs} } OPTIONAL,
SegmentInformationItem-SystemInfoUpdate-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    -- SYSTEM INFORMATION UPDATE RESPONSE
__ *********************
SystemInformationUpdateResponse ::= SEQUENCE {
                        ProtocolIE-Container
                                              {{SystemInformationUpdateResponse-IEs}},
   protocolIEs
                        ProtocolExtensionContainer {{SystemInformationUpdateResponse-Extensions}}
   protocolExtensions
                                                                                                          OPTIONAL,
SystemInformationUpdateResponse-IEs NBAP-PROTOCOL-IES ::= {
   { ID
          id-CriticalityDiagnostics
                                       CRITICALITY
                                                      ignore
                                                                    TYPE
                                                                           CriticalityDiagnostics
                                                                                                          PRESENCE optional }
SystemInformationUpdateResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
```

```
-- SYSTEM INFORMATION UPDATE FAILURE
  ******************
SystemInformationUpdateFailure ::= SEOUENCE
   protocolIEs
                       ProtocolIE-Container
                                            {{SystemInformationUpdateFailure-IEs}},
                       ProtocolExtensionContainer {{SystemInformationUpdateFailure-Extensions}}
   protocolExtensions
                                                                                                      OPTIONAL,
SystemInformationUpdateFailure-IEs NBAP-PROTOCOL-IES ::= {
         id-Cause
     ID
                                         CRITICALITY
                                                       ignore
                                                                            Cause
                                                                                                              PRESENCE mandatory
          id-CriticalityDiagnostics
   { ID
                                         CRITICALITY
                                                       ignore
                                                                            CriticalityDiagnostics
                                                                                                      PRESENCE optional },
SystemInformationUpdateFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  -- RADIO LINK SETUP REQUEST FDD
  ******************
RadioLinkSetupRequestFDD ::= SEQUENCE {
   protocolIEs
                       ProtocolIE-Container {{RadioLinkSetupRequestFDD-IEs}},
                       ProtocolExtensionContainer {{RadioLinkSetupRequestFDD-Extensions}}
   protocolExtensions
                                                                                                      OPTIONAL,
RadioLinkSetupRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
         id-CRNC-CommunicationContextID
                                                    CRITICALITY reject
                                                                               TYPE
                                                                                                    CRNC-CommunicationContextID
             PRESENCE mandatory }
   { ID
         id-UL-DPCH-Information-RL-SetupRqstFDD
                                                    CRITICALITY reject
                                                                               TYPE
                                                                                                    UL-DPCH-Information-RL-
SetupRqstFDD
                    PRESENCE mandatory } |
   { ID id-DL-DPCH-Information-RL-SetupRqstFDD
                                                   CRITICALITY reject
                                                                               TYPE
                                                                                                    DL-DPCH-Information-RL-
            PRESENCE mandatory } |
SetupRastFDD
     ID id-DCH-FDD-Information
                                     CRITICALITY reject
                                                                 TYPE
                                                                        DCH-FDD-Information
                                                                                                         PRESENCE mandatory } |
     ID id-DSCH-FDD-Information
                                     CRITICALITY reject
                                                                 TYPE
                                                                        DSCH-FDD-Information
                                                                                                      PRESENCE optional }
     ID id-TFCI2-Bearer-Information-RL-SetupRqstFDD
                                                    CRITICALITY ignore
                                                                               TYPE
                                                                                                    TFCI2-Bearer-Information-RL-
SetupRqstFDD PRESENCE optional }
   { ID id-RL-InformationList-RL-SetupRgstFDD
                                                    CRITICALITY notify
                                                                               TYPE
                                                                                                    RL-InformationList-RL-
SetupRastFDD
                    PRESENCE mandatory } |
  { ID id-Transmission-Gap-Pattern-Sequence-Information
                                                   CRITICALITY reject
                                                                               TYPE Transmission-Gap-Pattern-Sequence-Information
  PRESENCE optional } |
```

```
{ ID id-Active-Pattern-Sequence-Information
                                                        CRITICALITY reject
                                                                                         TYPE Active-Pattern-Sequence-Information PRESENCE
  optional },
    . . .
RadioLinkSetupRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
      ID id-DSCH-FDD-Common-Information
                                                        CRITICALITY ignore EXTENSION DSCH-FDD-Common-Information
                                                                                                                                    PRESENCE optional
UL-DPCH-Information-RL-SetupRgstFDD ::= SEQUENCE {
    ul-ScramblingCode
                                            UL-ScramblingCode,
   minUL-ChannelisationCodeLength
                                            MinUL-ChannelisationCodeLength,
    maxNrOfUL-DPDCHs
                                            MaxNrOfUL-DPDCHs
                                                                    OPTIONAL.
    -- This IE shall be present if Min UL Channelisation Code length IE is set to 4 --
    ul-PunctureLimit
                                            PunctureLimit,
    t.FCS
                                            TFCS,
    ul-DPCCH-SlotFormat
                                            UL-DPCCH-SlotFormat,
    ul-SIR-Target
                                            UL-SIR,
    diversityMode
                                            DiversityMode,
    sSDT-CellID-Length
                                            SSDT-CellID-Length
                                                                    OPTIONAL,
                                            S-FieldLength
    s-FieldLength
                                                                    OPTIONAL,
                                            ProtocolExtensionContainer { { UL-DPCH-Information-RL-SetupRgstFDD-ExtIEs} } OPTIONAL.
    iE-Extensions
UL-DPCH-Information-RL-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    {ID id-DPC-Mode
                            CRITICALITY reject EXTENSION DPC-Mode
                                                                        PRESENCE optional
    . . .
DL-DPCH-Information-RL-SetupRgstFDD ::= SEQUENCE {
    dl-DPCH-SlotFormat
                                            DL-DPCH-SlotFormat,
    tFCI-SignallingMode
                                            TFCI-SignallingMode,
    tFCI-Presence
                                            TFCI-Presence OPTIONAL,
    -- this IE shall be present if the DL DPCH slot format IE is set to any of the values from 12 to 16 --
    multiplexingPosition
                                            MultiplexingPosition,
    pDSCH-RL-ID
                                            RL-ID
                                                            OPTIONAL,
    -- This IE shall be present if the DSCH Information IE is present --
    pDSCH-CodeMapping
                                            PDSCH-CodeMapping
                                                                     OPTIONAL,
    -- This IE shall be present if the DSCH Information IE is present --
    powerOffsetInformation
                                            PowerOffsetInformation-RL-SetupRqstFDD,
    fdd-TPC-DownlinkStepSize
                                            FDD-TPC-DownlinkStepSize,
    limitedPowerIncrease
                                            LimitedPowerIncrease,
    innerLoopDLPCStatus
                                            InnerLoopDLPCStatus,
                                            ProtocolExtensionContainer { { DL-DPCH-Information-RL-SetupRqstFDD-ExtIEs} } OPTIONAL,
    iE-Extensions
    . . .
DL-DPCH-Information-RL-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
PowerOffsetInformation-RL-SetupRgstFDD ::= SEQUENCE {
   pO1-ForTFCI-Bits
                                          PowerOffset.
   pO2-ForTPC-Bits
                                          PowerOffset.
   pO3-ForPilotBits
                                          PowerOffset.
                                          ProtocolExtensionContainer { { PowerOffsetInformation-RL-SetupRqstFDD-ExtIEs} } OPTIONAL,
   iE-Extensions
PowerOffsetInformation-RL-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TFCI2-Bearer-Information-RL-SetupRgstFDD ::= SEOUENCE {
    t.oAWS
                                      ToAWS,
   t.oAWE
                                      TOAWE,
                                      ProtocolExtensionContainer { { TFCI2-Bearer-Information-RL-SetupRgstFDD-ExtIEs} }
   iE-Extensions
TFCI2-Bearer-Information-RL-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RL-InformationList-RL-SetupRqstFDD ::= SEQUENCE (SIZE (1..maxNrOfRLs)) OF
   ProtocolIE-Single-Container{{    RL-InformationItemIE-RL-SetupRqstFDD }}
RL-InformationItemIE-RL-SetupRgstFDD NBAP-PROTOCOL-IES ::= {
          id-RL-InformationItem-RL-SetupRgstFDD
                                                          CRITICALITY
                                                                         notify
                                                                                         TYPE
                                                                                                                RL-InformationItem-RL-
                              mandatory}
SetupRastFDD
                   PRESENCE
RL-InformationItem-RL-SetupRqstFDD ::= SEQUENCE {
   rI.-ID
                                      RL-ID,
   c-ID
                                      C-ID,
   firstRLS-indicator
                                      FirstRLS-Indicator,
   frameOffset
                                      FrameOffset,
    chipOffset
                                      ChipOffset,
                                      PropagationDelay
   propagationDelay
                                                                  OPTIONAL,
   diversityControlField
                                      DiversityControlField
                                                                  OPTIONAL,
    -- This IE shall be present if the RL is not the first one in the RL Information IE
   dl-CodeInformation
                                      FDD-DL-CodeInformation.
   initialDL-transmissionPower
                                      DL-Power,
   maximumDL-power
                                      DL-Power,
   minimumDL-power
                                      DL-Power,
   sSDT-Cell-Identity
                                      SSDT-Cell-Identity
                                                                  OPTIONAL,
    transmitDiversitvIndicator
                                      TransmitDiversitvIndicator
    -- This IE shall be present if Diversity Mode IE in UL DPCH Information group is not set to "none"
   iE-Extensions
                                      . . .
RL-InformationItem-RL-SetupRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    { ID id-SSDT-CellIDforEDSCHPC CRITICALITY ignore EXTENSION SSDT-Cell-Identity
                                                                                     PRESENCE conditional },
```

```
-- This IE shall be present if Enhanced DSCH PC IE is present in the DSCH Common Information IE.
  *****************
-- RADIO LINK SETUP REQUEST TDD
      RadioLinkSetupRequestTDD ::= SEQUENCE {
   protocolIEs
                         ProtocolIE-Container
                                                {{RadioLinkSetupRequestTDD-IEs}},
                         ProtocolExtensionContainer {{RadioLinkSetupRequestTDD-Extensions}}
   protocolExtensions
                                                                                                           OPTIONAL,
RadioLinkSetupRequestTDD-IES NBAP-PROTOCOL-IES ::= {
          id-CRNC-CommunicationContextID
                                                           CRITICALITY reject
                                                                                     TYPE
                                                                                                           CRNC-CommunicationContextID
                  PRESENCE mandatory } |
    { ID
          id-UL-CCTrCH-InformationList-RL-SetupRqstTDD
                                                           CRITICALITY notify
                                                                                     TYPE
                                                                                                           UL-CCTrCH-InformationList-RL-
SetupRqstTDD
                PRESENCE
                             optional }|
    { ID id-DL-CCTrCH-InformationList-RL-SetupRqstTDD
                                                           CRITICALITY notify
                                                                                     TYPE
                                                                                                           DL-CCTrCH-InformationList-RL-
SetupRqstTDD
                PRESENCE optional
     ID id-DCH-TDD-Information
                                            CRITICALITY reject
                                                                      TYPE
                                                                              DCH-TDD-Information
                                                                                                                   PRESENCE optional } |
                                                                                                                PRESENCE optional } |
     TD
          id-DSCH-TDD-Information
                                            CRITICALITY reject
                                                                      TYPE
                                                                             DSCH-TDD-Information
     ID id-USCH-Information
                                        CRITICALITY reject
                                                                  TYPE USCH-Information
                                                                                                                PRESENCE optional } |
                                                           CRITICALITY reject
                                                                                     TYPE
                                                                                                           RL-Information-RL-SetupRqstTDD
    ID
          id-RL-Information-RL-SetupRgstTDD
                  PRESENCE mandatory },
RadioLinkSetupRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
UL-CCTrCH-InformationList-RL-SetupRqstTDD ::= SEQUENCE (SIZE(1..maxNrOfCCTrCHs)) OF
   ProtocolIE-Single-Container { UL-CCTrCH-InformationItemIE-RL-SetupRqstTDD }}
UL-CCTrCH-InformationItemIE-RL-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
          id-UL-CCTrCH-InformationItem-RL-SetupRgstTDD
                                                           CRITICALITY
                                                                          notify
                                                                                         TYPE
                                                                                                           UL-CCTrCH-InformationItem-RL-
SetupRqstTDD
                  PRESENCE
                             mandatory}
UL-CCTrCH-InformationItem-RL-SetupRqstTDD ::= SEQUENCE {
   cCTrCH-ID
                                        CCTrCH-ID,
   tFCS
                                        TFCS,
   tFCI-Coding
                                        TFCI-Coding,
   punctureLimit
                                        PunctureLimit,
   uL-DPCH-Information
                                        UL-DPCH-Information-RL-SetupRqstTDD
                                                                             OPTIONAL, -- For 3.84Mcps TDD only
                                        ProtocolExtensionContainer { { UL-CCTrCH-InformationItem-RL-SetupRqstTDD-ExtIEs} }
   iE-Extensions
                                                                                                                         OPTIONAL,
UL-CCTrCH-InformationItem-RL-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
ID id-UL-DPCH-LCR-Information-RL-SetupRqstTDD CRITICALITY notify
                                                                            EXTENSION UL-DPCH-LCR-Information-RL-SetupRqstTDD PRESENCE optional
    } -- For 1.28Mcps TDD only
    { ID id-UL-SIRTarget
                                CRITICALITY reject
                                                                        UL-SIR
                                                                                    PRESENCE optional
    -- This IE shall be mandatory for 1.28Mcps TDD, not applicable for 3.84Mcps TDD.
UL-DPCH-Information-RL-SetupRqstTDD ::= ProtocolIE-Single-Container{{ UL-DPCH-InformationIE-RL-SetupRqstTDD }}
UL-DPCH-InformationIE-RL-SetupRgstTDD NBAP-PROTOCOL-IES ::= {
    { ID id-UL-DPCH-InformationList-RL-SetupRqstTDD
                                                        CRITICALITY notify TYPE UL-DPCH-InformationItem-RL-SetupRqstTDD
                                                                                                                            PRESENCE mandatory
UL-DPCH-InformationItem-RL-SetupRgstTDD ::= SEOUENCE {
    repetitionPeriod
                                            RepetitionPeriod,
    repetitionLength
                                            RepetitionLength,
    tdd-DPCHOffset
                                            TDD-DPCHOffset,
    uL-Timeslot-Information
                                            UL-Timeslot-Information,
    iE-Extensions
                                            ProtocolExtensionContainer { { UL-DPCH-InformationItem-RL-SetupRqstTDD-ExtIEs} }
UL-DPCH-InformationItem-RL-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    . . .
UL-DPCH-LCR-Information-RL-SetupRqstTDD ::= ProtocolIE-Single-Container{{ UL-DPCH-LCR-InformationIE-RL-SetupRqstTDD }}
UL-DPCH-LCR-InformationIE-RL-SetupRgstTDD NBAP-PROTOCOL-IES ::= {
    { ID id-UL-DPCH-LCR-InformationList-RL-SetupRqstTDD
                                                            CRITICALITY notify TYPE UL-DPCH-LCR-InformationItem-RL-SetupRgstTDD
                                                                                                                                      PRESENCE
optional }
UL-DPCH-LCR-InformationItem-RL-SetupRqstTDD ::= SEQUENCE
    repetitionPeriod
                                            RepetitionPeriod,
    repetitionLength
                                            RepetitionLength,
    tdd-DPCHOffset
                                            TDD-DPCHOffset,
    uL-TimeslotLCR-Information
                                            UL-TimeslotLCR-Information,
    iE-Extensions
                                            ProtocolExtensionContainer { { UL-DPCH-LCR-InformationItem-RL-SetupRqstTDD-ExtIEs} }
                                                                                                                                     OPTIONAL,
    . . .
UL-DPCH-LCR-InformationItem-RL-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-CCTrCH-InformationList-RL-SetupRgstTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF ProtocolIE-Single-Container {{ DL-CCTrCH-InformationItemIE-RL-
SetupRqstTDD }}
DL-CCTrCH-InformationItemIE-RL-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
          id-DL-CCTrCH-InformationItem-RL-SetupRgstTDD
                                                                    CRITICALITY
                                                                                    notify
                                                                                                                    TYPE DL-CCTrCH-InformationItem-
RL-SetupRgstTDD
                   PRESENCE
                               mandatory}
```

```
DL-CCTrCH-InformationItem-RL-SetupRqstTDD ::= SEQUENCE {
   cCTrCH-ID
                                          CCTrCH-ID.
   t.FCS
                                          TFCS.
   tFCI-Coding
                                          TFCI-Coding,
   punctureLimit
                                          PunctureLimit.
                                          TDD-TPC-DownlinkStepSize,
   tdd-TPC-DownlinkStepSize
   cCTrCH-TPCList
                                          CCTrCH-TPCList-RL-SetupRqstTDD
                                                                                 OPTIONAL.
                                          DL-DPCH-Information-RL-SetupRgstTDD
   dL-DPCH-Information
                                                                                OPTIONAL,
                                                                                           -- For 3.84Mcps TDD only
   iE-Extensions
                                          ProtocolExtensionContainer { { DL-CCTrCH-InformationItem-RL-SetupRqstTDD-ExtIEs} }
                                                                                                                             OPTIONAL,
DL-CCTrCH-InformationItem-RL-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ID id-DL-DPCH-LCR-Information-RL-SetupRgstTDD CRITICALITY notify
                                                                         EXTENSION DL-DPCH-LCR-Information-RL-SetupRgstTDD
                                                                                                                           PRESENCE optional
    }, -- For 1.28Mcps TDD only
CCTrCH-TPCList-RL-SetupRqstTDD ::= SEOUENCE (SIZE (1..maxNrOfCCTrCHs)) OF CCTrCH-TPCItem-RL-SetupRqstTDD
CCTrCH-TPCItem-RL-SetupRqstTDD ::= SEQUENCE {
   cCTrCH-ID
                                          iE-Extensions
                                                                                                                  OPTIONAL,
    . . .
CCTrCH-TPCItem-RL-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-DPCH-Information-RL-SetupRqstTDD ::= ProtocolIE-Single-Container{{ DL-DPCH-InformationIE-RL-SetupRqstTDD }}
DL-DPCH-InformationIE-RL-SetupRqstTDD NBAP-PROTOCOL-IES ::= {
                                                     CRITICALITY notify TYPE DL-DPCH-InformationItem-RL-SetupRqstTDD
    { ID id-DL-DPCH-InformationList-RL-SetupRqstTDD
                                                                                                                       PRESENCE mandatory }
DL-DPCH-InformationItem-RL-SetupRqstTDD ::= SEQUENCE {
                                          RepetitionPeriod,
   repetitionPeriod
                                          RepetitionLength,
   repetitionLength
   tdd-DPCHOffset
                                          TDD-DPCHOffset,
   dL-Timeslot-Information
                                      DL-Timeslot-Information,
                                          ProtocolExtensionContainer { { DL-DPCH-InformationItem-RL-SetupRgstTDD-ExtIEs} }
   iE-Extensions
DL-DPCH-InformationItem-RL-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-DPCH-LCR-Information-RL-SetupRgstTDD ::= ProtocolIE-Single-Container{{ DL-DPCH-LCR-InformationIE-RL-SetupRgstTDD }}
DL-DPCH-LCR-InformationIE-RL-SetupRgstTDD NBAP-PROTOCOL-IES ::= {
   { ID id-DL-DPCH-LCR-InformationList-RL-SetupRqstTDD
                                                         CRITICALITY notify TYPE DL-DPCH-LCR-InformationItem-RL-SetupRqstTDD
                                                                                                                                PRESENCE
mandatory }
```

```
DL-DPCH-LCR-InformationItem-RL-SetupRqstTDD ::= SEQUENCE
   repetitionPeriod
                                       RepetitionPeriod,
   repetitionLength
                                       RepetitionLength,
   tdd-DPCHOffset
                                       TDD-DPCHOffset,
   dL-TimeslotLCR-Information
                                       DL-TimeslotLCR-Information,
   tstdIndicator
                                       TSTD-Indicator,
   iE-Extensions
                                       ProtocolExtensionContainer { { DL-DPCH-LCR-InformationItem-RL-SetupRqstTDD-ExtIEs} }
                                                                                                                        OPTIONAL,
DL-DPCH-LCR-InformationItem-RL-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RL-Information-RL-SetupRgstTDD ::= SEQUENCE
                                       RL-ID,
   rL-ID
   c-ID
                                       C-ID,
   frameOffset
                                       FrameOffset,
   specialBurstScheduling
                                       SpecialBurstScheduling,
   initialDL-transmissionPower
                                       DL-Power,
   maximumDL-power
                                       DL-Power,
   minimumDL-power
                                       DL-Power,
   dL-TimeSlotISCPInfo
                                       DL-TimeslotISCPInfo OPTIONAL, -- For 3.84Mcps TDD only
   iE-Extensions
                                       ProtocolExtensionContainer { { RL-Information-RL-SetupRqstTDD-ExtIEs} }
   . . .
RL-Information-RL-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
   EXTENSION TimeslotISCP-LCR-InfoList-RL-SetupRqstTDD
                                                                                                                          PRESENCE
         }, -- For 1.28Mcps TDD only
optional
   . . .
TimeslotISCP-LCR-InfoList-RL-SetupRqstTDD ::= SEQUENCE {
   dL-TimeslotISCP-LCR-Info
                            DL-TimeslotISCPInfoLCR,
                            ProtocolExtensionContainer { {TimeslotISCP-LCR-InfoItem-RL-SetupRqstTDD-ExtIEs} }
   iE-Extensions
                                                                                                             OPTIONAL,
TimeslotISCP-LCR-InfoItem-RL-SetupRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  -- RADIO LINK SETUP RESPONSE FDD
  *****************
RadioLinkSetupResponseFDD ::= SEQUENCE {
   protocolIEs
                        ProtocolIE-Container
                                              {{RadioLinkSetupResponseFDD-IEs}},
                         ProtocolExtensionContainer {{RadioLinkSetupResponseFDD-Extensions}}
   protocolExtensions
                                                                                                           OPTIONAL,
```

```
RadioLinkSetupResponseFDD-IES NBAP-PROTOCOL-IES ::= {
           id-CRNC-CommunicationContextID
                                                                CRITICALITY ignore
                                                                                            TYPE
                                                                                                                    CRNC-CommunicationContextID
                    PRESENCE
                               mandatory } |
           id-NodeB-CommunicationContextID
                                                                CRITICALITY ignore
                                                                                            TYPE
                                                                                                                    NodeB-CommunicationContextID
                PRESENCE
                          mandatory }|
    { ID
           id-CommunicationControlPortID
                                                                CRITICALITY ignore
                                                                                            TYPE
                                                                                                                    CommunicationControlPortID
                           mandatory }|
                PRESENCE
    { ID
           id-RL-InformationResponseList-RL-SetupRspFDD
                                                                CRITICALITY ignore
                                                                                            TYPE
                                                                                                                    RL-InformationResponseList-RL-
                           mandatory }|
SetupRspFDD
                PRESENCE
           id-TFCI2-BearerInformationResponse CRITICALITY ignore
     ID
                                                                            TYPE
                                                                                    TFCI2-BearerInformationResponse PRESENCE optional }
           id-CriticalityDiagnostics
                                                                CRITICALITY ignore
                                                                                                                    CriticalityDiagnostics
                PRESENCE
                           optional
RadioLinkSetupResponseFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
RL-InformationResponseList-RL-SetupRspFDD ::= SEQUENCE (SIZE (1..maxNrOfRLs)) OF ProtocolIE-Single-Container (RL-InformationResponseItemIE-RL-
SetupRspFDD }}
RL-InformationResponseItemIE-RL-SetupRspFDD NBAP-PROTOCOL-IES ::= {
           id-RL-InformationResponseItem-RL-SetupRspFDD
                                                                    CRITICALITY
                                                                                                                    RL-InformationResponseItem-RL-
                                                                                    ignore
                                                                                                TYPE
SetupRspFDD
                PRESENCE
                           mandatory}
RL-InformationResponseItem-RL-SetupRspFDD ::= SEQUENCE {
    rI.-ID
                                                    RL-ID,
    rL-Set-ID
                                                    RL-Set-ID,
    received-total-wide-band-power
                                                                            Received-total-wide-band-power-Value,
    diversityIndication
                                   DiversityIndication-RL-SetupRspFDD,
    -- This IE represents both the Diversity Indication IE and the choice based on the diversity indication as described in
    -- the tabular message format in subclause 9.1.
    dSCH-InformationResponseList
                                                    DSCH-InformationResponseList-RL-SetupRspFDD
                                                                                                                    OPTIONAL,
    sSDT-SupportIndicator
                                                    SSDT-SupportIndicator,
    iE-Extensions
                                                    ProtocolExtensionContainer { { RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs} }
    OPTIONAL,
    . . .
RL-InformationResponseItem-RL-SetupRspFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DiversityIndication-RL-SetupRspFDD ::= CHOICE {
    combining
                                                Combining-RL-SetupRspFDD,
    nonCombiningOrFirstRL
                                                NonCombiningOrFirstRL-RL-SetupRspFDD
Combining-RL-SetupRspFDD ::= SEQUENCE {
```

```
rL-ID
                                           RL-ID,
   iE-Extensions
                                           ProtocolExtensionContainer { { Combining-RL-SetupRspFDD-ExtIEs} }
                                                                                                          OPTIONAL,
Combining-RL-SetupRspFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
NonCombiningOrFirstRL-RL-SetupRspFDD ::= SEQUENCE
   dCH-InformationResponse
                                           DCH-InformationResponse,
                                              ProtocolExtensionContainer { { NonCombiningOrFirstRLItem-RL-SetupRspFDD-ExtIEs} } OPTIONAL,
   iE-Extensions
NonCombiningOrFirstRLItem-RL-SetupRspFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DSCH-InformationResponseList-RL-SetupRspFDD ::= ProtocolIE-Single-Container {{ DSCH-InformationResponseListIEs-RL-SetupRspFDD }}
DSCH-InformationResponseListIEs-RL-SetupRspFDD NBAP-PROTOCOL-IES ::= {
    PRESENCE mandatory }
  *****************
-- RADIO LINK SETUP RESPONSE TDD
    RadioLinkSetupResponseTDD ::= SEQUENCE {
                        ProtocolIE-Container
                                              {{RadioLinkSetupResponseTDD-IEs}},
   protocolIEs
                        ProtocolExtensionContainer {{RadioLinkSetupResponseTDD-Extensions}}
   protocolExtensions
                                                                                                          OPTIONAL,
RadioLinkSetupResponseTDD-IEs NBAP-PROTOCOL-IES ::= {
          id-CRNC-CommunicationContextID
                                                         CRITICALITY
                                                                       ignore
                                                                                      TYPE
                                                                                                        CRNC-CommunicationContextID
                 PRESENCE mandatory } |
   { ID
          id-NodeB-CommunicationContextID
                                                         CRITICALITY
                                                                       ignore
                                                                                      TYPE
                                                                                                        NodeB-CommunicationContextID
              PRESENCE
                        mandatory }|
          id-CommunicationControlPortID
   { ID
                                                         CRITICALITY
                                                                       ignore
                                                                                      TYPE
                                                                                                        CommunicationControlPortID
              PRESENCE
                        mandatory }|
          id-RL-InformationResponse-RL-SetupRspTDD
   { ID
                                                         CRITICALITY
                                                                       ignore
                                                                                      TYPE
                                                                                                        RL-InformationResponse-RL-
                 PRESENCE optional } | -- Mandatory for 3.84Mcps TDD only
SetupRspTDD
          id-CriticalityDiagnostics
                                                         CRITICALITY
                                                                       ignore
                                                                                      TYPE
                                                                                                        CriticalityDiagnostics
              PRESENCE optional },
RadioLinkSetupResponseTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
         id-RL-InformationResponse-LCR-RL-SetupRspTDD
                                                             CRITICALITY
                                                                           ignore
                                                                                                        EXTENSION RL-
                                           PRESENCE
InformationResponse-LCR-RL-SetupRspTDD
                                                     optional
                                                                }, -- Mandatory for 1.28Mcps TDD only
```

```
RL-InformationResponse-RL-SetupRspTDD ::= SEQUENCE
                                            RL-ID.
   uL-TimeSlot-ISCP-Info
                                  UL-TimeSlot-ISCP-Info,
   ul-PhysCH-SF-Variation
                                            UL-PhysCH-SF-Variation,
   dCH-InformationResponseList
                                            DCH-InformationResponseList-RL-SetupRspTDD
                                                                                                     OPTIONAL,
   dSCH-InformationResponseList
                                            DSCH-InformationResponseList-RL-SetupRspTDD
                                                                                                     OPTIONAL,
   uSCH-InformationResponseList
                                            USCH-InformationResponseList-RL-SetupRspTDD
                                                                                                     OPTIONAL,
                                            ProtocolExtensionContainer { { RL-InformationResponseList-RL-SetupRspTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
   . . .
RL-InformationResponseList-RL-SetupRspTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DCH-InformationResponseListIEs-RL-SetupRspTDD NBAP-PROTOCOL-IES ::= {
   { ID id-DCH-InformationResponse CRITICALITY
                                            ignore
                                                      TYPE
                                                             DCH-InformationResponse PRESENCE
                                                                                                   mandatory }
DSCH-InformationResponseList-RL-SetupRspTDD ::= ProtocolIE-Single-Container {{ DSCH-InformationResponseListIEs-RL-SetupRspTDD }}
DSCH-InformationResponseListIEs-RL-SetupRspTDD NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
USCH-InformationResponseList-RL-SetupRspTDD ::= ProtocolIE-Single-Container {{ USCH-InformationResponseListIEs-RL-SetupRspTDD }}
USCH-InformationResponseListIEs-RL-SetupRspTDD NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
RL-InformationResponse-LCR-RL-SetupRspTDD ::= SEOUENCE {
   rL-ID
                                            RL-ID,
   uL-TimeSlot-ISCP-LCR-Info
                                            UL-TimeSlot-ISCP-LCR-Info,
   ul-PhysCH-SF-Variation
                                            UL-PhysCH-SF-Variation,
   dCH-InformationResponseList
                                            DCH-InformationResponseList-RL-SetupRspTDD
                                                                                                     OPTIONAL,
   dSCH-InformationResponseList
                                            DSCH-InformationResponseList-RL-SetupRspTDD
                                                                                                     OPTIONAL,
   uSCH-InformationResponseList
                                            USCH-InformationResponseList-RL-SetupRspTDD
                                                                                                     OPTIONAL,
                                            ProtocolExtensionContainer { RL-InformationResponseList-LCR-RL-SetupRspTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
   . . .
RL-InformationResponseList-LCR-RL-SetupRspTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ******************
```

```
-- RADIO LINK SETUP FAILURE FDD
  ******************
RadioLinkSetupFailureFDD ::= SEOUENCE {
   protocolIEs
                          ProtocolIE-Container
                                                 {{RadioLinkSetupFailureFDD-IEs}},
                          ProtocolExtensionContainer {{RadioLinkSetupFailureFDD-Extensions}}
   protocolExtensions
                                                                                                             OPTIONAL,
RadioLinkSetupFailureFDD-IEs NBAP-PROTOCOL-IES ::= {
          id-CRNC-CommunicationContextID
                                                                       CRITICALITY
                                                                                      ignore
                                                                                                                  TYPE CRNC-
CommunicationContextID
                                                    PRESENCE
                                                                mandatory }|
          id-NodeB-CommunicationContextID
   { ID
                                                                       CRITICALITY
                                                                                      ignore
                                                                                                                  TYPE NodeB-
CommunicationContextID
                                                 PRESENCE
                                                            conditional }
   -- This IE shall be present if at least one of the radio links has been successfully set up
          id-CommunicationControlPortID
                                                                       CRITICALITY
                                                                                                                  TYPE
                                                                                      ignore
   CommunicationControlPortID
                                                                       optional
          id-CauseLevel-RL-SetupFailureFDD
    { ID
                                                                       CRITICALITY
                                                                                      ignore
                                                                                                                  TYPE CauseLevel-RL-
SetupFailureFDD
                  PRESENCE mandatory
    { ID id-CriticalityDiagnostics
                                                                                                                  TYPE
                                                                       CRITICALITY
                                                                                      ignore
   CriticalityDiagnostics
                                                            PRESENCE
                                                                       optional
   . . .
RadioLinkSetupFailureFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CauseLevel-RL-SetupFailureFDD ::= CHOICE {
                      GeneralCauseList-RL-SetupFailureFDD,
   generalCause
   rLSpecificCause
                      RLSpecificCauseList-RL-SetupFailureFDD,
   . . .
GeneralCauseList-RL-SetupFailureFDD ::= SEQUENCE {
   cause
   iE-Extensions
                                             ProtocolExtensionContainer { GeneralCauseItem-RL-SetupFailureFDD-ExtIEs} }
                                                                                                                       OPTIONAL,
GeneralCauseItem-RL-SetupFailureFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RLSpecificCauseList-RL-SetupFailureFDD ::= SEQUENCE {
   unsuccessful-RL-InformationRespList-RL-SetupFailureFDD
                                                            Unsuccessful-RL-InformationRespList-RL-SetupFailureFDD,
   successful-RL-InformationRespList-RL-SetupFailureFDD
                                                            Successful-RL-InformationRespList-RL-SetupFailureFDD OPTIONAL,
                                             iE-Extensions
                                                                                                                          OPTIONAL,
RLSpecificCauseItem-RL-SetupFailureFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
Unsuccessful-RL-InformationRespList-RL-SetupFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfRLs)) OF ProtocolIE-Single-Container {{ Unsuccessful-RL-
InformationRespItemIE-RL-SetupFailureFDD }}
Unsuccessful-RL-InformationRespItemIE-RL-SetupFailureFDD NBAP-PROTOCOL-IES ::= {
           id-Unsuccessful-RL-InformationRespItem-RL-SetupFailureFDD
                                                                            CRITICALITY
                                                                                             ignore
                                                                                                                       TYPE Unsuccessful-RL-
InformationRespItem-RL-SetupFailureFDD
                                            PRESENCE
                                                        mandatory}
Unsuccessful-RL-InformationRespItem-RL-SetupFailureFDD ::= SEQUENCE {
                                                RL-ID,
    cause
                                                Cause,
    iE-Extensions
                                                ProtocolExtensionContainer { { Unsuccessful-RL-InformationRespItem-RL-SetupFailureFDD-ExtIEs} }
    OPTIONAL,
    . . .
Unsuccessful-RL-InformationRespItem-RL-SetupFailureFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
Successful-RL-InformationRespList-RL-SetupFailureFDD ::= SEOUENCE (SIZE (1.. maxNrOfRLs)) OF ProtocolIE-Single-Container {{ Successful-RL-
InformationRespItemIE-RL-SetupFailureFDD }}
Successful-RL-InformationRespItemIE-RL-SetupFailureFDD NBAP-PROTOCOL-IES ::= {
          id-Successful-RL-InformationRespItem-RL-SetupFailureFDD
                                                                            CRITICALITY
                                                                                             ignore
                                                                                                                       TYPE Successful-RL-
InformationRespItem-RL-SetupFailureFDD
                                            PRESENCE
                                                        mandatory}
Successful-RL-InformationRespItem-RL-SetupFailureFDD ::= SEQUENCE {
   rL-ID
                                                RL-ID,
   rL-Set-ID
                                                RL-Set-ID,
    received-total-wide-band-power
                                                                        Received-total-wide-band-power-Value,
    diversityIndication
                                                DiversityIndication-RL-SetupFailureFDD,
    -- This IE represents both the Diversity Indication IE and the choice based on the diversity indication as described in
    -- the tabular message format in subclause 9.1.
    dSCH-InformationResponseList
                                                DSCH-InformationRespList-RL-SetupFailureFDD
                                                                                                OPTIONAL,
    tFCI2-BearerInformationResponse
                                                TFCI2-BearerInformationResponse
                                                                                    OPTIONAL,
    sSDT-SupportIndicator
                                                SSDT-SupportIndicator,
                                                ProtocolExtensionContainer { { Successful-RL-InformationRespItem-RL-SetupFailureFDD-ExtIEs} }
    iE-Extensions
    OPTIONAL,
Successful-RL-InformationRespItem-RL-SetupFailureFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DiversityIndication-RL-SetupFailureFDD ::= CHOICE {
    combining
                                                Combining-RL-SetupFailureFDD,
    nonCombiningOrFirstRL
                                            NonCombiningOrFirstRL-RL-SetupFailureFDD
```

```
Combining-RL-SetupFailureFDD ::= SEQUENCE {
   rL-ID
                                            RL-ID.
   iE-Extensions
                                            ProtocolExtensionContainer { { CombiningItem-RL-SetupFailureFDD-ExtIEs} } }
                                                                                                                   OPTIONAL.
CombiningItem-RL-SetupFailureFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
NonCombiningOrFirstRL-RL-SetupFailureFDD ::= SEQUENCE
   dCH-InformationResponse
                                            DCH-InformationResponse,
   iE-Extensions
                                                ProtocolExtensionContainer { { NonCombiningOrFirstRLItem-RL-SetupFailureFDD-ExtIEs} }
   OPTIONAL,
NonCombiningOrFirstRLItem-RL-SetupFailureFDD-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
DSCH-InformationRespList-RL-SetupFailureFDD ::= ProtocolIE-Single-Container {{ DSCH-InformationRespListIEs-RL-SetupFailureFDD }}
DSCH-InformationRespListIEs-RL-SetupFailureFDD NBAP-PROTOCOL-IES ::= {
    ID id-DSCH-InformationResponse CRITICALITY ignore TYPE DSCH-InformationResponse
                                                                                         PRESENCE mandatory }
    -- RADIO LINK SETUP FAILURE TDD
  *****************
RadioLinkSetupFailureTDD ::= SEOUENCE {
   protocolIEs
                         ProtocolIE-Container
                                               {{RadioLinkSetupFailureTDD-IEs}},
   protocolExtensions
                         ProtocolExtensionContainer {{RadioLinkSetupFailureTDD-Extensions}}
                                                                                                              OPTIONAL,
RadioLinkSetupFailureTDD-IEs NBAP-PROTOCOL-IES ::= {
   { ID id-CRNC-CommunicationContextID
                                                                   CRITICALITY ignore
                                                                                         TYPE
                                                                                                           CRNC-CommunicationContextID
                         PRESENCE
                                    mandatory } |
   { ID id-CauseLevel-RL-SetupFailureTDD
                                                                      CRITICALITY
                                                                                     ignore
                                                                                                                TYPE CauseLevel-RL-
SetupFailureTDD PRESENCE mandatory
   { ID
          id-CriticalityDiagnostics
                                                                   CRITICALITY ignore
                                                                                         TYPE
                                                                                                           CriticalityDiagnostics
                      PRESENCE
                               optional },
RadioLinkSetupFailureTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
   . . .
```

```
CauseLevel-RL-SetupFailureTDD ::= CHOICE {
   generalCause
                      GeneralCauseList-RL-SetupFailureTDD,
   rLSpecificCause
                      RLSpecificCauseList-RL-SetupFailureTDD,
GeneralCauseList-RL-SetupFailureTDD ::= SEOUENCE {
   iE-Extensions
                              ProtocolExtensionContainer { { GeneralCauseItem-RL-SetupFailureTDD-ExtIEs} } 
                                                                                                                OPTIONAL,
GeneralCauseItem-RL-SetupFailureTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RLSpecificCauseList-RL-SetupFailureTDD ::= SEQUENCE {
   unsuccessful-RL-InformationRespItem-RL-SetupFailureTDD Unsuccessful-RL-InformationRespItem-RL-SetupFailureTDD,
                                                         ProtocolExtensionContainer { { RLSpecificCauseItem-RL-SetupFailureTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
    . . .
RLSpecificCauseItem-RL-SetupFailureTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
Unsuccessful-RL-InformationRespItem-RL-SetupFailureTDD ::= ProtocolIE-Single-Container { {Unsuccessful-RL-InformationRespItemIE-RL-SetupFailureTDD}
Unsuccessful-RL-InformationRespItemIE-RL-SetupFailureTDD NBAP-PROTOCOL-IES ::= {
          id-Unsuccessful-RL-InformationResp-RL-SetupFailureTDD
                                                                    CRITICALITY ignore
                                                                                           TYPE
                                                                                                              Unsuccessful-RL-InformationResp-
RL-SetupFailureTDD
                      PRESENCE
                                  mandatory }
Unsuccessful-RL-InformationResp-RL-SetupFailureTDD ::= SEQUENCE {
   rL-ID
    cause
                                             Cause,
                                             ProtocolExtensionContainer { { Unsuccessful-RL-InformationResp-RL-SetupFailureTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
Unsuccessful-RL-InformationResp-RL-SetupFailureTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
   ******************
-- RADIO LINK ADDITION REQUEST FDD
  *****************
RadioLinkAdditionRequestFDD ::= SEQUENCE {
```

```
protocolIEs
                           ProtocolIE-Container
                                                  {{RadioLinkAdditionRequestFDD-IEs}},
   protocolExtensions
                           ProtocolExtensionContainer {{RadioLinkAdditionRequestFDD-Extensions}}
                                                                                                                    OPTIONAL,
RadioLinkAdditionRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
         id-NodeB-CommunicationContextID
                                                         CRITICALITY reject
                                                                                    TYPE
                                                                                            NodeB-CommunicationContextID
                                                                                                                                   PRESENCE
   mandatory } |
    { ID id-Compressed-Mode-Deactivation-Flag
                                                  CRITICALITY reject
                                                                                 TYPE Compressed-Mode-Deactivation-Flag PRESENCE optional }
    { ID id-RL-InformationList-RL-AdditionRqstFDD
                                                             CRITICALITY notify
                                                                                                               RL-InformationList-RL-
                      PRESENCE
                                  mandatory
AdditionRqstFDD
    . . .
RadioLinkAdditionRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
RL-InformationList-RL-AdditionRgstFDD ::= SEQUENCE (SIZE (1..maxNrOfRLs-1)) OF ProtocolIE-Single-Container {{ RL-InformationItemIE-RL-
AdditionRqstFDD}}
RL-InformationItemIE-RL-AdditionRqstFDD NBAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationItem-RL-AdditionRqstFDD
                                                             CRITICALITY
                                                                             notify
                                                                                            TYPE
                                                                                                               RL-InformationItem-RL-
AdditionRgstFDD
                       PRESENCE
                                  mandatory}
RL-InformationItem-RL-AdditionRgstFDD ::= SEOUENCE
   rL-ID
                                              RL-ID,
   c-ID
                                              C-ID,
   frameOffset
                                              FrameOffset,
    chipOffset
                                              ChipOffset,
   diversityControlField
                                              DiversityControlField,
   dl-CodeInformation
                                          FDD-DL-CodeInformation,
   initialDL-TransmissionPower
                                              DL-Power
                                                                             OPTIONAL,
   maximumDL-Power
                                              DL-Power
                                                                             OPTIONAL,
   minimumDL-Power
                                              DL-Power
                                                                             OPTIONAL,
    sSDT-CellIdentity
                                              SSDT-Cell-Identity
                                                                             OPTIONAL,
    transmitDiversityIndicator
                                              TransmitDiversityIndicator
                                                                             OPTIONAL,
   iE-Extensions
                                              ProtocolExtensionContainer { RL-InformationItem-RL-AdditionRqstFDD-ExtIEs} }
                                                                                                                             OPTIONAL,
    . . .
RL-InformationItem-RL-AdditionRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    *****************
-- RADIO LINK ADDITION REQUEST TDD
      *********************
RadioLinkAdditionRequestTDD ::= SEQUENCE {
                                                  {{RadioLinkAdditionRequestTDD-IEs}},
   protocolIEs
                          ProtocolIE-Container
```

```
ProtocolExtensionContainer {{RadioLinkAdditionRequestTDD-Extensions}}
    protocolExtensions
                                                                                                                     OPTIONAL,
RadioLinkAdditionRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
           id-NodeB-CommunicationContextID
                                                                   CRITICALITY
                                                                                                                   TYPE NodeB-
                                                                                   reject
CommunicationContextID
                                           PRESENCE
                                                       mandatory
    { ID
           id-UL-CCTrCH-InformationList-RL-AdditionRqstTDD
                                                                                                                   TYPE UL-CCTrCH-InformationList-
                                                                   CRITICALITY
                                                                                   reject
RL-AdditionRqstTDD
                           PRESENCE
                                       optional
    { ID id-DL-CCTrCH-InformationList-RL-AdditionRgstTDD
                                                                   CRITICALITY
                                                                                   reiect
                                                                                                                   TYPE DL-CCTrCH-InformationList-
                    PRESENCE
RL-AdditionRqstTDD
                                      optional
           id-RL-Information-RL-AdditionRqstTDD
                                                                   CRITICALITY
                                                                                   reiect
                                                                                                                   TYPE RL-Information-RL-
                               PRESENCE
AdditionRgstTDD
                                           mandatory },
    . . .
RadioLinkAdditionRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
UL-CCTrCH-InformationList-RL-AdditionRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCH-InformationItem-RL-AdditionRqstTDD
UL-CCTrCH-InformationItem-RL-AdditionRgstTDD ::= SEQUENCE {
    cCTrCH-ID
                                               CCTrCH-ID,
    uL-DPCH-Information
                                               UL-DPCH-InformationList-RL-AdditionRqstTDD
                                                                                               OPTIONAL,
    iE-Extensions
                                               ProtocolExtensionContainer { { UL-CCTrCH-InformationItem-RL-AdditionRqstTDD-ExtIEs} } OPTIONAL,
UL-CCTrCH-InformationItem-RL-AdditionRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    { ID
           id-UL-DPCH-InformationItem-LCR-RL-AdditionRqstTDD
                                                                       CRITICALITY
                                                                                       notify
                                                                                                                      EXTENSION UL-DPCH-
InformationItem-LCR-RL-AdditionRqstTDD
                                               PRESENCE
                                                           optional }, -- For 1.28cps TDD only
UL-DPCH-InformationList-RL-AdditionRqstTDD ::= ProtocolIE-Single-Container {{ UL-DPCH-InformationItemIE-RL-AdditionRqstTDD }}
UL-DPCH-InformationItemIE-RL-AdditionRgstTDD NBAP-PROTOCOL-IES ::= {
          id-UL-DPCH-InformationItem-RL-AdditionRgstTDD
                                                                                   notify
                                                                                                                   TYPE UL-DPCH-InformationItem-
                                                                   CRITICALITY
RL-AdditionRgstTDD
                           PRESENCE
                                       optional -- For 3.84Mcps TDD only
UL-DPCH-InformationItem-RL-AdditionRqstTDD ::= SEQUENCE {
    repetitionPeriod
                                           RepetitionPeriod,
    repetitionLength
                                           RepetitionLength,
    tdd-DPCHOffset
                                           TDD-DPCHOffset,
    uL-Timeslot-Information
                                       UL-Timeslot-Information,
    iE-Extensions
                                               ProtocolExtensionContainer { { UL-DPCH-InformationItem-RL-AdditionRqstTDD-ExtIEs} }
                                                                                                                                       OPTIONAL,
    . . .
UL-DPCH-InformationItem-RL-AdditionRgstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
DL-CCTrCH-InformationList-RL-AdditionRgstTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCH-InformationItem-RL-AdditionRgstTDD
DL-CCTrCH-InformationItem-RL-AdditionRqstTDD ::= SEQUENCE
   cCTrCH-ID
                                              CCTrCH-ID.
   dL-DPCH-Information
                                              DL-DPCH-InformationList-RL-AdditionRqstTDD
                                                                                             OPTIONAL.
   iE-Extensions
                                              ProtocolExtensionContainer { { DL-CCTrCH-InformationItem-RL-AdditionRgstTDD-ExtIEs} }
DL-CCTrCH-InformationItem-RL-AdditionRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
           id-DL-DPCH-InformationItem-LCR-RL-AdditionRqstTDD
                                                                                     notify
                                                                                                                   EXTENSION DL-DPCH-
                                              PRESENCE
                                                         optional }, -- For 1.28Mcps TDD only
InformationItem-LCR-RL-AdditionRgstTDD
   . . .
DL-DPCH-InformationList-RL-AdditionRgstTDD ::= ProtocolIE-Single-Container {{ DL-DPCH-InformationItemIE-RL-AdditionRgstTDD }}
DL-DPCH-InformationItemIE-RL-AdditionRqstTDD NBAP-PROTOCOL-IES ::= {
          id-DL-DPCH-InformationItem-RL-AdditionRqstTDD
                                                                  CRITICALITY
                                                                                 notify
                                                                                                                TYPE DL-DPCH-InformationItem-
RL-AdditionRgstTDD
                           PRESENCE
                                      mandatory } -- For 3.84Mcps TDD only
DL-DPCH-InformationItem-RL-AdditionRgstTDD ::= SEOUENCE {
   repetitionPeriod
                                          RepetitionPeriod,
   repetitionLength
                                          RepetitionLength,
   tdd-DPCHOffset
                                          TDD-DPCHOffset,
   dL-Timeslot-Information
                                      DL-Timeslot-Information,
                                              ProtocolExtensionContainer { { DL-DPCH-InformationItem-RL-AdditionRqstTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
    . . .
DL-DPCH-InformationItem-RL-AdditionRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RL-Information-RL-AdditionRgstTDD ::= SEQUENCE
   rL-ID
                                              RL-ID,
   c-ID
                                              C-ID,
    frameOffset
                                              FrameOffset,
   diversityControlField
                                              DiversityControlField,
    initial-DL-Transmission-Power
                                              DL-Power
                                                                  OPTIONAL,
   maximumDL-Power
                                              DL-Power
                                                                  OPTIONAL,
   minimumDL-Power
                                              DL-Power
                                                                  OPTIONAL,
   dL-TimeSlotISCPInfo
                                              DL-TimeslotISCPInfo OPTIONAL,
                                                                             -- For 3.84Mcps TDD only
   iE-Extensions
                                              OPTIONAL,
RL-information-RL-AdditionRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
          id-TimeslotISCP-InformationList-LCR-RL-AdditionRqstTDD
                                                                         CRITICALITY
                                                                                         notify
                                                                                                                      EXTENSION TIMESLOTISCP-
InformationList-LCR-RL-AdditionRqstTDD
                                              PRESENCE
                                                          optional }, -- For 1.28Mcps TDD only
```

```
UL-DPCH-InformationItem-LCR-RL-AdditionRqstTDD ::= SEQUENCE {
   repetitionPeriod
                                         RepetitionPeriod,
   repetitionLength
                                         RepetitionLength,
   tdd-DPCHOffset
                                         TDD-DPCHOffset,
   uL-TimeslotLCR-Information
                                         UL-TimeslotLCR-Information,
   iE-Extensions
                                         ProtocolExtensionContainer { { UL-DPCH-InformationItem-LCR-RL-AdditionRqstTDD-ExtIEs} }
                                                                                                                                  OPTIONAL,
UL-DPCH-InformationItem-LCR-RL-AdditionRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-DPCH-InformationItem-LCR-RL-AdditionRqstTDD ::= SEQUENCE {
   repetitionPeriod
                                         RepetitionPeriod,
   repetitionLength
                                         RepetitionLength,
   tdd-DPCHOffset
                                         TDD-DPCHOffset,
   dL-TimeslotLCR-Information
                                         DL-TimeslotLCR-Information,
   iE-Extensions
                                         ProtocolExtensionContainer { { DL-DPCH-InformationItem-LCR-RL-AdditionRqstTDD-ExtIEs} }
                                                                                                                                  OPTIONAL,
DL-DPCH-InformationItem-LCR-RL-AdditionRqstTDD-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
TIMESLOTISCP-InformationList-LCR-RL-AdditionRqstTDD ::= SEQUENCE
                              DL-TimeslotISCPInfoLCR,
   dL-TimeslotISCP-LCR-Info
                              ProtocolExtensionContainer { {TimeslotISCPInfoList-LCR-RL-AdditionRqstTDD-ExtIEs} }
   iE-Extensions
                                                                                                                   OPTIONAL,
TimeslotISCPInfoList-LCR-RL-AdditionRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
      ****************
-- RADIO LINK ADDITION RESPONSE FDD
  ******************
RadioLinkAdditionResponseFDD ::= SEOUENCE {
   protocolIEs
                          ProtocolIE-Container
                                                 {{RadioLinkAdditionResponseFDD-IEs}},
                          ProtocolExtensionContainer {{RadioLinkAdditionResponseFDD-Extensions}}
   protocolExtensions
                                                                                                                   OPTIONAL.
RadioLinkAdditionResponseFDD-IES NBAP-PROTOCOL-IES ::= {
    { ID
         id-CRNC-CommunicationContextID
                                                                 CRITICALITY
                                                                                ignore
                                                                                                                 TYPE CRNC-
CommunicationContextID
                                         PRESENCE
                                                     mandatory
```

```
id-RL-InformationResponseList-RL-AdditionRspFDD
                                                                    CRITICALITY
                                                                                                                       TYPE RL-
                                                                                     ignore
InformationResponseList-RL-AdditionRspFDD PRESENCE
                                                        mandatory
    { ID
           id-CriticalityDiagnostics
                                                                    CRITICALITY
                                                                                     ignore
                                                                                                                       TYPE CriticalityDiagnostics
                            PRESENCE
                                        optional
RadioLinkAdditionResponseFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
RL-InformationResponseList-RL-AdditionRspFDD ::= SEQUENCE (SIZE (1..maxNrOfRLs-1)) OF ProtocolIE-Single-Container {{ RL-InformationResponseItemIE-
RL-AdditionRspFDD }}
RL-InformationResponseItemIE-RL-AdditionRspFDD NBAP-PROTOCOL-IES ::= {
          id-RL-InformationResponseItem-RL-AdditionRspFDD
                                                                    CRITICALITY
                                                                                     ignore
                                                                                                                     TYPE RL-
InformationResponseItem-RL-AdditionRspFDD
                                                PRESENCE
                                                            mandatory}
RL-InformationResponseItem-RL-AdditionRspFDD ::= SEQUENCE {
    rI.-ID
                                                    RL-ID,
   rL-Set-ID
                                                    RL-Set-ID,
   received-total-wide-band-power
                                                                            Received-total-wide-band-power-Value,
    diversityIndication
                                                    DiversityIndication-RL-AdditionRspFDD.
    -- This IE represents both the Diversity Indication IE and the choice based on the diversity indication as described in
    -- the tabular message format in subclause 9.1.
    sSDT-SupportIndicator
                                                    SSDT-SupportIndicator,
    iE-Extensions
                                                    ProtocolExtensionContainer { { RL-InformationResponseItem-RL-AdditionRspFDD-ExtIEs} }
    OPTIONAL,
RL-InformationResponseItem-RL-AdditionRspFDD-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
DiversityIndication-RL-AdditionRspFDD ::= CHOICE {
    combining
                                                    Combining-RL-AdditionRspFDD,
    non-combining
                                                    Non-Combining-RL-AdditionRspFDD
Combining-RL-AdditionRspFDD ::= SEQUENCE {
    rL-ID
                                                    RL-ID,
                                                    ProtocolExtensionContainer { { CombiningItem-RL-AdditionRspFDD-ExtIEs} }
    iE-Extensions
                                                                                                                                OPTIONAL,
    . . .
CombiningItem-RL-AdditionRspFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
Non-Combining-RL-AdditionRspFDD ::= SEQUENCE {
    dCH-InformationResponse
                                                DCH-InformationResponse,
    iE-Extensions
                                                    ProtocolExtensionContainer { { Non-CombiningItem-RL-AdditionRspFDD-ExtIEs} } 
                                                                                                                                      OPTIONAL,
```

```
Non-CombiningItem-RL-AdditionRspFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    *****************
-- RADIO LINK ADDITION RESPONSE TDD
  *****************
RadioLinkAdditionResponseTDD ::= SEOUENCE {
   protocolIEs
                                              {{RadioLinkAdditionResponseTDD-IEs}},
                        ProtocolIE-Container
   protocolExtensions
                         ProtocolExtensionContainer {{RadioLinkAdditionResponseTDD-Extensions}}
                                                                                                           OPTIONAL,
RadioLinkAdditionResponseTDD-IES NBAP-PROTOCOL-IES ::= {
   { ID id-CRNC-CommunicationContextID
                                                         CRITICALITY ignore
                                                                                   TYPE
                                                                                                        CRNC-CommunicationContextID
                 PRESENCE mandatory } |
   { ID id-RL-InformationResponse-RL-AdditionRspTDD
                                                         CRITICALITY ignore
                                                                                   TYPE
                                                                                                        RL-InformationResponse-RL-
AdditionRspTDD
                 PRESENCE
                            optional } -- Mandatory for 3.84Mcps TDD only
   { ID
         id-CriticalityDiagnostics
                                                         CRITICALITY ignore
                                                                                   TYPE
                                                                                                        CriticalityDiagnostics
              PRESENCE optional
RadioLinkAdditionResponseTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
   { ID id-RL-InformationResponse-LCR-RL-AdditionRspTDD
                                                         CRITICALITY ignore
                                                                                   EXTENSION
                                                                                                        RL-InformationResponse-LCR-RL-
AdditionRspTDD PRESENCE optional }, --Mandatory for 1.28Mcps TDD only
   . . .
RL-InformationResponse-RL-AdditionRspTDD ::= SEQUENCE {
   uL-TimeSlot-ISCP-Info
                                           UL-TimeSlot-ISCP-Info,
   ul-PhysCH-SF-Variation
                                           UL-PhysCH-SF-Variation,
   dCH-Information
                                           DCH-Information-RL-AdditionRspTDD
                                                                                      OPTIONAL,
   dSCH-InformationResponseList
                                           DSCH-InformationResponseList-RL-AdditionRspTDD
                                                                                                        OPTIONAL,
   uSCH-InformationResponseList
                                           USCH-InformationResponseList-RL-AdditionRspTDD
                                                                                                        OPTIONAL,
                                           iE-Extensions
                                                                                                                        OPTIONAL,
RL-InformationResponse-RL-AdditionRspTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DCH-Information-RL-AdditionRspTDD ::= SEQUENCE {
   diversityIndication
                                   DiversityIndication-RL-AdditionRspTDD,
   -- This IE represents both the Diversity Indication IE and the choice based on the diversity indication as described in
   -- the tabular message format in subclause 9.1.
```

. . .

```
ProtocolExtensionContainer { { DCH-Information-RL-AdditionRspTDD-ExtIEs} } OPTIONAL,
   iE-Extensions
DCH-Information-RL-AdditionRspTDD-ExtlEs NBAP-PROTOCOL-EXTENSION ::= {
DiversityIndication-RL-AdditionRspTDD ::= CHOICE {
   combining
                                            Combining-RL-AdditionRspTDD,
   non-Combining
                                            Non-Combining-RL-AdditionRspTDD
Combining-RL-AdditionRspTDD ::= SEOUENCE {
   rL-ID
                                            ProtocolExtensionContainer { { CombiningItem-RL-AdditionRspTDD-ExtIEs} }
   iE-Extensions
                                                                                                                   OPTIONAL,
   . . .
CombiningItem-RL-AdditionRspTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
Non-Combining-RL-AdditionRspTDD ::= SEOUENCE
   dCH-InformationResponse
                                        DCH-InformationResponse,
   iE-Extensions
                                            ProtocolExtensionContainer { { Non-CombiningItem-RL-AdditionRspTDD-ExtIEs} }
                                                                                                                        OPTIONAL.
   . . .
Non-CombiningItem-RL-AdditionRspTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
   . . .
DSCH-InformationResponseList-RL-AdditionRspTDD ::= ProtocolIE-Single-Container {{ DSCH-InformationResponseListIEs-RL-AdditionRspTDD }}
DSCH-InformationResponseListIEs-RL-AdditionRspTDD NBAP-PROTOCOL-IES ::= {
    PRESENCE mandatory }
USCH-InformationResponseList-RL-AdditionRspTDD ::= ProtocolIE-Single-Container {{ USCH-InformationResponseListIEs-RL-AdditionRspTDD }}
USCH-InformationResponseListIEs-RL-AdditionRspTDD NBAP-PROTOCOL-IES ::= {
    PRESENCE mandatory }
RL-InformationResponse-LCR-RL-AdditionRspTDD ::= SEQUENCE
                                            RL-ID,
   uL-TimeSlot-ISCP-InfoLCR
                                            UL-TimeSlot-ISCP-LCR-Info,
   ul-PhysCH-SF-Variation
                                            UL-PhysCH-SF-Variation,
   dCH-Information
                                            DCH-Information-RL-AdditionRspTDD
                                                                                        OPTIONAL,
   dSCH-InformationResponseList
                                            DSCH-InformationResponseList-RL-AdditionRspTDD
                                                                                                           OPTIONAL,
   uSCH-InformationResponseList
                                            USCH-InformationResponseList-RL-AdditionRspTDD
                                                                                                           OPTIONAL,
   iE-Extensions
                                            ProtocolExtensionContainer { { RL-InformationResponse-LCR-RL-AdditionRspTDD-ExtIEs} }
                                                                                                                             OPTIONAL,
```

```
RL-InformationResponse-LCR-RL-AdditionRspTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
-- RADIO LINK ADDITION FAILURE FDD
   RadioLinkAdditionFailureFDD ::= SEOUENCE {
   protocolIEs
                           ProtocolIE-Container
                                                  {{RadioLinkAdditionFailureFDD-IEs}},
   protocolExtensions
                           ProtocolExtensionContainer {{RadioLinkAdditionFailureFDD-Extensions}}
                                                                                                                   OPTIONAL,
RadioLinkAdditionFailureFDD-IEs NBAP-PROTOCOL-IES ::=
           id-CRNC-CommunicationContextID
                                                                                      CRNC-CommunicationContextID
                                                  CRITICALITY
                                                                  ignore
                                                                              TYPE
                                                                                                                         PRESENCE mandatory
     TD
           id-CauseLevel-RL-AdditionFailureFDD
                                                  CRITICALITY
                                                                  ignore
                                                                              TYPE
                                                                                      CauseLevel-RL-AdditionFailureFDD
                                                                                                                         PRESENCE mandatory
     ID
           id-CriticalityDiagnostics
                                                  CRITICALITY
                                                                              TYPE
                                                                                     CriticalityDiagnostics
                                                                                                                            PRESENCE optional
                                                                  ignore
RadioLinkAdditionFailureFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CauseLevel-RL-AdditionFailureFDD ::= CHOICE {
                       GeneralCauseList-RL-AdditionFailureFDD,
   generalCause
   rLSpecificCause
                       RLSpecificCauseList-RL-AdditionFailureFDD,
    . . .
GeneralCauseList-RL-AdditionFailureFDD ::= SEQUENCE {
    cause
                                              ProtocolExtensionContainer { { GeneralCauseItem-RL-AdditionFailureFDD-ExtIEs} }
   iE-Extensions
                                                                                                                                 OPTIONAL,
GeneralCauseItem-RL-AdditionFailureFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RLSpecificCauseList-RL-AdditionFailureFDD ::= SEQUENCE {
    unsuccessful-RL-InformationRespList-RL-AdditionFailureFDD
                                                                  Unsuccessful-RL-InformationRespList-RL-AdditionFailureFDD,
    successful-RL-InformationRespList-RL-AdditionFailureFDD
                                                                  Successful-RL-InformationRespList-RL-AdditionFailureFDD OPTIONAL,
                                              ProtocolExtensionContainer { { RLSpecificCauseItem-RL-AdditionFailureFDD-ExtIEs} }
   iE-Extensions
                                                                                                                                    OPTIONAL,
RLSpecificCauseItem-RL-AdditionFailureFDD-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
```

```
Unsuccessful-RL-InformationRespList-RL-AdditionFailureFDD ::= SEQUENCE (SIZE (1..maxNrOfRLs-1)) OF ProtocolIE-Single-Container {{ Unsuccessful-RL-
InformationRespItemIE-RL-AdditionFailureFDD }}
Unsuccessful-RL-InformationRespItemIE-RL-AdditionFailureFDD NBAP-PROTOCOL-IES ::= {
          id-Unsuccessful-RL-InformationRespItem-RL-AdditionFailureFDD
                                                                            CRITICALITY
                                                                                            ignore
                                                                                                                 TYPE Unsuccessful-RL-
InformationRespItem-RL-AdditionFailureFDD PRESENCE
Unsuccessful-RL-InformationRespItem-RL-AdditionFailureFDD ::= SEQUENCE {
                                              RL-ID,
   cause
                                              Cause,
   iE-Extensions
                                              OPTIONAL.
    . . .
Unsuccessful-RL-InformationRespItem-RL-AdditionFailureFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
Successful-RL-InformationRespList-RL-AdditionFailureFDD ::= SEOUENCE (SIZE (1..maxNrOfRLs-2)) OF ProtocolIE-Single-Container {{ Successful-RL-
InformationRespItemIE-RL-AdditionFailureFDD }}
Successful-RL-InformationRespItemIE-RL-AdditionFailureFDD NBAP-PROTOCOL-IES ::= {
          id-Successful-RL-InformationRespItem-RL-AdditionFailureFDD
                                                                        CRITICALITY
                                                                                        ignore
                                                                                                                 TYPE Successful-RL-
InformationRespItem-RL-AdditionFailureFDD
                                             PRESENCE
                                                         mandatory}
Successful-RL-InformationRespItem-RL-AdditionFailureFDD ::= SEQUENCE {
   rL-ID
                                              RL-ID,
   rL-Set-ID
                                             RL-Set-ID,
   received-total-wide-band-power
                                             Received-total-wide-band-power-Value,
   diversityIndication
                                             DiversityIndication-RL-AdditionFailureFDD,
    -- This IE represents both the Diversity Indication IE and the choice based on the diversity indication as described in
    -- the tabular message format in subclause 9.1.
    sSDT-SupportIndicator
                                             SSDT-SupportIndicator,
   iE-Extensions
                                             ProtocolExtensionContainer { { Successful-RL-InformationRespItem-RL-AdditionFailureFDD-ExtIEs} }
   OPTIONAL,
    . . .
Successful-RL-InformationRespItem-RL-AdditionFailureFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DiversityIndication-RL-AdditionFailureFDD ::= CHOICE {
   combining
                                  Combining-RL-AdditionFailureFDD,
   non-Combining
                                  Non-Combining-RL-AdditionFailureFDD
Combining-RL-AdditionFailureFDD ::= SEQUENCE {
```

```
rL-ID
                                            RL-ID,
   iE-Extensions
                                            ProtocolExtensionContainer { { CombiningItem-RL-AdditionFailureFDD-ExtIEs} } 
                                                                                                                         OPTIONAL,
CombiningItem-RL-AdditionFailureFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
Non-Combining-RL-AdditionFailureFDD ::= SEQUENCE
   dCH-InformationResponse
                                            DCH-InformationResponse,
                                                ProtocolExtensionContainer { { Non-CombiningItem-RL-AdditionFailureFDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
   . . .
Non-CombiningItem-RL-AdditionFailureFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
   -- RADIO LINK ADDITION FAILURE TDD
  ******************
RadioLinkAdditionFailureTDD ::= SEQUENCE {
   protocolIEs
                         ProtocolIE-Container
                                                {{RadioLinkAdditionFailureTDD-IEs}},
                         ProtocolExtensionContainer {{RadioLinkAdditionFailureTDD-Extensions}}
   protocolExtensions
                                                                                                              OPTIONAL,
RadioLinkAdditionFailureTDD-IEs NBAP-PROTOCOL-IES ::= {
                                                    CRITICALITY
    { ID id-CRNC-CommunicationContextID
                                                                   ignore
                                                                              TYPE
                                                                                     CRNC-CommunicationContextID
   PRESENCE mandatory } |
          id-CauseLevel-RL-AdditionFailureTDD
   { ID
                                                    CRITICALITY
                                                                   ignore
                                                                              TYPE
                                                                                     CauseLevel-RL-AdditionFailureTDD
    PRESENCE
              mandatory }
         id-CriticalityDiagnostics
                                                                                     CriticalityDiagnostics
    { ID
                                                    CRITICALITY
                                                                   ignore
                                                                              TYPE
              optional },
   PRESENCE
    . . .
RadioLinkAdditionFailureTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CauseLevel-RL-AdditionFailureTDD ::= CHOICE {
   generalCause
                     GeneralCauseList-RL-AdditionFailureTDD,
   rLSpecificCause
                      RLSpecificCauseList-RL-AdditionFailureTDD,
    . . .
GeneralCauseList-RL-AdditionFailureTDD ::= SEQUENCE {
   cause
```

```
ProtocolExtensionContainer { GeneralCauseItem-RL-AdditionFailureTDD-ExtIEs} }
   iE-Extensions
                                                                                                                OPTIONAL,
GeneralCauseItem-RL-AdditionFailureTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RLSpecificCauseList-RL-AdditionFailureTDD ::= SEQUENCE {
    unsuccessful-RL-InformationRespItem-RL-AdditionFailureTDD
                                                            Unsuccessful-RL-InformationRespItem-RL-AdditionFailureTDD,
                                                            ProtocolExtensionContainer { { RLSpecificCauseItem-RL-AdditionFailureTDD-ExtIEs} }
   iE-Extensions
       OPTIONAL,
    . . .
RLSpecificCauseItem-RL-AdditionFailureTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
Unsuccessful-RL-InformationRespItem-RL-AdditionFailureTDD := ProtocolIE-Single-Container { {Unsuccessful-RL-InformationRespItemIE-RL-
AdditionFailureTDD} }
Unsuccessful-RL-InformationRespItemIE-RL-AdditionFailureTDD NBAP-PROTOCOL-IES ::= {
    { ID id-Unsuccessful-RL-InformationResp-RL-AdditionFailureTDD CRITICALITY ignore TYPE Unsuccessful-RL-InformationResp-RL-AdditionFailureTDD
    PRESENCE mandatory }
Unsuccessful-RL-InformationResp-RL-AdditionFailureTDD ::= SEQUENCE {
   rL-ID
                                         RL-ID,
   cause
                                         Cause,
                                         ProtocolExtensionContainer { { Unsuccessful-RL-InformationResp-RL-AdditionFailureTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
    . . .
Unsuccessful-RL-InformationResp-RL-AdditionFailureTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    *****************
-- RADIO LINK RECONFIGURATION PREPARE FDD
  RadioLinkReconfigurationPrepareFDD ::= SEQUENCE {
   protocolIEs
                          ProtocolIE-Container
                                                 {{RadioLinkReconfigurationPrepareFDD-IEs}},
   protocolExtensions
                         ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareFDD-Extensions}}
                                                                                                                OPTIONAL,
RadioLinkReconfigurationPrepareFDD-IEs NBAP-PROTOCOL-IES ::= {
          id-NodeB-CommunicationContextID
                                                        CRITICALITY
                                                                                       TYPE
                                                                                                             NodeB-CommunicationContextID
                                                                       reject
                      mandatory } |
           PRESENCE
```

```
id-UL-DPCH-Information-RL-ReconfPrepFDD
                                                            CRITICALITY
                                                                            reject
                                                                                             TYPE
                                                                                                                     UL-DPCH-Information-RL-
ReconfPrepFDD
                    PRESENCE
                                optional
    { ID
           id-DL-DPCH-Information-RL-ReconfPrepFDD
                                                            CRITICALITY
                                                                            reject.
                                                                                             TYPE
                                                                                                                     DL-DPCH-Information-RL-
                   PRESENCE
ReconfPrepFDD
                               optional
           id-FDD-DCHs-to-Modify
                                                CRITICALITY
                                                                reject
                                                                                         FDD-DCHs-to-Modify
                                                                                                                             PRESENCE optional }
                                                                                        DCH-FDD-Information
                                                                                                                             PRESENCE optional }
     ID
           id-DCHs-to-Add-FDD
                                                CRITICALITY
                                                                reject
                                                                                 TYPE
            id-DCH-DeleteList-RL-ReconfPrepFDD
                                                            CRITICALITY
                                                                            reject
                                                                                             TYPE
                                                                                                                     DCH-DeleteList-RL-ReconfPrepFDD
     ID
                           optional } |
                PRESENCE
    { ID
            id-DSCH-ModifyList-RL-ReconfPrepFDD
                                                            CRITICALITY
                                                                            reject
                                                                                             TYPE
                                                                                                                     DSCH-ModifyList-RL-ReconfPrepFDD
                PRESENCE
                           optional } |
            id-DSCHs-to-Add-FDD
                                            CRITICALITY
                                                                            TYPE
                                                                                     DSCH-FDD-Information
                                                                                                                                PRESENCE optional }
    { ID
                                                            reject
            id-DSCH-DeleteList-RL-ReconfPrepFDD
                                                            CRITICALITY
                                                                                             TYPE
    { ID
                                                                            reject
                                                                                                                     DSCH-DeleteList-RL-ReconfPrepFDD
                PRESENCE
                           optional }
            id-TFCI2-BearerSpecificInformation-RL-ReconfPrepFDD
                                                                                                                     TFCI2-BearerSpecificInformation-
    { ID
                                                                     CRITICALITY
                                                                                     reject
                                                                                                 TYPE
RL-ReconfPrepFDD
    PRESENCE optional }
           id-RL-InformationList-RL-ReconfPrepFDD
    { ID
                                                            CRITICALITY
                                                                            reject
                                                                                             TYPE
                                                                                                                     RL-InformationList-RL-
                        PRESENCE
                                    optional
    { ID id-Transmission-Gap-Pattern-Sequence-Information
                                                            CRITICALITY
                                                                            reject
                                                                                             TYPE Transmission-Gap-Pattern-Sequence-Information
PRESENCE optional },
    . . .
RadioLinkReconfigurationPrepareFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
     ID id-DSCH-FDD-Common-Information
                                                        CRITICALITY ignore EXTENSION DSCH-FDD-Common-Information
                                                                                                                                    PRESENCE optional
UL-DPCH-Information-RL-ReconfPrepFDD ::= SEQUENCE
    ul-ScramblingCode
                                                                                         OPTIONAL,
                                                    UL-ScramblingCode
    ul-SIR-Target
                                                    UL-SIR
                                                                                         OPTIONAL,
    minUL-ChannelisationCodeLength
                                                    MinUL-ChannelisationCodeLength
                                                                                         OPTIONAL,
    maxNrOfUL-DPDCHs
                                                    MaxNrOfUL-DPDCHs
                                                                                         OPTIONAL,
    -- This IE shall be present if minUL-ChannelisationCodeLength Ie is set to 4
    ul-PunctureLimit
                                                    PunctureLimit
                                                                                         OPTIONAL,
    t.FCS
                                                    TFCS
                                                                OPTIONAL,
    ul-DPCCH-SlotFormat
                                                    UL-DPCCH-SlotFormat
                                                                                         OPTIONAL,
    diversityMode
                                                    DiversityMode
                                                                                         OPTIONAL,
    sSDT-CellIDLength
                                                    SSDT-CellID-Length
                                                                                         OPTIONAL,
    s-FieldLength
                                                    S-FieldLength
                                                                                         OPTIONAL,
    iE-Extensions
                                                    ProtocolExtensionContainer { { UL-DPCH-Information-RL-ReconfPrepFDD-ExtIEs} }
                                                                                                                                      OPTIONAL,
UL-DPCH-Information-RL-ReconfPrepFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-DPCH-Information-RL-ReconfPrepFDD ::= SEQUENCE {
    tFCS
                                                                                         OPTIONAL,
    dl-DPCH-SlotFormat
                                                    DL-DPCH-SlotFormat
                                                                                         OPTIONAL,
    tFCI-SignallingMode
                                                    TFCI-SignallingMode
                                                                                         OPTIONAL,
```

```
tFCI-Presence
                                                  TFCI-Presence
                                                                                     OPTIONAL,
    -- This IE shall be present if the DL DPCH Slot Format IE is set to any of the values from 12 to 16
   multiplexingPosition
                                                  MultiplexingPosition
                                                                                     OPTIONAL.
   pDSCH-CodeMapping
                                                  PDSCH-CodeMapping
                                                                                     OPTIONAL.
   pDSCH-RL-ID
                                                  RL-ID
                                                                                     OPTIONAL.
   limitedPowerIncrease
                                                  LimitedPowerIncrease
                                                                                     OPTIONAL,
   iE-Extensions
                                                  ProtocolExtensionContainer { { DL-DPCH-Information-RL-ReconfPrepFDD-ExtIEs} }
                                                                                                                                 OPTIONAL.
DL-DPCH-Information-RL-ReconfPrepFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DCH-DeleteList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-DeleteItem-RL-ReconfPrepFDD
DCH-DeleteItem-RL-ReconfPrepFDD ::= SEQUENCE {
   dCH-ID
                                                  DCH-ID,
   iE-Extensions
                                                  DCH-DeleteItem-RL-ReconfPrepFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    . . .
DSCH-ModifyList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxNrOfDSCHs)) OF ProtocolIE-Single-Container {{DSCH-ModifyItemIE-RL-ReconfPrepFDD }}
DSCH-ModifyItemIE-RL-ReconfPrepFDD NBAP-PROTOCOL-IES ::= {
          id-DSCH-ModifyItem-RL-ReconfPrepFDD
                                                                                 DSCH-ModifyItem-RL-ReconfPrepFDD PRESENCE mandatory}
                                                  CRITICALITY reject
                                                                         TYPE
DSCH-ModifyItem-RL-ReconfPrepFDD ::= SEQUENCE {
   dscH-TD
                                                  DSCH-ID,
   dl-TransportFormatSet
                                                  TransportFormatSet
                                                                              OPTIONAL,
   allocationRetentionPriority
                                                  AllocationRetentionPriority OPTIONAL,
    frameHandlingPriority
                                                  FrameHandlingPriority
                                                                              OPTIONAL,
    toAWS
                                                  ToAWS
                                                                              OPTIONAL,
                                                  ToAWE
                                                                              OPTIONAL,
    toAWE
    transportBearerRequestIndicator
                                                  TransportBearerRequestIndicator,
                                                  ProtocolExtensionContainer { { DSCH-ModifyItem-RL-ReconfPrepFDD-ExtIEs} } }
   iE-Extensions
                                                                                                                              OPTIONAL,
    . . .
DSCH-ModifyItem-RL-ReconfPrepFDD-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
DSCH-DeleteList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxNrOfDSCHs)) OF ProtocolIE-Single-Container {{DSCH-DeleteItemIE-RL-ReconfPrepFDD }}
DSCH-DeleteItemIE-RL-ReconfPrepFDD NBAP-PROTOCOL-IES ::= {
     ID
          id-DSCH-DeleteItem-RL-ReconfPrepFDD
                                                  CRITICALITY reject
                                                                         TYPE
                                                                                 DSCH-DeleteItem-RL-ReconfPrepFDD PRESENCE mandatory
```

```
DSCH-DeleteItem-RL-ReconfPrepFDD ::= SEQUENCE {
   dSCH-ID
                                               DSCH-ID.
   iE-Extensions
                                               ProtocolExtensionContainer { { DSCH-DeleteItem-RL-ReconfPrepFDD-ExtIEs} }
                                                                                                                      OPTIONAL.
DSCH-DeleteItem-RL-ReconfPrepFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TFCI2-BearerSpecificInformation-RL-ReconfPrepFDD ::= CHOICE {
   add0rModifv
                         AddOrModify-TFCI2-RL-ReconfPrepFDD,
                         NULL
   delete
AddOrModify-TFCI2-RL-ReconfPrepFDD ::= SEQUENCE {
   toAWS
                                    ToAWS,
   toAWE
                                    TOAWE,
                                    iE-Extensions
AddOrModify-TFCI2-RL-ReconfPrepFDD-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
   . . .
RL-InformationList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxNrOfRLs)) OF ProtocolIE-Single-Container {{ RL-InformationItemIE-RL-ReconfPrepFDD }}
RL-InformationItemIE-RL-ReconfPrepFDD NBAP-PROTOCOL-IES ::= {
         id-RL-InformationItem-RL-ReconfPrepFDD
                                                                                                         RL-InformationItem-RL-
                                                      CRITICALITY
                                                                     reject
                                                                                    TYPE
ReconfPrepFDD
                  PRESENCE
                             mandatory}
RL-InformationItem-RL-ReconfPrepFDD ::= SEQUENCE {
   rL-ID
                                               RL-ID,
   dl-CodeInformation
                                           FDD-DL-CodeInformation
                                                                     OPTIONAL.
   maxDL-Power
                                               DL-Power
                                                                                       OPTIONAL.
   minDL-Power
                                               DL-Power
                                                                                       OPTIONAL.
   sSDT-Indication
                                               SSDT-Indication
                                                                                       OPTIONAL,
   sSDT-Cell-Identity
                                               SSDT-Cell-Identity
                                                                                       OPTIONAL,
   -- The IE shall be present if the SSDT Indication IE is set to "SSDT Active in the UE"
   transmitDiversityIndicator
                                               TransmitDiversityIndicator
                                                                                       OPTIONAL.
   -- This IE shall be present if Diversity Mode IE is present in UL DPCH Information IE and it is not set to "none"
                                               iE-Extensions
                                                                                                                         OPTIONAL,
   . . .
RL-InformationItem-RL-ReconfPrepFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
   { ID id-SSDT-CellIDforEDSCHPC CRITICALITY ignore EXTENSION SSDT-Cell-Identity
                                                                                PRESENCE conditional },
   -- This IE shall be present if Enhanced DSCH PC IE is present in the DSCH Common Information IE.
__ ***********************
```

```
-- RADIO LINK RECONFIGURATION PREPARE TDD
  ******************
RadioLinkReconfigurationPrepareTDD ::= SEQUENCE {
    protocolIEs
                           ProtocolIE-Container
                                                   {{RadioLinkReconfigurationPrepareTDD-IEs}},
                           ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareTDD-Extensions}}
    protocolExtensions
                                                                                                                    OPTIONAL,
RadioLinkReconfigurationPrepareTDD-IES NBAP-PROTOCOL-IES ::= {
           id-NodeB-CommunicationContextID
                                                                   CRITICALITY
                                                                                   reject
                                                                                              TYPE
                                                                                                                  NodeB-CommunicationContextID
                   PRESENCE mandatory } |
           id-UL-CCTrCH-InformationAddList-RL-ReconfPrepTDD
                                                                       CRITICALITY
                                                                                       reject
                                                                                                                  TYPE UL-CCTrCH-
InformationAddList-RL-ReconfPrepTDD
                                           PRESENCE
                                                     optional
          id-UL-CCTrCH-InformationModifyList-RL-ReconfPrepTDD
                                                                       CRITICALITY
                                                                                       reject
                                                                                                                  TYPE UL-CCTrCH-
InformationModifyList-RL-ReconfPrepTDD
                                               PRESENCE
                                                          optional
           id-UL-CCTrCH-InformationDeleteList-RL-ReconfPrepTDD
                                                                       CRITICALITY
                                                                                      reject
                                                                                                                  TYPE UL-CCTrCH-
InformationDeleteList-RL-ReconfPrepTDD
                                               PRESENCE
                                                           optional
           id-DL-CCTrCH-InformationAddList-RL-ReconfPrepTDD
                                                                       CRITICALITY
                                                                                      reject
                                                                                                                  TYPE DL-CCTrCH-
InformationAddList-RL-ReconfPrepTDD
                                           PRESENCE
    { ID id-DL-CCTrCH-InformationModifyList-RL-ReconfPrepTDD
                                                                       CRITICALITY
                                                                                      reject
                                                                                                                  TYPE DL-CCTrCH-
InformationModifyList-RL-ReconfPrepTDD
                                               PRESENCE
                                                           optional
           id-DL-CCTrCH-InformationDeleteList-RL-ReconfPrepTDD
                                                                       CRITICALITY
                                                                                      reject
                                                                                                                  TYPE DL-CCTrCH-
InformationDeleteList-RL-ReconfPrepTDD
                                               PRESENCE
                                                           optional
           id-TDD-DCHs-to-Modify
                                                       CRITICALITY
    { ID
                                                                       reject
                                                                                   TYPE
                                                                                          TDD-DCHs-to-Modify
                                                                                                                                PRESENCE optional
       }
    { ID
           id-DCHs-to-Add-TDD
                                                       CRITICALITY
                                                                       reject
                                                                                   TYPE
                                                                                          DCH-TDD-Information
                                                                                                                                PRESENCE optional
    { ID
           id-DCH-DeleteList-RL-ReconfPrepTDD
                                                                   CRITICALITY
                                                                                  reject
                                                                                              TYPE
                                                                                                                  DCH-DeleteList-RL-ReconfPrepTDD
                       PRESENCE optional
           id-DSCH-Information-ModifyList-RL-ReconfPrepTDD
                                                                   CRITICALITY
                                                                                              TYPE
                                                                                                                  DSCH-Information-ModifyList-RL-
    { ID
                                                                                   reject
ReconfPrepTDD
                   PRESENCE optional
    { ID
           id-DSCHs-to-Add-TDD
                                       CRITICALITY
                                                       reject
                                                                          DSCH-TDD-Information
                                                                                                                       PRESENCE
                                                                                                                                   optional
                                                                                                                  DSCH-Information-DeleteList-RL-
           id-DSCH-Information-DeleteList-RL-ReconfPrepTDD
                                                                   CRITICALITY
                                                                                  reject
                                                                                              TYPE
    ID
                               optional
ReconfPrepTDD
                   PRESENCE
    { ID
           id-USCH-Information-ModifyList-RL-ReconfPrepTDD
                                                                                                                  USCH-Information-ModifyList-RL-
                                                                   CRITICALITY
                                                                                  reject
                                                                                              TYPE
ReconfPrepTDD
                   PRESENCE
                               optional
    { ID
           id-USCH-Information-Add
                                           CRITICALITY
                                                           reject
                                                                       TYPE
                                                                              USCH-Information
                                                                                                                       PRESENCE
                                                                                                                                   optional
           id-USCH-Information-DeleteList-RL-ReconfPrepTDD
                                                                                                                  USCH-Information-DeleteList-RL-
    { ID
                                                                   CRITICALITY
                                                                                   reject
                                                                                              TYPE
ReconfPrepTDD
                   PRESENCE
                              optional
           id-RL-Information-RL-ReconfPrepTDD
                                                                                                                  RL-Information-RL-ReconfPrepTDD
                                                                   CRITICALITY
                                                                                  reject
                                                                                              TYPE
                       PRESENCE
                                   optional
RadioLinkReconfigurationPrepareTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
UL-CCTrCH-InformationAddList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCH-InformationAddItem-RL-ReconfPrepTDD
```

. . .

```
UL-CCTrCH-InformationAddItem-RL-ReconfPrepTDD ::= SEQUENCE {
    cCTrCH-ID
                                                CCTrCH-ID.
    t.FCS
                                                TFCS,
    tFCI-Coding
                                                TFCI-Coding,
                                                PunctureLimit,
    punctureLimit
    ul-DPCH-InformationList
                                                UL-DPCH-InformationAddList-RL-ReconfPrepTDD OPTIONAL,
                                                ProtocolExtensionContainer { { UL-CCTrCH-InformationAddItem-RL-ReconfPrepTDD-ExtIEs} }
    iE-Extensions
    OPTIONAL,
UL-CCTrCH-InformationAddItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    { ID id-UL-DPCH-InformationAddListIE-RL-ReconfPrepTDD CRITICALITY reject
                                                                                    EXTENSION UL-DPCH-InformationAddList-RL-ReconfPrepTDD
    PRESENCE optional }
                           -- For 3.84Mcps TDD only
    { ID id-UL-SIRTarget
                               CRITICALITY reject
                                                        EXTENSION
                                                                        UL-SIR
                                                                                    PRESENCE optional
                                                                                                                    },
    -- This IE shall be mandatory for 1.28Mcps TDD, not applicable for 3.84Mcps TDD.
UL-DPCH-InformationAddList-RL-ReconfPrepTDD ::= ProtocolIE-Single-Container {{ UL-DPCH-InformationAddListIEs-RL-ReconfPrepTDD }}
UL-DPCH-InformationAddListIEs-RL-ReconfPrepTDD NBAP-PROTOCOL-IES ::= {
    { ID id-UL-DPCH-InformationAddListIE-RL-ReconfPrepTDD CRITICALITY reject
                                                                                    TYPE UL-DPCH-InformationAddItem-RL-ReconfPrepTDD
                                                                                                                                        PRESENCE
mandatory }
UL-DPCH-InformationAddItem-RL-ReconfPrepTDD ::= SEQUENCE
    repetitionPeriod
                                            RepetitionPeriod,
    repetitionLength
                                            RepetitionLength,
    tdd-DPCHOffset
                                            TDD-DPCHOffset,
    uL-Timeslot-Information
                                            UL-Timeslot-Information,
    iE-Extensions
                                            ProtocolExtensionContainer { { UL-DPCH-InformationAddItem-RL-ReconfPrepTDD-ExtIEs} }
                                                                                                                                      OPTIONAL,
UL-DPCH-InformationAddItem-RL-ReconfPrepTDD-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
UL-DPCH-LCR-InformationAddList-RL-ReconfPrepTDD ::= ProtocolIE-Single-Container {{ UL-DPCH-LCR-InformationAddListIEs-RL-ReconfPrepTDD }}
UL-DPCH-LCR-InformationAddListIEs-RL-ReconfPrepTDD NBAP-PROTOCOL-IES ::= {
    { ID id-UL-DPCH-LCR-InformationAddListIE-RL-ReconfPrepTDD CRITICALITY reject
                                                                                        TYPE UL-DPCH-LCR-InformationAddItem-RL-ReconfPrepTDD
    PRESENCE mandatory \ -- For 1.28Mcps TDD only
UL-DPCH-LCR-InformationAddItem-RL-ReconfPrepTDD ::= SEQUENCE {
    repetitionPeriod
                                            RepetitionPeriod,
    repetitionLength
                                            RepetitionLength,
    tdd-DPCHOffset
                                            TDD-DPCHOffset,
    uL-Timeslot-InformationLCR
                                            UL-TimeslotLCR-Information,
    iE-Extensions
                                            ProtocolExtensionContainer { { UL-DPCH-LCR-InformationAddItem-RL-ReconfPrepTDD-ExtIEs} }
                                                                                                                                        OPTIONAL,
```

```
UL-DPCH-LCR-InformationAddItem-RL-ReconfPrepTDD-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
UL-CCTrCH-InformationModifyList-RL-ReconfPrepTDD ::= SEOUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCH-InformationModifyItem-RL-ReconfPrepTDD
UL-CCTrCH-InformationModifyItem-RL-ReconfPrepTDD ::= SEQUENCE {
   cCTrCH-ID
                                              CCTrCH-ID,
   tFCS
                                              TFCS
                                                                                                                     OPTIONAL,
    tFCI-Coding
                                              TFCI-Coding
                                                                                                                     OPTIONAL,
   punctureLimit
                                              PunctureLimit
                                                                                                                     OPTIONAL,
   ul-DPCH-InformationAddList
                                              UL-DPCH-InformationModify-AddList-RL-ReconfPrepTDD
                                                                                                                  OPTIONAL,
   ul-DPCH-InformationModifyList
                                              UL-DPCH-InformationModify-ModifyList-RL-ReconfPrepTDD
                                                                                                                OPTIONAL,
    ul-DPCH-InformationDeleteList
                                              UL-DPCH-InformationModify-DeleteList-RL-ReconfPrepTDD
                                                                                                                OPTIONAL,
                                              ProtocolExtensionContainer { { UL-CCTrCH-InformationModifyItem-RL-ReconfPrepTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
    . . .
UL-CCTrCH-InformationModifyItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    { ID id-UL-DPCH-LCR-InformationModify-AddList
                                                  CRITICALITY reject
                                                                         EXTENSION
                                                                                      UL-DPCH-LCR-InformationModify-AddList-RL-ReconfPrepTDD
    PRESENCE optional } -- For 1.28Mcps TDD only
                                                      EXTENSION
   { ID id-UL-SIRTarget
                              CRITICALITY reject
                                                                     UL-SIR
                                                                                 PRESENCE optional
   -- This IE shall be applicable for 1.28Mcps TDD only.
UL-DPCH-InformationModify-AddList-RL-ReconfPrepTDD ::= ProtocolIE-Single-Container {{ UL-DPCH-InformationModify-AddListIEs-RL-ReconfPrepTDD }}
UL-DPCH-InformationModify-AddListIEs-RL-ReconfPrepTDD NBAP-PROTOCOL-IES ::= {
    TYPE UL-DPCH-InformationModify-AddItem-RL-ReconfPrepTDD
       PRESENCE mandatory }
UL-DPCH-InformationModify-AddItem-RL-ReconfPrepTDD ::= SEQUENCE {
    repetitionPeriod
                                          RepetitionPeriod,
                                          RepetitionLength,
   repetitionLength
    tdd-DPCHOffset
                                          TDD-DPCHOffset,
   uL-Timeslot-Information
                                      UL-Timeslot-Information,
                                              ProtocolExtensionContainer { { UL-DPCH-InformationModify-AddItem-RL-ReconfPrepTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
UL-DPCH-InformationModify-AddItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UL-DPCH-LCR-InformationModify-AddList-RL-ReconfPrepTDD ::= ProtocolIE-Single-Container {{ UL-DPCH-LCR-InformationModify-AddListIEs-RL-ReconfPrepTDD
}}
UL-DPCH-LCR-InformationModify-AddListIEs-RL-ReconfPrepTDD NBAP-PROTOCOL-IES ::= {
```

```
{ ID id-UL-DPCH-LCR-InformationModify-AddListIE-RL-ReconfPrepTDD
                                                                    CRITICALITY reject
                                                                                             TYPE UL-DPCH-LCR-InformationModify-AddItem-RL-
ReconfPrepTDD
                   PRESENCE mandatory }
UL-DPCH-LCR-InformationModify-AddItem-RL-ReconfPrepTDD ::= SEQUENCE {
    repetitionPeriod
                                          RepetitionPeriod,
   repetitionLength
                                          RepetitionLength,
    tdd-DPCHOffset
                                          TDD-DPCHOffset,
    uL-Timeslot-InformationLCR
                                          UL-TimeslotLCR-Information,
                                              ProtocolExtensionContainer { { UL-DPCH-LCR-InformationModify-AddItem-RL-ReconfPrepTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
    . . .
UL-DPCH-LCR-InformationModify-AddItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UL-DPCH-InformationModifyList-RL-ReconfPrepTDD ::= ProtocolIE-Single-Container {{ UL-DPCH-InformationModifyListIEs-RL-ReconfPrepTDD
UL-DPCH-InformationModify-ModifyListIEs-RL-ReconfPrepTDD NBAP-PROTOCOL-IES ::= {
    TYPE UL-DPCH-InformationModify-ModifyItem-RL-
ReconfPrepTDD
                   PRESENCE mandatory }
UL-DPCH-InformationModify-ModifyItem-RL-ReconfPrepTDD ::= SEQUENCE {
    repetitionPeriod
                                          RepetitionPeriod
                                                              OPTIONAL,
    repetitionLength
                                          RepetitionLength
                                                              OPTIONAL,
    tdd-DPCHOffset
                                          TDD-DPCHOffset
                                                              OPTIONAL,
    uL-Timeslot-InformationModify-ModifyList-RL-ReconfPrepTDD
                                                                         UL-Timeslot-InformationModify-ModifyList-RL-ReconfPrepTDD
   OPTIONAL,
   iE-Extensions
                                              ProtocolExtensionContainer { { UL-DPCH-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIEs} }
   OPTIONAL,
    . . .
UL-DPCH-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::=
    { ID id-UL-TimeslotLCR-Information-RL-ReconfPrepTDD
                                                                                            UL-TimeslotLCR-InformationModify-ModifyList-RL-
                                                          CRITICALITY reject
                                                                                 EXTENSION
ReconfPrepTDD
                   PRESENCE optional },
                                          -- For 1.28Mcps TDD only
    . . .
UL-Timeslot-InformationModify-ModifyList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxNrOfULTSs)) OF UL-Timeslot-InformationModify-ModifyItem-RL-
ReconfPrepTDD -- For 3.84Mcps TDD only
UL-Timeslot-InformationModify-ModifyItem-RL-ReconfPrepTDD ::= SEOUENCE {
    timeSlot
                                          TimeSlot,
   midambleShiftAndBurstTvpe
                                          MidambleShiftAndBurstType
                                                                         OPTIONAL,
    tFCI-Presence
                                          TFCI-Presence
                                                             OPTIONAL,
    uL-Code-InformationModify-ModifyList-RL-ReconfPrepTDD
                                                                      UL-Code-InformationModify-ModifyList-RL-ReconfPrepTDD
   iE-Extensions
                                          ProtocolExtensionContainer { { UL-Timeslot-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIEs} }
   OPTIONAL,
    . . .
```

```
UL-Timeslot-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
UL-Code-InformationModify-ModifyList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-Code-InformationModify-ModifyItem-RL-
ReconfPrepTDD
UL-Code-InformationModify-ModifyItem-RL-ReconfPrepTDD ::= SEQUENCE {
                                            DPCH-ID,
    tdd-ChannelisationCode
                                            TDD-ChannelisationCode
                                                                        OPTIONAL,
    iE-Extensions
                                            ProtocolExtensionContainer { { UL-Code-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIEs} }
   OPTIONAL,
    . . .
UL-Code-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UL-TimeslotLCR-InformationModify-ModifyList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxNrOfULTSLCRs)) OF UL-Timeslot-LCR-InformationModify-
ModifyItem-RL-ReconfPrepTDD -- For 1.28Mcps TDD only
UL-Timeslot-LCR-InformationModify-ModifyItem-RL-ReconfPrepTDD ::= SEQUENCE {
    timeSlotLCR
                                            TimeSlotLCR,
    midambleShiftLCR
                                MidambleShiftLCR
                                                        OPTIONAL,
    tFCI-Presence
                                            TFCI-Presence
                                                                OPTIONAL,
    uL-Code-InformationModify-ModifyList-RL-ReconfPrepTDDLCR
                                                                            UL-Code-InformationModify-ModifyList-RL-ReconfPrepTDDLCR
    iE-Extensions
                                            ProtocolExtensionContainer { { UL-Timeslot-LCR-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIEs} }
       OPTIONAL,
    . . .
UL-Timeslot-LCR-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UL-Code-InformationModify-ModifyList-RL-ReconfPrepTDDLCR ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-Code-InformationModify-ModifyItem-RL-
ReconfPrepTDD
UL-Code-InformationModify-ModifyItem-RL-ReconfPrepTDDLCR ::= SEQUENCE {
    dPCH-ID
                                            DPCH-ID.
    tdd-ChannelisationCodeLCR
                                            TDD-ChannelisationCodeLCR
                                                                            OPTIONAL,
    iE-Extensions
                                            ProtocolExtensionContainer { { UL-Code-InformationModify-ModifyItem-RL-ReconfPrepTDDLCR-ExtIEs} }
    OPTIONAL,
UL-Code-InformationModify-ModifyItem-RL-ReconfPrepTDDLCR-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
UL-DPCH-InformationModify-DeleteList-RL-ReconfPrepTDD ::= ProtocolIE-Single-Container {{ UL-DPCH-InformationModify-DeleteListIEs-RL-ReconfPrepTDD
}}
```

```
UL-DPCH-InformationModify-DeleteListIEs-RL-ReconfPrepTDD NBAP-PROTOCOL-IES ::= {
    TYPE UL-DPCH-InformationModify-DeleteListIE-RL-
ReconfPrepTDD
                   PRESENCE mandatory }
UL-DPCH-InformationModify-DeleteListIE-RL-ReconfPrepTDD ::= SEOUENCE (SIZE (1..maxNrOfDPCHs)) OF UL-DPCH-InformationModify-DeleteItem-RL-
ReconfPrepTDD
UL-DPCH-InformationModify-DeleteItem-RL-ReconfPrepTDD ::= SEOUENCE {
                                              ProtocolExtensionContainer { { UL-DPCH-InformationModify-DeleteItem-RL-ReconfPrepTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
    . . .
UL-DPCH-InformationModify-DeleteItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UL-CCTrCH-InformationDeleteList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF UL-CCTrCH-InformationDeleteItem-RL-ReconfPrepTDD
UL-CCTrCH-InformationDeleteItem-RL-ReconfPrepTDD ::= SEQUENCE {
   cCTrCH-ID
                                              CCTrCH-ID,
   iE-Extensions
                                              ProtocolExtensionContainer { { UL-CCTrCH-InformationDeleteItem-RL-ReconfPrepTDD-ExtIEs} }
   OPTIONAL,
UL-CCTrCH-InformationDeleteItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    . . .
DL-CCTrCH-InformationAddList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCH-InformationAddItem-RL-ReconfPrepTDD
DL-CCTrCH-InformationAddItem-RL-ReconfPrepTDD ::= SEQUENCE {
   cCTrCH-ID
                                                  CCTrCH-ID,
    tFCS
                                                  TFCS,
   tFCI-Coding
                                                  TFCI-Coding,
   punctureLimit
                                                  PunctureLimit,
   cCTrCH-TPCList
                                                  CCTrCH-TPCAddList-RL-ReconfPrepTDD
                                                                                                               OPTIONAL,
   dl-DPCH-InformationList
                                                  DL-DPCH-InformationAddList-RL-ReconfPrepTDD
                                                                                                                OPTIONAL.
                                                  ProtocolExtensionContainer { { DL-CCTrCH-InformationAddItem-RL-ReconfPrepTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
    . . .
DL-CCTrCH-InformationAddItem-RL-ReconfPrepTDD-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
    { ID id-DL-DPCH-LCR-InformationAddList-RL-ReconfPrepTDD CRITICALITY reject
                                                                                     EXTENSION
                                                                                                                   DL-DPCH-LCR-
InformationAddList-RL-ReconfPrepTDD
                                      PRESENCE optional }, -- For 1.28Mcps TDD only
CCTrCH-TPCAddList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF CCTrCH-TPCAddItem-RL-ReconfPrepTDD
                                                                                                                  -- For 3.84Mcps TDD only
```

```
CCTrCH-TPCAddItem-RL-ReconfPrepTDD ::= SEQUENCE {
   cCTrCH-ID
   iE-Extensions
                                        ProtocolExtensionContainer { { CCTrCH-TPCAddItem-RL-ReconfPrepTDD-ExtIEs} }
                                                                                                                  OPTIONAL.
CCTrCH-TPCAddItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-DPCH-InformationAddList-RL-ReconfPrepTDD ::= ProtocolIE-Single-Container {{ DL-DPCH-InformationAddListIEs-RL-ReconfPrepTDD }}
DL-DPCH-InformationAddListIEs-RL-ReconfPrepTDD NBAP-PROTOCOL-IES ::= {
   TYPE DL-DPCH-InformationAddItem-RL-ReconfPrepTDD
                                                                                                                             PRESENCE
mandatory }
DL-DPCH-InformationAddItem-RL-ReconfPrepTDD ::= SEQUENCE
   repetitionPeriod
                                        RepetitionPeriod,
   repetitionLength
                                        RepetitionLength,
   tdd-DPCHOffset
                                        TDD-DPCHOffset,
                                        DL-Timeslot-Information,
   dL-Timeslot-Information
   iE-Extensions
                                        ProtocolExtensionContainer { { DL-DPCH-InformationAddItem-RL-ReconfPrepTDD-ExtIEs} }
                                                                                                                          OPTIONAL,
DL-DPCH-InformationAddItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-DPCH-LCR-InformationAddList-RL-ReconfPrepTDD ::= ProtocolIE-Single-Container {{ DL-DPCH-LCR-InformationAddListIEs-RL-ReconfPrepTDD }}
DL-DPCH-LCR-InformationAddListIEs-RL-ReconfPrepTDD NBAP-PROTOCOL-IES ::= {
   { ID id-DL-DPCH-LCR-InformationAddListIE-RL-ReconfPrepTDD CRITICALITY reject
                                                                                 TYPE DL-DPCH-LCR-InformationAddItem-RL-ReconfPrepTDD
   PRESENCE mandatory \ -- For 1.28Mcps TDD only
DL-DPCH-LCR-InformationAddItem-RL-ReconfPrepTDD ::= SEQUENCE {
   repetitionPeriod
                                        RepetitionPeriod,
   repetitionLength
                                        RepetitionLength,
   tdd-DPCHOffset
                                        TDD-DPCHOffset,
   dL-Timeslot-InformationLCR
                                        DL-TimeslotLCR-Information,
   iE-Extensions
                                        OPTIONAL,
   . . .
DL-DPCH-LCR-InformationAddItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-CCTrCH-InformationModifyList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCH-InformationModifyItem-RL-ReconfPrepTDD
DL-CCTrCH-InformationModifyItem-RL-ReconfPrepTDD ::= SEQUENCE {
```

```
cCTrCH-ID
                                                  CCTrCH-ID,
    +FCS
                                                  TFCS
                                                                                                                        OPTIONAL,
    tFCI-Coding
                                                  TFCI-Coding
                                                                                                                        OPTIONAL.
                                                  PunctureLimit
   punctureLimit
                                                                                                                        OPTIONAL.
    cCTrCH-TPCList
                                                  CCTrCH-TPCModifyList-RL-ReconfPrepTDD
                                                                                                                        OPTIONAL.
   dl-DPCH-InformationAddList
                                                  DL-DPCH-InformationModify-AddList-RL-ReconfPrepTDD
                                                                                                                  OPTIONAL,
   dl-DPCH-InformationModifyList
                                                  DL-DPCH-InformationModify-ModifyList-RL-ReconfPrepTDD
                                                                                                                OPTIONAL.
   dl-DPCH-InformationDeleteList
                                                  DL-DPCH-InformationModify-DeleteList-RL-ReconfPrepTDD
                                                                                                                OPTIONAL,
   iE-Extensions
                                                  ProtocolExtensionContainer { { DL-CCTrCH-InformationModifyItem-RL-ReconfPrepTDD-ExtIEs} }
   OPTIONAL,
DL-CCTrCH-InformationModifyItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    { ID id-DL-DPCH-LCR-InformationModify-AddList-RL-ReconfPrepTDD CRITICALITY reject
                                                                                         EXTENSION
                                                                                                                DL-DPCH-LCR-InformationModify-
                              PRESENCE optional }
AddList-RL-ReconfPrepTDD
CCTrCH-TPCModifyList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF CCTrCH-TPCModifyItem-RL-ReconfPrepTDD
CCTrCH-TPCModifyItem-RL-ReconfPrepTDD
                                       ::= SEQUENCE {
   cCTrCH-ID
                                          CCTrCH-ID,
                                          ProtocolExtensionContainer { { CCTrCH-TPCModifyItem-RL-ReconfPrepTDD-ExtIEs} }
   iE-Extensions
                                                                                                                           OPTIONAL,
CCTrCH-TPCModifyItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-DPCH-InformationModify-AddList-RL-ReconfPrepTDD ::= ProtocolIE-Single-Container {{ DL-DPCH-InformationModify-AddListIEs-RL-ReconfPrepTDD }} --
For 3.84Mcps TDD only
DL-DPCH-InformationModify-AddListIEs-RL-ReconfPrepTDD NBAP-PROTOCOL-IES ::= {
    TYPE DL-DPCH-InformationModify-AddItem-RL-ReconfPrepTDD
       PRESENCE mandatory \ -- For 1.28Mcps TDD only
DL-DPCH-InformationModify-AddItem-RL-ReconfPrepTDD ::= SEQUENCE {
   repetitionPeriod
                                          RepetitionPeriod,
   repetitionLength
                                          RepetitionLength,
    tdd-DPCHOffset
                                          TDD-DPCHOffset,
   dL-Timeslot-Information
                                          DL-Timeslot-Information,
                                          ProtocolExtensionContainer { { DL-DPCH-InformationModify-AddItem-RL-ReconfPrepTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
DL-DPCH-InformationModify-AddItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
DL-DPCH-LCR-InformationModify-AddList-RL-ReconfPrepTDD ::= ProtocolIE-Single-Container {{ DL-DPCH-LCR-InformationModify-AddListIEs-RL-ReconfPrepTDD
}}
DL-DPCH-LCR-InformationModify-AddListIEs-RL-ReconfPrepTDD NBAP-PROTOCOL-IES ::= {
    { ID id-DL-DPCH-LCR-InformationModify-AddListIE-RL-ReconfPrepTDD CRITICALITY reject
                                                                                            TYPE DL-DPCH-LCR-InformationModify-AddItem-RL-
                   PRESENCE mandatory }
ReconfPrepTDD
DL-DPCH-LCR-InformationModify-AddItem-RL-ReconfPrepTDD ::= SEQUENCE {
   repetitionPeriod
                                          RepetitionPeriod,
   repetitionLength
                                          RepetitionLength,
    tdd-DPCHOffset
                                          TDD-DPCHOffset,
   dL-Timeslot-InformationLCR
                                          DL-TimeslotLCR-Information,
   iE-Extensions
                                          OPTIONAL.
DL-DPCH-LCR-InformationModify-AddItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-DPCH-InformationModifyList-RL-ReconfPrepTDD ::= ProtocolIE-Single-Container {{ DL-DPCH-InformationModifyListIEs-RL-ReconfPrepTDD
}}
DL-DPCH-InformationModify-ModifyListIEs-RL-ReconfPrepTDD NBAP-PROTOCOL-IES ::= {
    { ID id-DL-DPCH-InformationModify-ModifyListIE-RL-ReconfPrepTDD CRITICALITY reject
                                                                                            TYPE DL-DPCH-InformationModify-ModifyItem-RL-
ReconfPrepTDD
                   PRESENCE mandatory }
DL-DPCH-InformationModify-ModifyItem-RL-ReconfPrepTDD ::= SEQUENCE {
   repetitionPeriod
                                          RepetitionPeriod
                                                                     OPTIONAL,
   repetitionLength
                                          RepetitionLength
                                                                     OPTIONAL,
                                          TDD-DPCHOffset
    tdd-DPCHOffset
                                                                     OPTIONAL,
   dL-Timeslot-InformationAddModify-ModifyList-RL-ReconfPrepTDD
                                                                     DL-Timeslot-InformationModify-ModifyList-RL-ReconfPrepTDD
                                                                                                                                   OPTIONAL,
   iE-Extensions
                                              ProtocolExtensionContainer { { DL-DPCH-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIEs} }
   OPTIONAL,
DL-DPCH-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    { ID id-DL-Timeslot-LCR-InformationModify-ModifyList-RL-ReconfPrepTDD CRITICALITY reject
                                                                                                                  EXTENSION
                                                                                                                                 DL-Timeslot-
LCR-InformationModify-ModifyList-RL-ReconfPrepTDD
                                                     PRESENCE optional },
DL-Timeslot-InformationModify-ModifyList-RL-ReconfPrepTDD ::= SEOUENCE (SIZE (1..maxNrOfDLTSs)) OF DL-Timeslot-InformationModify-ModifyLtem-RL-
ReconfPrepTDD
DL-Timeslot-InformationModify-ModifyItem-RL-ReconfPrepTDD
                                                          ::= SEOUENCE {
    timeSlot
                                          TimeSlot,
   midambleShiftAndBurstType
                                          MidambleShiftAndBurstType
                                                                             OPTIONAL,
    tFCI-Presence
                                          TFCI-Presence
                                                                 OPTIONAL,
   dL-Code-InformationModify-ModifyList-RL-ReconfPrepTDD
                                                                     DL-Code-InformationModify-ModifyList-RL-ReconfPrepTDD
                                                                                                                                OPTIONAL,
```

```
ProtocolExtensionContainer { { DL-Timeslot-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIEs} }
    iE-Extensions
    OPTIONAL.
DL-Timeslot-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
DL-Code-InformationModify-ModifyList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (0..maxNrOfDPCHs)) OF DL-Code-InformationModify-ModifyItem-RL-
ReconfPrepTDD
DL-Code-InformationModify-ModifyItem-RL-ReconfPrepTDD
                                                         ::= SEOUENCE {
    tdd-ChannelisationCode
                                            TDD-ChannelisationCode
                                                                         OPTIONAL,
    iE-Extensions
                                            ProtocolExtensionContainer { { DL-Code-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIEs} }
    OPTIONAL,
    . . .
DL-Code-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-Timeslot-LCR-InformationModify-ModifyList-RL-ReconfPrepTDD ::= SEOUENCE (SIZE (1..maxNrOfDLTSLCRs)) OF DL-Timeslot-InformationModify-ModifyLtem-
RL-ReconfPrepTDD
DL-Timeslot-LCR-InformationModify-ModifyItem-RL-ReconfPrepTDD
                                                                  ::= SEOUENCE {
    timeSlotLCR
                                            TimeSlotLCR,
    midambleShiftLCR
                                MidambleShiftLCR
                                                            OPTIONAL,
                                            TFCI-Presence
    tFCI-Presence
                                                                     OPTIONAL,
    {\tt dL-Code-LCR-InformationModify-ModifyList-RL-ReconfPrepTDD}
                                                                             DL-Code-LCR-InformationModify-ModifyList-RL-ReconfPrepTDD
    OPTIONAL,
    iE-Extensions
                                            ProtocolExtensionContainer { { DL-Timeslot-LCR-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIEs} }
        OPTIONAL,
DL-Timeslot-LCR-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-Code-LCR-InformationModify-ModifyList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (0..maxNrOfDPCHs)) OF DL-Code-InformationModify-ModifyItem-RL-
ReconfPrepTDD
DL-Code-LCR-InformationModify-ModifyItem-RL-ReconfPrepTDD
                                                             ::= SEQUENCE {
    dPCH-ID
                                            DPCH-ID,
    tdd-ChannelisationCodeLCR
                                            TDD-ChannelisationCodeLCR
                                                                             OPTIONAL,
    iE-Extensions
                                            ProtocolExtensionContainer { | DL-Code-LCR-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIEs} }
    OPTIONAL,
    . . .
DL-Code-LCR-InformationModify-ModifyItem-RL-ReconfPrepTDD-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
```

```
DL-DPCH-InformationModify-DeleteList-RL-ReconfPrepTDD ::= ProtocolIE-Single-Container {{ DL-DPCH-InformationModify-DeleteListIEs-RL-ReconfPrepTDD
}}
DL-DPCH-InformationModify-DeleteListIEs-RL-ReconfPrepTDD NBAP-PROTOCOL-IES ::= {
    { ID id-DL-DPCH-InformationModify-DeleteListIE-RL-ReconfPrepTDD CRITICALITY reject
                                                                                            TYPE DL-DPCH-InformationModify-DeleteListIE-RL-
ReconfPrepTDD
                   PRESENCE mandatory }
DL-DPCH-InformationModify-DeleteListIE-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF DL-DPCH-InformationModify-DeleteItem-RL-
ReconfPrepTDD
DL-DPCH-InformationModify-DeleteItem-RL-ReconfPrepTDD ::= SEQUENCE {
                                              DPCH-ID.
   iE-Extensions
                                              ProtocolExtensionContainer { { DL-DPCH-InformationModify-DeleteItem-RL-ReconfPrepTDD-ExtIEs} }
   OPTIONAL,
    . . .
DL-DPCH-InformationModify-DeleteItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-CCTrCH-InformationDeleteList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF DL-CCTrCH-InformationDeleteItem-RL-ReconfPrepTDD
DL-CCTrCH-InformationDeleteItem-RL-ReconfPrepTDD ::= SEQUENCE {
    cCTrCH-ID
   iE-Extensions
                                                  ProtocolExtensionContainer { { DL-CCTrCH-InformationDeleteItem-RL-ReconfPrepTDD-ExtIEs} }
   OPTIONAL,
DL-CCTrCH-InformationDeleteItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DCH-DeleteList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-DeleteItem-RL-ReconfPrepTDD
DCH-DeleteItem-RL-ReconfPrepTDD ::= SEQUENCE {
   dCH-ID
                                              DCH-ID,
                                              iE-Extensions
                                                                                                                        OPTIONAL,
DCH-DeleteItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DSCH-Information-ModifyList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxNrOfDSCHs)) OF DSCH-Information-ModifyItem-RL-ReconfPrepTDD
DSCH-Information-ModifyItem-RL-ReconfPrepTDD ::= SEQUENCE {
   dSCH-ID
                                              DSCH-ID,
   cCTrCH-ID
                                              CCTrCH-ID
                                                                     OPTIONAL,
    transportFormatSet
                                              TransportFormatSet
                                                                     OPTIONAL,
```

```
allocationRetentionPriority
                                                AllocationRetentionPriority OPTIONAL,
    frameHandlingPriority
                                                FrameHandlingPriority OPTIONAL,
    t.oAWS
                                                TOAWS
                                                                         OPTIONAL.
    toAWE
                                                TOAWE
                                                                         OPTIONAL,
    transportBearerRequestIndicator
                                                TransportBearerRequestIndicator,
                                                ProtocolExtensionContainer { { DSCH-Information-ModifyItem-RL-ReconfPrepTDD-ExtIEs} }
    iE-Extensions
DSCH-Information-ModifyItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DSCH-Information-DeleteList-RL-ReconfPrepTDD ::= SEOUENCE (SIZE (1..maxNrOfDSCHs)) OF DSCH-Information-DeleteItem-RL-ReconfPrepTDD
DSCH-Information-DeleteItem-RL-ReconfPrepTDD ::= SEQUENCE {
    dSCH-ID
                                                ProtocolExtensionContainer { { DSCH-Information-DeleteItem-RL-ReconfPrepTDD-ExtIEs} }
    iE-Extensions
                                                                                                                                         OPTIONAL,
    . . .
DSCH-Information-DeleteItem-RL-ReconfPrepTDD-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
USCH-Information-ModifyList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxNrOfUSCHs)) OF USCH-Information-ModifyItem-RL-ReconfPrepTDD
USCH-Information-ModifyItem-RL-ReconfPrepTDD ::= SEQUENCE {
    uSCH-ID
                                                USCH-ID,
    transportFormatSet
                                                TransportFormatSet
                                                                         OPTIONAL,
    allocationRetentionPriority
                                                AllocationRetentionPriority OPTIONAL,
    cCTrCH-ID
                                                CCTrCH-ID
                                                                         OPTIONAL,
    transportBearerRequestIndicator
                                                TransportBearerRequestIndicator,
                                                ProtocolExtensionContainer { { USCH-Information-ModifyItem-RL-ReconfPrepTDD-ExtIEs} }
    iE-Extensions
                                                                                                                                         OPTIONAL,
    . . .
USCH-Information-ModifyItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
USCH-Information-DeleteList-RL-ReconfPrepTDD ::= SEOUENCE (SIZE (1..maxNrOfUSCHs)) OF USCH-Information-DeleteItem-RL-ReconfPrepTDD
USCH-Information-DeleteItem-RL-ReconfPrepTDD ::= SEQUENCE {
    uSCH-ID
                                                USCH-ID,
    iE-Extensions
                                                ProtocolExtensionContainer { { USCH-Information-DeleteItem-RL-ReconfPrepTDD-ExtIEs} }
                                                                                                                                         OPTIONAL,
    . . .
USCH-Information-DeleteItem-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    . . .
```

```
RL-Information-RL-ReconfPrepTDD ::= SEQUENCE {
   rL-ID
                                              RL-ID.
   maxDL-Power
                                              DL-Power
                                                                 OPTIONAL.
   minDL-Power
                                              DL-Power
                                                                 OPTIONAL,
                                              ProtocolExtensionContainer { { RL-Information-RL-ReconfPrepTDD-ExtIEs} }
                                                                                                                       OPTIONAL.
   iE-Extensions
RL-Information-RL-ReconfPrepTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
       ID id-InitDL-Power
                              CRITICALITY ignore
                                                     EXTENSION DL-Power
                                                                            PRESENCE optional
  -- RADIO LINK RECONFIGURATION READY
  ******************
RadioLinkReconfigurationReady ::= SEQUENCE {
   protocolIEs
                          ProtocolIE-Container
                                                 {{RadioLinkReconfigurationReady-IEs}},
   protocolExtensions
                          ProtocolExtensionContainer {{RadioLinkReconfigurationReady-Extensions}}
                                                                                                                 OPTIONAL,
RadioLinkReconfigurationReady-IEs NBAP-PROTOCOL-IES ::= {
           id-CRNC-CommunicationContextID
    { ID
                                                                            ignore
                                                                                                               CRNC-CommunicationContextID
                                                             CRITICALITY
                                                                                        TYPE
                   PRESENCE
                              mandatory } |
    { ID
           id-RL-InformationResponseList-RL-ReconfReady
                                                             CRITICALITY
                                                                            ignore
                                                                                        TYPE
                                                                                                              RL-InformationResponseList-RL-
ReconfReady
               PRESENCE
                          optional
    { ID
           id-CriticalityDiagnostics
                                                             CRITICALITY
                                                                            ignore
                                                                                        TYPE
                                                                                                               CriticalityDiagnostics
               PRESENCE
                          optional
RadioLinkReconfigurationReady-Extensions NBAP-PROTOCOL-EXTENSION ::= {
RL-InformationResponseList-RL-ReconfReady
                                           ::= SEQUENCE (SIZE (1..maxNrOfRLs)) OF ProtocolIE-Single-Container {{ RL-InformationResponseItemIE-RL-
ReconfReady \ \ \ \
RL-InformationResponseItemIE-RL-ReconfReady NBAP-PROTOCOL-IES ::= {
         id-RL-InformationResponseItem-RL-ReconfReady
                                                                 CRITICALITY
                                                                                                               TYPE RL-
                                                                                ignore
InformationResponseItem-RL-ReconfReady
                                          PRESENCE
                                                     mandatory}
RL-InformationResponseItem-RL-ReconfReady ::= SEQUENCE {
                                                  RL-ID,
    dCH-InformationResponseList-RL-ReconfReady
                                                  DCH-InformationResponseList-RL-ReconfReady OPTIONAL,
    dSCH-InformationResponseList-RL-ReconfReady
                                                 DSCH-InformationResponseList-RL-ReconfReady OPTIONAL,
    uSCH-InformationResponseList-RL-ReconfReady
                                                 USCH-InformationResponseList-RL-ReconfReady OPTIONAL,
    tFCI2-BearerInformationResponse
                                                 TFCI2-BearerInformationResponse
                                                                                    OPTIONAL, --FDD only
```

```
ProtocolExtensionContainer { { RL-InformationResponseItem-RL-ReconfReady-ExtIEs} }
   iE-Extensions
   OPTIONAL.
RL-InformationResponseItem-RL-ReconfReady-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DCH-InformationResponseList-RL-ReconfReady: = ProtocolIE-Single-Container {{ DCH-InformationResponseListIEs-RL-ReconfReady }}
DCH-InformationResponseListIEs-RL-ReconfReady NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
DSCH-InformationResponseList-RL-ReconfReady: = ProtocolIE-Single-Container {{ DSCH-InformationResponseListIEs-RL-ReconfReady }}
DSCH-InformationResponseListIEs-RL-ReconfReady NBAP-PROTOCOL-IES ::= {
   USCH-InformationResponseList-RL-ReconfReady: = ProtocolIE-Single-Container {{ USCH-InformationResponseListIEs-RL-ReconfReady }}
USCH-InformationResponseListIEs-RL-ReconfReady NBAP-PROTOCOL-IES ::= {
    ID id-USCH-InformationResponse CRITICALITY ignore TYPE USCH-InformationResponse
                                                                                  PRESENCE mandatory }
      ****************
-- RADIO LINK RECONFIGURATION FAILURE
  *****************
RadioLinkReconfigurationFailure ::= SEQUENCE {
   protocolIEs
                       ProtocolIE-Container
                                            {{RadioLinkReconfigurationFailure-IEs}},
                       ProtocolExtensionContainer {{RadioLinkReconfigurationFailure-Extensions}}
   protocolExtensions
                                                                                                     OPTIONAL.
RadioLinkReconfigurationFailure-IES NBAP-PROTOCOL-IES ::= {
   { ID
         id-CRNC-CommunicationContextID
                                                       CRITICALITY
                                                                    ignore
                                                                               TYPE
                                                                                                   CRNC-CommunicationContextID
                    PRESENCE
                              mandatory } |
          id-CauseLevel-RL-ReconfFailure CRITICALITY
                                                                                                      PRESENCE mandatory
    ID
                                                                    CauseLevel-RL-ReconfFailure
                                                             TYPE
                                                                                                   CriticalityDiagnostics
    ID
          id-CriticalityDiagnostics
                                                      CRITICALITY
                                                                               TYPE
                                                                    ignore
                 PRESENCE optional
RadioLinkReconfigurationFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CauseLevel-RL-ReconfFailure ::= CHOICE {
                    GeneralCauseList-RL-ReconfFailure,
   generalCause
```

```
rLSpecificCause
                    RLSpecificCauseList-RL-ReconfFailure,
GeneralCauseList-RL-ReconfFailure ::= SEQUENCE
   iE-Extensions
                                        ProtocolExtensionContainer { { GeneralCauseItem-RL-ReconfFailure-ExtIEs} }
                                                                                                             OPTIONAL.
GeneralCauseItem-RL-ReconfFailure-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RLSpecificCauseList-RL-ReconfFailure ::= SEQUENCE {
   rL-ReconfigurationFailureList-RL-ReconfFailure
                                               RL-ReconfigurationFailureList-RL-ReconfFailure
                                                                                                   OPTIONAL,
                                               iE-Extensions
   OPTIONAL,
   . . .
RLSpecificCauseItem-RL-ReconfFailure-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RL-ReconfigurationFailureList-RL-ReconfFailure ::= SEQUENCE (SIZE (1..maxNrOfRLs)) OF ProtocolIE-Single-Container {{ RL-
ReconfigurationFailureItemIE-RL-ReconfFailure}}
RL-ReconfigurationFailureItemIE-RL-ReconfFailure NBAP-PROTOCOL-IES ::= {
        id-RL-ReconfigurationFailureItem-RL-ReconfFailure
                                                            CRITICALITY
                                                                          ignore
                                                                                                 TYPE RL-
ReconfigurationFailureItem-RL-ReconfFailure
                                           PRESENCE
                                                     mandatory }
RL-ReconfigurationFailureItem-RL-ReconfFailure ::= SEQUENCE {
   rL-ID
                                        RL-ID,
   cause
   iE-Extensions
                                        OPTIONAL,
RL-ReconfigurationFailureItem-RL-ReconfFailure-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  -- RADIO LINK RECONFIGURATION COMMIT
  *****************
RadioLinkReconfigurationCommit ::= SEQUENCE
   protocolIEs
                                           {{RadioLinkReconfigurationCommit-IEs}},
                       ProtocolIE-Container
                       ProtocolExtensionContainer {{RadioLinkReconfigurationCommit-Extensions}}
   protocolExtensions
                                                                                                   OPTIONAL,
```

```
RadioLinkReconfigurationCommit-IES NBAP-PROTOCOL-IES ::= {
          id-NodeB-CommunicationContextID
                                                            ignore
                                                                              NodeB-CommunicationContextID
                                                                                                           PRESENCE mandatory
                                              CRITICALITY
                                                                       TYPE
    ID
                                              CRITICALITY
                                                            ignore
                                                                       TYPE
                                                                                                                      PRESENCE
   mandatory } |
   { ID
                                                                              Active-Pattern-Sequence-Information PRESENCE optional },
          id-Active-Pattern-Sequence-Information CRITICALITY
                                                            ignore
                                                                       TYPE
RadioLinkReconfigurationCommit-Extensions NBAP-PROTOCOL-EXTENSION ::= {
     -- RADIO LINK RECONFIGURATION CANCEL
__ **********************
RadioLinkReconfigurationCancel ::= SEQUENCE {
                                              {{RadioLinkReconfigurationCancel-IEs}},
   protocolIEs
                        ProtocolIE-Container
                        ProtocolExtensionContainer {{RadioLinkReconfigurationCancel-Extensions}}
   protocolExtensions
                                                                                                         OPTIONAL,
RadioLinkReconfigurationCancel-IES NBAP-PROTOCOL-IES ::= {
          id-NodeB-CommunicationContextID
                                              CRITICALITY
                                                            ignore
                                                                       TYPE
                                                                              NodeB-CommunicationContextID
                                                                                                              PRESENCE mandatory
RadioLinkReconfigurationCancel-Extensions NBAP-PROTOCOL-EXTENSION ::= {
   -- RADIO LINK RECONFIGURATION REQUEST FDD
__ ********************************
RadioLinkReconfigurationRequestFDD ::= SEQUENCE {
                                              {{RadioLinkReconfigurationRequestFDD-IEs}},
   protocolIEs
                        ProtocolIE-Container
                        ProtocolExtensionContainer {{RadioLinkReconfigurationRequestFDD-Extensions}}
   protocolExtensions
                                                                                                         OPTIONAL,
RadioLinkReconfigurationRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
          id-NodeB-CommunicationContextID
   { ID
                                                     CRITICALITY
                                                                   reject
                                                                                     NodeB-CommunicationContextID
                                                                                                                      PRESENCE
   mandatory }
         id-UL-DPCH-Information-RL-ReconfRqstFDD
                                                     CRITICALITY
                                                                   reject
                                                                              TYPE
                                                                                     UL-DPCH-Information-RL-ReconfRqstFDD
                                                                                                                           PRESENCE
   optional } |
```

```
id-DL-DPCH-Information-RL-ReconfRqstFDD
                                                          CRITICALITY
                                                                                     TYPE
                                                                                            DL-DPCH-Information-RL-ReconfRqstFDD
                                                                                                                                      PRESENCE
                                                                         reject
   optional
     ID
          id-FDD-DCHs-to-Modify
                                              CRITICALITY
                                                             reject
                                                                         TYPE
                                                                                 FDD-DCHs-to-Modify
                                                                                                                       PRESENCE optional } |
                                                                                                                          PRESENCE optional
     ID
           id-DCHs-to-Add-FDD
                                              CRITICALITY
                                                             reject
                                                                         TYPE
                                                                                 DCH-FDD-Information
           id-DCH-DeleteList-RL-ReconfRqstFDD
                                                          CRITICALITY
                                                                                            DCH-DeleteList-RL-ReconfRqstFDD
                                                                                                                                   PRESENCE
    { ID
                                                                         reject
                                                                                     TYPE
    optional } |
    { ID
          id-RL-InformationList-RL-ReconfRqstFDD
                                                                                            RL-InformationList-RL-ReconfRqstFDD
                                                          CRITICALITY
                                                                         reject
                                                                                     TYPE
                                                                                                                                      PRESENCE
   optional
    { ID id-Transmission-Gap-Pattern-Sequence-Information CRITICALITY
                                                                                            Transmission-Gap-Pattern-Sequence-Information
                                                                         reject
                                                                                     TYPE
PRESENCE optional },
    . . .
RadioLinkReconfigurationRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
UL-DPCH-Information-RL-ReconfRgstFDD ::= SEQUENCE {
   ul-TECS
                                                  TFCS
                                                                 OPTIONAL,
                                                  ProtocolExtensionContainer { { UL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs} }
   iE-Extensions
                                                                                                                                OPTIONAL,
UL-DPCH-Information-RL-ReconfRgstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-DPCH-Information-RL-ReconfRgstFDD ::= SEQUENCE {
   dl-TFCS
                                                                 OPTIONAL.
   tFCI-SignallingMode
                                                                                        OPTIONAL,
                                                  TFCI-SignallingMode
   limitedPowerIncrease
                                                  LimitedPowerIncrease
                                                                                        OPTIONAL,
                                                  ProtocolExtensionContainer { { DL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs} } 
   iE-Extensions
                                                                                                                                OPTIONAL,
DL-DPCH-Information-RL-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DCH-DeleteList-RL-ReconfRqstFDD ::= SEOUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-DeleteItem-RL-ReconfRqstFDD
DCH-DeleteItem-RL-ReconfRqstFDD ::= SEQUENCE {
   dCH-ID
   iE-Extensions
                                                  OPTIONAL,
    . . .
DCH-DeleteItem-RL-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    . . .
```

. . .

```
RL-InformationList-RL-ReconfRqstFDD ::= SEQUENCE (SIZE (1..maxNrOfRLs)) OF ProtocolIE-Single-Container {{ RL-InformationItemIE-RL-ReconfRqstFDD}}
RL-InformationItemIE-RL-ReconfRqstFDD NBAP-PROTOCOL-IES ::= {
          id-RL-InformationItem-RL-ReconfRqstFDD
                                                            CRITICALITY
                                                                           reject
                                                                                          TYPE
                                                                                                            RL-InformationItem-RL-
ReconfRast.FDD
                      PRESENCE
                                 mandatory}
RL-InformationItem-RL-ReconfRqstFDD ::= SEQUENCE
   maxDL-Power
                                             DL-Power
                                                            OPTIONAL.
   minDL-Power
                                             DL-Power
                                                            OPTIONAL.
   dl-CodeInformation
                                         FDD-DL-CodeInformation
                                                                   OPTIONAL,
-- The IE shall be present if the Transmission Gap Pattern Sequence Information IE is included and the indicated Downlink Compressed Mode method
for at least one of the included Transmission Gap Pattern Sequence is set to "SF/2".
   iE-Extensions
                                            OPTIONAL.
RL-InformationItem-RL-ReconfRqstFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
        ***************
-- RADIO LINK RECONFIGURATION REQUEST TDD
  ******************
RadioLinkReconfigurationRequestTDD ::= SEQUENCE {
                         ProtocolIE-Container
                                                {{RadioLinkReconfigurationRequestTDD-IEs}},
   protocolIEs
                          ProtocolExtensionContainer {{RadioLinkReconfigurationRequestTDD-Extensions}}
   protocolExtensions
                                                                                                               OPTIONAL,
RadioLinkReconfigurationRequestTDD-IES NBAP-PROTOCOL-IES ::= {
          id-NodeB-CommunicationContextID
                                                                CRITICALITY
                                                                               reject
                                                                                                            TYPE NodeB-
CommunicationContextID
                                     PRESENCE
                                                mandatory
          id-UL-CCTrCH-InformationModifyList-RL-ReconfRqstTDD
                                                                   CRITICALITY
                                                                                  notify
                                                                                                               TYPE UL-CCTrCH-
InformationModifyList-RL-ReconfRqstTDD
                                         PRESENCE
                                                    optional
          id-UL-CCTrCH-InformationDeleteList-RL-ReconfRqstTDD
                                                                   CRITICALITY
                                                                                  notify
                                                                                                               TYPE UL-CCTrCH-
InformationDeleteList-RL-ReconfRqstTDD
                                         PRESENCE
                                                    optional
          id-DL-CCTrCH-InformationModifyList-RL-ReconfRqstTDD
                                                                   CRITICALITY
                                                                                  notify
                                                                                                               TYPE DL-CCTrCH-
InformationModifyList-RL-ReconfRqstTDD
                                         PRESENCE
                                                    optional
          id-DL-CCTrCH-InformationDeleteList-RL-ReconfRqstTDD
                                                                   CRITICALITY
                                                                                                               TYPE DL-CCTrCH-
                                                                                  notify
InformationDeleteList-RL-ReconfRgstTDD
                                                    optional
                                         PRESENCE
   { ID
          id-TDD-DCHs-to-Modify
                                                    CRITICALITY
                                                                   reject
                                                                                  TYPE
                                                                                          TDD-DCHs-to-Modify
                                                                                                                       PRESENCE optional }
       { ID
              id-DCHs-to-Add-TDD
                                                        CRITICALITY
                                                                       reject
                                                                                      TYPE
                                                                                                            DCH-TDD-Information
   PRESENCE
              optional
                       } |
   { ID
          id-DCH-DeleteList-RL-ReconfRqstTDD
                                                               CRITICALITY
                                                                               reject
                                                                                                            TYPE DCH-DeleteList-RL-
ReconfRastTDD
                             PRESENCE
                                         optional
    { ID
          id-RL-Information-RL-ReconfRqstTDD
                                                            CRITICALITY
                                                                           ignore
                                                                                          TYPE
                                                                                                            RL-Information-RL-ReconfRqstTDD
              PRESENCE
                        optional },
```

```
RadioLinkReconfigurationRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
UL-CCTrCH-InformationModifyList-RL-ReconfRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF ProtocolIE-Single-Container {{ UL-CCTrCH-
InformationModifyItemIE-RL-ReconfRgstTDD}}
UL-CCTrCH-InformationModifyItemIE-RL-ReconfRqstTDD NBAP-PROTOCOL-IES ::= {
   { ID id-UL-CCTrCH-InformationModifyItem-RL-ReconfRqstTDD
                                                                     CRITICALITY
                                                                                    notify
                                                                                                                 TYPE UL-CCTrCH-
InformationModifyItem-RL-ReconfRqstTDD
                                         PRESENCE
UL-CCTrCH-InformationModifyItem-RL-ReconfRqstTDD ::= SEQUENCE {
   cCTrCH-ID
                                                 CCTrCH-ID,
   t.FCS
                                                 TFCS
                                                                 OPTIONAL,
   punctureLimit
                                                 PunctureLimit OPTIONAL,
                                                 ProtocolExtensionContainer { { UL-CCTrCH-InformationModifyItem-RL-ReconfRqstTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
    . . .
UL-CCTrCH-InformationModifyItem-RL-ReconfRgstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UL-CCTrCH-InformationDeleteList-RL-ReconfRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF ProtocolIE-Single-Container {{ UL-CCTrCH-
InformationDeleteItemIE-RL-ReconfRqstTDD}}
UL-CCTrCH-InformationDeleteItemIE-RL-ReconfRqstTDD NBAP-PROTOCOL-IES ::= {
   { ID id-UL-CCTrCH-InformationDeleteItem-RL-ReconfRqstTDD
                                                                    CRITICALITY
                                                                                    notify
                                                                                                                 TYPE UL-CCTrCH-
InformationDeleteItem-RL-ReconfRqstTDD
                                         PRESENCE
                                                     mandatory }
UL-CCTrCH-InformationDeleteItem-RL-ReconfRqstTDD ::= SEQUENCE {
   cCTrCH-ID
                                                 iE-Extensions
   OPTIONAL,
    . . .
UL-CCTrCH-InformationDeleteItem-RL-ReconfRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-CCTrCH-InformationModifyList-RL-ReconfRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF ProtocolIE-Single-Container {{ DL-CCTrCH-
InformationModifyItemIE-RL-ReconfRqstTDD}}
DL-CCTrCH-InformationModifyItemIE-RL-ReconfRgstTDD NBAP-PROTOCOL-IES ::= {
    { ID id-DL-CCTrCH-InformationModifyItem-RL-ReconfRqstTDD
                                                                     CRITICALITY
                                                                                    notify
                                                                                                                 TYPE DL-CCTrCH-
InformationModifyItem-RL-ReconfRqstTDD
                                         PRESENCE
                                                     mandatory }
```

```
DL-CCTrCH-InformationModifyItem-RL-ReconfRqstTDD ::= SEQUENCE {
   cCTrCH-ID
                                                  CCTrCH-ID.
   t.FCS
                                                                  OPTIONAL.
   punctureLimit
                                                  PunctureLimit
                                                                 OPTIONAL,
   iE-Extensions
                                                  ProtocolExtensionContainer { { DL-CCTrCH-InformationModifyItem-RL-ReconfRqstTDD-ExtIEs} }
   OPTIONAL,
    . . .
DL-CCTrCH-InformationModifyItem-RL-ReconfRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-CCTrCH-InformationDeleteList-RL-ReconfRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF ProtocolIE-Single-Container {{ DL-CCTrCH-
InformationDeleteItemIE-RL-ReconfRgstTDD}}
DL-CCTrCH-InformationDeleteItemIE-RL-ReconfRqstTDD NBAP-PROTOCOL-IES ::= {
          id-DL-CCTrCH-InformationDeleteItem-RL-ReconfRqstTDD
                                                                      CRITICALITY
                                                                                     notify
                                                                                                                   TYPE DL-CCTrCH-
InformationDeleteItem-RL-ReconfRgstTDD
                                          PRESENCE
                                                      mandatory }
DL-CCTrCH-InformationDeleteItem-RL-ReconfRqstTDD ::= SEQUENCE {
   cCTrCH-ID
                                                  CCTrCH-ID,
                                                  ProtocolExtensionContainer { { DL-CCTrCH-InformationDeleteItem-RL-ReconfRgstTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
DL-CCTrCH-InformationDeleteItem-RL-ReconfRgstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DCH-DeleteList-RL-ReconfRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-DeleteItem-RL-ReconfRqstTDD
DCH-DeleteItem-RL-ReconfRgstTDD ::= SEOUENCE {
   dCH-ID
   iE-Extensions
                                                  OPTIONAL,
DCH-DeleteItem-RL-ReconfRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RL-Information-RL-ReconfRgstTDD ::= SEOUENCE
   rL-ID
                                              RL-ID,
   maxDL-Power
                                              DL-Power
                                                              OPTIONAL,
   minDL-Power
                                                              OPTIONAL,
                                              DL-Power
   iE-Extensions
                                              ProtocolExtensionContainer { { RL-InformationItem-RL-ReconfRqstTDD-ExtIEs} }
                                                                                                                              OPTIONAL.
    . . .
RL-InformationItem-RL-ReconfRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    . . .
```

```
-- RADIO LINK RECONFIGURATION RESPONSE
  ******************
RadioLinkReconfigurationResponse ::= SEQUENCE {
                                             {{RadioLinkReconfigurationResponse-IEs}},
   protocolIEs
                        ProtocolIE-Container
                        ProtocolExtensionContainer {{RadioLinkReconfigurationResponse-Extensions}}
   protocolExtensions
                                                                                                       OPTIONAL,
   . . .
RadioLinkReconfigurationResponse-IEs NBAP-PROTOCOL-IES ::= {
         id-CRNC-CommunicationContextID
                                                    CRITICALITY ignore
                                                                         TYPE
                                                                                CRNC-CommunicationContextID
                                                                                                                       PRESENCE
   mandatory }
         id-RL-InformationResponseList-RL-ReconfRsp
   { ID
                                                    CRITICALITY ignore
                                                                         TYPE
                                                                                RL-InformationResponseList-RL-ReconfRsp
                                                                                                                         PRESENCE
   optional
         id-CriticalityDiagnostics
   { ID
                                                    CRITICALITY ignore
                                                                         TYPE
                                                                                CriticalityDiagnostics
                                                                                                                    PRESENCE
   optional },
   . . .
RadioLinkReconfigurationResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
RL-InformationResponseList-RL-ReconfRsp ::= SEOUENCE (SIZE (1..maxNrOfRLs)) OF ProtocolIE-Single-Container {{RL-InformationResponseItemIE-RL-
ReconfRsp } }
RL-InformationResponseItemIE-RL-ReconfRsp NBAP-PROTOCOL-IES ::= {
          id-RL-InformationResponseItem-RL-ReconfRsp
                                                       CRITICALITY
                                                                      ignore
                                                                                   TYPE
                                                                                                     RL-InformationResponseItem-RL-
ReconfRsp
                 PRESENCE
                          mandatory}
RL-InformationResponseItem-RL-ReconfRsp ::= SEQUENCE {
   rL-ID
                                         RL-ID,
   dCH-InformationResponseList-RL-ReconfRsp
                                             DCH-InformationResponseList-RL-ReconfRsp
                                          iE-Extensions
                                                                                                                    OPTIONAL,
RL-InformationResponseItem-RL-ReconfRsp-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DCH-InformationResponseList-RL-ReconfRsp::= ProtocolIE-Single-Container {{ DCH-InformationResponseListIEs-RL-ReconfRsp }}
DCH-InformationResponseListIEs-RL-ReconfRsp NBAP-PROTOCOL-IES ::= {
   TYPE DCH-InformationResponse
                                                                                PRESENCE mandatory }
```

```
****************
-- RADIO LINK DELETION REQUEST
  *******************
RadioLinkDeletionRequest ::= SEQUENCE {
                       ProtocolIE-Container
   protocolIEs
                                            {{RadioLinkDeletionRequest-IEs}},
                       ProtocolExtensionContainer {{RadioLinkDeletionRequest-Extensions}}
   protocolExtensions
                                                                                                   OPTIONAL,
RadioLinkDeletionRequest-IEs NBAP-PROTOCOL-IES ::= {
         id-NodeB-CommunicationContextID
                                                   CRITICALITY
                                                                reject
                                                                              TYPE
                                                                                                   NodeB-CommunicationContextID
          PRESENCE
                    mandatory
         id-CRNC-CommunicationContextID
                                                                                                   CRNC-CommunicationContextID
   { ID
                                                   CRITICALITY
                                                                 reject
                                                                                  TYPE
          PRESENCE
                   mandatory }|
         id-RL-informationList-RL-DeletionRqst
   { ID
                                                   CRITICALITY
                                                                 notify
                                                                              TYPE
                                                                                                   RL-informationList-RL-
DeletionRast
                   PRESENCE
                              mandatory
RadioLinkDeletionRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
RL-informationList-RL-DeletionRgst ::= SEQUENCE (SIZE (1..maxNrOfRLs)) OF ProtocolIE-Single-Container {{RL-informationItemIE-RL-DeletionRgst}}
RL-informationItemIE-RL-DeletionRqst NBAP-PROTOCOL-IES ::= {
         id-RL-informationItem-RL-DeletionRqst
                                                   CRITICALITY
                                                                 notify
                                                                              TYPE
                                                                                                   RL-informationItem-RL-
DeletionRast
                       PRESENCE
                                 mandatory }
RL-informationItem-RL-DeletionRqst ::= SEQUENCE {
   rL-ID
                                         RL-ID,
   iE-Extensions
                                         OPTIONAL,
RL-informationItem-RL-DeletionRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    *****************
-- RADIO LINK DELETION RESPONSE
  ******************
RadioLinkDeletionResponse ::= SEOUENCE {
   protocolIEs
                       ProtocolIE-Container
                                            {{RadioLinkDeletionResponse-IEs}},
                       ProtocolExtensionContainer {{RadioLinkDeletionResponse-Extensions}}
   protocolExtensions
                                                                                                     OPTIONAL,
```

```
RadioLinkDeletionResponse-IEs NBAP-PROTOCOL-IES ::= {
          id-CRNC-CommunicationContextID
                                                 CRITICALITY
                                                                 ignore
                                                                                TYPE
                                                                                        CRNC-CommunicationContextID
                                                                                                                            PRESENCE
   mandatory }|
          id-CriticalityDiagnostics
                                                                                        CriticalityDiagnostics
    { ID
                                                                 ignore
                                                                                TYPE
                                                                                                                          PRESENCE optional },
                                                 CRITICALITY
    . . .
RadioLinkDeletionResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
   *****************
-- DL POWER CONTROL REQUEST FDD
   ***************
DL-PowerControlRequest ::= SEQUENCE {
                                                {{DL-PowerControlRequest-IEs}},
   protocolIEs
                          ProtocolIE-Container
                          ProtocolExtensionContainer {{DL-PowerControlRequest-Extensions}}
   protocolExtensions
                                                                                                               OPTIONAL,
DL-PowerControlRequest-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID
                                             CRITICALITY ignore
                                                                        TYPE
                                                                                NodeB-CommunicationContextID
                                                                                                                       PRESENCE mandatory
     ID id-PowerAdjustmentType
                                             CRITICALITY ignore TYPE PowerAdjustmentType
                                                                                                                    PRESENCE mandatory}
    { ID id-DLReferencePower
                                             CRITICALITY ignore TYPE DL-Power
                                                                                                                    PRESENCE conditional
    -- This IE shall be present if the Adjustment Type IE is set to 'Common'
    { ID id-InnerLoopDLPCStatus
                                             CRITICALITY ignore TYPE InnerLoopDLPCStatus
                                                                                                                    PRESENCE optional }
    { ID id-DLReferencePowerList-DL-PC-Rqst
                                             CRITICALITY ignore TYPE DL-ReferencePowerInformationList-DL-PC-Rqst PRESENCE conditional
    -- This IE shall be present if the Adjustment Type IE is set to 'Individual'
                                                                                                               PRESENCE conditional }
   { ID id-MaxAdjustmentStep
                                             CRITICALITY ignore TYPE MaxAdjustmentStep
    -- This IE shall be present if the Adjustment Type IE is set to 'Common' or 'Individual'
   { ID id-AdjustmentPeriod
                                             CRITICALITY ignore TYPE AdjustmentPeriod
                                                                                                               PRESENCE conditional } |
    -- This IE shall be present if the Adjustment Type IE is set to 'Common' or 'Individual'
   { ID id-AdjustmentRatio
                            CRITICALITY ignore TYPE ScaledAdjustmentRatio
                                                                                        PRESENCE conditional
    -- This IE shall be present if the Adjustment Type IE is set to 'Common' or 'Individual'
DL-PowerControlRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
DL-ReferencePowerInformationList-DL-PC-Rgst ::= SEOUENCE (SIZE (1..maxNrOfRLs)) OF ProtocolIE-Single-Container {{DL-
ReferencePowerInformationItemIE-DL-PC-Rgst }}
DL-ReferencePowerInformationItemIE-DL-PC-Rgst NBAP-PROTOCOL-IES ::= {
    { ID id-DL-ReferencePowerInformationItem-DL-PC-Rqst
                                                         CRITICALITY
                                                                                    TYPE
                                                                                           DL-ReferencePowerInformationItem-DL-PC-Rqst
                                                                         ignore
    PRESENCE
               mandatory
```

```
DL-ReferencePowerInformationItem-DL-PC-Rqst ::= SEQUENCE {
                                     RL-ID.
   dl-ReferencePower
                                     DL-Power,
   iE-Extensions
                                     ProtocolExtensionContainer { { DL-ReferencePowerInformationItem-DL-PC-Rgst-ExtIEs } }
                                                                                                                 OPTIONAL.
DL-ReferencePowerInformationItem-DL-PC-Rqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ******************
-- DL POWER TIMESLOT CONTROL REQUEST TDD
  ******************
DL-PowerTimeslotControlRequest ::= SEQUENCE {
                                          {{DL-PowerTimeslotControlRequest-IEs}},
   protocolIEs
               ProtocolIE-Container
                       ProtocolExtensionContainer {{DL-PowerTimeslotControlRequest-Extensions}}
   protocolExtensions
                                                                                                     OPTIONAL,
DL-PowerTimeslotControlRequest-IEs NBAP-PROTOCOL-IES ::= {
     ID id-NodeB-CommunicationContextID
                                            CRITICALITY ignore
                                                                    TYPE
                                                                           NodeB-CommunicationContextID
                                                                                                            PRESENCE mandatory
                                                                                  PRESENCE optional }, -- Mandatory for 3.84Mcps TDD
     ID id-TimeslotISCPInfo
                            CRITICALITY ignore
                                                      TYPE DL-TimeslotISCPInfo
only
DL-PowerTimeslotControlRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
   { ID id-TimeslotISCPInfoList-LCR-DL-PC-RqstTDD
                                            CRITICALITY ignore
                                                                       EXTENSION TimeslotISCPInfoList-LCR-DL-PC-RqstTDD
                                                                                                                       PRESENCE
optional },
TimeslotISCPInfoList-LCR-DL-PC-RgstTDD ::= SEQUENCE {
   dL-TimeslotISCP-LCR-Info DL-TimeslotISCPInfoLCR,
                                                   -- Mandatory for 1.28Mcps TDD only
                           iE-Extensions
                                                                                                       OPTIONAL,
   . . .
TimeslotISCPInfoItem-LCR-DL-PC-RqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ****************
-- DEDICATED MEASUREMENT INITIATION REQUEST
```

```
DedicatedMeasurementInitiationRequest ::= SEQUENCE {
   protocolIEs
                         ProtocolIE-Container
                                                {{DedicatedMeasurementInitiationRequest-IEs}},
                         ProtocolExtensionContainer {{DedicatedMeasurementInitiationRequest-Extensions}}
   protocolExtensions
                                                                                                              OPTIONAL,
DedicatedMeasurementInitiationRequest-IES NBAP-PROTOCOL-IES ::= {
          id-NodeB-CommunicationContextID
                                                       CRITICALITY
                                                                       reject
                                                                                  TYPE
                                                                                         NodeB-CommunicationContextID
                                                                                                                            PRESENCE
   mandatory } |
   { ID id-MeasurementID
                                                        CRITICALITY
                                                                       reject
                                                                                  TYPE
                                                                                         MeasurementID
                                                                                                                               PRESENCE
   mandatory } |
   { ID id-DedicatedMeasurementObjectType-DM-Rqst
                                                                                         DedicatedMeasurementObjectType-DM-Rgst
                                                        CRITICALITY
                                                                       reject
                                                                                  TYPE
                                                                                                                                  PRESENCE
   mandatory } |
   -- This IE represents both the Dedicated Measurement Object Type IE and the choice based on the Dedicated Measurement Object Type
   -- as described in the tabular message format in subclause 9.1.
   { ID id-DedicatedMeasurementType
                                                       CRITICALITY
                                                                       reject
                                                                                  TYPE
                                                                                         DedicatedMeasurementType
                                                                                                                            PRESENCE
   mandatory } |
   { ID
          id-MeasurementFilterCoefficient
                                                       CRITTCALITY
                                                                       reject
                                                                                  TYPE
                                                                                         MeasurementFilterCoefficient
                                                                                                                               PRESENCE
   optional } |
         id-ReportCharacteristics
   { ID
                                                        CRITICALITY
                                                                      reject
                                                                                  TYPE
                                                                                         ReportCharacteristics
                                                                                                                            PRESENCE
   mandatory } |
   { ID id-CFNReportingIndicator
                                                        CRITICALITY
                                                                      reject
                                                                                  TYPE
                                                                                         FNReportingIndicator
                                                                                                                            PRESENCE
   mandatory } |
          id-CFN
                                                                                  TYPE
                                                                                         CFN
   { ID
                                                        CRITICALITY
                                                                       reject
                                                                                                                            PRESENCE
optional
          } ,
   . . .
DedicatedMeasurementInitiationRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
DedicatedMeasurementObjectType-DM-Rqst ::= CHOICE {
                             RL-DM-Rqst,
   rLS
                             RL-Set-DM-Rgst,
   all-RL
                             AllRL-DM-Rast,
   all-RLS
                             AllRL-Set-DM-Rgst,
RL-DM-Rqst ::= SEQUENCE {
   rL-InformationList
                                     RL-InformationList-DM-Rgst,
   iE-Extensions
                                     OPTIONAL,
   . . .
RLItem-DM-Rqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RL-InformationList-DM-Rqst ::= SEQUENCE (SIZE (1..maxNrOfRLs)) OF ProtocolIE-Single-Container {{ RL-InformationItemIE-DM-Rqst }}
```

```
RL-InformationItemIE-DM-Rgst NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
RL-InformationItem-DM-Rgst ::= SEQUENCE {
      rL-ID
                                   RL-ID.
      dPCH-ID
                                   DPCH-ID
                                                     OPTIONAL,
                                   ProtocolExtensionContainer { { RL-InformationItem-DM-Rqst-ExtIEs } }
      iE-Extensions
                                                                                                         OPTIONAL,
       . . .
RL-InformationItem-DM-Rqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
   { ID id-PUSCH-Info-DM-Rqst
                               CRITICALITY reject
                                                            EXTENSION PUSCH-Info-DM-Rast
                                                                                                         PRESENCE optional }.
   -- TDD only
PUSCH-Info-DM-Rqst ::= SEQUENCE (SIZE (1..maxNrOfPUSCHs)) OF PUSCH-ID
RL-Set-DM-Rqst ::= SEQUENCE {
   rL-Set-InformationList-DM-Rqst
                                       RL-Set-InformationList-DM-Rqst,
                                       ProtocolExtensionContainer { { RL-SetItem-DM-Rqst-ExtIEs } }
   iE-Extensions
                                                                                                         OPTIONAL,
   . . .
RL-SetItem-DM-Rqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RL-Set-InformationList-DM-Rgst
                                        ::= SEOUENCE (SIZE(1..maxNrOfRLSets)) OF RL-Set-InformationItem-DM-Rqst
RL-Set-InformationItem-DM-Rqst ::= SEQUENCE {
   rL-Set-ID
                                ProtocolExtensionContainer { { RL-Set-InformationItem-DM-Rgst-ExtIEs} } OPTIONAL.
   iE-Extensions
RL-Set-InformationItem-DM-Rgst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
AllRL-DM-Rqst ::= NULL
AllRL-Set-DM-Rqst ::= NULL
__ *********************
-- DEDICATED MEASUREMENT INITIATION RESPONSE
__ ********************************
DedicatedMeasurementInitiationResponse ::= SEQUENCE {
```

```
{{DedicatedMeasurementInitiationResponse-IEs}},
   protocolIEs
                        ProtocolIE-Container
   protocolExtensions
                        ProtocolExtensionContainer {{DedicatedMeasurementInitiationResponse-Extensions}}
                                                                                                        OPTIONAL,
DedicatedMeasurementInitiationResponse-IES NBAP-PROTOCOL-IES ::= {
         id-CRNC-CommunicationContextID
                                                    CRITICALITY
                                                                                    CRNC-CommunicationContextID
                                                                                                                        PRESENCE
                                                                   ignore
                                                                             TYPE
   mandatory } |
   { ID
         id-MeasurementID
                                                     CRITICALITY
                                                                   ignore
                                                                             TYPE
                                                                                    Measurement TD
                                                                                                                        PRESENCE
   mandatory } |
          id-DedicatedMeasurementObjectType-DM-Rsp
                                                                             TYPE
                                                                                    DedicatedMeasurementObjectType-DM-Rsp
   { ID
                                                     CRITICALITY
                                                                   ignore
                                                                                                                       PRESENCE
   optional
         id-CriticalityDiagnostics
                                                                                    CriticalityDiagnostics
                                                                                                                     PRESENCE
   { ID
                                                     CRITICALITY
                                                                   ignore
                                                                             TYPE
   optional },
   . . .
DedicatedMeasurementInitiationResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
DedicatedMeasurementObjectType-DM-Rsp ::= CHOICE {
                            RL-DM-Rsp,
   rLS
                            RL-Set-DM-Rsp.
   all-RL
                            RL-DM-Rsp,
   all-RLS
                            RL-Set-DM-Rsp,
   . . .
RL-DM-Rsp ::= SEQUENCE {
   rL-InformationList-DM-Rsp
                                   RL-InformationList-DM-Rsp,
   iE-Extensions
                                   OPTIONAL,
   . . .
RLItem-DM-Rsp-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RL-InformationList-DM-Rsp ::= SEQUENCE (SIZE (1..maxNrOfRLs)) OF ProtocolIE-Single-Container {{ RL-InformationItemIE-DM-Rsp }}
RL-InformationItemIE-DM-Rsp NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
RL-InformationItem-DM-Rsp ::= SEQUENCE
   rL-ID
                                   RL-ID,
   dPCH-ID
                                   DPCH-ID
                                                 OPTIONAL,
   dedicatedMeasurementValue
                                   DedicatedMeasurementValue.
                                                 OPTIONAL,
                                   iE-Extensions
                                                                                                        OPTIONAL,
   . . .
```

427

```
RL-InformationItem-DM-Rsp-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    {ID id-PUSCH-Info-DM-Rsp
                                  CRITICALITY reject
                                                                             PUSCH-Info-DM-Rsp
                                                                                                                  PRESENCE optional },
                                                                 EXTENSION
    -- TDD only
PUSCH-Info-DM-Rsp ::= SEQUENCE (SIZE (0..maxNrOfPUSCHs)) OF PUSCH-ID
RL-Set-DM-Rsp ::= SEQUENCE {
   rL-Set-InformationList-DM-Rsp
                                      RL-Set-InformationList-DM-Rsp,
                                      ProtocolExtensionContainer { { RL-SetItem-DM-Rsp-ExtIEs } }
   iE-Extensions
                                                                                                                  OPTIONAL,
    . . .
RL-SetItem-DM-Rsp-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RL-Set-InformationList-DM-Rsp ::= SEOUENCE (SIZE (1..maxNrOfRLSets)) OF ProtocolIE-Single-Container {{ RL-Set-InformationItemIE-DM-Rsp }}
RL-Set-InformationItemIE-DM-Rsp NBAP-PROTOCOL-IES ::= {
    { ID id-RL-Set-InformationItem-DM-Rsp
                                              CRITICALITY ignore
                                                                             RL-Set-InformationItem-DM-Rsp
                                                                                                                PRESENCE mandatory }
                                                                     TYPE
RL-Set-InformationItem-DM-Rsp ::= SEQUENCE {
   rL-Set-ID
                                  RL-Set-ID.
   dedicatedMeasurementValue
                                  DedicatedMeasurementValue,
   CFN
                                  CFN
                                                  OPTIONAL,
                                  ProtocolExtensionContainer { { RL-Set-InformationItem-DM-Rsp-ExtIEs} } OPTIONAL,
   iE-Extensions
RL-Set-InformationItem-DM-Rsp-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
   ******************
-- DEDICATED MEASUREMENT INITIATION FAILURE
__ ********************************
DedicatedMeasurementInitiationFailure ::= SEQUENCE
   protocolIEs
                          ProtocolIE-Container
                                                  {{DedicatedMeasurementInitiationFailure-IEs}},
                          ProtocolExtensionContainer {{DedicatedMeasurementInitiationFailure-Extensions}}
   protocolExtensions
                                                                                                                  OPTIONAL,
DedicatedMeasurementInitiationFailure-IEs NBAP-PROTOCOL-IES ::= {
           id-CRNC-CommunicationContextID
    ID
                                                  CRITICALITY
                                                                 ignore
                                                                                 TYPE
                                                                                        CRNC-CommunicationContextID
                                                                                                                        PRESENCE mandatory
     ID
           id-MeasurementID
                                                  CRITICALITY
                                                                 ignore
                                                                                 TYPE
                                                                                        MeasurementID
                                                                                                                           PRESENCE mandatory
```

```
{ ID id-Cause
                                                                                                                      PRESENCE
                                              CRITICALITY
                                                                          TYPE
                                                                                  Cause
                                                            ignore
   mandatory } |
   { ID
         id-CriticalityDiagnostics
                                              CRITICALITY
                                                            ignore
                                                                          TYPE
                                                                                  CriticalityDiagnostics
                                                                                                            PRESENCE optional },
DedicatedMeasurementInitiationFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    *****************
-- DEDICATED MEASUREMENT REPORT
__ *********************
DedicatedMeasurementReport ::= SEQUENCE {
   protocolIEs
                       ProtocolIE-Container
                                            {{DedicatedMeasurementReport-IEs}},
                     ProtocolExtensionContainer {{DedicatedMeasurementReport-Extensions}}
   protocolExtensions
                                                                                                         OPTIONAL,
DedicatedMeasurementReport-IEs NBAP-PROTOCOL-IES ::= {
   { ID id-CRNC-CommunicationContextID
                                                        CRITICALITY
                                                                       ignore
                                                                                  TYPE
                                                                                                       CRNC-CommunicationContextID
             PRESENCE
                        mandatory } |
          id-Measurement.ID
                                                         CRITICALITY
                                                                       ignore
                                                                                  TYPE
                                                                                                       Measurement.ID
      PRESENCE mandatory } |
          id-DedicatedMeasurementObjectType-DM-Rprt
                                                        CRITICALITY
                                                                       ignore
                                                                                  TYPE
                                                                                                       DedicatedMeasurementObjectType-
          PRESENCE mandatory } ,
DM-Rprt
DedicatedMeasurementReport-Extensions NBAP-PROTOCOL-EXTENSION ::= {
DedicatedMeasurementObjectType-DM-Rprt ::= CHOICE {
                                   RL-DM-Rprt,
   rLS
                                   RL-Set-DM-Rprt,
   all-RL
                                   RL-DM-Rprt,
   all-RLS
                                   RL-Set-DM-Rprt,
RL-DM-Rprt ::= SEQUENCE {
   rL-InformationList-DM-Rprt
                                   RL-InformationList-DM-Rprt,
   iE-Extensions
                                   OPTIONAL,
RLItem-DM-Rprt-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
   . . .
```

```
RL-InformationList-DM-Rprt ::= SEQUENCE (SIZE (1..maxNrOfRLs)) OF ProtocolIE-Single-Container {{ RL-InformationItemIE-DM-Rprt }}
RL-InformationItemIE-DM-Rprt NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
RL-InformationItem-DM-Rprt ::= SEOUENCE {
   rL-ID
   dPCH-ID
                             DPCH-TD
                                       OPTIONAL,
   dedicatedMeasurementValueInformation DedicatedMeasurementValueInformation,
                             ProtocolExtensionContainer { { RL-InformationItem-DM-Rprt-ExtIEs } }
   iE-Extensions
                                                                                                 OPTIONAL,
   . . .
RL-InformationItem-DM-Rprt-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
   {ID id-PUSCH-Info-DM-Rprt
                             CRITICALITY reject
                                                       EXTENSION PUSCH-Info-DM-Rprt
                                                                                                 PRESENCE optional },
   -- TDD only
PUSCH-Info-DM-Rprt ::= SEQUENCE (SIZE (0..maxNrOfPUSCHs)) OF PUSCH-ID
RL-Set-DM-Rprt ::= SEQUENCE {
   rL-Set-InformationList-DM-Rprt
                                RL-Set-InformationList-DM-Rprt,
   iE-Extensions
                                OPTIONAL,
   . . .
RL-SetItem-DM-Rprt-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RL-Set-InformationList-DM-Rprt ::= SEQUENCE (SIZE (1..maxNrOfRLSets)) OF ProtocolIE-Single-Container {{ RL-Set-InformationItemIE-DM-Rprt }}
RL-Set-InformationItemIE-DM-Rprt NBAP-PROTOCOL-IES ::= {
   PRESENCE mandatory }
RL-Set-InformationItem-DM-Rprt ::= SEQUENCE
                             RL-Set-ID,
   dedicatedMeasurementValueInformation DedicatedMeasurementValueInformation,
                             ProtocolExtensionContainer { { RL-Set-InformationItem-DM-Rprt-ExtIEs} } OPTIONAL,
   iE-Extensions
RL-Set-InformationItem-DM-Rprt-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ****************
-- DEDICATED MEASUREMENT TERMINATION REQUEST
__ **********************
```

```
DedicatedMeasurementTerminationRequest ::= SEQUENCE
   protocolIEs
                         ProtocolIE-Container
                                                {{DedicatedMeasurementTerminationRequest-IEs}},
   protocolExtensions
                         ProtocolExtensionContainer {{DedicatedMeasurementTerminationRequest-Extensions}}
                                                                                                              OPTIONAL,
DedicatedMeasurementTerminationRequest-IEs NBAP-PROTOCOL-IES ::= {
          id-NodeB-CommunicationContextID
                                                CRITICALITY
                                                                              TYPE
                                                                                     NodeB-CommunicationContextID
                                                                                                                   PRESENCE mandatory
                                                               ignore
          id-MeasurementID
                                                                             TYPE
                                                                                                                         PRESENCE
   { ID
                                                CRITICALITY
                                                               ignore
                                                                                     MeasurementID
   mandatory },
DedicatedMeasurementTerminationRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    *****************
  DEDICATED MEASUREMENT FAILURE INDICATION
  ******************
DedicatedMeasurementFailureIndication ::= SEQUENCE
                                                {{DedicatedMeasurementFailureIndication-IEs}},
   protocolIEs
                         ProtocolIE-Container
                         ProtocolExtensionContainer {{DedicatedMeasurementFailureIndication-Extensions}}
   protocolExtensions
                                                                                                              OPTIONAL,
DedicatedMeasurementFailureIndication-IES NBAP-PROTOCOL-IES ::= {
          id-CRNC-CommunicationContextID
                                            CRITICALITY
                                                                      TYPE
                                                                              CRNC-CommunicationContextID
                                                                                                              PRESENCE mandatory
                                                           ignore
     ID
          id-MeasurementID
                                            CRITICALITY
                                                           ignore
                                                                      TYPE
                                                                                                                      PRESENCE mandatory
                                                                              MeasurementID
     ID
          id-Cause
                                            CRITICALITY
                                                           ignore
                                                                      TYPE
                                                                              Cause
                                                                                                                      PRESENCE mandatory
   . . .
DedicatedMeasurementFailureIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
-- RADIO LINK FAILURE INDICATION
  *****************
RadioLinkFailureIndication ::= SEQUENCE {
   protocolIEs
                         ProtocolIE-Container
                                                {{RadioLinkFailureIndication-IEs}},
   protocolExtensions
                         ProtocolExtensionContainer {{RadioLinkFailureIndication-Extensions}}
                                                                                                              OPTIONAL,
   . . .
```

```
RadioLinkFailureIndication-IES NBAP-PROTOCOL-IES ::= {
          id-CRNC-CommunicationContextID
                                                     CRITICALITY
                                                                     ignore
                                                                                    TYPE
                                                                                            CRNC-CommunicationContextID
                                                                                                                               PRESENCE
   mandatory } |
          id-Reporting-Object-RL-FailureInd
    { ID
                                                     CRITICALITY
                                                                     ignore
                                                                                            Reporting-Object-RL-FailureInd
                                                                                                                            PRESENCE
                                                                                    TYPE
   mandatory },
RadioLinkFailureIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
Reporting-Object-RL-FailureInd ::= CHOICE {
                          RL-RL-FailureInd,
   rL-Set
                          RL-Set-RL-FailureInd, --FDD only
    cCTrCH
                          CCTrCH-RL-FailureInd --TDD only
RL-RL-FailureInd ::= SEQUENCE {
   rL-InformationList-RL-FailureInd
                                          RL-InformationList-RL-FailureInd,
                                          iE-Extensions
                                                                                                                 OPTIONAL,
RLItem-RL-FailureInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RL-InformationList-RL-FailureInd ::= SEQUENCE (SIZE (1..maxNrOfRLs)) OF ProtocolIE-Single-Container {{ RL-InformationItemIE-RL-FailureInd}}
RL-InformationItemIE-RL-FailureInd NBAP-PROTOCOL-IES ::= {
        id-RL-InformationItem-RL-FailureInd
                                                     CRITICALITY
                                                                     ignore
                                                                                    TYPE
                                                                                           RL-InformationItem-RL-FailureInd
                                                                                                                                  PRESENCE
    mandatory}
RL-InformationItem-RL-FailureInd ::= SEQUENCE {
   rL-ID
                                              RL-ID,
    cause
                                              Cause,
                                              ProtocolExtensionContainer { { RL-InformationItem-RL-FailureInd-ExtIEs } }
   iE-Extensions
                                                                                                                          OPTIONAL,
RL-InformationItem-RL-FailureInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RL-Set-RL-FailureInd ::= SEOUENCE {
   rL-Set-InformationList-RL-FailureInd
                                              RL-Set-InformationList-RL-FailureInd,
                                          ProtocolExtensionContainer { { RL-SetItem-RL-FailureInd-ExtIEs } }
   iE-Extensions
                                                                                                                 OPTIONAL,
```

```
RL-SetItem-RL-FailureInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RL-Set-InformationList-RL-FailureInd ::= SEOUENCE (SIZE (1..maxNrOfRLSets)) OF ProtocolIE-Single-Container {{ RL-Set-InformationItemIE-RL-
FailureInd }}
RL-Set-InformationItemIE-RL-FailureInd NBAP-PROTOCOL-IES ::= {
   { ID id-RL-Set-InformationItem-RL-FailureInd CRITICALITY ignore
                                                                     TYPE RL-Set-InformationItem-RL-FailureInd
                                                                                                               PRESENCE mandatory }
RL-Set-InformationItem-RL-FailureInd ::= SEOUENCE {
   rL-Set-ID
                         RL-Set-ID,
   cause
   iE-Extensions
                         RL-Set-InformationItem-RL-FailureInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CCTrCH-RL-FailureInd ::= SEOUENCE {
   rI.-ID
                                            RL-ID,
   cCTrCH-InformationList-RL-FailureInd
                                            CCTrCH-InformationList-RL-FailureInd,
   iE-Extensions
                                        ProtocolExtensionContainer { { CCTrCHItem-RL-FailureInd-ExtIEs } }
                                                                                                             OPTIONAL,
CCTrCHItem-RL-FailureInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CCTrCH-InformationList-RL-FailureInd ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF ProtocolIE-Single-Container {{ CCTrCH-InformationItemIE-RL-
FailureInd}}
CCTrCH-InformationItemIE-RL-FailureInd NBAP-PROTOCOL-IES ::= {
   { ID id-CCTrCH-InformationItem-RL-FailureInd
                                                       CRITICALITY
                                                                                    TYPE
                                                                                                          CCTrCH-InformationItem-RL-
                                                                      ignore
FailureInd
                  PRESENCE
                             mandatory}
CCTrCH-InformationItem-RL-FailureInd ::= SEQUENCE {
   cCTrCH-ID
                                            CCTrCH-ID,
   cause
                                            ProtocolExtensionContainer { { CCTrCH-InformationItem-RL-FailureInd-ExtIEs } }
   iE-Extensions
                                                                                                                        OPTIONAL,
CCTrCH-InformationItem-RL-FailureInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
__ **********************
```

```
-- RADIO LINK PREEMPTION REQUIRED INDICATION
  *****************
RadioLinkPreemptionRequiredIndication ::= SEQUENCE {
                              ProtocolIE-Container
                                                      {{RadioLinkPreemptionRequiredIndication-IEs}},
   protocolIEs
                              ProtocolExtensionContainer {{RadioLinkPreemptionRequiredIndication-Extensions}}
   protocolExtensions
                                                                                                                   OPTIONAL,
RadioLinkPreemptionRequiredIndication-IEs NBAP-PROTOCOL-IES ::= {
       id-CRNC-CommunicationContextID
                                                   CRITICALITY
                                                                 ignore
                                                                               TYPE
                                                                                                   CRNC-CommunicationContextID
          PRESENCE
                  mandatorv
   RadioLinkPreemptionRequiredIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
RL-InformationList-RL-PreemptRequiredInd
                                            ::= SEQUENCE (SIZE (1..maxNrOfRLs)) OF ProtocolIE-Single-Container { {RL-InformationItemIE-RL-
PreemptRequiredInd}}
RL-InformationItemIE-RL-PreemptRequiredInd NBAP-PROTOCOL-IES ::= {
   { ID id-RL-InformationItem-RL-PreemptReguiredInd
                                                   CRITICALITY ignore TYPE RL-InformationItem-RL-PreemptRequiredInd
                                                                                                                PRESENCE
mandatory },
RL-InformationItem-RL-PreemptRequiredInd::= SEQUENCE {
                           ProtocolExtensionContainer { {RL-InformationItem-RL-PreemptRequiredInd-ExtIEs} } OPTIONAL,
   iE-Extensions
RL-InformationItem-RL-PreemptRequiredInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
-- RADIO LINK RESTORE INDICATION
__ *********************
RadioLinkRestoreIndication ::= SEQUENCE {
   protocolIEs
               ProtocolIE-Container
                                            {{RadioLinkRestoreIndication-IEs}},
   protocolExtensions ProtocolExtensionContainer {{RadioLinkRestoreIndication-Extensions}}
                                                                                                     OPTIONAL,
RadioLinkRestoreIndication-IEs NBAP-PROTOCOL-IES ::= {
```

```
id-CRNC-CommunicationContextID
   { ID
                                                  CRITICALITY
                                                                               TYPE
                                                                                      CRNC-CommunicationContextID
                                                                                                                        PRESENCE
                                                                 ignore
   mandatory } |
   { ID
          id-Reporting-Object-RL-RestoreInd
                                                  CRITICALITY
                                                                ignore
                                                                               TYPE
                                                                                      Reporting-Object-RL-RestoreInd
                                                                                                                     PRESENCE
   mandatory },
RadioLinkRestoreIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
Reporting-Object-RL-RestoreInd ::= CHOICE {
                        RL-RL-RestoreInd,
   rL-Set
                        RL-Set-RL-RestoreInd, --FDD only
   . . . ,
   cCTrCH
                        CCTrCH-RL-RestoreInd --TDD only
RL-RL-RestoreInd ::= SEOUENCE {
   rL-InformationList-RL-RestoreInd
                                       RL-InformationList-RL-RestoreInd,
   iE-Extensions
                                       OPTIONAL,
RLItem-RL-RestoreInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RL-InformationList-RL-RestoreInd ::= SEQUENCE (SIZE (1..maxNrOfRLs)) OF ProtocolIE-Single-Container {{RL-InformationItemIE-RL-RestoreInd}}
RL-InformationItemIE-RL-RestoreInd NBAP-PROTOCOL-IES ::= {
   { ID id-RL-InformationItem-RL-RestoreInd
                                                  CRITICALITY
                                                                                      RL-InformationItem-RL-RestoreInd
                                                                                                                          PRESENCE
                                                                ignore
                                                                               TYPE
   mandatory}
RL-InformationItem-RL-RestoreInd ::= SEQUENCE {
                                       iE-Extensions
RL-InformationItem-RL-RestoreInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
RL-Set-RL-RestoreInd ::= SEQUENCE {
   rL-Set-InformationList-RL-RestoreInd
                                       RL-Set-InformationList-RL-RestoreInd,
   iE-Extensions
                                       ProtocolExtensionContainer { { RL-SetItem-RL-RestoreInd-ExtIEs } }
                                                                                                          OPTIONAL,
RL-SetItem-RL-RestoreInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
RL-Set-InformationList-RL-RestoreInd ::= SEQUENCE (SIZE (1..maxNrOfRLSets)) OF ProtocolIE-Single-Container {{ RL-Set-InformationItemIE-RL-
RestoreInd }}
RL-Set-InformationItemIE-RL-RestoreInd NBAP-PROTOCOL-IES ::= {
   TYPE RL-Set-InformationItem-RL-RestoreInd PRESENCE mandatory }
RL-Set-InformationItem-RL-RestoreInd ::= SEQUENCE {
   rL-Set-ID
                        RL-Set-ID,
   iE-Extensions
                        ProtocolExtensionContainer { { RL-Set-InformationItem-RL-RestoreInd-ExtIEs} } OPTIONAL,
RL-Set-InformationItem-RL-RestoreInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CCTrCH-RL-RestoreInd ::= SEQUENCE {
                                          RL-ID.
   cCTrCH-InformationList-RL-RestoreInd
                                          CCTrCH-InformationList-RL-RestoreInd,
                                       ProtocolExtensionContainer { { CCTrCHItem-RL-RestoreInd-ExtIEs } }
   iE-Extensions
                                                                                                         OPTIONAL,
CCTrCHItem-RL-RestoreInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CCTrCH-InformationList-RL-RestoreInd ::= SEQUENCE (SIZE (1..maxNrOfCCTrCHs)) OF ProtocolIE-Single-Container {{ CCTrCH-InformationItemIE-RL-
RestoreInd}}
CCTrCH-InformationItemIE-RL-RestoreInd NBAP-PROTOCOL-IES ::= {
                                                     CRITICALITY
                                                                                 TYPE
                                                                                                       CCTrCH-InformationItem-RL-
   { ID id-CCTrCH-InformationItem-RL-RestoreInd
                                                                   ignore
RestoreInd
                 PRESENCE
                           mandatory}
CCTrCH-InformationItem-RL-RestoreInd ::= SEQUENCE {
                                              CCTrCH-ID,
   cCTrCH-ID
   iE-Extensions
                                          ProtocolExtensionContainer { { CCTrCH-InformationItem-RL-RestoreInd-ExtIEs } } OPTIONAL,
CCTrCH-InformationItem-RL-RestoreInd-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  -- COMPRESSED MODE COMMAND FDD
__ *********************
```

```
CompressedModeCommand ::= SEQUENCE {
                                                 {{CompressedModeCommand-IEs}},
   protocolIEs
                          ProtocolIE-Container
   protocolExtensions
                          ProtocolExtensionContainer {{CompressedModeCommand-Extensions}}
                                                                                                         OPTIONAL,
CompressedModeCommand-IEs NBAP-PROTOCOL-IES ::= {
    { ID
          id-NodeB-CommunicationContextID
                                                 CRITICALITY
                                                                    ignore
                                                                               TYPE
                                                                                       NodeB-CommunicationContextID
                                                                                                                           PRESENCE
   mandatory } |
          id-Active-Pattern-Sequence-Information CRITICALITY
                                                                               TYPE
                                                                                       Active-Pattern-Sequence-Information
                                                                                                                           PRESENCE
                                                                    ignore
   mandatory },
    . . .
CompressedModeCommand-Extensions NBAP-PROTOCOL-EXTENSION ::= {
-- ERROR INDICATION
__ **********************
ErrorIndication ::= SEQUENCE {
                                                {{ErrorIndication-IEs}},
   protocolIEs
                          ProtocolIE-Container
                          ProtocolExtensionContainer {{ErrorIndication-Extensions}}
   protocolExtensions
                                                                                       OPTIONAL,
ErrorIndication-IEs NBAP-PROTOCOL-IES ::= {
          id-CRNC-CommunicationContextID
                                             CRITICALITY
                                                            ignore
                                                                            TYPE
                                                                                   CRNC-CommunicationContextID
                                                                                                                   PRESENCE optional
          id-NodeB-CommunicationContextID
                                                                                   NodeB-CommunicationContextID
                                                                                                                   PRESENCE optional }
     ID
                                             CRITICALITY
                                                            ignore
                                                                            TYPE
     ID
          id-Cause
                                             CRITICALITY
                                                            ignore
                                                                            TYPE
                                                                                   Cause
                                                                                                                              PRESENCE
   optional
           id-CriticalityDiagnostics
    { ID
                                             CRITICALITY
                                                            ignore
                                                                            TYPE
                                                                                   CriticalityDiagnostics
                                                                                                                      PRESENCE optional },
    . . .
ErrorIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ****************
-- PRIVATE MESSAGE
```

```
__ *******************
PrivateMessage ::= SEQUENCE {
   privateIEs
                  PrivateIE-Container {{PrivateMessage-IEs}},
   . . .
PrivateMessage-IEs NBAP-PRIVATE-IES ::= {
__ *********************
-- PHYSICAL SHARED CHANNEL RECONFIGURATION REQUEST TDD
  ******************
PhysicalSharedChannelReconfigurationRequestTDD ::= SEQUENCE {
                      ProtocolIE-Container {{PhysicalSharedChannelReconfigurationRequestTDD-IEs}},
   protocolExtensions ProtocolExtensionContainer {{PhysicalSharedChannelReconfigurationRequestTDD-Extensions}}
                                                                                                              OPTIONAL,
PhysicalSharedChannelReconfigurationRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID
          id-C-ID
                                                    CRITICALITY
                                                                   reject
                                                                                  TYPE
                                                                                         C-ID
   PRESENCE
              mandatory } |
   { ID
         id-SFN
                                                    CRITICALITY
                                                                   reject
                                                                                  TYPE
                                                                                         SFN
       PRESENCE optional |
   { ID
          id-PDSCHSets-AddList-PSCH-ReconfRqst
                                                    CRITICALITY
                                                                   reject
                                                                                  TYPE
                                                                                         PDSCHSets-AddList-PSCH-ReconfRqst
                                                                                                                               PRESENCE
   optional
   { ID
         id-PDSCHSets-ModifyList-PSCH-ReconfRqst
                                                    CRITICALITY
                                                                   reject
                                                                                  TYPE
                                                                                         PDSCHSets-ModifyList-PSCH-ReconfRqst
                                                                                                                               PRESENCE
   optional
   { ID
          id-PDSCHSets-DeleteList-PSCH-ReconfRqst
                                                    CRITICALITY
                                                                   reject
                                                                                  TYPE
                                                                                         PDSCHSets-DeleteList-PSCH-ReconfRqst
                                                                                                                               PRESENCE
   optional } |
   { ID
          id-PUSCHSets-AddList-PSCH-ReconfRast
                                                    CRITICALITY
                                                                   reiect
                                                                                  TYPE
                                                                                         PUSCHSets-AddList-PSCH-ReconfRast
                                                                                                                               PRESENCE
   optional } |
   { ID
          id-PUSCHSets-ModifyList-PSCH-ReconfRqst
                                                    CRITICALITY
                                                                   reject
                                                                                  TYPE
                                                                                         PUSCHSets-ModifyList-PSCH-ReconfRqst
                                                                                                                               PRESENCE
   optional
                                                    CRITICALITY
   { ID
          id-PUSCHSets-DeleteList-PSCH-ReconfRqst
                                                                   reject
                                                                                  TYPE
                                                                                         PUSCHSets-DeleteList-PSCH-ReconfRgst
                                                                                                                               PRESENCE
   optional
   . . .
PhysicalSharedChannelReconfigurationRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
   . . .
PDSCHSets-AddList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfPDSCHSets)) OF PDSCHSets-AddItem-PSCH-ReconfRqst
PDSCHSets-AddItem-PSCH-ReconfRqst
                                ::= SEOUENCE {
   pDSCHSet-ID
                                            PDSCHSet-ID,
   pDSCH-InformationList
                                            PDSCH-Information-AddList-PSCH-ReconfRqst OPTIONAL,
   iE-Extensions
                                            ProtocolExtensionContainer { {PDSCHSets-AddItem-PSCH-ReconfRqst-ExtIEs} }
                                                                                                                    OPTIONAL,
   . . .
```

```
PDSCHSets-AddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::=
    {ID id-PDSCH-AddInformation-LCR-PSCH-ReconfRqst
                                                        CRITICALITY reject
                                                                                EXTENSION PDSCH-AddInformation-LCR-PSCH-ReconfRgst
                                                                                                                                            PRESENCE
    optional},
    . . .
PDSCH-Information-AddList-PSCH-ReconfRqst ::= ProtocolIE-Single-Container {{ PDSCH-Information-AddListIEs-PSCH-ReconfRqst }} -- Mandatory for
3.84Mcps TDD only
PDSCH-Information-AddListIEs-PSCH-ReconfRqst
                                               NBAP-PROTOCOL-IES ::= {
    {ID id-PDSCH-Information-AddListIE-PSCH-ReconfRqst CRITICALITY reject
                                                                                TYPE
                                                                                        PDSCH-Information-AddItem-PSCH-ReconfRqst
                                                                                                                                         PRESENCE
    mandatory}
PDSCH-Information-AddItem-PSCH-ReconfRqst ::= SEQUENCE {
    repetitionPeriod
                                            RepetitionPeriod,
    repetitionLength
                                            RepetitionLength,
                                                TDD-PhysicalChannelOffset,
    tdd-PhysicalChannelOffset
    dL-Timeslot-InformationAddList-PSCH-ReconfRqst
                                                                DL-Timeslot-InformationAddList-PSCH-ReconfRqst,
    iE-Extensions
                                                ProtocolExtensionContainer { {PDSCH-Information-AddItem-PSCH-ReconfRqst-ExtIEs} }
                                                                                                                                      OPTIONAL,
PDSCH-Information-AddItem-PSCH-ReconfRgst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-Timeslot-InformationAddList-PSCH-ReconfRgst ::= SEOUENCE (SIZE (1.. maxNrOfDLTSs)) OF DL-Timeslot-InformationAddItem-PSCH-ReconfRgst
DL-Timeslot-InformationAddItem-PSCH-ReconfRqst ::= SEQUENCE {
    timeSlot
                                            TimeSlot,
    midambleShiftAndBurstType
                                            MidambleShiftAndBurstType,
    tFCI-Presence
                                            TFCI-Presence,
    dL-Code-InformationAddList-PSCH-ReconfRqst
                                                            DL-Code-InformationAddList-PSCH-ReconfRqst,
    iE-Extensions
                                            ProtocolExtensionContainer { { DL-Timeslot-InformationAddItem-PSCH-ReconfRqst-ExtIEs} }
                                                                                                                                         OPTIONAL,
DL-Timeslot-InformationAddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-Code-InformationAddList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfULTSs)) OF DL-Code-InformationAddItem-PSCH-ReconfRqst
DL-Code-InformationAddItem-PSCH-ReconfRgst ::= SEOUENCE {
    pDSCH-ID
                                            PDSCH-ID,
    tdd-ChannelisationCode
                                            TDD-ChannelisationCode
                                            ProtocolExtensionContainer { { DL-Code-InformationAddItem-PSCH-ReconfRqst-ExtIEs} }
    iE-Extensions
                                                                                                                                  OPTIONAL,
DL-Code-InformationAddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
PDSCH-AddInformation-LCR-PSCH-ReconfRqst ::= ProtocolIE-Single-Container {{ PDSCH-AddInformation-LCR-AddListIEs-PSCH-ReconfRqst }}
for 1.28Mcps TDD only
PDSCH-AddInformation-LCR-AddListIEs-PSCH-ReconfRqst NBAP-PROTOCOL-IES ::= {
    PDSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst
       PRESENCE
                   optional}
PDSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst ::= SEQUENCE {
   repetitionPeriod
                                          RepetitionPeriod,
   repetitionLength
                                          RepetitionLength,
    tdd-PhysicalChannelOffset
                                          TDD-PhysicalChannelOffset,
   dL-Timeslot-InformationAddList-LCR-PSCH-ReconfRqst
                                                                  DL-Timeslot-InformationAddList-LCR-PSCH-ReconfRqst,
                                              ProtocolExtensionContainer { { PDSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst-ExtIEs} }
   iE-Extensions
   OPTIONAL,
    . . .
PDSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-Timeslot-InformationAddList-LCR-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1.. maxNrOfDLTSLCRs)) OF DL-Timeslot-InformationAddItem-LCR-PSCH-ReconfRqst
DL-Timeslot-InformationAddItem-LCR-PSCH-ReconfRgst ::= SEQUENCE {
    timeSlotLCR
                                          TimeSlotLCR,
   midambleShiftLCR
                                          MidambleShiftLCR,
   tFCI-Presence
                                          TFCI-Presence,
   dL-Code-InformationAddList-LCR-PSCH-ReconfRqst
                                                             DL-Code-InformationAddList-LCR-PSCH-ReconfRqst,
   iE-Extensions
                                          ProtocolExtensionContainer { { DL-Timeslot-InformationAddItem-LCR-PSCH-ReconfRqst-ExtIEs} }
   OPTIONAL,
    . . .
DL-Timeslot-InformationAddItem-LCR-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-Code-InformationAddList-LCR-PSCH-ReconfRgst ::= SEQUENCE (SIZE (1..maxNrOfULTSs)) OF DL-Code-InformationAddItem-LCR-PSCH-ReconfRgst
DL-Code-InformationAddItem-LCR-PSCH-ReconfRqst ::= SEQUENCE {
   pDSCH-ID
                                          PDSCH-ID.
   tdd-ChannelisationCodeLCR
                                          TDD-ChannelisationCodeLCR,
   iE-Extensions
                                          ProtocolExtensionContainer { { DL-Code-InformationAddItem-LCR-PSCH-ReconfRqst-ExtIEs} }
                                                                                                                                    OPTIONAL,
DL-Code-InformationAddItem-LCR-PSCH-ReconfRqst-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
```

```
PDSCHSets-ModifyList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfPDSCHSets)) OF PDSCHSets-ModifyItem-PSCH-ReconfRqst
PDSCHSets-ModifyItem-PSCH-ReconfRast
                                      ::= SEQUENCE {
   pDSCHSet-ID
                                             PDSCHSet-ID.
   pDSCH-InformationList
                                             PDSCH-Information-ModifyList-PSCH-ReconfRqst,
                                             iE-Extensions
PDSCHSets-ModifyItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    {ID id-PDSCH-ModifyInformation-LCR-PSCH-ReconfRqst CRITICALITY reject
                                                                           EXTENSION PDSCH-ModifyInformation-LCR-PSCH-ReconfRqst
   PRESENCE
              optional }, -- Mandatory for 1.28Mcps TDD only
   . . .
PDSCH-Information-ModifyList-PSCH-ReconfRgst ::= ProtocolIE-Single-Container {{ PDSCH-Information-ModifyListIEs-PSCH-ReconfRgst }}
PDSCH-Information-ModifyListIEs-PSCH-ReconfRqst NBAP-PROTOCOL-IES ::= {
    TYPE
                                                                                      PDSCH-Information-ModifyItem-PSCH-ReconfRqst
              optional -- Mandatory for 3.84Mcps TDD only
   PRESENCE
PDSCH-Information-ModifyItem-PSCH-ReconfRqst ::= SEQUENCE {
   repetitionPeriod
                                         RepetitionPeriod
                                                                           OPTIONAL,
   repetitionLength
                                         RepetitionLength
                                                                           OPTIONAL,
   tdd-PhysicalChannelOffset
                                             TDD-PhysicalChannelOffset
                                                                           OPTIONAL.
   dL-Timeslot-InformationModifyList-PSCH-ReconfRqst
                                                                DL-Timeslot-InformationModifyList-PSCH-ReconfRqst
   iE-Extensions
                                             ProtocolExtensionContainer { {PDSCH-Information-ModifyItem-PSCH-ReconfRqst-ExtIEs} }
                                                                                                                                OPTIONAL,
PDSCH-Information-ModifyItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-Timeslot-InformationModifyList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1.. maxNrOfDLTSs)) OF DL-Timeslot-InformationModifyItem-PSCH-ReconfRqst
DL-Timeslot-InformationModifyItem-PSCH-ReconfRqst ::= SEQUENCE {
   timeSlot
                                         TimeSlot,
   midambleShiftAndBurstType
                                         MidambleShiftAndBurstType
                                                                   OPTIONAL,
   tFCI-Presence
                                         TFCI-Presence OPTIONAL,
   dL-Code-InformationModifyList-PSCH-ReconfRqst
                                                            DL-Code-InformationModifyList-PSCH-ReconfRqst
                                                                                                               OPTIONAL.
                                         ProtocolExtensionContainer { | DL-Timeslot-InformationModifyItem-PSCH-ReconfRqst-ExtIEs} }
   iE-Extensions
   OPTIONAL,
   . . .
DL-Timeslot-InformationModifyItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-Code-InformationModifyList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfPDSCHs)) OF DL-Code-InformationModifyItem-PSCH-ReconfRqst
DL-Code-InformationModifyItem-PSCH-ReconfRqst ::= SEQUENCE {
```

```
pDSCH-ID
                                            PDSCH-ID.
    tdd-ChannelisationCode
                                            TDD-ChannelisationCode.
    iE-Extensions
                                            ProtocolExtensionContainer { { DL-Code-InformationModifyItem-PSCH-ReconfRqst-ExtIEs} }
DL-Code-InformationModifyItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PDSCH-ModifyInformation-LCR-PSCH-ReconfRqst NBAP-PROTOCOL-IES ::= {
    {ID id-PDSCH-ModifyInformation-LCR-ModifyListIE-PSCH-ReconfRqst
                                                                         CRITICALITY reject
                                                                                                 TYPE
                                                                                                                     PDSCH-ModifyInformation-LCR-
                                    PRESENCE
ModifyItem-PSCH-ReconfRqst
                                                mandatory}
PDSCH-ModifyInformation-LCR-ModifyItem-PSCH-ReconfRqst ::= SEQUENCE {
    repetitionPeriod
                                            RepetitionPeriod
                                                                                 OPTIONAL,
    repetitionLength
                                            RepetitionLength
                                                                                 OPTIONAL,
    tdd-PhysicalChannelOffset
                                                TDD-PhysicalChannelOffset
                                                                                 OPTIONAL,
    dL-Timeslot-LCR-InformationModifyList-PSCH-ReconfRqst
                                                                        DL-Timeslot-LCR-InformationModifyList-PSCH-ReconfRqst
    iE-Extensions
                                                ProtocolExtensionContainer { {PDSCH-ModifyInformation-LCR-ModifyListIE-PSCH-ReconfRqst-ExtIEs} }
    OPTIONAL,
PDSCH-ModifyInformation-LCR-ModifyListIE-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::=
DL-Timeslot-LCR-InformationModifyList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1.. maxNrOfDLTSLCRs)) OF DL-Timeslot-InformationModifyItem-PSCH-
ReconfRast
DL-Timeslot-LCR-InformationModifyItem-PSCH-ReconfRqst ::= SEQUENCE {
    timeSlotLCR
                                            TimeSlotLCR,
    midambleShiftLCR
                                            MidambleShiftLCR
                                                                OPTIONAL.
    tFCI-Presence
                                            TFCI-Presence OPTIONAL,
    dL-Code-LCR-InformationModifyList-PSCH-ReconfRqst
                                                                    DL-Code-LCR-InformationModifyList-PSCH-ReconfRqst
                                            ProtocolExtensionContainer { { DL-Timeslot-LCR-InformationModifyItem-PSCH-ReconfRqst-ExtIEs} }
    iE-Extensions
    OPTIONAL,
    . . .
DL-Timeslot-LCR-InformationModifyItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-Code-LCR-InformationModifyList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfPDSCHs)) OF DL-Code-InformationModifyItem-PSCH-ReconfRqst
DL-Code-LCR-InformationModifyItem-PSCH-ReconfRqst ::= SEQUENCE {
    pDSCH-ID
                                            PDSCH-ID,
    tdd-ChannelisationCodeLCR
                                                TDD-ChannelisationCodeLCR,
    iE-Extensions
                                            ProtocolExtensionContainer { { DL-Code-LCR-InformationModifyItem-PSCH-ReconfRqst-ExtIEs} }
    OPTIONAL,
    . . .
```

```
DL-Code-LCR-InformationModifyItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PDSCHSets-DeleteList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfPDSCHSets)) OF PDSCHSets-DeleteItem-PSCH-ReconfRqst
PDSCHSets-DeleteItem-PSCH-ReconfRqst
                                       ::= SEQUENCE {
   pDSCHSet-ID
                                              PDSCHSet-ID,
                                              iE-Extensions
                                                                                                                          OPTIONAL,
    . . .
PDSCHSets-DeleteItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PUSCHSets-AddList-PSCH-ReconfRqst ::= SEOUENCE (SIZE (1..maxNrOfPUSCHSets)) OF PUSCHSets-AddItem-PSCH-ReconfRqst
PUSCHSets-AddItem-PSCH-ReconfRqst
                                 ::= SEQUENCE {
   pUSCHSet-ID
                                              PUSCHSet-ID,
   pUSCH-InformationList
                                              PUSCH-Information-AddList-PSCH-ReconfRqst OPTIONAL,
                                              ProtocolExtensionContainer { {PUSCHSets-AddItem-PSCH-ReconfRgst-ExtIEs} }
   iE-Extensions
PUSCHSets-AddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    {ID id-PUSCH-AddInformation-LCR-PSCH-ReconfRqst
                                                     CRITICALITY reject
                                                                             EXTENSION PUSCH-AddInformation-LCR-PSCH-ReconfRqst
                                                                                                                                     PRESENCE
   optional \, -- Mandatory for 1.28Mcps TDD only
    . . .
PUSCH-Information-AddList-PSCH-ReconfRqst ::= ProtocolIE-Single-Container {{ PUSCH-Information-AddListIEs-PSCH-ReconfRqst }} -- Mandatory for
3.84Mcps TDD only
PUSCH-Information-AddListIEs-PSCH-ReconfRqst NBAP-PROTOCOL-IES ::= {
    {ID id-PUSCH-Information-AddListIE-PSCH-ReconfRqst CRITICALITY reject
                                                                            TYPE
                                                                                    PUSCH-Information-AddItem-PSCH-ReconfRqst
                                                                                                                                   PRESENCE
   mandatory}
PUSCH-Information-AddItem-PSCH-ReconfRqst ::= SEQUENCE {
   repetitionPeriod
                                          RepetitionPeriod,
   repetitionLength
                                          RepetitionLength,
    tdd-PhysicalChannelOffset
                                          TDD-PhysicalChannelOffset,
   uL-Timeslot-InformationAddList-PSCH-ReconfRqst
                                                             UL-Timeslot-InformationAddList-PSCH-ReconfRqst,
   iE-Extensions
                                              ProtocolExtensionContainer { {PUSCH-Information-AddItem-PSCH-ReconfRqst-ExtIEs} }
                                                                                                                                OPTIONAL,
PUSCH-Information-AddItem-PSCH-ReconfRqst-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
    . . .
```

```
UL-Timeslot-InformationAddList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfULTSs)) OF UL-Timeslot-InformationAddItem-PSCH-ReconfRqst
UL-Timeslot-InformationAddItem-PSCH-ReconfRqst ::= SEOUENCE {
    timeSlot
                                          TimeSlot.
    midambleShiftAndBurstType
                                          MidambleShiftAndBurstType,
    tFCI-Presence
                                          TFCI-Presence,
    uL-Code-InformationAddList-PSCH-ReconfRqst
                                                          UL-Code-InformationAddList-PSCH-ReconfRqst,
                                          ProtocolExtensionContainer { { UL-Timeslot-InformationAddItem-PSCH-ReconfRqst-ExtIEs} }
    iE-Extensions
                                                                                                                                    OPTIONAL,
UL-Timeslot-InformationAddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UL-Code-InformationAddList-PSCH-ReconfRqst ::= SEOUENCE (SIZE (1..maxNrOfPDSCHs)) OF UL-Code-InformationAddItem-PSCH-ReconfRqst
UL-Code-InformationAddItem-PSCH-ReconfRqst ::= SEQUENCE {
    pUSCH-ID
                                          PUSCH-ID,
    tdd-ChannelisationCode
                                          TDD-ChannelisationCode,
    iE-Extensions
                                          ProtocolExtensionContainer { { UL-Code-InformationAddItem-PSCH-ReconfRqst-ExtIEs} }
                                                                                                                              OPTIONAL,
UL-Code-InformationAddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PUSCH-AddInformation-LCR-PSCH-ReconfRqst ::= ProtocolIE-Single-Container {{ PUSCH-AddInformation-LCR-AddListIEs-PSCH-ReconfRqst }}
PUSCH-AddInformation-LCR-AddListIEs-PSCH-Reconfrqst NBAP-PROTOCOL-IES ::= {
    TYPE
                                                                                             PUSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst
       PRESENCE
                   optional}
PUSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst ::= SEQUENCE {
    repetitionPeriod
                                          RepetitionPeriod,
    repetitionLength
                                          RepetitionLength,
    tdd-PhysicalChannelOffset
                                          TDD-PhysicalChannelOffset,
    uL-Timeslot-InformationAddList-LCR-PSCH-ReconfRqst
                                                                  UL-Timeslot-InformationAddList-LCR-PSCH-ReconfRqst,
                                              ProtocolExtensionContainer { {PUSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst-ExtIEs} }
    iE-Extensions
   OPTIONAL,
    . . .
PUSCH-AddInformation-LCR-AddItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UL-Timeslot-InformationAddList-LCR-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1.. maxNrOfDLTSLCRs)) OF UL-Timeslot-InformationAddItem-LCR-PSCH-ReconfRqst
UL-Timeslot-InformationAddItem-LCR-PSCH-ReconfRqst ::= SEQUENCE {
    timeSlotLCR
                                          TimeSlotLCR,
    midambleShiftLCR
                                          MidambleShiftLCR,
```

. . .

```
TFCI-Presence,
   tFCI-Presence
   uL-Code-InformationAddList-LCR-PSCH-ReconfRqst
                                                         UL-Code-InformationAddList-LCR-PSCH-ReconfRqst,
   iE-Extensions
                                       ProtocolExtensionContainer { { UL-Timeslot-InformationAddItem-LCR-PSCH-ReconfRqst-ExtIEs} }
   OPTIONAL,
   . . .
UL-Timeslot-InformationAddItem-LCR-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UL-Code-InformationAddList-LCR-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfULTSs)) OF UL-Code-InformationAddItem-LCR-PSCH-ReconfRqst
UL-Code-InformationAddItem-LCR-PSCH-ReconfRgst ::= SEOUENCE {
   pUSCH-ID
                                       PUSCH-ID.
   tdd-ChannelisationCodeLCR
                                       TDD-ChannelisationCodeLCR,
   iE-Extensions
                                       OPTIONAL,
UL-Code-InformationAddItem-LCR-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PUSCHSets-ModifyList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfPUSCHSets)) OF PUSCHSets-ModifyItem-PSCH-ReconfRqst
PUSCHSets-ModifyItem-PSCH-ReconfRqst
                                    ::= SEOUENCE {
   pUSCHSet-ID
                                           PUSCHSet-ID,
   pUSCH-InformationList
                                           PUSCH-Information-ModifyList-PSCH-ReconfRqst
                                                                                      OPTIONAL,
                                           iE-Extensions
                                                                                                                  OPTIONAL,
   . . .
PUSCHSets-ModifyItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
   {ID id-PUSCH-ModifyInformation-LCR-PSCH-ReconfRgst CRITICALITY reject
                                                                        EXTENSION
                                                                                 PUSCH-ModifyInformation-LCR-PSCH-ReconfRgst
              optional}, -- For 1.28Mcps TDD only
   PRESENCE
PUSCH-Information-ModifyList-PSCH-ReconfRgst ::= ProtocolIE-Single-Container {{ PUSCH-Information-ModifyListIEs-PSCH-ReconfRgst }}
3.84Mcps TDD only
PUSCH-Information-ModifyListIEs-PSCH-ReconfRqst NBAP-PROTOCOL-IES ::= {
   TYPE
                                                                                  PUSCH-Information-ModifyItem-PSCH-ReconfRqst
   PRESENCE
              mandatory}
PUSCH-Information-ModifyItem-PSCH-ReconfRqst ::= SEQUENCE {
   repetitionPeriod
                                       RepetitionPeriod
                                                                        OPTIONAL,
   repetitionLength
                                       RepetitionLength
                                                                        OPTIONAL,
   tdd-PhysicalChannelOffset
                                       TDD-PhysicalChannelOffset
                                                                        OPTIONAL,
   uL-Timeslot-InformationModifyList-PSCH-ReconfRqst
                                                             UL-Timeslot-InformationModifyList-PSCH-ReconfRqst
                                           ProtocolExtensionContainer { {PUSCH-Information-ModifyItem-PSCH-ReconfRqst-ExtIEs} }
   iE-Extensions
                                                                                                                          OPTIONAL,
```

445

```
PUSCH-Information-ModifyItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UL-Timeslot-InformationModifyList-PSCH-ReconfRgst ::= SEQUENCE (SIZE (1..maxNrOfULTSs)) OF UL-Timeslot-InformationModifyItem-PSCH-ReconfRgst
UL-Timeslot-InformationModifyItem-PSCH-ReconfRqst ::= SEQUENCE {
    timeSlot
                                            TimeSlot,
    midambleShiftAndBurstType
                                            MidambleShiftAndBurstType
                                                                        OPTIONAL,
    tFCI-Presence
                                            TFCI-Presence OPTIONAL,
    uL-Code-InformationModifyList-PSCH-ReconfRqst
                                                                UL-Code-InformationModifyList-PSCH-ReconfRqst
    iE-Extensions
                                            ProtocolExtensionContainer { { UL-Timeslot-InformationModifyItem-PSCH-ReconfRgst-ExtIEs} }
    OPTIONAL,
UL-Timeslot-InformationModifyItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UL-Code-InformationModifyList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfPUSCHs)) OF UL-Code-InformationModifyItem-PSCH-ReconfRqst
UL-Code-InformationModifyItem-PSCH-ReconfRqst ::= SEQUENCE {
                                            PUSCH-ID,
    pUSCH-ID
    tdd-ChannelisationCode
                                            TDD-ChannelisationCode,
    iE-Extensions
                                            ProtocolExtensionContainer { { UL-Code-InformationModifyItem-PSCH-ReconfRqst-ExtIEs} } OPTIONAL,
UL-Code-InformationModifyItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PUSCH-ModifyInformation-LCR-PSCH-ReconfRqst ::= ProtocolIE-Single-Container {{ PUSCH-ModifyInformation-LCR-ModifyListIEs-PSCH-ReconfRqst }}
PUSCH-ModifyInformation-LCR-ModifyListIEs-PSCH-ReconfRqst NBAP-PROTOCOL-IES ::= {
    {ID id-PUSCH-ModifyInformation-LCR-ModifyListIE-PSCH-ReconfRqst
                                                                                                                    PUSCH-ModifyInformation-LCR-
                                                                        CRITICALITY reject
                                                                                                TYPE
ModifyItem-PSCH-ReconfRqst
                                    PRESENCE
                                                optional }
PUSCH-ModifyInformation-LCR-ModifyItem-PSCH-ReconfRqst ::= SEQUENCE {
    repetitionPeriod
                                            RepetitionPeriod
                                                                    OPTIONAL,
    repetitionLength
                                            RepetitionLength
                                                                    OPTIONAL,
    tdd-PhysicalChannelOffset
                                            TDD-PhysicalChannelOffset OPTIONAL,
    uL-Timeslot-InformationModifyList-LCR-PSCH-ReconfRqst
                                                                        UL-Timeslot-LCR-InformationModifyList-PSCH-ReconfRgst
    iE-Extensions
                                                ProtocolExtensionContainer { {PUSCH-ModifyInformation-LCR-ModifyItem-PSCH-ReconfRqst-ExtIEs} }
    OPTIONAL,
        . . .
PUSCH-ModifyInformation-LCR-ModifyItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
UL-Timeslot-LCR-InformationModifyList-PSCH-ReconfRqst ::= SEOUENCE (SIZE (1..maxNrOfULTSLCRs)) OF UL-Timeslot-InformationModifyList-PSCH-ReconfRqst
UL-Timeslot-LCR-InformationModifyItem-PSCH-ReconfRqst ::= SEQUENCE {
   timeSlotLCR
                                         TimeSlotLCR,
   midambleShiftLCR
                                         MidambleShiftLCR
                                                            OPTIONAL,
                                         TFCI-Presence
   tFCI-Presence
                                                            OPTIONAL,
   uL-Code-InformationModifyList-PSCH-ReconfRqst
                                                            UL-Code-InformationModifyList-PSCH-ReconfRqst
                                                                                                               OPTIONAL,
   iE-Extensions
                                         ProtocolExtensionContainer { { UL-Timeslot-LCR-InformationModifyItem-PSCH-ReconfRqst-ExtIEs} }
   OPTIONAL,
   . . .
UL-Timeslot-LCR-InformationModifyItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UL-Code-LCR-InformationModifyList-PSCH-ReconfRqst ::= SEOUENCE (SIZE (1..maxNrOfPDSCHs)) OF UL-Code-InformationModifyItem-PSCH-ReconfRqst
UL-Code-LCR-InformationModifyItem-PSCH-ReconfRqst ::= SEQUENCE {
                                         PUSCH-ID,
   pUSCH-ID
   tdd-ChannelisationCodeLCR
                                             TDD-ChannelisationCodeLCR,
   iE-Extensions
                                         ProtocolExtensionContainer { { UL-Code-LCR-InformationModifyItem-PSCH-ReconfRgst-ExtIEs} }
   OPTIONAL,
   . . .
UL-Code-LCR-InformationModifyItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PUSCHSets-DeleteList-PSCH-ReconfRqst ::= SEQUENCE (SIZE (1..maxNrOfPUSCHSets)) OF PUSCHSets-DeleteItem-PSCH-ReconfRqst
PUSCHSets-DeleteItem-PSCH-ReconfRast
                                      ::= SEOUENCE {
   pUSCHSet-ID
   iE-Extensions
                                             OPTIONAL,
PUSCHSets-DeleteItem-PSCH-ReconfRqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
-- PHYSICAL SHARED CHANNEL RECONFIGURATION RESPONSE TDD
  ******************
PhysicalSharedChannelReconfigurationResponseTDD ::= SEQUENCE {
                      ProtocolIE-Container {{PhysicalSharedChannelReconfigurationResponseTDD-IEs}},
   protocolExtensions ProtocolExtensionContainer {{PhysicalSharedChannelReconfigurationResponseTDD-Extensions}}
                                                                                                                            OPTIONAL,
```

```
PhysicalSharedChannelReconfigurationResponseTDD-IEs NBAP-PROTOCOL-IES ::= {
           id-CriticalityDiagnostics
                                           CRITICALITY
                                                                        TYPE
                                                                                    CriticalityDiagnostics
                                                                                                                      PRESENCE optional },
    . . .
PhysicalSharedChannelReconfigurationResponseTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
-- PHYSICAL SHARED CHANNEL RECONFIGURATION FAILURE TDD
PhysicalSharedChannelReconfigurationFailureTDD ::= SEQUENCE {
                        ProtocolIE-Container {{PhysicalSharedChannelReconfigurationFailureTDD-IEs}},
   protocolExtensions ProtocolExtensionContainer {{PhysicalSharedChannelReconfigurationFailureTDD-Extensions}}
                                                                                                                                   OPTIONAL,
PhysicalSharedChannelReconfigurationFailureTDD-IES NBAP-PROTOCOL-IES ::= {
           id-CauseLevel-PSCH-ReconfFailureTDD
                                                    CRITICALITY ignore TYPE CauseLevel-PSCH-ReconfFailureTDD
                                                                                                                     PRESENCE mandatory } |
    { ID
           id-CriticalityDiagnostics
                                       CRITICALITY ignore
                                                                    TYPE CriticalityDiagnostics
                                                                                                                    PRESENCE optional },
PhysicalSharedChannelReconfigurationFailureTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CauseLevel-PSCH-ReconfFailureTDD ::= CHOICE {
                           GeneralCauseList-PSCH-ReconfFailureTDD,
    generalCause
    setSpecificCause
                           SetSpecificCauseList-PSCH-ReconfFailureTDD,
GeneralCauseList-PSCH-ReconfFailureTDD ::= SEQUENCE {
    cause
    iE-Extensions
                                ProtocolExtensionContainer { GeneralCauseItem-PSCH-ReconfFailureTDD-ExtIEs} }
                                                                                                                      OPTIONAL,
GeneralCauseItem-PSCH-ReconfFailureTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
SetSpecificCauseList-PSCH-ReconfFailureTDD ::= SEQUENCE {
    unsuccessful-PDSCHSetList-PSCH-ReconfFailureTDD Unsuccessful-PDSCHSetList-PSCH-ReconfFailureTDD
                                                                                                                      OPTIONAL,
    unsuccessful-PUSCHSetList-PSCH-ReconfFailureTDD Unsuccessful-PUSCHSetList-PSCH-ReconfFailureTDD
                                                                                                                      OPTIONAL,
```

```
ProtocolExtensionContainer { { SetSpecificCauseItem-PSCH-ReconfFailureTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL.
SetSpecificCauseItem-PSCH-ReconfFailureTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
Unsuccessful-PDSCHSetList-PSCH-ReconfFailureTDD ::= SEQUENCE (SIZE (0.. maxNrOfPDSCHSets)) OF ProtocolIE-Single-Container {{ Unsuccessful-
PDSCHSetItemIE-PSCH-ReconfFailureTDD }}
Unsuccessful-PDSCHSetItemIE-PSCH-ReconfFailureTDD NBAP-PROTOCOL-IES ::= {
          id-Unsuccessful-PDSCHSetItem-PSCH-ReconfFailureTDD CRITICALITY ignore TYPE Unsuccessful-PDSCHSetItem-PSCH-ReconfFailureTDDPRESENCE
mandatory}
Unsuccessful-PDSCHSetItem-PSCH-ReconfFailureTDD ::= SEQUENCE {
   pDSCHSet-ID
                          PDSCHSet-ID,
   cause
                          Cause,
   iE-Extensions
                          ProtocolExtensionContainer { {Unsuccessful-PDSCHSetItem-PSCH-ReconfFailureTDD-ExtIEs} } OPTIONAL,
Unsuccessful-PDSCHSetItem-PSCH-ReconfFailureTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
Unsuccessful-PUSCHSetList-PSCH-ReconfFailureTDD ::= SEQUENCE (SIZE (0.. maxNrOfPUSCHSets)) OF ProtocolIE-Single-Container {{ Unsuccessful-
PUSCHSetItemIE-PSCH-ReconfFailureTDD }}
Unsuccessful-PUSCHSetItemIE-PSCH-ReconfFailureTDD NBAP-PROTOCOL-IES ::= {
           id-Unsuccessful-PUSCHSetItem-PSCH-ReconfFailureTDD CRITICALITY ignore TYPE Unsuccessful-PUSCHSetItem-PSCH-ReconfFailureTDDPRESENCE
mandatory}
Unsuccessful-PUSCHSetItem-PSCH-ReconfFailureTDD ::= SEQUENCE {
   pUSCHSet-ID
                          PUSCHSet-ID,
   cause
                          Cause,
   iE-Extensions
                          ProtocolExtensionContainer { {Unsuccessful-PUSCHSetItem-PSCH-ReconfFailureTDD-ExtIEs} } OPTIONAL,
Unsuccessful-PUSCHSetItem-PSCH-ReconfFailureTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  ******************
-- RESET REQUEST
__ *********************
```

```
ResetRequest ::= SEQUENCE {
                                               {{ResetRequest-IEs}},
   protocolIEs
                         ProtocolIE-Container
   protocolExtensions
                         ProtocolExtensionContainer {{ResetRequest-Extensions}}
                                                                                OPTIONAL,
ResetRequest-IEs NBAP-PROTOCOL-IES ::= {
   {ID id-ResetIndicator
                             CRITICALITY ignore
                                                  TYPE
                                                          ResetIndicator
                                                                            PRESENCE
                                                                                       mandatory },
   . . .
ResetRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
ResetIndicator ::= CHOICE {
   communicationContext
                                CommunicationContextList-Reset,
   communicationControlPort
                                CommunicationControlPortList-Reset,
   nodeB
                                NULL,
   . . .
CommunicationContextList-Reset ::= SEQUENCE {
   communicationContextInfoList-Reset
                                        CommunicationContextInfoList-Reset,
   iE-Extensions
                                        ProtocolExtensionContainer { {CommunicationContextItem-Reset-ExtIEs} }
CommunicationContextItem-Reset-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CommunicationContextInfoItemIE-Reset }}
CommunicationContextInfoItemIE-Reset NBAP-PROTOCOL-IES ::= {
    {ID id-CommunicationContextInfoItem-Reset
                                               CRITICALITY reject
                                                                    TYPE CommunicationContextInfoItem-Reset
                                                                                                           PRESENCE mandatory }
CommunicationContextInfoItem-Reset ::= SEQUENCE {
```

450

```
communicationContextType-Reset
                                            CommunicationContextType-Reset,
                                            ProtocolExtensionContainer { { CommunicationContextInfoItem-Reset-ExtIEs} }
    iE-Extensions
                                                                                                                             OPTIONAL,
CommunicationContextInfoItem-Reset-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CommunicationContextType-Reset ::= CHOICE {
    cRNC-CommunicationContextID
                                            CRNC-CommunicationContextID,
    nodeB-CommunicationContextID
                                            NodeB-CommunicationContextID
CommunicationControlPortList-Reset ::= SEQUENCE {
    communicationControlPortInfoList-Reset
                                                CommunicationControlPortInfoList-Reset,
    iE-Extensions
                                                ProtocolExtensionContainer { {CommunicationControlPortItem-Reset-ExtIEs} }
                                                                                                                                OPTIONAL,
    . . .
CommunicationControlPortItem-Reset-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CommunicationControlPortInfoList-Reset ::= SEQUENCE (SIZE (1.. maxCCPinNodeB)) OF ProtocolIE-Single-Container
{{CommunicationControlPortInfoItemIE-Reset }}
CommunicationControlPortInfoItemIE-Reset NBAP-PROTOCOL-IES ::= {
    {ID id-CommunicationControlPortInfoItem-Reset
                                                        CRITICALITY reject
                                                                                TYPE CommunicationControlPortInfoItem-Reset
                                                                                                                                PRESENCE mandatory }
CommunicationControlPortInfoItem-Reset ::= SEQUENCE {
    communicationControlPortID
                                        CommunicationControlPortID,
    iE-Extensions
                                        ProtocolExtensionContainer { {CommunicationControlPortInfoItem-Reset-ExtIEs} } OPTIONAL,
CommunicationControlPortInfoItem-Reset-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
-- RESET RESPONSE
    *****************
ResetResponse ::= SEQUENCE {
   protocolIEs
                                            {{ResetResponse-IEs}},
                        ProtocolIE-Container
   protocolExtensions
                        ProtocolExtensionContainer {{ResetResponse-Extensions}}
                                                                                     OPTIONAL,
ResetResponse-IEs NBAP-PROTOCOL-IES ::= {
   {ID id-CriticalityDiagnostics
                                   CRITICALITY
                                                 ignore
                                                                   CriticalityDiagnostics
                                                                                                         PRESENCE optional },
ResetResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  -- INFORMATION EXCHANGE INITIATION REQUEST
InformationExchangeInitiationRequest ::= SEQUENCE {
                                             {{InformationExchangeInitiationRequest-IEs}},
   protocolIEs
                        ProtocolIE-Container
                        ProtocolExtensionContainer {{InformationExchangeInitiationRequest-Extensions}}
   protocolExtensions
                                                                                                         OPTIONAL,
InformationExchangeInitiationRequest-IES NBAP-PROTOCOL-IES ::= {
   { ID id-InformationExchangeID
                                                            CRITICALITY reject
                                                                                     TYPE
                                                                                                      InformationExchangeID
              PRESENCE
                       mandatory }|
   { ID id-InformationExchangeObjectType-InfEx-Rqst
                                                        CRITICALITY reject
                                                                                 TYPE
                                                                                                      InformationExchangeObjectType-
              PRESENCE mandatory } |
   -- This IE represents both the Information Exchange Object Type IE and the choice based on the Information Exchange Object Type
   -- as described in the tabular message format in subclause 9.1.
   { ID
          id-InformationType
                                             CRITICALITY reject
                                                                                     InformationType
                                                                                                                PRESENCE mandatory
   { ID
          id-InformationReportCharacteristics
                                                            CRITICALITY reject
                                                                                     TYPE
                                                                                                      InformationReportCharacteristics
                 PRESENCE
                           mandatory},
   . . .
InformationExchangeInitiationRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
```

```
InformationExchangeObjectType-InfEx-Rqst ::= CHOICE {
   cell
                                 Cell-InfEx-Rast,
    . . .
Cell-InfEx-Rgst ::= SEQUENCE {
                                  C-ID.
                                  ProtocolExtensionContainer { { CellItem-InfEx-Rgst-ExtIEs} }
   iE-Extensions
                                                                                                                OPTIONAL,
Cellitem-InfEx-Rqst-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
      ************
-- INFORMATION EXCHANGE INITIATION RESPONSE
__ **********************
InformationExchangeInitiationResponse ::= SEQUENCE {
                         ProtocolIE-Container
                                                 {{InformationExchangeInitiationResponse-IEs}},
   protocolIEs
                          ProtocolExtensionContainer {{InformationExchangeInitiationResponse-Extensions}}
   protocolExtensions
                                                                                                                OPTIONAL,
InformationExchangeInitiationResponse-IEs NBAP-PROTOCOL-IES ::= {
          id-InformationExchangeID
                                                            CRITICALITY ignore
                                                                                       TYPE
                                                                                                              InformationExchangeID
               PRESENCE
                        mandatory }|
    { ID
          id-InformationExchangeObjectType-InfEx-Rsp
                                                        CRITICALITY ignore
                                                                                           InformationExchangeObjectType-InfEx-Rsp
                                                                                                                                    PRESENCE
   optional
   { ID
          id-CriticalityDiagnostics
                                                     CRITICALITY ignore
                                                                               TYPE
                                                                                       CriticalityDiagnostics
                                                                                                                        PRESENCE optional },
    . . .
InformationExchangeInitiationResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
InformationExchangeObjectType-InfEx-Rsp ::= CHOICE {
   cell
                              Cell-InfEx-Rsp,
    . . .
Cell-InfEx-Rsp ::= SEQUENCE {
   requestedDataValue
                                  RequestedDataValue,
                                  ProtocolExtensionContainer { { CellItem-InfEx-Rsp-ExtIEs} }
   iE-Extensions
                                                                                                                OPTIONAL,
CellItem-InfEx-Rsp-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
-- INFORMATION EXCHANGE INITIATION FAILURE
__ ********************************
InformationExchangeInitiationFailure ::= SEQUENCE {
   protocolIEs
                         ProtocolIE-Container
                                                {{InformationExchangeInitiationFailure-IEs}},
                         ProtocolExtensionContainer {{InformationExchangeInitiationFailure-Extensions}}
   protocolExtensions
                                                                                                             OPTIONAL,
InformationExchangeInitiationFailure-IEs NBAP-PROTOCOL-IES ::= {
          id-InformationExchangeID
                                                                                     InformationExchangeID
                                                                                                                   PRESENCE mandatory
                                                                             TYPE
     ID
          id-Cause
                                        CRITICALITY
                                                                      TYPE
                                                                             Cause
                                                                                                                   PRESENCE mandatory
                                                       ignore
          id-CriticalityDiagnostics
                                                                             CriticalityDiagnostics
                                                                                                             PRESENCE optional },
     ID
                                        CRITICALITY
                                                       ignore
                                                                      TYPE
InformationExchangeInitiationFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
     -- INFORMATION REPORT
__ ********************************
InformationReport ::= SEQUENCE {
   protocolIEs
                                               {{InformationReport-IEs}},
                         ProtocolIE-Container
   protocolExtensions
                         ProtocolExtensionContainer {{InformationReport-Extensions}}
                                                                                        OPTIONAL,
InformationReport-IES NBAP-PROTOCOL-IES ::= {
   { ID id-InformationExchangeID
                                                           CRITICALITY ignore
                                                                                     TYPE
                                                                                                           InformationExchangeID
                         mandatory }
              PRESENCE
          id-InformationExchangeObjectType-InfEx-Rprt
                                                       CRITICALITY ignore
                                                                                        InformationExchangeObjectType-InfEx-Rprt
   mandatory },
   . . .
InformationReport-Extensions NBAP-PROTOCOL-EXTENSION ::= {
InformationExchangeObjectType-InfEx-Rprt ::= CHOICE {
   cell
                                 Cell-Inf-Rprt,
   . . .
Cell-Inf-Rprt ::= SEQUENCE {
```

```
requestedDataValueInformation
                               RequestedDataValueInformation,
   iE-Extensions
                               ProtocolExtensionContainer {{ CellItem-Inf-Rprt-ExtIEs }}
                                                                                                     OPTIONAL.
CellItem-Inf-Rprt-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
       -- INFORMATION EXCHANGE TERMINATION REQUEST
  *****************
InformationExchangeTerminationRequest ::= SEQUENCE
                                             {{InformationExchangeTerminationRequest-IEs}},
   protocolIEs
                        ProtocolIE-Container
                        ProtocolExtensionContainer {{InformationExchangeTerminationRequest-Extensions}}
   protocolExtensions
                                                                                                       OPTIONAL,
InformationExchangeTerminationRequest-IEs NBAP-PROTOCOL-IES ::= {
   { ID
          id-InformationExchangeID
                                         CRITICALITY
                                                                         TYPE
                                                                                InformationExchangeID
                                                                                                         PRESENCE mandatory },
                                                       ignore
InformationExchangeTerminationRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ****************
-- INFORMATION EXCHANGE FAILURE INDICATION
  ******************
InformationExchangeFailureIndication ::= SEOUENCE {
                                             {{InformationExchangeFailureIndication-IEs}},
   protocolIEs
                        ProtocolIE-Container
   protocolExtensions
                           ProtocolExtensionContainer {{InformationExchangeFailureIndication-Extensions}}
                                                                                                            OPTIONAL,
   . . .
InformationExchangeFailureIndication-IES NBAP-PROTOCOL-IES ::= {
     ID
          id-InformationExchangeID
                                         CRITICALITY ignore
                                                                  TYPE
                                                                         InformationExchangeID
                                                                                                         PRESENCE mandatory
    ID
          id-Cause
                                  CRITICALITY ignore
                                                           TYPE
                                                                  Cause
                                                                                                     PRESENCE mandatory },
   . . .
InformationExchangeFailureIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
__ ********************************
```

```
CELL SYNCHRONISATION INITIATION REQUEST TDD
  CellSynchronisationInitiationRequestTDD ::= SEQUENCE
   protocolIEs
                           ProtocolIE-Container
                                                   {{CellSynchronisationInitiationRequestTDD-IEs}},
   protocolExtensions
                           ProtocolExtensionContainer {{CellSynchronisationInitiationRequestTDD-Extensions}}
                                                                                                                 OPTIONAL,
CellSynchronisationInitiationRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CellSynchronisationInitiationRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
           id-C-ID
                                           CRITICALITY
                                                          reject
                                                                      TYPE
                                                                                                                          PRESENCE mandatory
     ID
           id-cellSyncBurstRepetitionPeriod
                                                                                  TYPE
                                                                                          CellSyncBurstRepetitionPeriod
                                                                                                                         PRESENCE mandatory
                                                       CRITICALITY
                                                                      reject
           id-timeslotInfo-CellSyncInitiationRqstTDD
                                                                                          TimeslotInfo-CellSyncInitiationRgstTDD
                                                      CRITICALITY
                                                                      reject
                                                                                  TYPE
    mandatory } |
    { ID
           id-CellSyncBurstTransInit-CellSyncInitiationRqstTDD
                                                                  CRITICALITY
                                                                                  reject
                                                                                              TYPE
                                                                                                                 CellSyncBurstTransInit-
CellSyncInitiationRqstTDD
                               PRESENCE
                                          optional
           id-CellSyncBurstMeasureInit-CellSyncInitiationRgstTDD
                                                                      CRITICALITY
                                                                                      reject
                                                                                                                 TYPE CellSyncBurstMeasureInit-
CellSyncInitiationRqstTDD
                               PRESENCE
                                           optional
CellSyncBurstTransInit-CellSyncInitiationRqstTDD::= SEQUENCE {
    cSBTransmissionID
                                           CSBTransmissionID,
    sfn
                                           SFN,
    cellSyncBurstCode
                                           CellSyncBurstCode,
    cellSyncBurstCodeShift
                                           CellSyncBurstCodeShift,
    initialDLTransPower
                                           DL-Power,
                                           ProtocolExtensionContainer { { CellSyncBurstTransInit-CellSyncInitiationRqstTDD-ExtIEs} }
   iE-Extensions
    . . .
CellSyncBurstTransInit-CellSyncInitiationRgstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TimeslotInfo-CellSyncInitiationRqstTDD::= SEQUENCE (SIZE (1..15)) OF TimeSlot
CellSyncBurstMeasureInit-CellSyncInitiationRqstTDD::= SEQUENCE {
    cSBMeasurementID
                                           CSBMeasurementID,
    cellSyncBurstCode
                                           CellSyncBurstCode,
    cellSyncBurstCodeShift
                                           CellSyncBurstCodeShift,
    synchronisationReportType
                                           SynchronisationReportType,
    sfn
                                                                      OPTIONAL,
    synchronisationReportCharacteristics
                                           SynchronisationReportCharacteristics,
                                           ProtocolExtensionContainer { { CellSyncBurstMeasureInit-CellSyncInitiationRqstTDD-ExtIEs} }
    iE-Extensions
   OPTIONAL,
```

```
CellSyncBurstMeasureInit-CellSyncInitiationRgstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
  CELL SYNCHRONISATION INITIATION RESPONSE TDD
*****************
CellSynchronisationInitiationResponseTDD ::= SEQUENCE
                                                {{CellSynchronisationInitiationResponseTDD-IEs}},
   protocolIEs
                         ProtocolIE-Container
   protocolExtensions
                         ProtocolExtensionContainer {{CellSynchronisationInitiationResponseTDD-Extensions}}
                                                                                                            OPTIONAL,
CellSynchronisationInitiationResponseTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CellSynchronisationInitiationResponseTDD-IEs NBAP-PROTOCOL-IES ::= {
         id-CriticalityDiagnostics
                                                                                     CriticalityDiagnostics
                                                   CRITICALITY
                                                                   ignore
                                                                              TYPE
                                                                                                                              PRESENCE
   optional },
  CELL SYNCHRONISATION INITIATION FAILURE TDD
  *****************
CellSynchronisationInitiationFailureTDD ::= SEQUENCE {
                                                {{CellSynchronisationInitiationFailureTDD-IEs}},
   protocolIEs
                         ProtocolIE-Container
                         ProtocolExtensionContainer {{CellSynchronisationInitiationFailureTDD-Extensions}}
   protocolExtensions
                                                                                                           OPTIONAL,
CellSynchronisationInitiationFailureTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CellSynchronisationInitiationFailureTDD-IEs NBAP-PROTOCOL-IES ::= {
     ID
        id-Cause
                                            CRITICALITY
                                                           ignore
                                                                              Cause
                                                                                                                      PRESENCE mandatory
    { ID
          id-CriticalityDiagnostics
                                            CRITICALITY
                                                           ignore
                                                                      TYPE
                                                                              CriticalityDiagnostics
                                                                                                              PRESENCE optional },
-- CELL SYNCHRONISATION RECONFIGURATION REQUEST TDD
```

```
__ *******************
CellSynchronisationReconfigurationRequestTDD ::= SEOUENCE
                                                   {{CellSynchronisationReconfigurationRequestTDD-IEs}},
    protocolIEs
                           ProtocolIE-Container
   protocolExtensions
                           ProtocolExtensionContainer {{CellSynchronisationReconfigurationRequestTDD-Extensions}}
                                                                                                                      OPTIONAL.
CellSynchronisationReconfigurationRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CellSynchronisationReconfigurationRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
           id-C-ID
                                           CRITICALITY
                                                           reject
                                                                       TYPE
                                                                               C-ID
                                                                                                                           PRESENCE
                                                                                                                                      mandatory
     ID
           id-TimeSlot
                                           CRITICALITY
                                                           reject
                                                                       TYPE
                                                                              TimeSlot
                                                                                                                        PRESENCE
                                                                                                                                    mandatory
           id-NCyclesPerSFNperiod
                                                                              NCyclesPerSFNperiod
     ID
                                           CRITICALITY
                                                           reject
                                                                       TYPE
                                                                                                                        PRESENCE
                                                                                                                                   mandatory
           id-NRepetitionsPerCyclePeriod
                                           CRITICALITY
                                                                               NRepetitionsPerCyclePeriod PRESENCE
     ID
                                                           reject
                                                                       TYPE
                                                                                                                     mandatory
           id-CellSyncBurstTransReconfInfo-CellSyncReconfRqstTDD
                                                                       CRITICALITY
                                                                                       reject
    CellSyncBurstTransReconfInfo-CellSyncReconfRqstTDD
                                                           PRESENCE
                                                                       optional
           id-CellSyncBurstMeasReconfiguration-CellSyncReconfRqstTDD
                                                                           CRITICALITY
                                                                                           reject
                                                                                                                     TYPE
    CellSyncBurstMeasReconfiguration-CellSyncReconfRqstTDD
                                                               PRESENCE
                                                                           optional
CellSyncBurstTransReconfInfo-CellSyncReconfRqstTDD ::= SEQUENCE (SIZE (1.. maxNrOfCellSyncBursts)) OF CellSyncBurstTransInfoItem-
CellSyncReconfRqstTDD
CellSyncBurstTransInfoItem-CellSyncReconfRqstTDD ::= SEQUENCE {
                                               CSBTransmissionID,
    cSBTransmissionID
    syncFrameNumberToTransmit
                                               SyncFrameNumber,
                                               CellSyncBurstCode
    cellSyncBurstCode
                                                                           OPTIONAL,
    cellSyncBurstCodeShift
                                               CellSyncBurstCodeShift
                                                                           OPTIONAL,
    dlTransPower
                                               DL-Power
                                                                           OPTIONAL,
    iE-Extensions
                                               ProtocolExtensionContainer { CellSyncBurstTransInfoItem-CellSyncReconfRqstTDD-ExtIEs} }
    OPTIONAL,
CellSyncBurstTransInfoItem-CellSyncReconfRgstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CellSyncBurstMeasReconfiguration-CellSyncReconfRqstTDD ::= ProtocolIE-Single-Container {{ CellSyncBurstMeasInfo-CellSyncReconfRqstTDD }}
CellSyncBurstMeasInfo-CellSyncReconfRqstTDD NBAP-PROTOCOL-IES ::= {
    { ID id-CellSyncBurstMeasInfoList-CellSyncReconfRqstTDD CRITICALITY reject TYPE CellSyncBurstMeasInfoList-CellSyncReconfRqstTDD PRESENCE
    mandatory } |
    { ID id-SynchronisationReportType
                                                       CRITICALITY reject TYPE SynchronisationReportType
                                                                                                                                    PRESENCE
    optional }|
    { ID id-SynchronisationReportCharacteristics
                                                       CRITICALITY reject TYPE SynchronisationReportCharacteristics
                                                                                                                           PRESENCE optional },
    . . .
```

```
CellSyncBurstMeasInfoList-CellSyncReconfRqstTDD ::= SEQUENCE (SIZE (1.. maxNrOfCellSyncBursts)) OF CellSyncBurstMeasInfoItem-CellSyncReconfRqstTDD
CellSyncBurstMeasInfoItem-CellSyncReconfRgstTDD ::= SEQUENCE {
   syncFrameNrToReceive
                                      SyncFrameNumber,
                                       CellSyncBurstInfoList-CellSyncReconfRqstTDD,
   syncBurstInfo
   . . .
CellSyncBurstInfoList-CellSyncReconfRqstTDD ::= SEQUENCE (SIZE (1..maxNrOfReceptsPerSyncFrame)) OF CellSyncBurstInfoItem-CellSyncReconfRqstTDD
CellSyncBurstInfoItem-CellSyncReconfRqstTDD ::= SEQUENCE {
   cSBMeasurementID
                                          CSBMeasurementID,
   cellSvncBurstCode
                                          CellSyncBurstCode,
   cellSyncBurstCodeShift
                                          CellSyncBurstCodeShift,
   iE-Extensions
                                          ProtocolExtensionContainer { { CellSyncBurstMeasInfo-CellSyncReconfRqstTDD-ExtIEs} }
                                                                                                                         OPTIONAL,
CellSyncBurstMeasInfo-CellSyncReconfRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
      CELL SYNCHRONISATION RECONFIGURATION RESPONSE TDD
  CellSynchronisationReconfigurationResponseTDD ::= SEQUENCE {
                                              {{CellSynchronisationReconfigurationResponseTDD-IEs}},
   protocolIEs
                        ProtocolIE-Container
   protocolExtensions
                        ProtocolExtensionContainer {{CellSynchronisationReconfigurationResponseTDD-Extensions}}
                                                                                                           OPTIONAL,
CellSynchronisationReconfigurationResponseTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CellSynchronisationReconfigurationResponseTDD-IEs NBAP-PROTOCOL-IES ::=
   { ID
          id-CriticalityDiagnostics
                                                 CRITICALITY
                                                                ignore
                                                                          TYPE
                                                                                 CriticalityDiagnostics
                                                                                                           PRESENCE optional },
   . . .
     -- CELL SYNCHRONISATION RECONFIGURATION FAILURE TDD
    CellSynchronisationReconfigurationFailureTDD ::= SEQUENCE
                                                  {{CellSynchronisationReconfigurationFailureTDD-IEs}},
   protocolIEs
                        ProtocolIE-Container
   protocolExtensions
                        ProtocolExtensionContainer
                                                 {{CellSynchronisationReconfigurationFailureTDD-Extensions}}
                                                                                                          OPTIONAL,
```

```
CellSynchronisationReconfigurationFailureTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CellSynchronisationReconfigurationFailureTDD-IEs NBAP-PROTOCOL-IES ::= {
           id-Cause
                                                                                                                                 PRESENCE mandatory
                                                CRITICALITY
                                                                ignore
                                                                            TYPE
                                                                                     Cause
    { ID
           id-CriticalityDiagnostics
                                                CRITICALITY
                                                                ignore
                                                                            TYPE
                                                                                     CriticalityDiagnostics
                                                                                                                        PRESENCE optional },
    . . .
  CELL SYNCHRONISATION ADJUSTMENT REQUEST TDD
CellSynchronisationAdjustmentRequestTDD ::= SEQUENCE {
                                                         {{CellSynchronisationAdjustmentRequestTDD-IEs}},
    protocolIEs
                           ProtocolIE-Container
   protocolExtensions
                           ProtocolExtensionContainer {{CellSynchronisationAdjustmentRequestTDD-Extensions}}
                                                                                                                    OPTIONAL,
CellSynchronisationAdjustmentRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CellSynchronisationAdjustmentRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
           id-CellAdjustmentInfo-SyncAdjustmntRqstTDD CRITICALITY ignore TYPE CellAdjustmentInfo-SyncAdjustmentRqstTDD PRESENCE mandatory },
    . . .
CellAdjustmentInfo-SyncAdjustmentRqstTDD::= SEQUENCE (SIZE (1..maxCellinNodeB)) OF ProtocolIE-Single-Container {{ CellAdjustmentInfoItemIE-
SyncAdjustmntRqstTDD }}
CellAdjustmentInfoItemIE-SyncAdjustmntRqstTDD NBAP-PROTOCOL-IES ::= {
    { ID id-CellAdjustmentInfoItem-SyncAdjustmentRqstTDD
                                                                CRITICALITY
                                                                                 ignore
                                                                                                 TYPE
                                                                                                                       CellAdjustmentInfoItem-
                            PRESENCE
SyncAdjustmentRqstTDD
                                        mandatory }
CellAdjustmentInfoItem-SyncAdjustmentRqstTDD ::= SEQUENCE {
    c-ID
                                            C-ID,
    frameAdjustmentValue
                                            FrameAdjustmentValue
                                                                         OPTIONAL,
    timingAdjustmentValue
                                            TimingAdjustmentValue
                                                                         OPTIONAL,
                                            DL-Power
    dLTransPower
                                                                        OPTIONAL,
    sfn
                                                                         OPTIONAL,
    iE-Extensions
                                            ProtocolExtensionContainer { { CellAdjustmentInfoItem-SyncAdjustmntRqstTDD-ExtIEs} }
                                                                                                                                      OPTIONAL,
CellAdjustmentInfoItem-SyncAdjustmntRqstTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
****************
  CELL SYNCHRONISATION ADJUSTMENT RESPONSE TDD
  *****************
CellSynchronisationAdjustmentResponseTDD ::= SEQUENCE {
   protocolIEs
                        ProtocolIE-Container
                                              {{CellSynchronisationAdjustmentResponseTDD-IEs}},
                        ProtocolExtensionContainer {{CellSynchronisationAdjustmentResponseTDD-Extensions}}
   protocolExtensions
                                                                                                        OPTIONAL,
CellSynchronisationAdjustmentResponseTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CellSynchronisationAdjustmentResponseTDD-IEs NBAP-PROTOCOL-IES ::= {
          id-CriticalityDiagnostics
                                           CRITICALITY
                                                         ignore
                                                                    TYPE
                                                                           CriticalityDiagnostics
                                                                                                                  PRESENCE optional },
     -- CELL SYNCHRONISATION ADJUSTMENT FAILURE TDD
  *****************
CellSynchronisationAdjustmentFailureTDD ::= SEQUENCE
   protocolIEs
                        ProtocolIE-Container
                                              {{CellSynchronisationAdjustmentFailureTDD-IEs}},
   protocolExtensions
                        ProtocolExtensionContainer {{CellSynchronisationAdjustmentFailureTDD-Extensions}}
                                                                                                       OPTIONAL,
CellSynchronisationAdjustmentFailureTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CellSynchronisationAdjustmentFailureTDD-IEs NBAP-PROTOCOL-IES ::= {
          id-CauseLevel-SyncAdjustmntFailureTDD CRITICALITY ignore
                                                                    TYPE
                                                                           CauseLevel-SyncAdjustmntFailureTDD
                                                                                                            PRESENCE mandatory
          id-CriticalityDiagnostics
     ID
                                              CRITICALITY ignore
                                                                    TYPE
                                                                           CriticalityDiagnostics
                                                                                                                     PRESENCE optional
   . . .
CauseLevel-SyncAdjustmntFailureTDD ::= CHOICE {
   generalCause
                        GeneralCauseList-SyncAdjustmntFailureTDD,
   cellSpecificCause
                        CellSpecificCauseList-SyncAdjustmntFailureTDD,
GeneralCauseList-SyncAdjustmntFailureTDD::= SEQUENCE {
   cause
   iE-Extensions
                                           ProtocolExtensionContainer { GeneralCauseList-SyncAdjustmntFailureTDD-ExtIEs} }
                                                                                                                       OPTIONAL,
```

```
GeneralCauseList-SyncAdjustmntFailureTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CellSpecificCauseList-SyncAdjustmntFailureTDD ::= SEQUENCE {
    unsuccessful-cell-InformationRespList-SyncAdjustmntFailureTDD
                                                                     Unsuccessful-cell-InformationRespList-SyncAdjustmntFailureTDD,
                                             ProtocolExtensionContainer { { CellSpecificCauseList-SyncAdjustmntFailureTDD-ExtIEs} }
   iE-Extensions
   OPTIONAL,
    . . .
CellSpecificCauseList-SyncAdjustmntFailureTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
Unsuccessful-cell-InformationRespList-SyncAdjustmntFailureTDD ::= SEQUENCE (SIZE (1..maxNrOfRLs))
                                                                                                               OF ProtocolIE-Single-Container
{{ Unsuccessful-cell-InformationRespItemIE-SyncAdjustmntFailureTDD }}
Unsuccessful-cell-InformationRespItemIE-SyncAdjustmntFailureTDD NBAP-PROTOCOL-IES ::= {
          id-Unsuccessful-cell-InformationRespItem-SyncAdjustmntFailureTDD
                                                                                CRITICALITY
                                                                                                               ignore
                                                                                                                          TYPE Unsuccessful-
cell-InformationRespItem-SyncAdjustmntFailureTDD
                                                     PRESENCE
Unsuccessful-cell-InformationRespItem-SyncAdjustmntFailureTDD::= SEOUENCE {
   c-ID
                                             C-ID,
   cause
                                              Cause,
                                              ProtocolExtensionContainer { { Unsuccessful-cell-InformationRespItem-SyncAdjustmntFailureTDD-
   iE-Extensions
               OPTIONAL,
ExtIEs} }
Unsuccessful-cell-InformationRespItem-SyncAdjustmntFailureTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    ******************
-- CELL SYNCHRONISATION TERMINATION REQUEST TDD
  ******************
CellSynchronisationTerminationRequestTDD ::= SEQUENCE
   protocolIEs
                          ProtocolIE-Container
                                                  {{CellSynchronisationTerminationRequestTDD-IEs}},
   protocolExtensions
                          ProtocolExtensionContainer {{CellSynchronisationTerminationRequestTDD-Extensions}}
                                                                                                               OPTIONAL,
CellSynchronisationTerminationRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
```

```
CellSynchronisationTerminationRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
     ID
          id-C-ID
                                       CRITICALITY
                                                      ignore
                                                                TYPE
                                                                                                                PRESENCE mandatory
          id-CSBTransmissionID
     ID
                                       CRITICALITY
                                                      ignore
                                                                TYPE
                                                                        CSBTransmissionID
                                                                                                               PRESENCE optional
    ID
          id-CSBMeasurementID
                                       CRITICALITY
                                                      ignore
                                                                 TYPE
                                                                        CSBMeasurement.ID
                                                                                                                PRESENCE optional
       CELL SYNCHRONISATION FAILURE INDICATION TDD
  ******************
CellSynchronisationFailureIndicationTDD ::= SEQUENCE
   protocolIEs
                        ProtocolIE-Container
                                              {{CellSynchronisationFailureIndicationTDD-IEs}},
                         ProtocolExtensionContainer {{CellSynchronisationFailureIndicationTDD-Extensions}}
   protocolExtensions
                                                                                                       OPTIONAL,
CellSynchronisationFailureIndicationTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CellSynchronisationFailureIndicationTDD-IES NBAP-PROTOCOL-IES ::= {
     ID
          id-C-ID
                                                                        C-ID
                                                                                                                PRESENCE mandatory
                                       CRITICALITY
                                                      ignore
                                                                TYPE
     ID
          id-CSBTransmissionID
                                       CRITICALITY
                                                      ignore
                                                                 TYPE
                                                                        CSBTransmissionID
                                                                                                                PRESENCE optional
     ID
          id-CSBMeasurementID
                                       CRITICALITY
                                                      ignore
                                                                TYPE
                                                                        CSBMeasurementID
                                                                                                               PRESENCE optional
     ID
          id-Cause
                                       CRITICALITY
                                                      ignore
                                                                TYPE
                                                                        Cause
                                                                                                                PRESENCE mandatory
  *****************
-- CELL SYNCHRONISATION REPORT TDD
  *****************
CellSynchronisationReportTDD ::= SEQUENCE
   protocolIEs
                         ProtocolIE-Container
                                               {{CellSynchronisationReportTDD-IEs}},
                         ProtocolExtensionContainer {{CellSynchronisationReportTDD-Extensions}}
   protocolExtensions
                                                                                             OPTIONAL,
CellSynchronisationReportTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
CellSynchronisationReportTDD-IEs NBAP-PROTOCOL-IES ::= {
   { ID
          id-CellSyncInfo-CellSyncReprtTDD
                                              CRITICALITY ignore
                                                                    TYPE
                                                                           CellSyncInfo-CellSyncReprtTDD
                                                                                                             PRESENCE mandatory },
```

```
OF ProtocolIE-Single-Container {{ CellSyncInfoItemIE-CellSyncReprtTDD }}
CellSyncInfo-CellSyncReprtTDD ::= SEQUENCE (SIZE (1..maxCellinNodeB))
CellSyncInfoItemIE-CellSyncReprtTDD NBAP-PROTOCOL-IES ::= {
    { ID id-C-ID
                                                            CRITICALITY ignore TYPE C-ID
    PRESENCE
               mandatory}|
           id-SyncReportType-CellSyncReprtTDD
                                                    CRITICALITY ignore
                                                                            TYPE SyncReportType-CellSyncReprtTDD
                                                                                                                       PRESENCE optional },
    { ID
SyncReportType-CellSyncReprtTDD ::= CHOICE
    intStdPhSyncInfo-CellSyncReprtTDD
                                            IntStdPhCellSyncInfo-CellSyncReprtTDD,
    lateEntrantCell
                                NULL,
                                NULL,
    frequencyAcquisition
    . . .
IntStdPhCellSyncInfo-CellSyncReprtTDD ::= SEQUENCE
    cellSyncBurstMeasuredInfo
                                                CellSyncBurstMeasInfoList-CellSyncReprtTDD,
                                                ProtocolExtensionContainer { { IntStdPhCellSyncInfoList-CellSyncReprtTDD-ExtIEs} }
    iE-Extensions
IntStdPhCellSyncInfoList-CellSyncReprtTDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CellSyncBurstMeasInfoList-CellSyncReprtTDD ::= SEOUENCE (SIZE (1.. maxNrOfCellSyncBursts)) OF CellSyncBurstMeasInfoItem-CellSyncReprtTDD
CellSyncBurstMeasInfoItem-CellSyncReprtTDD ::= SEQUENCE {
    cellSyncBurstInfo-CellSyncReprtTDD
                                            SEQUENCE (SIZE (1...maxNrOfReceptsPerSyncFrame)) OF CellSyncBurstInfo-CellSyncReprtTDD,
CellSyncBurstInfo-CellSyncReprtTDD ::= CHOICE {
    cellSyncBurstAvailable
                                CellSyncBurstAvailable-CellSyncReprtTDD,
    cellSyncBurstNotAvailable
                               NULL,
    . . .
CellSyncBurstAvailable-CellSyncReprtTDD ::= SEQUENCE {
    cellSyncBurstTiming
                                CellSyncBurstTiming,
    cellSyncBurstSIR
                                CellSyncBurstSIR,
END
```

9.3.4 Information Elements Definitions

```
NBAP-IEs {
itu-t (0) identified-organization (4) etsi (0) mobileDomain (0)
umts-Access (20) modules (3) nbap (2) version1 (1) nbap-IEs (2) }
DEFINITIONS AUTOMATIC TAGS ::=
BEGIN
IMPORTS
    maxNrOfTFCs,
    maxNrOfErrors,
    maxCTFC,
    maxNrOfTFs,
    maxTTI-count,
    maxRateMatching,
    maxCodeNrComp-1,
    maxNrOfCellSyncBursts,
    maxNrOfCodeGroups,
    maxNrOfMeasNCell,
    maxNrOfMeasNCell-1,
    maxNrOfReceptsPerSyncFrame,
    maxNrOfTFCIGroups,
    maxNrOfTFCI1Combs,
    maxNrOfTFCI2Combs.
    maxNrOfTFCI2Combs-1,
    maxNrOfSF,
    maxTGPS,
    maxNrOfUSCHs,
    maxNrOfULTSs,
    maxNrOfULTSLCRs,
    maxNrOfDPCHs,
    maxNrOfDPCHLCRs,
    maxNrOfCodes,
    maxNrOfDSCHs.
    maxNrOfDLTSs.
    maxNrOfDLTSLCRs,
    maxNrOfDCHs,
    maxNrOfLevels,
    maxNoGPSItems,
    maxNoSat,
    id-MessageStructure,
    id-ReportCharacteristicsType-OnModification,
    id-Rx-Timing-Deviation-Value-LCR,
    id-SFNSFNMeasurementValueInformation,
    id-SFNSFNMeasurementThresholdInformation,
    id-TUTRANGPSMeasurementValueInformation,
    id-TUTRANGPSMeasurementThresholdInformation,
    id-TypeOfError
FROM NBAP-Constants
    Criticality,
```

```
ProcedureID,
    ProtocolIE-ID,
   TransactionID,
   TriggeringMessage
FROM NBAP-CommonDataTypes
   NBAP-PROTOCOL-IES,
    ProtocolExtensionContainer{},
    ProtocolIE-Single-Container{},
    NBAP-PROTOCOL-EXTENSION
FROM NBAP-Containers;
__ ______
-- -----
Acknowledged-PCPCH-access-preambles ::= INTEGER (0..15,...)
Acknowledged-PRACH-preambles-Value ::= INTEGER(0..240,...)
-- The number of L1 acknowledged random access tries per every 20 ms period.
AddorDeleteIndicator ::= ENUMERATED {
    add,
    delete
Active-Pattern-Sequence-Information ::= SEQUENCE {
    cMConfigurationChangeCFN
                                                         CFN,
    transmission-Gap-Pattern-Sequence-Status
                                             Transmission-Gap-Pattern-Sequence-Status-List OPTIONAL,
    iE-Extensions
                                              ProtocolExtensionContainer { {Active-Pattern-Sequence-Information-ExtIEs} } OPTIONAL,
Active-Pattern-Sequence-Information-ExtlEs NBAP-PROTOCOL-EXTENSION ::= {
Transmission-Gap-Pattern-Sequence-Status-List ::= SEQUENCE (SIZE (0..maxTGPS)) OF
    SEQUENCE {
       tGPSID
                       TGPSID,
       tGPRC
                       TGPRC,
       tGCFN
                       CFN,
                          ProtocolExtensionContainer { { Transmission-Gap-Pattern-Sequence-Status-List-ExtIEs } } OPTIONAL,
       iE-Extensions
Transmission-Gap-Pattern-Sequence-Status-List-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    . . .
```

```
AICH-Power ::= INTEGER (-22..5)
-- Offset in dB.
AICH-TransmissionTiming ::= ENUMERATED {
   v1
AllocationRetentionPriority ::= SEQUENCE {
                              PriorityLevel,
   priorityLevel
   pre-emptionCapability
                              Pre-emptionCapability,
   pre-emptionVulnerability Pre-emptionVulnerability,
   iE-Extensions
                              ProtocolExtensionContainer { {AllocationRetentionPriority-ExtIEs} } OPTIONAL,
AllocationRetentionPriority-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
APPreambleSignature ::= INTEGER (0..15)
APSubChannelNumber ::= INTEGER (0..11)
AvailabilityStatus ::= ENUMERATED {
   empty,
   in-test,
   failed,
   power-off,
   off-line,
   off-duty,
   dependency,
   degraded,
   not-installed,
   log-full,
    . . .
-- -------
-- -------
BCCH-ModificationTime ::= INTEGER (0..511)
-- Time = BCCH-ModificationTime * 8
-- Range 0 to 4088, step 8
-- All SFN values in which MIB may be mapped are allowed
BindingID ::= OCTET STRING (SIZE (1..4, ...))
BetaCD ::= INTEGER (0..15)
BlockingPriorityIndicator ::= ENUMERATED {
```

```
high,
   normal.
   low.
-- High priority: Block resource immediately.
-- Normal priority: Block resource when idle or upon timer expiry.
-- Low priority: Block resource when idle.
SCTD-Indicator ::= ENUMERATED {
    active,
    inactive
-- -------
-- -----
Cause ::= CHOICE {
   radioNetwork
                          CauseRadioNetwork,
    transport
                       CauseTransport,
                          CauseProtocol,
   protocol
   misc
                          CauseMisc,
    . . .
CauseMisc ::= ENUMERATED {
    control-processing-overload,
   hardware-failure,
    oam-intervention,
   not-enough-user-plane-processing-resources,
    unspecified,
    . . .
CauseProtocol ::= ENUMERATED {
    transfer-syntax-error,
    abstract-syntax-error-reject,
    abstract-syntax-error-ignore-and-notify,
    message-not-compatible-with-receiver-state,
    semantic-error,
    unspecified,
    abstract-syntax-error-falsely-constructed-message,
CauseRadioNetwork ::= ENUMERATED {
    unknown-C-ID,
    cell-not-available,
    power-level-not-supported,
    dl-radio-resources-not-available,
    ul-radio-resources-not-available,
    rl-already-ActivatedOrAlocated,
    nodeB-Resources-unavailable,
```

```
measurement-not-supported-for-the-object,
    combining-resources-not-available,
    requested-configuration-not-supported,
    synchronisation-failure,
    priority-transport-channel-established,
    sIB-Origination-in-Node-B-not-Supported,
    requested-tx-diversity-mode-not-supported,
    unspecified,
    bCCH-scheduling-error,
    measurement-temporarily-not-available,
    invalid-CM-settings,
    reconfiguration-CFN-not-elapsed,
    number-of-DL-codes-not-supported,
    s-cipch-not-supported,
    combining-not-supported,
    ul-sf-not-supported,
    dl-SF-not-supported,
    common-transport-channel-type-not-supported,
    dedicated-transport-channel-type-not-supported,
    downlink-shared-channel-type-not-supported,
    uplink-shared-channel-type-not-supported,
    cm-not-supported,
    tx-diversity-no-longer-supported,
    unknown-Local-Cell-ID,
    number-of-UL-codes-not-supported,
    information-temporarily-not-available,
    information-provision-not-supported-for-the-object,
    cell-synchronisation-not-supported,
    synchronisation-adjustment-not-supported,
    dpc-mode-change-not-supported,
    iPDL-already-activated,
    iPDL-not-supported,
    iPDL-parameters-not-available,
    frequency-acquisition-not-supported
CauseTransport ::= ENUMERATED {
    transport-resource-unavailable,
    unspecified,
    . . .
CCTrCH-ID ::= INTEGER (0..15)
CDSubChannelNumbers ::= BIT STRING {
                                        subCh11(0),
                                        subCh10(1),
                                        subCh9(2),
                                        subCh8(3),
                                        subCh7(4),
                                        subCh6(5),
                                        subCh5(6),
                                        subCh4(7),
```

```
subCh3(8),
                                     subCh2(9),
                                     subCh1(10),
                                     subCh0(11)
                                     } (SIZE (12))
CellParameterID ::= INTEGER (0..127,...)
CellSyncBurstAvailabilityIndicator ::= ENUMERATED {
   cellSyncBurstAvailable,
   cellSyncBurstNotAvailable
CellSyncBurstCode ::= INTEGER(0..7, ...)
CellSyncBurstCodeShift ::= INTEGER(0..7)
CellSyncBurstRepetitionPeriod ::= INTEGER (0..4095)
CellSyncBurstSIR ::= INTEGER (0..31)
CellSyncBurstTiming ::= CHOICE {
   initialPhase
                      INTEGER (0..1048575),
   steadyStatePhase
                          INTEGER (0..255)
CellSyncBurstTimingThreshold ::= INTEGER(0..254)
CFN ::= INTEGER (0..255)
Channel-Assignment-Indication ::= ENUMERATED {
   cA-Active,
   cA-Inactive
ChipOffset ::= INTEGER (0..38399)
-- Unit Chip
C-ID ::= INTEGER (0..65535)
Closedlooptimingadjustmentmode ::= ENUMERATED {
   adj-1-slot,
   adj-2-slot,
CommonChannelsCapacityConsumptionLaw ::= SEQUENCE (SIZE(1..maxNrOfSF)) OF
   SEQUENCE {
       dl-Cost
                  INTEGER (0..65535),
       ul-Cost
                  INTEGER (0..65535),
                          iE-Extensions
                                                                                                              OPTIONAL,
       . . .
```

```
CommonChannelsCapacityConsumptionLaw-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CommonMeasurementAccuracy ::= CHOICE -
    tUTRANGPSMeasurementAccuracyClass
                                         TUTRANGPSAccuracyClass,
CommonMeasurementType ::= ENUMERATED
   received-total-wide-band-power,
    transmitted-carrier-power,
   acknowledged-prach-preambles,
   ul-timeslot-iscp,
    acknowledged-PCPCH-access-preambles,
   detected-PCPCH-access-preambles,
    uTRAN-GPS-Timing-of-Cell-Frames-for-LCS,
    sFN-SFN-Observed-Time-Difference
CommonMeasurementValue ::= CHOICE {
    transmitted-carrier-power
                                         Transmitted-Carrier-Power-Value,
   received-total-wide-band-power
                                         Received-total-wide-band-power-Value,
   acknowledged-prach-preambles
                                         Acknowledged-PRACH-preambles-Value,
    uL-TimeslotISCP
                                         UL-TimeslotISCP-Value,
    acknowledged-PCPCH-access-preambles
                                         Acknowledged-PCPCH-access-preambles,
   detected-PCPCH-access-preambles
                                         Detected-PCPCH-access-preambles,
                                         Extension-CommonMeasurementValue
    extension-CommonMeasurementValue
Extension-CommonMeasurementValue
                                  ::= ProtocolIE-Single-Container {{ Extension-CommonMeasurementValueIE }}
Extension-CommonMeasurementValueIE NBAP-PROTOCOL-IES ::= {
     ID id-TUTRANGPSMeasurementValueInformation
                                                 CRITICALITY ignore TYPE TUTRANGPSMeasurementValueInformation PRESENCE mandatory }
     CommonMeasurementValueInformation ::= CHOICE {
   measurementAvailable
                              CommonMeasurementAvailable,
                              CommonMeasurementnotAvailable
   measurementnotAvailable
CommonMeasurementAvailable::= SEOUENCE {
    commonmeasurementValue
                              CommonMeasurementValue,
                                  ProtocolExtensionContainer { { CommonMeasurementAvailableItem-ExtIEs} }
   ie-Extensions
                                                                                                                OPTIONAL,
```

```
CommonMeasurementAvailableItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CommonMeasurementnotAvailable ::= NULL
CommonPhysicalChannelID ::= INTEGER (0..255)
Common-PhysicalChannel-Status-Information ::= SEQUENCE {
    commonPhysicalChannelID
                                    CommonPhysicalChannelID,
    resourceOperationalState
                                        ResourceOperationalState,
                                        AvailabilityStatus,
    availabilityStatus
                                        ProtocolExtensionContainer { { Common-PhysicalChannel-Status-Information-ExtIEs} }
    iE-Extensions
                                                                                                                                OPTIONAL,
    . . .
Common-PhysicalChannel-Status-Information-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CommonTransportChannelID ::= INTEGER (0..255)
Common-TransportChannel-Status-Information ::= SEQUENCE
    commonTransportChannelID
                                        CommonTransportChannelID,
    resourceOperationalState
                                        ResourceOperationalState,
    availabilityStatus
                                        AvailabilityStatus,
    iE-Extensions
                                        ProtocolExtensionContainer { { Common-TransportChannel-Status-Information-ExtIEs} }
    . . .
Common-TransportChannel-Status-Information-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CommunicationControlPortID ::= INTEGER (0..65535)
Compressed-Mode-Deactivation-Flag::= ENUMERATED {
    deactivate,
    maintain-Active
-- on=deactivate
ConfigurationGenerationID ::= INTEGER (0..255)
-- Value '0' means "No configuration"
ConstantValue ::= INTEGER (-10..10,...)
-- -10 dB - +10 dB
-- unit dB
-- step 1 dB
CPCH-Allowed-Total-Rate ::= ENUMERATED {
    v15,
    v30,
```

```
v60,
    v120.
    v240.
    v480,
    v960.
    v1920,
    v2880,
   v3840,
   v4800,
    v5760,
CPCHScramblingCodeNumber ::= INTEGER (0..79)
CPCH-UL-DPCCH-SlotFormat ::= INTEGER (0..2,...)
CriticalityDiagnostics ::= SEQUENCE {
                                ProcedureID
    procedureID
                                                        OPTIONAL,
                                TriggeringMessage
    triggeringMessage
                                                            OPTIONAL,
    procedureCriticality
                                Criticality
                                                        OPTIONAL,
                                TransactionID
    transactionID
                                                            OPTIONAL,
    iEsCriticalityDiagnostics CriticalityDiagnostics-IE-List OPTIONAL,
                                ProtocolExtensionContainer { {CriticalityDiagnostics-ExtIEs} }
   iE-Extensions
                                                                                                                     OPTIONAL,
CriticalityDiagnostics-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CriticalityDiagnostics-IE-List ::= SEQUENCE (SIZE (1..maxNrOfErrors)) OF
    SEQUENCE {
       iECriticality
                            Criticality,
                            ProtocolIE-ID,
       iE-ID
       repetitionNumber
                           RepetitionNumber0
                                                    OPTIONAL,
                            ProtocolExtensionContainer { (CriticalityDiagnostics-IE-List-ExtIEs) }
       iE-Extensions
                                                                                                                        OPTIONAL,
CriticalityDiagnostics-IE-List-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
       ID id-MessageStructure
                                    CRITICALITY ignore
                                                            EXTENSION MessageStructure
                                                                                             PRESENCE optional
       ID id-TypeOfError
                                    CRITICALITY ignore
                                                            EXTENSION TypeOfError
                                                                                             PRESENCE mandatory
MessageStructure ::= SEQUENCE (SIZE (1..maxNrOfLevels)) OF
    SEOUENCE {
       iE-ID
                                ProtocolIE-ID,
       repetitionNumber
                                RepetitionNumber1
                                                        OPTIONAL,
       iE-Extensions
                                ProtocolExtensionContainer { {MessageStructure-ExtIEs} } OPTIONAL,
        . . .
```

```
MessageStructure-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
CRNC-CommunicationContextID ::= INTEGER (0..1048575)
CSBMeasurementID ::= INTEGER (0..65535)
CSBTransmissionID ::= INTEGER (0..65535)
-- -----
DATA-ID ::= INTEGER (0..3)
DCH-ID ::= INTEGER (0..255)
DCH-FDD-Information ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-FDD-InformationItem
DCH-FDD-InformationItem ::= SEQUENCE {
   payloadCRC-PresenceIndicator
                                    PayloadCRC-PresenceIndicator,
   ul-FP-Mode
                                    UL-FP-Mode,
   toAWS
                                    ToAWS,
                                    TOAWE,
   dCH-SpecificInformationList
                                    DCH-Specific-FDD-InformationList,
   iE-Extensions
                                    ProtocolExtensionContainer { { DCH-FDD-InformationItem-ExtIEs} }
                                                                                                        OPTIONAL,
DCH-FDD-InformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DCH-Specific-FDD-InformationList ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-Specific-FDD-Item
DCH-Specific-FDD-Item ::= SEQUENCE {
   dCH-ID
                                    DCH-ID,
   ul-TransportFormatSet
                                    TransportFormatSet,
   dl-TransportFormatSet
                                    TransportFormatSet,
   allocationRetentionPriority
                                   AllocationRetentionPriority,
                                    FrameHandlingPriority,
   frameHandlingPriority
   qE-Selector
                                    QE-Selector,
   iE-Extensions
                                    OPTIONAL,
DCH-Specific-FDD-Item-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
   . . .
DCH-InformationResponse ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-InformationResponseItem
```

```
DCH-InformationResponseItem ::= SEQUENCE {
   dCH-ID
                                                DCH-ID.
   bindingID
                                                BindingID
                                                                      OPTIONAL.
   transportLayerAddress
                                                TransportLayerAddress OPTIONAL,
   iE-Extensions
                                                OPTIONAL.
DCH-InformationResponseItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DCH-TDD-Information ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-TDD-InformationItem
DCH-TDD-InformationItem ::= SEQUENCE {
   payloadCRC-PresenceIndicator
                                     PayloadCRC-PresenceIndicator,
   ul-FP-Mode
                                     UL-FP-Mode,
   toAWS
                                     ToAWS,
                                     TOAWE,
   dCH-SpecificInformationList
                                     DCH-Specific-TDD-InformationList,
   iE-Extensions
                                        ProtocolExtensionContainer { { DCH-TDD-InformationItem-ExtIEs} } 
                                                                                                              OPTIONAL,
DCH-TDD-InformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DCH-Specific-TDD-InformationList ::= SEOUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-Specific-TDD-Item
DCH-Specific-TDD-Item ::= SEQUENCE {
   dCH-TD
                                        DCH-ID,
   ul-CCTrCH-ID
                                        CCTrCH-ID,
   dl-CCTrCH-ID
                                        CCTrCH-ID,
   ul-TransportFormatSet
                                        TransportFormatSet,
   dl-TransportFormatSet
                                        TransportFormatSet,
   allocationRetentionPriority
                                        AllocationRetentionPriority,
   frameHandlingPriority
                                        FrameHandlingPriority,
                                        OE-Selector
   qE-Selector
                                                                      OPTIONAL,
   -- This IE shall be present if DCH is part of set of Coordinated DCHs
                                        iE-Extensions
                                                                                                              OPTIONAL,
   . . .
DCH-Specific-TDD-Item-ExtlEs NBAP-PROTOCOL-EXTENSION ::= {
FDD-DCHs-to-Modify ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF FDD-DCHs-to-ModifyItem
FDD-DCHs-to-ModifyItem ::= SEQUENCE {
   ul-FP-Mode
                                     UL-FP-Mode
                                                    OPTIONAL,
                                     ToAWS
                                                    OPTIONAL,
   toAWS
   toAWE
                                     ToAWE
                                                    OPTIONAL,
```

```
transportBearerRequestIndicator
                                     TransportBearerRequestIndicator,
   dCH-SpecificInformationList
                                     DCH-ModifySpecificInformation-FDD,
   iE-Extensions
                                     ProtocolExtensionContainer { { FDD-DCHs-to-ModifyItem-ExtIEs} }
                                                                                                               OPTIONAL.
FDD-DCHs-to-ModifyItem-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
DCH-ModifySpecificInformation-FDD::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-ModifySpecificItem-FDD
DCH-ModifySpecificItem-FDD::=
                             SEOUENCE {
   dCH-ID
                                                 DCH-ID.
   ul-TransportFormatSet
                                                 TransportFormatSet
                                                                           OPTIONAL,
   dl-TransportFormatSet
                                                 TransportFormatSet
                                                                           OPTIONAL,
   allocationRetentionPriority
                                                 AllocationRetentionPriority OPTIONAL,
   frameHandlingPriority
                                                 FrameHandlingPriority
                                                                           OPTIONAL,
   iE-Extensions
                                                 OPTIONAL,
   . . .
DCH-ModifySpecificItem-FDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TDD-DCHs-to-Modify ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-ModifyItem-TDD
DCH-ModifyItem-TDD ::= SEQUENCE {
   ul-FP-Mode
                                     UL-FP-Mode
                                                    OPTIONAL,
                                                    OPTIONAL,
   toAWS
                                     ToAWS
   toAWE
                                     ToAWE
                                                    OPTIONAL,
   transportBearerRequestIndicator
                                     TransportBearerRequestIndicator,
   dCH-SpecificInformationList
                                     DCH-ModifySpecificInformation-TDD
   iE-Extensions
                                     ProtocolExtensionContainer { { TDD-DCHs-to-ModifyItem-ExtIEs} }
                                                                                                                  OPTIONAL
TDD-DCHs-to-ModifyItem-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
DCH-ModifySpecificInformation-TDD ::= SEQUENCE (SIZE (1..maxNrOfDCHs)) OF DCH-ModifySpecificItem-TDD
DCH-ModifySpecificItem-TDD ::= SEQUENCE {
   dCH-ID
                                                 DCH-ID.
   ul-CCTrCH-ID
                                                 CCTrCH-ID
                                                                           OPTIONAL,
   dl-CCTrCH-ID
                                                 CCTrCH-ID
                                                                           OPTIONAL,
   ul-TransportFormatSet
                                                 TransportFormatSet
                                                                           OPTIONAL,
   dl-TransportFormatSet
                                                 TransportFormatSet
                                                                           OPTIONAL,
   allocationRetentionPriority
                                                 AllocationRetentionPriority OPTIONAL,
   frameHandlingPriority
                                                 FrameHandlingPriority
                                                                           OPTIONAL,
   iE-Extensions
                                                 OPTIONAL,
```

```
DCH-ModifySpecificItem-TDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DedicatedChannelsCapacityConsumptionLaw ::= SEOUENCE ( SIZE(1..maxNrOfSF) ) OF
   SEQUENCE {
      dl-Cost-1
                   INTEGER (0..65535),
      d1-Cost-1 INTEGER (0..65535),
d1-Cost-2 INTEGER (0..65535),
      ul-Cost-1 INTEGER (0..65535),
      ul-Cost-2 INTEGER (0..65535),
      iE-Extensions
                        OPTIONAL,
DedicatedChannelsCapacityConsumptionLaw-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DedicatedMeasurementType ::= ENUMERATED {
   sir,
   sir-error,
   transmitted-code-power,
   rx-timing-deviation,
   round-trip-time,
   rx-timing-deviation-LCR
DedicatedMeasurementValue ::= CHOICE
   sIR-Value
                               SIR-Value,
   sIR-ErrorValue
                               SIR-Error-Value,
   transmittedCodePowerValue
                                  Transmitted-Code-Power-Value,
                                  RSCP-Value,
   rxTimingDeviationValue
                                  Rx-Timing-Deviation-Value,
   roundTripTime
                                  Round-Trip-Time-Value,
   extension-DedicatedMeasurementValue
                                      Extension-DedicatedMeasurementValue
Extension-DedicatedMeasurementValue ::= ProtocolIE-Single-Container {{ Extension-DedicatedMeasurementValueIE }}
Extension-DedicatedMeasurementValueIE NBAP-PROTOCOL-IES ::= {
   }
DedicatedMeasurementValueInformation ::= CHOICE {
   measurementAvailable
                           DedicatedMeasurementAvailable,
   measurementnotAvailable
                           DedicatedMeasurementnotAvailable
```

```
DedicatedMeasurementAvailable::= SEQUENCE {
   dedicatedmeasurementValue
                                DedicatedMeasurementValue,
   cFN
                                CFN
                                                         OPTIONAL,
   ie-Extensions
                                ProtocolExtensionContainer { { DedicatedMeasurementAvailableItem-ExtIEs} }
                                                                                                         OPTIONAL,
DedicatedMeasurementAvailableItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DedicatedMeasurementnotAvailable ::= NULL
Detected-PCPCH-access-preambles ::= INTEGER (0..240,...)
DeltaSIR
                     ::= INTEGER (0..30)
-- Unit dB, Step 0.1 dB, Range 0..3 dB.
DGPSCorrections ::= SEQUENCE {
                      GPSTOW,
  gpstow
  status-health
                      GPS-Status-Health,
  satelliteinfo
                      SAT-Info-DGPSCorrections,
                      ie-Extensions
                                                                              OPTIONAL,
DGPSCorrections-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DGPSThresholds ::= SEQUENCE {
  prcdeviation
                     PRCDeviation,
                     ie-Extensions
                                                                          OPTIONAL,
DGPSThresholds-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DiversityControlField ::= ENUMERATED {
   must,
   must-not,
   . . .
```

```
DiversityMode ::= ENUMERATED {
    none,
    sTTD.
    closed-loop-model,
    closed-loop-mode2,
DL-DPCH-SlotFormat ::= INTEGER (0..16,...)
DL-Timeslot-Information ::= SEOUENCE (SIZE (1.. maxNrOfDLTSs)) OF DL-Timeslot-InformationItem
DL-Timeslot-InformationItem ::= SEQUENCE {
    timeSlot
                                            TimeSlot,
    midambleShiftAndBurstType
                                            MidambleShiftAndBurstType,
    tFCI-Presence
                                            TFCI-Presence,
    dL-Code-Information
                                            TDD-DL-Code-Information,
                                            ProtocolExtensionContainer { { DL-Timeslot-InformationItem-ExtIEs} }
    iE-Extensions
                                                                                                                       OPTIONAL,
DL-Timeslot-InformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-TimeslotLCR-Information ::= SEQUENCE (SIZE (1.. maxNrOfDLTSLCRs)) OF DL-TimeslotLCR-InformationItem
DL-TimeslotLCR-InformationItem ::= SEQUENCE {
    timeSlotLCR
                                            TimeSlotLCR,
    midambleShiftLCR
                                            MidambleShiftLCR,
    tFCI-Presence
                                            TFCI-Presence,
    dL-Code-LCR-Information
                                            TDD-DL-Code-LCR-Information,
                                            ProtocolExtensionContainer { { DL-TimeslotLCR-InformationItem-ExtIEs} }
    iE-Extensions
DL-TimeslotLCR-InformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-FrameType ::= ENUMERATED {
    typeA,
    typeB,
DL-or-Global-CapacityCredit ::= INTEGER (0..65535)
DL-Power ::= INTEGER (-350..150)
-- DL-Power = power * 10
-- If Power <=-35 DL-Power shall be set to -350
-- if Power >=15 DL-Power shall be set to 150
```

OPTIONAL,

OPTIONAL,

```
-- Unit dB, Range -35dB .. +15dB, Step +0.1dB
DLPowerAveragingWindowSize ::= INTEGER (1..60)
DL-ScramblingCode ::= INTEGER (0..15)
-- 0= Primary scrambling code of the cell, 1..15= Secondary scrambling code --
DL-TimeslotISCP ::= INTEGER (0..91)
DL-TimeslotISCPInfo ::= SEQUENCE (SIZE (1..maxNrOfDLTSs)) OF DL-TimeslotISCPInfoItem
DL-TimeslotISCPInfoItem ::= SEQUENCE {
   timeSlot
   dL-TimeslotISCP
                              DL-TimeslotISCP,
   iE-Extensions
                              ProtocolExtensionContainer { {DL-TimeslotISCPInfoItem-ExtIEs} }
DL-TimeslotISCPInfoItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-TimeslotISCPInfoLCR ::= SEQUENCE (SIZE (1..maxNrOfDLTSLCRs)) OF DL-TimeslotISCPInfoItemLCR
DL-TimeslotISCPInfoItemLCR ::= SEQUENCE {
   timeSlotLCR
                           TimeSlotLCR,
   dL-TimeslotISCP
                             DL-TimeslotISCP,
                              iE-Extensions
DL-TimeslotISCPInfoItemLCR-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DL-TPC-Pattern01Count ::= INTEGER (0..30,...)
Downlink-Compressed-Mode-Method
                                ::= ENUMERATED {
   puncturing,
   sFdiv2,
   higher-layer-scheduling,
    . . .
DPC-Mode ::= ENUMERATED {
   mode0,
   mode1,
DPCH-ID ::= INTEGER (0..239)
DSCH-ID ::= INTEGER (0..255)
```

```
DSCH-InformationResponse ::= SEQUENCE (SIZE (1..maxNrOfDSCHs)) OF DSCH-InformationResponseItem
DSCH-InformationResponseItem ::= SEQUENCE {
   dSCH-ID
                                              DSCH-ID.
   bindingID
                                              BindingID
                                                                       OPTIONAL,
   transportLayerAddress
                                              TransportLayerAddress
                                                                       OPTIONAL,
   iE-Extensions
                                              OPTIONAL,
DSCH-InformationResponseItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DSCH-FDD-Common-Information ::= SEQUENCE {
   enhancedDSCHPCIndicator
                                EnhancedDSCHPCIndicator
                                                        OPTIONAL,
   enhancedDSCHPC
                                EnhancedDSCHPC
                                                        OPTIONAL,
   -- The IE shall be present if the Enhanced DSCH PC Indicator IE is set to "Enhanced DSCH PC Active in the UE".
                                   iE-Extensions
                                                                                                         OPTIONAL,
   . . .
DSCH-FDD-Common-Information-ExtlEs NBAP-PROTOCOL-EXTENSION ::= {
DSCH-FDD-Information ::= SEQUENCE (SIZE (1..maxNrOfDSCHs)) OF DSCH-FDD-InformationItem
DSCH-FDD-InformationItem ::= SEQUENCE {
   dSCH-ID
                                   DSCH-ID,
   transportFormatSet
                                   TransportFormatSet,
   allocationRetentionPriority
                                   AllocationRetentionPriority,
   frameHandlingPriority
                                   FrameHandlingPriority,
   toAWS
                                   ToAWS.
   toAWE
                                   TOAWE,
   iE-Extensions
                                   OPTIONAL,
DSCH-FDD-InformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DSCH-TDD-Information ::= SEQUENCE (SIZE (1..maxNrOfDSCHs)) OF DSCH-TDD-InformationItem
DSCH-TDD-InformationItem ::= SEQUENCE {
   dsch-ID
                                       DSCH-ID,
   cCTrCH-ID
                                       CCTrCH-ID,
   transportFormatSet
                                       TransportFormatSet,
                                       AllocationRetentionPriority,
   allocationRetentionPriority
   frameHandlingPriority
                                       FrameHandlingPriority,
                                       ToAWS,
   toAWS
   toAWE
                                       TOAWE,
```

OPTIONAL,

```
ProtocolExtensionContainer { { DSCH-TDD-InformationItem-ExtIEs} }
   iE-Extensions
DSCH-TDD-InformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
DwPCH-Power ::= INTEGER (-150..400,...)
-- DwPCH-power = power * 10
-- If power <= -15 DwPCH shall be set to -150
-- If power >= 40 DwPCH shall be set to 400
-- Unit dBm, Range -15dBm .. +40 dBm, Step +0.1dB
-- -----
-- ------
End-Of-Audit-Sequence-Indicator ::= ENUMERATED {
   end-of-audit-sequence,
   not-end-of-audit-sequence
EnhancedDSCHPC ::= SEOUENCE {
   enhancedDSCHPCWnd EnhancedDSCHPCWnd,
   enhancedDSCHPCCounter EnhancedDSCHPCCounter,
   enhancedDSCHPowerOffset EnhancedDSCHPowerOffset,
EnhancedDSCHPCCounter ::= INTEGER (1..50)
EnhancedDSCHPCIndicator ::= ENUMERATED {
   enhancedDSCHPCActiveInTheUE,
   enhancedDSCHPCNotActiveInTheUE
EnhancedDSCHPCWnd ::= INTEGER (1..10)
EnhancedDSCHPowerOffset ::= INTEGER (-15..0)
-- -----
FDD-DL-ChannelisationCodeNumber ::= INTEGER(0.. 511)
-- According to the mapping in [9]. The maximum value is equal to the DL spreading factor -1--
FDD-DL-CodeInformation ::= SEQUENCE (SIZE (1..maxNrOfCodes)) OF FDD-DL-CodeInformationItem
FDD-DL-CodeInformationItem ::= SEQUENCE {
   dl-ScramblingCode
                                       DL-ScramblingCode,
   fdd-DL-ChannelisationCodeNumber
                                       FDD-DL-ChannelisationCodeNumber,
```

OPTIONAL,

OPTIONAL,

```
transmissionGapPatternSequenceCodeInformation
                                                 TransmissionGapPatternSequenceCodeInformation
                                      iE-Extensions
FDD-DL-CodeInformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
FDD-S-CCPCH-Offset ::= INTEGER (0..149)
-- 0: 0 chip, 1: 256 chip, 2: 512 chip, .. ,149: 38144 chip [7] --
FDD-TPC-DownlinkStepSize ::= ENUMERATED {
   step-size0-5,
   step-sizel,
   step-size1-5,
   step-size2,
   . . .
FirstRLS-Indicator ::= ENUMERATED {
   first-RLS,
   not-first-RLS,
FNReportingIndicator ::= ENUMERATED {
fN-reporting-required,
fN-reporting-not-required
FrameHandlingPriority ::= INTEGER (0..15)
-- 0=lower priority, 15=higher priority --
FrameAdjustmentValue ::= INTEGER(0..4095)
FrameOffset ::= INTEGER (0..255)
FPACH-Power ::= INTEGER (-150..400,...) -- FPACH-power = power * 10
-- If power <= -15 FPACH shall be set to -150
-- If power >= 40 FPACH shall be set to 400
-- Unit dBm, Range -15dBm .. +40 dBm, Step +0.1dB
-- -----
GapLength
                    ::= INTEGER (1..14)
-- Unit slot
GapDuration
                    ::= INTEGER (1..144,...)
-- Unit frame
```

```
GPS-Almanac ::= SEQUENCE {
    wn<sub>a</sub>-alm
                         BIT STRING (SIZE (8)),
                        SAT-Info-Almanac,
   sat-info-almanac
    sVGlobalHealth-alm BIT STRING (SIZE (364)) OPTIONAL,
                         ProtocolExtensionContainer { GPS-Almanac-ExtIEs} }
   ie-Extensions
                                                                                     OPTIONAL,
GPS-Almanac-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
GPS-Ionospheric-Model ::= SEQUENCE {
   alpha-zero-ionos
                         BIT STRING (SIZE (8)),
   alpha-one-ionos
                         BIT STRING (SIZE (8)),
   alpha-two-ionos
                         BIT STRING (SIZE (8)),
   alpha-three-ionos
                         BIT STRING (SIZE (8)),
  beta-zero-ionos
                         BIT STRING (SIZE (8)),
  beta-one-ionos
                         BIT STRING (SIZE (8)),
  beta-two-ionos
                         BIT STRING (SIZE (8)),
  beta-three-ionos
                         BIT STRING (SIZE (8)),
   ie-Extensions
                         ProtocolExtensionContainer { GPS-Ionospheric-Model-ExtIEs} }
                                                                                             OPTIONAL,
   . . .
GPS-Ionospheric-Model-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    . . .
GPS-Information ::= SEQUENCE (SIZE (0..maxNoGPSItems)) OF GPS-Information-Item
-- This IE shall be present if the Information Type Item IE indicates 'GPS Information'
GPS-Information-Item ::= ENUMERATED {
  gps-navigation-model-and-time-recovery,
  gps-ionospheric-model,
   gps-utc-model,
  gps-almanac,
  gps-rt-integrity,
GPS-RealTime-Integrity ::= CHOICE {
    bad-satellites
                                GPSBadSat-Info-RealTime-Integrity,
    no-bad-satellites
                                NULL
GPSBadSat-Info-RealTime-Integrity ::= SEQUENCE {
```

```
sat-info
                                    SATInfo-RealTime-Integrity,
    ie-Extensions
                                    ProtocolExtensionContainer { { GPSBadSat-Info-RealTime-Integrity-ExtIEs} }
                                                                                                                        OPTIONAL,
GPSBadSat-Info-RealTime-Integrity-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
GPS-NavigationModel-and-TimeRecovery ::= SEOUENCE (SIZE (1..maxNoSat)) OF GPS-NavandRecovery-Item
GPS-NavandRecovery-Item ::= SEQUENCE
  tx-tow-nav
                                   INTEGER (0..1048575),
  sat-id-nav
                                   SAT-ID,
  tlm-message-nav
                                   BIT STRING (SIZE (14)),
  tlm-revd-c-nav
                                   BIT STRING (SIZE (2)),
 ho-word-nav
                                   BIT STRING (SIZE (22)),
 w-n-nav
                                   BIT STRING (SIZE (10)),
  ca-or-p-on-12-nav
                                   BIT STRING (SIZE (2)),
 user-range-accuracy-index-nav
                                   BIT STRING (SIZE (4)),
  sv-health-nav
                                   BIT STRING (SIZE (6)),
 iodc-nav
                                   BIT STRING (SIZE (10)),
 12-p-dataflag-nav
                                   BIT STRING (SIZE (1)),
  sf1-reserved-nav
                                   BIT STRING (SIZE (87)),
  t-qd-nav
                                   BIT STRING (SIZE (8)),
  t-oc-nav
                                   BIT STRING (SIZE (16)),
  a-f-2-nav
                                   BIT STRING (SIZE (8)),
 a-f-1-nav
                                   BIT STRING (SIZE (16)),
 a-f-zero-nav
                                   BIT STRING (SIZE (22)),
  c-rs-nav
                                   BIT STRING (SIZE (16)),
 delta-n-nav
                                   BIT STRING (SIZE (16)),
 m-zero-nav
                                   BIT STRING (SIZE (32)),
 c-uc-nav
                                   BIT STRING (SIZE (16)),
  qps-e-nav
                                   BIT STRING (SIZE (32)),
  c-us-nav
                                   BIT STRING (SIZE (16)),
                                   BIT STRING (SIZE (32)),
  a-sqrt-nav
  t-oe-nav
                                   BIT STRING (SIZE (16)),
  fit-interval-flag-nav
                                   BIT STRING (SIZE (1)),
  aodo-nav
                                   BIT STRING (SIZE (5)),
 c-ic-nav
                                   BIT STRING (SIZE (16)),
  omega-zero-nav
                                   BIT STRING (SIZE (32)),
 c-is-nav
                                   BIT STRING (SIZE (16)),
 i-zero-nav
                                   BIT STRING (SIZE (32)),
  c-rc-nav
                                   BIT STRING (SIZE (16)),
  gps-omega-nav
                                   BIT STRING (SIZE (32)),
  omegadot-nav
                                   BIT STRING (SIZE (24)),
 idot-nav
                                   BIT STRING (SIZE (14)),
  spare-zero-fill
                                   BIT STRING (SIZE (20)),
                                   ProtocolExtensionContainer { { GPS-NavandRecovery-Item-ExtIEs} }
 ie-Extensions
                                                                                                                        OPTIONAL,
```

```
GPS-NavandRecovery-Item-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
GPS-RX-POS ::= SEQUENCE {
   latitudeSign
                          ENUMERATED {north, south},
   latitude
                          INTEGER (0..8388607),
   longitude
                          INTEGER (-8388608..8388607),
   directionOfAltitude
                          ENUMERATED {height, depth},
   altitude
                          INTEGER (0..32767),
   iE-Extensions
                          ProtocolExtensionContainer { { GPS-RX-POS-ExtIEs} } OPTIONAL,
GPS-RX-POS-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
GPS-Status-Health ::= ENUMERATED {
  udre-scale-1dot0.
  udre-scale-0dot75,
  udre-scale-0dot5,
  udre-scale-0dot3,
  udre-scale-0dot1,
  no-data,
  invalid-data
GPSTOW ::= INTEGER (0..604799)
GPS-UTC-Model ::= SEQUENCE {
  a-one-utc
                BIT STRING (SIZE (24)),
  a-zero-utc
                       BIT STRING (SIZE (32)),
                 BIT STRING (SIZE (8)),
  t-ot-utc
                  BIT STRING (SIZE (8)),
  delta-t-ls-utc
  w-n-t-utc
                       BIT STRING (SIZE (8)),
  w-n-lsf-utc
                    BIT STRING (SIZE (8)),
  dn-utc
                       BIT STRING (SIZE (8)),
  delta-t-lsf-utc
                       BIT STRING (SIZE (8)),
  ie-Extensions
                       ProtocolExtensionContainer { GPS-UTC-Model-ExtIEs} }
                                                                                OPTIONAL,
  . . .
GPS-UTC-Model-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
-- ------
```

```
-- -----
IB-OC-ID ::= INTEGER (1..16)
IB-SG-DATA ::= BIT STRING
-- Contains SIB data fixed" or "SIB data variable" in segment as encoded in ref.[18].
IB-SG-POS ::= INTEGER (0..4094)
-- Only even positions allowed
IB-SG-REP ::= ENUMERATED {rep4, rep8, rep16, rep32, rep64, rep128, rep256, rep512, rep1024, rep2048, rep4096}
IB-Type ::= ENUMERATED {
   mIB,
   sB1,
   sB2.
   sIB1,
   sIB2,
   sIB3,
   sIB4,
   sIB5,
   sIB6,
   sIB7,
   sIB8,
   sIB9,
   sIB10,
   sIB11,
   sIB12,
   sIB13,
   sIB13dot1,
   sIB13dot2,
   sIB13dot3,
   sIB13dot4,
   sIB14,
   sIB15,
   sIB15dot1,
   sIB15dot2,
   sIB15dot3,
   sIB16,
   . . . ,
   sIB17,
   sIB15dot4,
   sIB18
IndicationType ::= ENUMERATED {
   noFailure,
   serviceImpacting,
   . . .
```

```
InformationReportCharacteristics ::= CHOICE {
    onDemand
    periodic
                            InformationReportCharacteristicsType-ReportPeriodicity,
    onModification
                            InformationReportCharacteristicsType-OnModification,
InformationReportCharacteristicsType-ReportPeriodicity ::= CHOICE {
                        ReportPeriodicity-Scaledmin,
                        ReportPeriodicity-Scaledhour,
    hours
    . . .
InformationReportCharacteristicsType-OnModification ::= SEQUENCE
    information-thresholds
                                  InformationThresholds
                                                            OPTIONAL,
    ie-Extensions
                                  ProtocolExtensionContainer { { InformationReportCharacteristicsType-OnModification-ExtIEs} } OPTIONAL,
InformationReportCharacteristicsType-OnModification-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
InformationThresholds ::= CHOICE {
                        DGPSThresholds,
    dgps
    . . .
InformationExchangeID ::= INTEGER (0..1048575)
InformationType ::= SEQUENCE {
    information-Type-Item
                                Information-Type-Item,
    gPSInformation
                                GPS-Information OPTIONAL,
    iE-Extensions
                                ProtocolExtensionContainer { { Information-Type-ExtIEs} }
                                                                                                 OPTIONAL,
Information-Type-ExtlEs NBAP-PROTOCOL-EXTENSION ::= {
Information-Type-Item ::= ENUMERATED
    gpsinformation,
    dgpscorrections,
    gpsrxpos,
```

```
InnerLoopDLPCStatus ::= ENUMERATED {
   active.
   inactive
IPDL-Indicator ::= ENUMERATED {
   active,
   inactive
IPDL-FDD-Parameters ::= SEQUENCE {
                               ENUMERATED{sp5,sp7,sp10,sp15,sp20,sp30,sp40,sp50,...},
   iP-SpacingFDD
                               ENUMERATED{len5, len10},
   iP-Length
   seed
                               INTEGER(1..63),
                               BurstModeParams
                                                 OPTIONAL,
   burstModeParams
   iE-Extensions
                        ProtocolExtensionContainer { { IPDLFDDParameter-ExtIEs} }
                                                                            OPTIONAL,
IPDLFDDParameter-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
IPDL-TDD-Parameters ::= SEQUENCE {
   iP-SpacingTDD
                               ENUMERATED{sp30,sp40,sp50,sp70,sp100,...},
   iP-Start
                               INTEGER(0..4095),
   iP-Slot
                               INTEGER(0..14),
                               ENUMERATED { switchOff-1-Frame, switchOff-2-Frames }.
   iP-PCCPCH
                                                OPTIONAL,
   burstModeParams
                               BurstModeParams
   iE-Extensions
                        ProtocolExtensionContainer { { IPDLTDDParameter-ExtIEs} }
                                                                            OPTIONAL,
BurstModeParams ::= SEQUENCE {
                                   INTEGER(0..15),
   burstStart
   burstLenth
                                   INTEGER(10..25),
   burstFreq
                                   INTEGER(1..16),
IPDLTDDParameter-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
-- ------
-- ------
-- ------
```

__ ______

```
_____
Local-Cell-ID ::= INTEGER (0..268435455)
  __ ______
MaximumDL-PowerCapability ::= INTEGER(0..500)
-- Unit dBm, Range OdBm .. 50dBm, Step +0.1dB
MaximumTransmissionPower ::= INTEGER(0..500)
-- Unit dBm, Range 0dBm .. 50dBm, Step +0.1dB
MaxNrOfUL-DPDCHs ::= INTEGER (1..6)
Max-Number-of-PCPCHes ::= INTEGER (1..64,...)
MaxPRACH-MidambleShifts ::= ENUMERATED {
   shift4,
   shift8,
   . . .
MeasurementFilterCoefficient ::= ENUMERATED {k0, k1, k2, k3, k4, k5, k6, k7, k8, k9, k11, k13, k15, k17, k19,...}
-- Measurement Filter Coefficient to be used for measurement
MeasurementID ::= INTEGER (0..1048575)
MidambleConfigurationBurstType1And3 ::=
                                        ENUMERATED {v4, v8, v16}
MidambleConfigurationBurstType2 ::=
                                    ENUMERATED {v3, v6}
MidambleShiftAndBurstType ::=
                                 CHOICE {
   type1
                                    SEQUENCE {
       midambleConfigurationBurstTypelAnd3 MidambleConfigurationBurstTypelAnd3,
       midambleAllocationMode
                                        CHOICE +
          defaultMidamble
                                            NULL,
          commonMidamble
                                            NULL,
                                            MidambleShiftLong,
          ueSpecificMidamble
   . . .
   },
       midambleConfigurationBurstType2
                                        MidambleConfigurationBurstType2,
       midambleAllocationMode
                                        CHOICE {
          defaultMidamble
                                            NULL,
          commonMidamble
                                            NULL,
          ueSpecificMidamble
                                            MidambleShiftShort,
```

```
type3
                                        SEOUENCE {
       midambleConfigurationBurstTypelAnd3 MidambleConfigurationBurstTypelAnd3,
        midambleAllocationMode
                                            CHOICE +
            defaultMidamble
                                                 NULL,
            ueSpecificMidamble
                                                 MidambleShiftLong,
        . . .
MidambleShiftLong ::=
                                    INTEGER (0..15)
MidambleShiftShort ::=
                                    INTEGER (0..5)
MidambleShiftLCR ::= SEQUENCE {
    midambleAllocationMode
                                MidambleAllocationMode,
    midambleShift
                                MidambleShiftLong
                                                         OPTIONAL,
    iE-Extensions
                                ProtocolExtensionContainer { {MidambleShiftLCR-ExtIEs} }
                                                                                                  OPTIONAL,
MidambleAllocationMode ::= ENUMERATED {
    defaultMidamble,
    commonMidamble,
    uESpecificMidamble,
MidambleShiftLCR-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
MinimumDL-PowerCapability ::= INTEGER(0..800)
-- Unit dBm, Range -30dBm .. 50dBm, Step +0.1dB
MinSpreadingFactor ::= ENUMERATED {
        v4,
        v8,
        v16,
        v32,
        v64,
        v128,
       v256,
        v512
Modulation ::= ENUMERATED {
    qPSK,
    eightPSK,
    . . .
```

```
MinUL-ChannelisationCodeLength ::= ENUMERATED {
   v8.
   v16,
   v32,
   v64,
   v128,
   v256,
MultiplexingPosition ::= ENUMERATED {
   fixed,
   flexible
  -- -----
NCyclesPerSFNperiod ::= ENUMERATED {
   v1.
   v2,
   v4,
   v8,
NEOT ::= INTEGER (0..8)
NFmax ::= INTEGER (1..64,...)
NRepetitionsPerCyclePeriod ::= INTEGER (2..10)
N-INSYNC-IND ::= INTEGER (1..256)
N-OUTSYNC-IND ::= INTEGER (1..256)
NeighbouringCellMeasurementInformation ::= SEQUENCE (SIZE (1..maxNrOfMeasNCell)) OF
       CHOICE {
               {\tt neighbouringFDDCellMeasurementInformation}
                                                           NeighbouringFDDCellMeasurementInformation, -- FDD only
               neighbouringTDDCellMeasurementInformation
                                                           NeighbouringTDDCellMeasurementInformation, -- 3.84Mcps TDD only
NeighbouringFDDCellMeasurementInformation ::= SEQUENCE {
   uC-Id
                                     UC-Id,
   uARFCN
                                     UARFCN,
   primaryScramblingCode
                                     PrimaryScramblingCode,
                                     ProtocolExtensionContainer { { NeighbouringFDDCellMeasurementInformationItem-ExtIEs} } OPTIONAL,
   iE-Extensions
```

```
NeighbouringFDDCellMeasurementInformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
NeighbouringTDDCellMeasurementInformation ::= SEQUENCE {
   uC-Id
                                   UC-Id,
   uARFCN
                                   UARFCN,
   cellParameterID
                                   CellParameterID,
   timeSlot
                                   TimeSlot
                                                               OPTIONAL,
   midambleShiftAndBurstType
                                   MidambleShiftAndBurstType
                                                               OPTIONAL,
                                   ProtocolExtensionContainer { { NeighbouringTDDCellMeasurementInformationItem-ExtIEs} } OPTIONAL,
   iE-Extensions
   . . .
NeighbouringTDDCellMeasurementInformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
NodeB-CommunicationContextID ::= INTEGER (0..1048575)
NStartMessage ::= INTEGER (1..8)
-- -----
__ ______
__ ______
-- -----
PagingIndicatorLength ::= ENUMERATED {
   v2,
   v4,
   v8,
PayloadCRC-PresenceIndicator ::= ENUMERATED {
   cRC-Included,
   cRC-NotIncluded,
PCCPCH-Power ::= INTEGER (-150..400,...)
-- PCCPCH-power = power * 10
-- If power <= -15 PCCPCH shall be set to -150
-- If power >= 40 PCCPCH shall be set to 400
-- Unit dBm, Range -15dBm .. +40 dBm, Step +0.1dB
PCP-Length ::= ENUMERATED{
   v0,
   v8
```

```
PDSCH-CodeMapping ::= SEQUENCE {
   dl-ScramblingCode
                                  DL-ScramblingCode,
    signallingMethod
                                      CHOICE {
       code-Range
                                      PDSCH-CodeMapping-PDSCH-CodeMappingInformationList,
       tFCI-Range
                                      PDSCH-CodeMapping-DSCH-MappingInformationList,
                                          PDSCH-CodeMapping-PDSCH-CodeInformationList,
       explicit
       . . . ,
                                      PDSCH-CodeMapping-ReplacedPDSCH-CodeInformationList
       replace
                                          ProtocolExtensionContainer { { PDSCH-CodeMapping-ExtIEs} }
   iE-Extensions
                                                                                                                 OPTIONAL,
PDSCH-CodeMapping-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PDSCH-CodeMapping-CodeNumberComp ::= INTEGER (0..maxCodeNrComp-1)
PDSCH-CodeMapping-SpreadingFactor ::= ENUMERATED {
   v4,
   v8,
   v16,
   v32.
   v64,
   v128,
   v256,
PDSCH-CodeMapping-PDSCH-CodeMappingInformationList ::= SEQUENCE (SIZE (1..maxNrOfCodeGroups)) OF
   SEQUENCE
       spreadingFactor
                                  PDSCH-CodeMapping-SpreadingFactor,
       multi-CodeInfo
                                  PDSCH-Multi-CodeInfo,
       start-CodeNumber
                                      PDSCH-CodeMapping-CodeNumberComp,
                                  PDSCH-CodeMapping-CodeNumberComp,
       stop-CodeNumber
       iE-Extensions
                                      OPTIONAL,
       . . .
PDSCH-CodeMapping-PDSCH-CodeMappingInformationList-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PDSCH-CodeMapping-DSCH-MappingInformationList ::= SEQUENCE (SIZE (1..maxNrOfTFCIGroups)) OF
   SEQUENCE {
       maxTFCI-field2-Value
                                      PDSCH-CodeMapping-MaxTFCI-Field2-Value,
                                  PDSCH-CodeMapping-SpreadingFactor,
       spreadingFactor
                                  PDSCH-Multi-CodeInfo,
       multi-CodeInfo
       codeNumber
                                  PDSCH-CodeMapping-CodeNumberComp
       iE-Extensions
                                      ProtocolExtensionContainer { { PDSCH-CodeMapping-DSCH-MappingInformationList-ExtIEs} }
                                                                                                                            OPTIONAL,
       . . .
```

```
PDSCH-CodeMapping-DSCH-MappingInformationList-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PDSCH-CodeMapping-MaxTFCI-Field2-Value ::= INTEGER (1..1023)
PDSCH-CodeMapping-PDSCH-CodeInformationList ::= SEQUENCE (SIZE (1..maxNrOfTFCI2Combs)) OF
    SEQUENCE
                                    PDSCH-CodeMapping-SpreadingFactor,
        spreadingFactor
        multi-CodeInfo
                                    PDSCH-Multi-CodeInfo,
                                    PDSCH-CodeMapping-CodeNumberComp,
        codeNumber
       iE-Extensions
                                        ProtocolExtensionContainer { { PDSCH-CodeMapping-PDSCH-CodeInformationList-ExtIEs} }
                                                                                                                                   OPTIONAL,
PDSCH-CodeMapping-PDSCH-CodeInformationList-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
PDSCH-CodeMapping-ReplacedPDSCH-CodeInformationList ::= SEQUENCE (SIZE (1..maxNrOfTFCI2Combs)) OF
    SEQUENCE {
       tfci-Field2
                                    TFCS-MaxTFCI-field2-Value,
       spreadingFactor
                                    PDSCH-CodeMapping-SpreadingFactor,
        multi-CodeInfo
                                    PDSCH-Multi-CodeInfo,
                                    PDSCH-CodeMapping-CodeNumberComp,
        codeNumber
        iE-Extensions
                                    ProtocolExtensionContainer { { PDSCH-CodeMapping-ReplacedPDSCH-CodeInformationList-ExtIEs} }
                                                                                                                                      OPTIONAL,
    . . .
PDSCH-CodeMapping-ReplacedPDSCH-CodeInformationList-ExtIES NBAP-PROTOCOL-EXTENSION ::= {
PDSCH-Multi-CodeInfo ::= INTEGER (1..16)
PDSCH-ID ::= INTEGER (0..255)
PDSCHSet-ID ::= INTEGER (0..255)
PICH-Mode ::= ENUMERATED {
    v18,
    v36,
    v72,
    v144,
    . . .
PICH-Power ::= INTEGER (-10..5)
-- Unit dB, Range -10dB .. +5dB, Step +1dB
PowerAdjustmentType ::= ENUMERATED {
    none,
```

```
common,
    individual
PowerOffset ::= INTEGER (0..24)
-- PowerOffset = offset * 0.25
-- Unit dB, Range 0dB .. +6dB, Step +0.25dB
PowerRaiseLimit ::= INTEGER (0..10)
PRACH-Midamble ::= ENUMERATED {
    inverted,
    direct,
    . . .
PRC ::= INTEGER (-2047..2047)
--pseudo range correction; scaling factor 0.32 meters
PRCDeviation ::= ENUMERATED {
   one,
   two,
   five,
   ten,
PreambleSignatures ::= BIT STRING {
                                     signature15(0),
                                     signature14(1),
                                     signature13(2),
                                     signature12(3),
                                     signature11(4),
                                     signature10(5),
                                     signature9(6),
                                     signature8(7),
                                     signature7(8),
                                     signature6(9),
                                     signature5(10),
                                     signature4(11),
                                     signature3(12),
                                     signature2(13),
                                     signature1(14),
                                     signature0(15)
                                     } (SIZE (16))
PreambleThreshold ::= INTEGER (0..72)
-- 0= -36.0dB, 1= -35.5dB, ..., 72= 0.0dB
PredictedSFNSFNDeviationLimit ::=INTEGER (1..256)
-- Unit chip, Step 1/16 chip, Range 1/16..16 chip
PredictedTUTRANGPSDeviationLimit ::= INTEGER (1..256)
-- Unit chip, Step 1/16 chip, Range 1/16..16 chip
```

```
Pre-emptionCapability ::= ENUMERATED {
   shall-not-trigger-pre-emption,
   may-trigger-pre-emption
Pre-emptionVulnerability ::= ENUMERATED {
   not-pre-emptable,
   pre-emptable
PrimaryCPICH-Power ::= INTEGER(-100..500)
-- step 0.1 (Range -10.0..50.0) Unit is dBm
PrimaryScramblingCode ::= INTEGER (0..511)
PriorityLevel
                        ::= INTEGER (0..15)
-- 0 = spare, 1 = highest priority, ...14 = lowest priority and 15 = no priority
PropagationDelay ::= INTEGER (0..255)
-- Unit: chips, step size 3 chips
-- example: 0 = 0chip, 1 = 3chips
SCH-TimeSlot ::= INTEGER (0..6)
PunctureLimit ::= INTEGER (0..15)
-- 0: 40%; 1: 44%; ... 14: 96%; 15: 100%
PUSCH-ID ::= INTEGER (0..255)
PUSCHSet-ID ::= INTEGER (0..255)
-- -----
QE-Selector ::= ENUMERATED {
   selected,
   non-selected
-- -----
RACH-SlotFormat ::= ENUMERATED {
   v0,
   v1.
   v2.
   v3,
RACH-SubChannelNumbers ::= BIT STRING {
```

```
subCh11(0),
                                        subCh10(1),
                                        subCh9(2),
                                        subCh8(3),
                                        subCh7(4),
                                        subCh6(5),
                                        subCh5(6),
                                        subCh4(7),
                                        subCh3(8),
                                        subCh2(9),
                                        subCh1(10),
                                        subCh0(11)
                                        } (SIZE (12))
Range-Correction-Rate ::= INTEGER (-127..127)
-- scaling factor 0.032 m/s
ReferenceClockAvailability ::= ENUMERATED {
    available,
    notAvailable
ReferenceSFNoffset ::= INTEGER (0..255)
RepetitionLength ::= INTEGER (1..63)
RepetitionPeriod ::= ENUMERATED {
    v1,
    v2,
    v4,
    v8,
    v16,
    v32,
    v64,
    . . .
RepetitionNumber0 ::= INTEGER (0..255)
RepetitionNumber1 ::= INTEGER (1..256)
RefTFCNumber ::= INTEGER (0..3)
ReportCharacteristics ::= CHOICE {
    onDemand
    periodic
                            ReportCharacteristicsType-ReportPeriodicity,
    event-a
                        ReportCharacteristicsType-EventA,
                        ReportCharacteristicsType-EventB,
    event-b
    event-c
                        ReportCharacteristicsType-EventC,
                        ReportCharacteristicsType-EventD,
    event-d
                        ReportCharacteristicsType-EventE,
    event-e
    event-f
                        ReportCharacteristicsType-EventF,
    extension-ReportCharacteristics
                                        Extension-ReportCharacteristics
```

```
Extension-ReportCharacteristics ::= ProtocolIE-Single-Container {{ Extension-ReportCharacteristicsIE }}
Extension-ReportCharacteristicsIE NBAP-PROTOCOL-IES ::= {
    { ID id-ReportCharacteristicsType-OnModification
                                                      CRITICALITY reject TYPE ReportCharacteristicsType-OnModification PRESENCE mandatory }
ReportCharacteristicsType-EventA ::= SEQUENCE {
    measurementThreshold
                                    ReportCharacteristicsType-MeasurementThreshold,
                                    ReportCharacteristicsType-ScaledMeasurementHysteresisTime
    measurementHysteresisTime
                                                                                                                       OPTIONAL,
   iE-Extensions
                                    ProtocolExtensionContainer { { ReportCharacteristicsType-EventA-ExtIEs} }
                                                                                                                        OPTIONAL,
    . . .
ReportCharacteristicsType-EventA-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
ReportCharacteristicsType-EventB ::= SEQUENCE {
    measurementThreshold
                                    ReportCharacteristicsType-MeasurementThreshold,
                                    ReportCharacteristicsType-ScaledMeasurementHysteresisTime
    measurementHysteresisTime
                                                                                                                        OPTIONAL,
                                    ProtocolExtensionContainer { { ReportCharacteristicsType-EventB-ExtIEs} }
    iE-Extensions
                                                                                                                        OPTIONAL,
    . . .
ReportCharacteristicsType-EventB-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
ReportCharacteristicsType-EventC ::= SEQUENCE {
    measurementIncreaseThreshold
                                    ReportCharacteristicsType-MeasurementIncreaseDecreaseThreshold,
    measurementChangeTime
                                    ReportCharacteristicsType-ScaledMeasurementChangeTime,
                                    ProtocolExtensionContainer { { ReportCharacteristicsType-EventC-ExtIEs} }
    iE-Extensions
                                                                                                                       OPTIONAL,
ReportCharacteristicsType-EventC-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
ReportCharacteristicsType-EventD ::= SEQUENCE {
    measurementDecreaseThreshold
                                    ReportCharacteristicsType-MeasurementIncreaseDecreaseThreshold,
    measurementChangeTime
                                    ReportCharacteristicsType-ScaledMeasurementChangeTime,
                                    ProtocolExtensionContainer { { ReportCharacteristicsType-EventD-ExtIEs} } 
   iE-Extensions
                                                                                                                        OPTIONAL.
ReportCharacteristicsType-EventD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
ReportCharacteristicsType-EventE ::= SEQUENCE {
    measurementThreshold1
                                    ReportCharacteristicsType-MeasurementThreshold,
```

```
measurementThreshold2
                                    ReportCharacteristicsType-MeasurementThreshold
                                                                                                 OPTIONAL,
    measurementHysteresisTime
                                    ReportCharacteristicsType-ScaledMeasurementHysteresisTime
                                                                                                 OPTIONAL,
    reportPeriodicity
                                    ReportCharacteristicsType-ReportPeriodicity
                                                                                                 OPTIONAL.
    iE-Extensions
                                    ProtocolExtensionContainer { { ReportCharacteristicsType-EventE-ExtIEs} }
                                                                                                                        OPTIONAL,
ReportCharacteristicsType-EventE-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
ReportCharacteristicsType-EventF ::= SEQUENCE {
    measurementThreshold1
                                    ReportCharacteristicsType-MeasurementThreshold,
    measurementThreshold2
                                    ReportCharacteristicsType-MeasurementThreshold
                                                                                                 OPTIONAL.
    measurementHysteresisTime
                                    ReportCharacteristicsType-ScaledMeasurementHysteresisTime
                                                                                                 OPTIONAL,
    reportPeriodicity
                                    ReportCharacteristicsType-ReportPeriodicity
                                                                                                 OPTIONAL,
                                    ProtocolExtensionContainer { { ReportCharacteristicsType-EventF-ExtIEs}
    iE-Extensions
                                                                                                                        OPTIONAL,
ReportCharacteristicsType-EventF-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
ReportCharacteristicsType-OnModification ::= SEQUENCE
    measurement.Threshold
                                    ReportCharacteristicsType-MeasurementThreshold,
    iE-Extensions
                                    ProtocolExtensionContainer { { ReportCharacteristicsType-OnModification-ExtIEs} }
                                                                                                                           OPTIONAL,
        . . .
ReportCharacteristicsType-OnModification-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
ReportCharacteristicsType-MeasurementIncreaseDecreaseThreshold ::= CHOICE {
    received-total-wide-band-power
                                                             Received-total-wide-band-power-Value-IncrDecrThres,
    transmitted-carrier-power
                                    Transmitted-Carrier-Power-Value,
    ackowledged-prach-preambles
                                        Acknowledged-PRACH-preambles-Value,
    uL-TimeslotISCP
                                    UL-TimeslotISCP-Value-IncrDecrThres,
    sir
                                SIR-Value-IncrDecrThres,
                                SIR-Error-Value-IncrDecrThres,
    sir-error
    transmitted-code-power
                                    Transmitted-Code-Power-Value-IncrDecrThres,
                                    RSCP-Value-IncrDecrThres,
    rscp
    round-trip-time
                                    Round-Trip-Time-IncrDecrThres,
                                            Acknowledged-PCPCH-access-preambles,
    acknowledged-PCPCH-access-preambles
    detected-PCPCH-access-preambles
                                            Detected-PCPCH-access-preambles,
    . . .
ReportCharacteristicsType-MeasurementThreshold ::= CHOICE
    received-total-wide-band-power
                                                             Received-total-wide-band-power-Value,
    transmitted-carrier-power
                                    Transmitted-Carrier-Power-Value,
    ackowledged-prach-preambles
                                        Acknowledged-PRACH-preambles-Value,
    uL-TimeslotISCP
                                    UL-TimeslotISCP-Value,
```

```
SIR-Value,
   sir
   sir-error
                            SIR-Error-Value,
   transmitted-code-power
                                Transmitted-Code-Power-Value.
                                RSCP-Value.
   rx-timing-deviation
                                Rx-Timing-Deviation-Value,
   round-trip-time
                                Round-Trip-Time-Value,
   acknowledged-PCPCH-access-preambles
                                       Acknowledged-PCPCH-access-preambles,
   detected-PCPCH-access-preambles
                                       Detected-PCPCH-access-preambles,
   extension-ReportCharacteristicsType-MeasurementThreshold
                                                             Extension-ReportCharacteristicsType-MeasurementThreshold
                                                     ::= ProtocolIE-Single-Container {{ Extension-ReportCharacteristicsType-
Extension-ReportCharacteristicsType-MeasurementThreshold
MeasurementThresholdIE }}
Extension-ReportCharacteristicsType-MeasurementThresholdIE NBAP-PROTOCOL-IES ::= {
     PRESENCE mandatory } |
     PRESENCE mandatory }
ReportCharacteristicsType-ScaledMeasurementChangeTime ::= CHOICE {
                     MeasurementChangeTime-Scaledmsec,
   msec
   . . .
MeasurementChangeTime-Scaledmsec ::= INTEGER (1..6000,...)
-- MeasurementChangeTime-Scaledmsec = Time * 10
-- Unit ms, Range 10ms .. 60000ms(1min), Step 10ms
ReportCharacteristicsType-ScaledMeasurementHysteresisTime ::= CHOICE {
   msec
                     MeasurementHysteresisTime-Scaledmsec,
   . . .
MeasurementHysteresisTime-Scaledmsec ::= INTEGER (1..6000,...)
-- MeasurementHysteresisTime-Scaledmsec = Time * 10
-- Unit ms, Range 10ms .. 60000ms(1min), Step 10ms
ReportCharacteristicsType-ReportPeriodicity ::= CHOICE {
   msec
                     ReportPeriodicity-Scaledmsec,
                     ReportPeriodicity-Scaledmin,
   min
ReportPeriodicity-Scaledmsec ::= INTEGER (1..6000,...)
-- ReportPeriodicity-msec = ReportPeriodicity * 10
-- Unit ms, Range 10ms .. 60000ms(1min), Step 10ms
ReportPeriodicity-Scaledmin ::= INTEGER (1..60,...)
-- Unit min, Range 1min .. 60min(hour), Step 1min
ReportPeriodicity-Scaledhour ::= INTEGER (1..24,...)
-- Unit hour, Range 1hour .. 24hours(day), Step 1hour
```

```
ResourceOperationalState ::= ENUMERATED {
    enabled.
    disabled
CommonTransportChannel-InformationResponse ::= SEQUENCE {
    commonTransportChannelID
                                        CommonTransportChannelID,
    bindingID
                                        BindingID
                                                                OPTIONAL,
    transportLayerAddress
                                        TransportLayerAddress OPTIONAL,
                                        ProtocolExtensionContainer { { CommonTransportChannel-InformationResponse-ExtIEs} }
    iE-Extensions
CommonTransportChannel-InformationResponse-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
LimitedPowerIncrease ::= ENUMERATED {
    not-used
RL-ID ::= INTEGER (0..31)
RL-Set-ID
                        ::= INTEGER (0..31)
Round-Trip-Time-IncrDecrThres ::= INTEGER(0..32766)
RNC-ID
                        ::= INTEGER (0..4095)
Round-Trip-Time-Value ::= INTEGER(0..32767)
-- According to mapping in [22]
RSCP-Value ::= INTEGER (0..127)
-- According to mapping in [23]
RSCP-Value-IncrDecrThres ::= INTEGER (0..126)
Received-total-wide-band-power-Value ::= INTEGER(0..621)
-- According to mapping in [22]/[23]
Received-total-wide-band-power-Value-IncrDecrThres ::= INTEGER (0..620)
RequestedDataValueInformation ::= CHOICE {
    informationAvailable
                                InformationAvailable,
    informationnotAvailable
                                InformationnotAvailable
InformationAvailable::= SEQUENCE {
    requesteddataValue
                            RequestedDataValue,
    ie-Extensions
                            ProtocolExtensionContainer { { InformationAvailableItem-ExtIEs} }
                                                                                                                     OPTIONAL,
```

```
InformationAvailableItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
InformationnotAvailable ::= NULL
RequestedDataValue ::= SEQUENCE {
    dgps-corrections
                       DGPSCorrections OPTIONAL,
    qps-navandrecovery
                       GPS-NavigationModel-and-TimeRecovery
    qps-ionos-model
                       GPS-Ionospheric-Model OPTIONAL,
    gps-utc-model
                       GPS-UTC-Model
                                             OPTIONAL,
    gps-almanac
                       GPS-Almanac
                                             OPTIONAL,
    gps-rt-integrity
                       GPS-RealTime-Integrity OPTIONAL,
                       GPS-RX-POS
    gpsrxpos
                                              OPTIONAL,
    . . .
Rx-Timing-Deviation-Value ::= INTEGER (0..8191)
Rx-Timing-Deviation-Value-LCR ::= INTEGER (0..255)
-- ------
-- -----
AdjustmentPeriod
                          ::= INTEGER(1..256)
-- Unit Frame
SAT-ID ::= INTEGER (0..63)
SAT-Info-Almanac ::= SEQUENCE (SIZE (1..maxNoSat)) OF SAT-Info-Almanac-Item
SAT-Info-Almanac-Item ::= SEQUENCE {
    data-id
                     DATA-ID,
    sat-id
                     SAT-ID,
    gps-e-alm
                     BIT STRING (SIZE (16)),
    gps-toa-alm
                     BIT STRING (SIZE (8)),
    gps-delta-I-alm
                     BIT STRING (SIZE (16)),
    omegadot-alm
                     BIT STRING (SIZE (16)),
    svhealth-alm
                     BIT STRING (SIZE (8)),
    gps-a-sgrt-alm
                     BIT STRING (SIZE (24)),
    omegazero-alm
                     BIT STRING (SIZE (24)),
    m-zero-alm
                     BIT STRING (SIZE (24)),
    gps-omega-alm
                     BIT STRING (SIZE (24)),
    gps-af-zero-alm
                     BIT STRING (SIZE (11)),
    gps-af-one-alm
                     BIT STRING (SIZE (11)),
                     ProtocolExtensionContainer { { SAT-Info-Almanac-Item-ExtIEs} }
    ie-Extensions
                                                                                       OPTIONAL,
```

```
SAT-Info-Almanac-Item-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
SAT-Info-DGPSCorrections ::= SEOUENCE (SIZE (1..maxNoSat)) OF SAT-Info-DGPSCorrections-Item
SAT-Info-DGPSCorrections-Item ::= SEQUENCE {
   sat-id
                                      SAT-ID,
   iode-daps
                                      BIT STRING (SIZE (8)),
   udre
                                      UDRE,
                                      PRC,
                                     Range-Correction-Rate,
   range-correction-rate
   ie-Extensions
                                      SAT-Info-DGPSCorrections-Item-ExtlEs NBAP-PROTOCOL-EXTENSION ::= {
   . . .
SATInfo-RealTime-Integrity ::= SEQUENCE (SIZE (1..maxNoSat)) OF SAT-Info-RealTime-Integrity-Item
SAT-Info-RealTime-Integrity-Item ::= SEQUENCE {
 bad-sat-id
                SAT-ID,
 OPTIONAL,
SAT-Info-RealTime-Integrity-Item-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
ScaledAdjustmentRatio
                           ::= INTEGER(0..100)
-- AdjustmentRatio = ScaledAdjustmentRatio / 100
MaxAdjustmentStep
                       ::= INTEGER(1..10)
-- Unit Slot
ScramblingCodeNumber ::= INTEGER (0..15)
SecondaryCCPCH-SlotFormat ::= INTEGER(0..17,...)
Segment-Type ::= ENUMERATED {
       first-segment,
       first-segment-short,
       subsequent-segment,
      last-segment,
      last-segment-short,
       complete-SIB,
      complete-SIB-short,
```

```
S-FieldLength ::= ENUMERATED {
       v1.
       v2,
        . . .
SFN ::= INTEGER (0..4095)
SFNSFN-FDD ::= INTEGER (0..614399)
SFNSFN-TDD ::= INTEGER (0..40961)
SFNSFNChangeLimit ::= INTEGER (1..256)
-- Unit chip, Step 1/16 chip, Range 1/16..16 chip
SFNSFNDriftRate ::= INTEGER (-100..100)
-- Unit chip/s, Step 1/256 chip/s, Range -100/256..+100/256 chip/s
SFNSFNDriftRateOuality ::= INTEGER (0..100)
-- Unit chip/s, Step 1/256 chip/s, Range 0..100/256 chip/s
SFNSFNMeasurementThresholdInformation::= SEQUENCE {
    sFNSFNChangeLimit
                                      SFNSFNChangeLimit
                                                                          OPTIONAL,
   predictedSFNSFNDeviationLimit
                                      PredictedSFNSFNDeviationLimit
                                                                          OPTIONAL,
   iE-Extensions
                                   OPTIONAL,
SFNSFNMeasurementThresholdInformation-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
SFNSFNMeasurementValueInformation ::= SEOUENCE {
    successfullNeighbouringCellSFNSFNObservedTimeDifferenceMeasurementInformation
                                                                                     SEOUENCE (SIZE(1..maxNrOfMeasNCell)) OF
       SEOUENCE {
           uC-Td
                                      UC-Id,
           sFNSFNValue
                           SFNSFNValue,
                               SFNSFNQuality
           sFNSFNQuality
                                                              OPTIONAL.
           sFNSFNDriftRate
                               SFNSFNDriftRate,
           sFNSFNDriftRateQuality
                                      SFNSFNDriftRateQuality,
           sFNSFNTimeStampInformation
                                                  SFNSFNTimeStampInformation,
                               ProtocolExtensionContainer { { SuccessfullNeighbouringCellSFNSFNObservedTimeDifferenceMeasurementInformationItem-
           iE-Extensions
ExtIEs} }
               OPTIONAL,
   unsuccessfull \verb+NeighbouringCellSFNSFNObservedTimeDifference \texttt{MeasurementInformation}
                                                                                     SEQUENCE (SIZE(0..maxNrOfMeasNCell-1)) OF
       SEQUENCE {
           uC-Id
                                      UC-Id,
                               ProtocolExtensionContainer { { UnsuccessfullNeighbouringCellSFNSFNObservedTimeDifferenceMeasurementInformationItem-
           iE-Extensions
ExtIEs } }
               OPTIONAL,
```

```
iE-Extensions
                                                                                                               OPTIONAL,
SFNSFNMeasurementValueInformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
SuccessfullNeighbouringCellSFNSFNObservedTimeDifferenceMeasurementInformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UnsuccessfullNeighbouringCellSFNSFNObservedTimeDifferenceMeasurementInformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
SFNSFNOuality ::= INTEGER (0..255)
-- Unit chip, Step 1/16 chip, Range 0.. 255/16 chip
ShutdownTimer ::= INTEGER (1..3600)
-- Unit sec
SIB-Originator ::= ENUMERATED {
   nodeB,
   cRNC,
    . . .
SIR-Error-Value ::= INTEGER (0..125)
SFNSFNTimeStampInformation ::= CHOICE {
   sFNSFNTimeStamp-FDD
                          SFN,
   sFNSFNTimeStamp-TDD
                          SFNSFNTimeStamp-TDD,
    . . . }
SFNSFNTimeStamp-TDD::= SEQUENCE {
   sFN
                      SFN,
   timeSlot
                      TimeSlot,
                                 ProtocolExtensionContainer { { SFNSFNTimeStamp-ExtIEs} }
   iE-Extensions
                                                                                                            OPTIONAL,
   . . .
SFNSFNTimeStamp-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
SFNSFNValue ::= CHOICE {
   sFNSFN-FDD
                  SFNSFN-FDD,
```

```
sFNSFN-TDD
                    SFNSFN-TDD,
    . . .
SIR-Error-Value-IncrDecrThres ::= INTEGER (0..124)
SIR-Value ::= INTEGER (0..63)
-- According to mapping in [22]/[23]
SIR-Value-IncrDecrThres ::= INTEGER (0..62)
SpecialBurstScheduling ::= INTEGER (1..256)
SSDT-Cell-Identity ::= ENUMERATED {a, b, c, d, e, f, g, h}
SSDT-CellID-Length ::= ENUMERATED {
    short,
    medium,
    long
SSDT-Indication ::= ENUMERATED {
    ssdt-active-in-the-UE,
    ssdt-not-active-in-the-UE
Start-Of-Audit-Sequence-Indicator ::= ENUMERATED {
    start-of-audit-sequence,
    not-start-of-audit-sequence
STTD-Indicator ::= ENUMERATED {
    active,
    inactive,
    . . .
SSDT-SupportIndicator ::= ENUMERATED {
    sSDT-Supported,
    sSDT-not-supported
SyncCase ::= INTEGER (1..2,...)
SYNCDlCodeId ::= INTEGER (1..32,...)
SyncFrameNumber ::= INTEGER (1..10)
SynchronisationReportCharacteristics ::= SEQUENCE
    synchronisationReportCharacteristicsType
                                                 SynchronisationReportCharacteristicsType,
                                                 SynchronisationReportCharactThreExc
    {\tt synchronisationReportCharactThreExc}
                                                                                          OPTIONAL,
        -- Thie IE shall be included if the synchronisationReportCharacteristicsType IE is set to "thresholdExceeding".
    iE-Extensions
                                                 ProtocolExtensionContainer { { SynchronisationReportCharacteristics-ExtIEs } } OPTIONAL,
```

```
SynchronisationReportCharacteristics-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
SynchronisationReportCharactThreExc::= SEOUENCE (SIZE (1..maxNrOfCellSyncBursts)) OF SynchronisationReportCharactThreInfoItem
SynchronisationReportCharactThreInfoItem ::= SEQUENCE {
   syncFrameNumber
                              SyncFrameNumber,
                              SEQUENCE (SIZE (1.. maxNrOfReceptsPerSyncFrame)) OF SynchronisationReportCharactCellSyncBurstInfoItem,
    cellSyncBurstInformation
   iE-Extensions
                              ProtocolExtensionContainer { { SynchronisationReportCharactThreInfoItem-ExtIEs } }
    . . .
SynchronisationReportCharactThreInfoItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
SynchronisationReportCharactCellSyncBurstInfoItem ::= SEQUENCE {
                                  CellSyncBurstCode,
   cellSyncBurstCode
   cellSyncBurstCodeShift
                                  CellSyncBurstCodeShift,
   cellSyncBurstTiming
                                  CellSyncBurstTiming
                                                                 OPTIONAL,
   cellSyncBurstTimingThreshold
                                  CellSyncBurstTimingThreshold
                                                                 OPTIONAL,
   iE-Extensions
                                  ProtocolExtensionContainer { { SynchronisationReportCharactCellSyncBurstInfoItem-ExtIEs } }
    . . .
SynchronisationReportCharactCellSyncBurstInfoItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    . . .
SynchronisationReportCharacteristicsType ::= ENUMERATED {
    frameRelated,
    sFNperiodRelated,
    cycleLengthRelated,
    thresholdExceeding,
    frequencyAcquisitionCompleted,
    . . .
SynchronisationReportType ::= ENUMERATED {
   initialPhase,
    steadyStatePhase,
   lateEntrantCell,
   frequencyAcquisition,
-- -----
```

```
T-Cell ::= ENUMERATED {
    ν0,
    v1,
    v2,
    v3,
    v4,
    ν5,
    v6,
    v7,
    v8,
    v9
T-RLFAILURE ::= INTEGER (0..255)
-- Unit seconds, Range 0s .. 25.5s, Step 0.1s
TDD-ChannelisationCode ::= ENUMERATED {
    chCodeldiv1,
    chCode2div1,
    chCode2div2,
    chCode4div1,
    chCode4div2,
    chCode4div3,
    chCode4div4,
    chCode8div1,
    chCode8div2,
    chCode8div3,
    chCode8div4,
    chCode8div5,
    chCode8div6,
    chCode8div7,
    chCode8div8,
    chCode16div1,
    chCode16div2,
    chCode16div3,
    chCode16div4,
    chCode16div5,
    chCode16div6,
    chCode16div7,
    chCode16div8,
    chCode16div9,
    chCode16div10,
    chCode16div11,
    chCode16div12,
    chCode16div13,
    chCode16div14,
    chCode16div15,
    chCodel6div16,
    . . .
TDD-ChannelisationCodeLCR ::= SEQUENCE {
                                     TDD-ChannelisationCode,
    tDD-ChannelisationCode
    modulation
                                     Modulation, -- Modulation options for 1.28Mcps TDD in contrast to 3.84Mcps TDD
```

```
TDD-DL-Code-Information ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF TDD-DL-Code-InformationItem
TDD-DL-Code-InformationItem ::= SEQUENCE {
    dPCH-ID
                                            DPCH-ID,
    tdd-ChannelisationCode
                                            TDD-ChannelisationCode,
                                            ProtocolExtensionContainer { { TDD-DL-Code-InformationItem-ExtIEs} }
    iE-Extensions
                                                                                                                        OPTIONAL,
TDD-DL-Code-InformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TDD-DL-Code-LCR-Information ::= SEOUENCE (SIZE (1..maxNrOfDPCHLCRs)) OF TDD-DL-Code-LCR-InformationItem
TDD-DL-Code-LCR-InformationItem ::= SEQUENCE {
    dPCH-ID
                                            DPCH-ID,
    tdd-ChannelisationCodeLCR
                                            TDD-ChannelisationCodeLCR,
    iE-Extensions
                                            ProtocolExtensionContainer { { TDD-DL-Code-LCR-InformationItem-ExtIEs} }
                                                                                                                           OPTIONAL,
TDD-DL-Code-LCR-InformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TDD-DPCHOffset ::= CHOICE {
    initialOffset
                        INTEGER (0..255),
    noinitialOffset
                        INTEGER (0..63)
TDD-PhysicalChannelOffset ::= INTEGER (0..63)
TDD-TPC-DownlinkStepSize ::= ENUMERATED {
    step-sizel,
    step-size2,
    step-size3,
TransportFormatCombination-Beta ::= CHOICE {
    signalledGainFactors
                                SEOUENCE {
       gainFactor
                                    CHOICE {
           fdd
                                        SEOUENCE
                betaC
                                            BetaCD,
                betaD
                                            BetaCD,
                                    ProtocolExtensionContainer { { GainFactorFDD-ExtIEs } }
                iE-Extensions
                                                                                                 OPTIONAL,
            tdd
                                        BetaCD,
            . . .
```

```
refTFCNumber
                                 RefTFCNumber
                                                 OPTIONAL.
       iE-Extensions
                              ProtocolExtensionContainer { { SignalledGainFactors-ExtIEs } }
                                                                                                             OPTIONAL.
                                  RefTFCNumber,
    computedGainFactors
GainFactorFDD-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
SignalledGainFactors-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TDD-UL-Code-Information ::= SEQUENCE (SIZE (1..maxNrOfDPCHs)) OF TDD-UL-Code-InformationItem
TDD-UL-Code-InformationItem ::= SEQUENCE {
   dPCH-ID
                                         DPCH-ID,
    tdd-ChannelisationCode
                                         TDD-ChannelisationCode,
   iE-Extensions
                                         ProtocolExtensionContainer { { TDD-UL-Code-InformationItem-ExtIEs} }
                                                                                                                OPTIONAL,
TDD-UL-Code-InformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TDD-UL-Code-LCR-Information ::= SEQUENCE (SIZE (1..maxNrOfDPCHLCRs)) OF TDD-UL-Code-LCR-InformationItem
TDD-UL-Code-LCR-InformationItem ::= SEQUENCE {
   dPCH-TD
                                         DPCH-ID,
    tdd-ChannelisationCodeLCR
                                         TDD-ChannelisationCodeLCR,
   iE-Extensions
                                         OPTIONAL.
TDD-UL-Code-LCR-InformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TFCI-Coding ::= ENUMERATED {
   v4,
   v8,
   v16,
    v32,
    . . .
TFCI-Presence ::= ENUMERATED {
   present,
    not-present
```

```
TFCI-SignallingMode ::= SEQUENCE {
    tFCI-SignallingOption
                                TFCI-SignallingMode-TFCI-SignallingOption,
    splitType
                            TFCI-SignallingMode-SplitType
                                                                         OPTIONAL,
    -- This IE shall be present if the TFCI signalling option is split --
    lengthOfTFCI2
                                TFCI-SignallingMode-LengthOfTFCI2
                                                                             OPTIONAL,
    -- This IE shall be present if the split type is logical --
    iE-Extensions
                                ProtocolExtensionContainer { { TFCI-SignallingMode-ExtIEs} }
                                                                                                                     OPTIONAL,
    . . .
TFCI-SignallingMode-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TFCI-SignallingMode-LengthOfTFCI2 ::= INTEGER (1..10)
TFCI-SignallingMode-SplitType ::= ENUMERATED {
    hard,
    logical
TFCI-SignallingMode-TFCI-SignallingOption ::= ENUMERATED {
    normal,
    split
TFCI2-BearerInformationResponse ::= SEQUENCE {
    bindingID
                                                     BindingID,
    transportLayerAddress
                                                     TransportLayerAddress,
    iE-Extensions
                                                     ProtocolExtensionContainer { { TFCI2-BearerInformationResponse-ExtIEs} }
                                                                                                                                 OPTIONAL,
    . . .
TFCI2-BearerInformationResponse-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
                    ::= INTEGER (0|15..269)
TGD
-- 0 = Undefined, only one transmission gap in the transmission gap pattern sequence
TGPRC
                    ::= INTEGER (0..511)
-- 0 = infinity
TGPSID
                    ::= INTEGER (1.. maxTGPS)
TGSN
                    ::= INTEGER (0..14)
TimeSlot ::= INTEGER (0..14)
```

```
TimeSlotDirection ::= ENUMERATED {
    ul,
    dl.
TimeSlotLCR ::= INTEGER (0..6)
TimeSlotStatus ::= ENUMERATED {
    active,
    not-active,
    . . .
TimingAdjustmentValue ::= CHOICE {
    initialPhase
                        INTEGER (0..255),
    steadyStatePhase
                        INTEGER (0..1048575)
TimingAdvanceApplied ::= ENUMERATED {
    yes,
    no
-- For 1.28Mcps TDD TimingAdvanceApplied = No
ToAWE ::= INTEGER (0..2559)
-- Unit ms
ToAWS ::= INTEGER (0..1279)
-- Unit ms
Transmission-Gap-Pattern-Sequence-Information ::= SEQUENCE (SIZE (1..maxTGPS)) OF
    SEQUENCE {
        tGPSID
                        TGPSID,
        tGSN
                        TGSN,
        tGL1
                        GapLength,
        tGL2
                        GapLength OPTIONAL,
        tGD
                        TGD,
        tGPL1
                        GapDuration,
        tGPL2
                        GapDuration OPTIONAL,
        uL-DL-mode
                        UL-DL-mode,
        downlink-Compressed-Mode-Method
                                             Downlink-Compressed-Mode-Method
                                                                                 OPTIONAL,
            -- This IE shall be present if the UL/DL mode IE is set to "DL only" or "UL/DL"
        uplink-Compressed-Mode-Method
                                             Uplink-Compressed-Mode-Method
                                                                                 OPTIONAL,
            -- This IE shall be present if the UL/DL mode IE is set to "UL only" or "UL/DL"
        dL-FrameType
                            DL-FrameType,
        delta-SIR1
                            DeltaSIR,
        delta-SIR-after1
                            DeltaSIR,
```

```
delta-SIR2
                            DeltaSIR
                                        OPTIONAL,
        delta-SIR-after2
                            DeltaSIR
                                        OPTIONAL,
        iE-Extensions
                                ProtocolExtensionContainer { {Transmission-Gap-Pattern-Sequence-Information-ExtIEs} } OPTIONAL,
Transmission-Gap-Pattern-Sequence-Information-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TransmissionGapPatternSequenceCodeInformation ::= ENUMERATED{
   code-change,
   nocode-change
Transmitted-Carrier-Power-Value ::= INTEGER(0..100)
-- According to mapping in [4]/[5]
Transmitted-Code-Power-Value ::= INTEGER (0..127)
-- According to mapping in [4]/[5]
Transmitted-Code-Power-Value-IncrDecrThres ::= INTEGER (0..112,...)
TransmissionDiversityApplied ::= BOOLEAN
-- true: applied, false: not applied
TransmitDiversityIndicator ::= ENUMERATED {
    active,
    inactive
TFCS ::= SEQUENCE {
    tFCSvalues
                                CHOICE {
                                    TFCS-TFCSList,
        no-Split-in-TFCI
        split-in-TFCI
                                    SEQUENCE {
            transportFormatCombination-DCH
                                                TFCS-DCHList,
            signallingMethod
                                                CHOICE {
                                                TFCS-MapingOnDSCHList,
                tFCI-Range
                explicit
                                                    TFCS-DSCHList,
                . . .
            iE-Extensions
                                                ProtocolExtensionContainer { { Split-in-TFCI-ExtIEs } }
                                                                                                                        OPTIONAL,
    iE-Extensions
                        ProtocolExtensionContainer { { TFCS-ExtIEs} }
                                                                             OPTIONAL,
```

```
Split-in-TFCI-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TECS-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TFCS-TFCSList ::= SEQUENCE (SIZE (1..maxNrOfTFCs)) OF
    SEOUENCE {
       cTFC
                         TFCS-CTFC,
       tFC-Beta TransportFormatCombination-Beta
                                                       OPTIONAL,
       iE-Extensions ProtocolExtensionContainer { { TFCS-TFCSList-ExtIEs} }
                                                                                     OPTIONAL,
TFCS-TFCSList-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TFCS-CTFC ::= CHOICE {
   ctfc2bit
                                      INTEGER (0..3),
   ctfc4bit
                                      INTEGER (0..15),
   ctfc6bit
                                      INTEGER (0..63),
   ctfc8bit
                                      INTEGER (0..255),
   ctfc12bit
                                      INTEGER (0..4095),
   ctfc16bit
                                      INTEGER (0..65535),
    ctfcmaxbit
                                      INTEGER (0..maxCTFC)
TFCS-DCHList ::= SEOUENCE (SIZE (1..maxNrOfTFCI1Combs)) OF
    SEQUENCE {
       cTFC
                          TFCS-CTFC,
       iE-Extensions ProtocolExtensionContainer { { TFCS-DCHList-ExtIEs} }
                                                                                     OPTIONAL,
TFCS-DCHList-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TFCS-MapingOnDSCHList ::= SEOUENCE (SIZE (1..maxNrOfTFCIGroups)) OF
    SEQUENCE {
       maxTFCI-field2-Value
                                TFCS-MaxTFCI-field2-Value,
       cTFC-DSCH
                            TFCS-CTFC,
                                  ProtocolExtensionContainer { { TFCS-MapingOnDSCHList-ExtIEs} }
       iE-Extensions
                                                                                                                  OPTIONAL,
    . . .
TFCS-MapingOnDSCHList-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TFCS-MaxTFCI-field2-Value ::= INTEGER (1..maxNrOfTFCI2Combs-1)
```

```
TFCS-DSCHList ::= SEQUENCE (SIZE (1..maxNrOfTFCI2Combs)) OF
   SEQUENCE {
       cTFC-DSCH
                              TFCS-CTFC,
       iE-Extensions
                                  ProtocolExtensionContainer { { TFCS-DSCHList-ExtIEs} }
                                                                                            OPTIONAL.
TFCS-DSCHList-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TransportBearerRequestIndicator ::= ENUMERATED {
   bearerRequested,
   bearerNotRequested,
TransportFormatSet ::= SEQUENCE {
   dynamicParts
                          TransportFormatSet-DynamicPartList,
    semi-staticPart
                          TransportFormatSet-Semi-staticPart,
                          ProtocolExtensionContainer { { TransportFormatSet-ExtIEs} }
   iE-Extensions
                                                                                            OPTIONAL,
TransportFormatSet-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TransportFormatSet-DynamicPartList ::= SEQUENCE (SIZE (1..maxNrOfTFs)) OF
   SEQUENCE {
       nrOfTransportBlocks
                                  TransportFormatSet-NrOfTransportBlocks,
       transportBlockSize
                                  TransportFormatSet-TransportBlockSize
                                                                            OPTIONAL,
       -- This IE shall be present if the Number of Transport Blocks IE is set to a value greater than 0
                                  TransportFormatSet-ModeDP,
                                  iE-Extensions
                                                                                                                 OPTIONAL,
TransportFormatSet-DynamicPartList-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TDD-TransportFormatSet-ModeDP ::= SEQUENCE {
   transmissionTimeIntervalInformation
                                          TransmissionTimeIntervalInformation
   -- This IE shall be present if the Transmission Time Interval IE in the Semi-static Transport Format Information IE is set to "dynamic"
   iE-Extensions
                                          ProtocolExtensionContainer { {TDD-TransportFormatSet-ModeDP-ExtIEs} } OPTIONAL,
TDD-TransportFormatSet-ModeDP-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    . . .
```

```
TransmissionTimeIntervalInformation ::= SEQUENCE (SIZE (1..maxTTI-count)) OF
    SEQUENCE {
       transmissionTimeInterval
                                        TransportFormatSet-TransmissionTimeIntervalDynamic,
                                        ProtocolExtensionContainer { { TransmissionTimeIntervalInformation-ExtIEs} }
    iE-Extensions
                                                                                                                           OPTIONAL,
TransmissionTimeIntervalInformation-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TransportFormatSet-Semi-staticPart ::= SEQUENCE {
    transmissionTimeInterval
                                        TransportFormatSet-TransmissionTimeIntervalSemiStatic,
    channelCoding
                                    TransportFormatSet-ChannelCodingType,
    codingRate
                                    TransportFormatSet-CodingRate
    -- This IE shall be present if the Type of channel coding IE is set to 'convolutional' or 'turbo'
    rateMatcingAttribute
                                    TransportFormatSet-RateMatchingAttribute,
    cRC-Size
                                    TransportFormatSet-CRC-Size,
                                    TransportFormatSet-ModeSSP
    mode
                                    ProtocolExtensionContainer { { TransportFormatSet-Semi-staticPart-ExtIEs} }
    iE-Extensions
                                                                                                                        OPTIONAL,
TransportFormatSet-Semi-staticPart-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TransportFormatSet-ChannelCodingType ::= ENUMERATED {
    no-codingTDD,
    convolutional-coding,
    turbo-coding,
TransportFormatSet-CodingRate ::= ENUMERATED {
   half,
    third,
TransportFormatSet-CRC-Size ::= ENUMERATED {
    νO.
    v8,
    v12.
    v16,
    v24,
    . . .
TransportFormatSet-ModeDP ::= CHOICE {
                        TDD-TransportFormatSet-ModeDP,
    notApplicable
                                NULL,
```

```
TransportFormatSet-ModeSSP ::= CHOICE {
                    TransportFormatSet-SecondInterleavingMode,
    notApplicable
                                NULL,
TransportFormatSet-NrOfTransportBlocks ::= INTEGER (0..512)
TransportFormatSet-RateMatchingAttribute ::= INTEGER (1..maxRateMatching)
TransportFormatSet-SecondInterleavingMode ::= ENUMERATED {
    frame-rlated,
    timeSlot-related,
TransportFormatSet-TransmissionTimeIntervalDynamic ::= ENUMERATED {
    msec-10,
    msec-20,
    msec-40,
    msec-80,
TransportFormatSet-TransmissionTimeIntervalSemiStatic ::= ENUMERATED {
    msec-10,
   msec-20,
   msec-40,
    msec-80,
    dynamic,
    msec-5
TransportFormatSet-TransportBlockSize ::= INTEGER (0..5000)
TransportLayerAddress ::= BIT STRING (SIZE (1..160, ...))
TSTD-Indicator ::= ENUMERATED {
    active,
    inactive
TUTRANGPS ::= SEQUENCE {
    ms-part
                INTEGER (0..16383),
    ls-part
                INTEGER (0..4294967295)
TUTRANGPSChangeLimit ::= INTEGER (1..256)
-- Unit chip, Step 1/16 chip, Range 1/16..16 chip
TUTRANGPSDriftRate ::= INTEGER (-50..50)
-- Unit chip/s, Step 1/256 chip/s, Range -50/256..+50/256 chip/s
```

```
TUTRANGPSDriftRateQuality ::= INTEGER (0..50)
-- Unit chip/s, Step 1/256 chip/s, Range 0..50/256 chip/s
TUTRANGPSAccuracyClass ::= ENUMERATED {
   accuracy-class-A,
   accuracy-class-B,
   accuracy-class-C,
TUTRANGPSMeasurementThresholdInformation ::= SEQUENCE {
   tUTRANGPSChangeLimit
                                      TUTRANGPSChangeLimit
                                                                          OPTIONAL,
   predictedTUTRANGPSDeviationLimit
                                      PredictedTUTRANGPSDeviationLimit
                                                                          OPTIONAL,
   iE-Extensions
                               OPTIONAL,
TUTRANGPSMeasurementThresholdInformation-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TUTRANGPSMeasurementValueInformation ::= SEQUENCE {
       tUTRANGPS
                                   TUTRANGPS,
       tUTRANGPSQuality
                                   TUTRANGPSQuality,
       tUTRANGPSDriftRate
                                   TUTRANGPSDriftRate,
       tUTRANGPSDriftRateQuality
                                   TUTRANGPSDriftRateQuality,
                                   ProtocolExtensionContainer { {TUTRANGPSMeasurementValueInformationItem-ExtIEs} }
      iE-Extensions
                                                                                                             OPTIONAL,
TUTRANGPSMeasurementValueInformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
TUTRANGPSOuality ::= INTEGER (0..255)
-- Unit chip, Step 1/16 chip, Range 0.. 255/16 chip
TypeOfError ::= ENUMERATED {
   not-understood,
   missing,
-- ------
UARFCN ::= INTEGER (0..16383, ...)
-- corresponds to 1885.2MHz .. 2024.8MHz
UC-Id ::= SEQUENCE {
```

```
rNC-ID
                        RNC-ID,
    c-ID
                        C-ID,
    iE-Extensions
                            ProtocolExtensionContainer { {UC-Id-ExtIEs} } OPTIONAL,
UC-Id-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UDRE ::= ENUMERATED {
    udre-minusequal-one-m,
    udre-betweenoneandfour-m,
    udre-betweenfourandeight-m,
    udre-greaterequaleight-m
UL-CapacityCredit ::= INTEGER (0..65535)
UL-DL-mode ::= ENUMERATED {
    ul-only,
    dl-only,
    both-ul-and-dl
Uplink-Compressed-Mode-Method
                               ::= ENUMERATED {
    sFdiv2,
    higher-layer-scheduling,
UL-Timeslot-Information ::= SEQUENCE (SIZE (1..maxNrOfULTSs)) OF UL-Timeslot-InformationItem
UL-Timeslot-InformationItem ::= SEQUENCE {
    timeSlot
                                            TimeSlot,
    midambleShiftAndBurstType
                                            MidambleShiftAndBurstType,
    tFCI-Presence
                                            TFCI-Presence,
    uL-Code-InformationList
                                            TDD-UL-Code-Information,
    iE-Extensions
                                            ProtocolExtensionContainer { { UL-Timeslot-InformationItem-ExtIEs} }
                                                                                                                        OPTIONAL,
    . . .
UL-Timeslot-InformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UL-TimeslotLCR-Information ::= SEQUENCE (SIZE (1..maxNrOfULTSLCRs)) OF UL-TimeslotLCR-InformationItem
UL-TimeslotLCR-InformationItem ::= SEQUENCE {
    timeSlotLCR
                                            TimeSlotLCR,
    midambleShiftLCR
                                            MidambleShiftLCR,
    tFCI-Presence
                                            TFCI-Presence,
```

519

```
uL-Code-InformationList
                                            TDD-UL-Code-LCR-Information,
    iE-Extensions
                                            ProtocolExtensionContainer { { UL-TimeslotLCR-InformationItem-ExtIEs} }
                                                                                                                        OPTIONAL,
UL-TimeslotLCR-InformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UL-DPCCH-SlotFormat ::= INTEGER (0..5,...)
UL-SIR ::= INTEGER (-82..173)
-- According to mapping in [16]
UL-FP-Mode ::= ENUMERATED {
    normal,
    silent,
UL-PhysCH-SF-Variation ::= ENUMERATED {
    sf-variation-supported,
    sf-variation-not-supported
UL-ScramblingCode ::= SEQUENCE {
    uL-ScramblingCodeNumber
                                    UL-ScramblingCodeNumber,
    uL-ScramblingCodeLength
                                    UL-ScramblingCodeLength,
                                    ProtocolExtensionContainer { { UL-ScramblingCode-ExtIEs } }
    iE-Extensions
                                                                                                                      OPTIONAL,
UL-ScramblingCode-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UL-ScramblingCodeNumber ::= INTEGER (0..16777215)
UL-ScramblingCodeLength ::= ENUMERATED {
    short,
    long
UL-TimeSlot-ISCP-Info ::= SEQUENCE (SIZE (1..maxNrOfULTSs)) OF UL-TimeSlot-ISCP-InfoItem
UL-TimeSlot-ISCP-InfoItem ::= SEQUENCE {
    timeSlot
                                    TimeSlot,
    iSCP
                                    UL-TimeslotISCP-Value,
    iE-Extensions
                                    ProtocolExtensionContainer { { UL-TimeSlot-ISCP-InfoItem-ExtIEs} } 
                                                                                                                        OPTIONAL,
    . . .
UL-TimeSlot-ISCP-InfoItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
    . . .
```

```
UL-TimeSlot-ISCP-LCR-Info ::= SEQUENCE (SIZE (1..maxNrOfULTSLCRs)) OF UL-TimeSlot-ISCP-LCR-InfoItem
UL-TimeSlot-ISCP-LCR-InfoItem ::= SEQUENCE {
   timeSlotLCR
                                TimeSlotLCR,
   iSCP
                                UL-TimeslotISCP-Value,
                                ProtocolExtensionContainer { { UL-TimeSlot-ISCP-LCR-InfoItem-ExtIEs} }
   iE-Extensions
                                                                                                           OPTIONAL,
UL-TimeSlot-ISCP-LCR-InfoItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
USCH-Information ::= SEQUENCE (SIZE (1..maxNrOfUSCHs)) OF USCH-InformationItem
USCH-InformationItem ::= SEQUENCE {
   uSCH-ID
                                        USCH-ID,
   cCTrCH-ID
                                        CCTrCH-ID,
   transportFormatSet
                                        TransportFormatSet,
   allocationRetentionPriority
                                        AllocationRetentionPriority,
                                        ProtocolExtensionContainer { { USCH-InformationItem-ExtIEs} }
   iE-Extensions
                                                                                                           OPTIONAL,
   . . .
USCH-InformationItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
USCH-InformationResponse ::= SEQUENCE (SIZE (1..maxNrOfUSCHs)) OF USCH-InformationResponseItem
USCH-InformationResponseItem ::= SEQUENCE {
   uSCH-ID
                                           USCH-ID,
   bindingID
                                           BindingID
                                                                 OPTIONAL,
   transportLayerAddress
                                           TransportLayerAddress OPTIONAL,
   iE-Extensions
                                           OPTIONAL,
USCH-InformationResponseItem-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
UL-TimeslotISCP-Value ::= INTEGER (0..127)
-- According to mapping in [23]
UL-TimeslotISCP-Value-IncrDecrThres ::= INTEGER (0..126)
USCH-ID ::= INTEGER (0..255)
-- -------
-- -----
```

9.3.5 Common Definitions

```
__ *********************
-- Common definitions
__ **********************
NBAP-CommonDataTypes {
itu-t (0) identified-organization (4) etsi (0) mobileDomain (0)
umts-Access (20) modules (3) nbap (2) version1 (1) nbap-CommonDataTypes (3) }
DEFINITIONS AUTOMATIC TAGS ::=
BEGIN
__ ********************
-- Extension constants
__ *********************************
maxPrivateIEs
                    INTEGER ::= 65535
                    INTEGER ::= 65535
maxProtocolExtensions
maxProtocolIEs
                      INTEGER ::= 65535
__ *********************
-- Common Data Types
__ *********************************
Criticality ::= ENUMERATED { reject, ignore, notify }
```

523

```
MessageDiscriminator
                     ::= ENUMERATED { common, dedicated }
Presence
               ::= ENUMERATED { optional, conditional, mandatory }
PrivateIE-ID
               ::= CHOICE {
   local
                      INTEGER (0..maxPrivateIEs),
    qlobal
                       OBJECT IDENTIFIER
ProcedureCode ::= INTEGER (0..255)
ProcedureID
               ::= SEQUENCE {
   procedureCode
                           ProcedureCode,
   ddMode
                           ENUMERATED { tdd, fdd, common, ... }
                 ::= INTEGER (0..maxProtocolIEs)
ProtocolIE-ID
TransactionID
                 ::= CHOICE {
    shortTransActionId
                          INTEGER (0..127),
   longTransActionId
                           INTEGER (0..32767)
TriggeringMessage ::= ENUMERATED { initiating-message, successful-outcome, unsuccessfull-outcome, outcome }
END
```

9.3.6 Constant Definitions

id-audit	ProcedureCode	::=	0
id-auditRequired	ProcedureCode	::=	1
id-blockResource	ProcedureCode	::=	2
id-cellDeletion	ProcedureCode	::=	3
id-cellReconfiguration	ProcedureCode	::=	4
id-cellSetup	ProcedureCode	::=	5
id-cellSynchronisationInitiation	ProcedureCode	::=	45
id-cellSynchronisationReconfiguration	ProcedureCode	::=	46
id-cellSynchronisationReporting	ProcedureCode	::=	47
id-cellSynchronisationTermination	ProcedureCode	::=	48
id-cellSynchronisationFailure	ProcedureCode	::=	49
id-commonMeasurementFailure	ProcedureCode	::=	6
id-commonMeasurementInitiation	ProcedureCode	::=	7
id-commonMeasurementReport	ProcedureCode	::=	8
id-commonMeasurementTermination	ProcedureCode		
id-commonTransportChannelDelete	ProcedureCode		
id-commonTransportChannelReconfigure	ProcedureCode		
id-commonTransportChannelSetup	ProcedureCode		
id-compressedModeCommand	ProcedureCode		
id-dedicatedMeasurementFailure	ProcedureCode		
id-dedicatedMeasurementInitiation	ProcedureCode		
id-dedicatedMeasurementReport	ProcedureCode		
id-dedicatedMeasurementTermination	ProcedureCode		
id-downlinkPowerControl	ProcedureCode		
id-downlinkPowerTimeslotControl			
	ProcedureCode		
id-errorIndicationForCommon	ProcedureCode		
id-errorIndicationForDedicated	ProcedureCode		
id-informationExchangeFailure	ProcedureCode		
id-informationExchangeInitiation	ProcedureCode		
id-informationExchangeTermination	ProcedureCode		
id-informationReporting	ProcedureCode		
id-physicalSharedChannelReconfiguration	ProcedureCode		
id-privateMessageForCommon	ProcedureCode		
id-privateMessageForDedicated	ProcedureCode		
id-radioLinkAddition	ProcedureCode		
id-radioLinkDeletion	ProcedureCode		
id-radioLinkFailure	ProcedureCode		
id-radioLinkPreemption	ProcedureCode		
id-radioLinkRestoration	ProcedureCode		
id-radioLinkSetup	ProcedureCode		
id-reset	ProcedureCode		
id-resourceStatusIndication	ProcedureCode	::=	28
id-cellSynchronisationAdjustment	ProcedureCode	::=	44
id-synchronisedRadioLinkReconfigurationCancellation	ProcedureCode	::=	29
id-synchronisedRadioLinkReconfigurationCommit	ProcedureCode	::=	30
id-synchronisedRadioLinkReconfigurationPreparation	ProcedureCode	::=	31
id-systemInformationUpdate	ProcedureCode	::=	32
id-unblockResource	ProcedureCode	::=	33
id-unSynchronisedRadioLinkReconfiguration	ProcedureCode	::=	34
-			

--

-- Lists

```
maxNrOfCodes
                            INTEGER ::= 10
maxNrOfDLTSs
                            INTEGER ::= 15
maxNrOfDLTSLCRs
                            INTEGER ::= 6
maxNrOfErrors
                            INTEGER ::= 256
maxNrOfTFs
                            INTEGER ::= 32
maxNrOfTFCs
                            INTEGER ::= 1024
                            INTEGER ::= 16
maxNrOfRLs
maxNrOfRLs-1
                            INTEGER ::= 15 -- maxNrOfRLs - 1
maxNrOfRLs-2
                            INTEGER ::= 14 -- maxNrOfRLs - 2
                            INTEGER ::= maxNrOfRLs
maxNrOfRLSets
maxNrOfDPCHs
                            INTEGER ::= 240
                            INTEGER ::= 240
maxNrOfDPCHLCRs
maxNrOfSCCPCHs
                            INTEGER ::= 8
                            INTEGER ::= 16
maxNrOfCPCHs
maxNrOfPCPCHs
                            INTEGER ::= 64
maxNrOfDCHs
                            INTEGER ::= 128
                            INTEGER ::= 32
maxNrOfDSCHs
maxNrOfFACHs
                            INTEGER ::= 8
maxNrOfCCTrCHs
                            INTEGER ::= 16
                            INTEGER ::= 256
maxNrOfPDSCHs
maxNrOfPUSCHs
                            INTEGER ::= 256
maxNrOfPDSCHSets
                            INTEGER ::= 256
maxNrOfPRACHLCRs
                            INTEGER ::= 8
                            INTEGER ::= 256
maxNrOfPUSCHSets
maxNrOfSCCPCHLCRs
                            INTEGER ::= 8
maxNrOfULTSs
                            INTEGER ::= 15
maxNrOfULTSLCRs
                            INTEGER ::= 6
maxNrOfUSCHs
                            INTEGER ::= 32
maxAPSiqNum
                            INTEGER ::= 16
maxNrOfSlotFormatsPRACH
                            INTEGER ::= 8
maxCellinNodeB
                            INTEGER ::= 256
maxCCPinNodeB
                            INTEGER ::= 256
maxCPCHCell
                            INTEGER ::= maxNrOfCPCHs
maxCTFC
                            INTEGER ::= 16777215
                            INTEGER ::= maxCellinNodeB
maxLocalCellinNodeB
maxNoofLen
                            INTEGER ::= 7
maxFPACHCell
                            INTEGER ::= 8
maxRACHCell
                            INTEGER ::= maxPRACHCell
maxPRACHCell
                            INTEGER ::= 16
maxPCPCHCell
                            INTEGER ::= 64
maxSCCPCHCell
                            INTEGER ::= 32
                            INTEGER ::= 32
maxSCPICHCell
maxTTI-count
                            INTEGER ::= 4
maxIBSEG
                            INTEGER ::= 16
maxIB
                            INTEGER ::= 64
maxFACHCell
                            INTEGER ::= 256 -- maxNrOfFACHs * maxSCCPCHCell
maxRateMatching
                            INTEGER ::= 256
maxCodeNrComp-1
                            INTEGER ::= 256
maxNrOfCellSyncBursts
                            INTEGER ::= 10
maxNrOfCodeGroups
                            INTEGER ::= 256
maxNrOfReceptsPerSyncFrame
                           INTEGER ::= 16
```

```
INTEGER ::= 96
maxNrOfMeasNCell
maxNrOfMeasNCell-1
                           INTEGER ::= 95 -- maxNrOfMeasNCell - 1
maxNrOfTFCIGroups
                           INTEGER ::= 256
maxNrOfTFCI1Combs
                           INTEGER ::= 512
maxNrOfTFCI2Combs
                           INTEGER ::= 1024
maxNrOfTFCI2Combs-1
                           INTEGER ::= 1023
maxNrOfSF
                           INTEGER ::= 8
maxTGPS
                           INTEGER ::= 6
maxCommunicationContext
                           INTEGER ::= 1048575
                           INTEGER ::= 256
maxNrOfLevels
maxNoSat
                           INTEGER ::= 16
maxNoGPSItems
                           INTEGER ::= 8
  -----
-- TES
id-AICH-Information
                                                                   ProtocolIE-ID ::= 0
id-AICH-InformationItem-ResourceStatusInd
                                                                   ProtocolTE-TD ::= 1
id-BCH-Information
                                                                   ProtocolIE-ID ::= 7
id-BCH-InformationItem-ResourceStatusInd
                                                                   ProtocolTE-TD ::= 8
id-BCCH-ModificationTime
                                                                   ProtocolIE-ID ::= 9
id-BlockingPriorityIndicator
                                                                   ProtocolIE-ID ::= 10
id-Cause
                                                                   ProtocolIE-ID ::= 13
id-CCP-InformationItem-AuditRsp
                                                                   ProtocolIE-ID ::= 14
id-CCP-InformationList-AuditRsp
                                                                   ProtocolIE-ID ::= 15
id-CCP-InformationItem-ResourceStatusInd
                                                                   ProtocolIE-ID ::= 16
id-Cell-InformationItem-AuditRsp
                                                                   ProtocolIE-ID ::= 17
                                                                   ProtocolIE-ID ::= 18
id-Cell-InformationItem-ResourceStatusInd
id-Cell-InformationList-AuditRsp
                                                                   ProtocolIE-ID ::= 19
id-CellParameterID
                                                                   ProtocolIE-ID ::= 23
id-CFN
                                                                   ProtocolIE-ID ::= 24
id-C-ID
                                                                   ProtocolIE-ID ::= 25
id-CommonMeasurementAccuracy
                                                                   ProtocolIE-ID ::= 39
id-CommonMeasurementObjectType-CM-Rprt
                                                                   ProtocolIE-ID ::= 31
id-CommonMeasurementObjectType-CM-Rgst
                                                                   ProtocolIE-ID ::= 32
id-CommonMeasurementObjectType-CM-Rsp
                                                                   ProtocolIE-ID ::= 33
id-CommonMeasurementType
                                                                   ProtocolIE-ID ::= 34
id-CommonPhysicalChannelID
                                                                   ProtocolIE-ID ::= 35
id-CommonPhysicalChannelType-CTCH-SetupRgstFDD
                                                                   ProtocolIE-ID ::= 36
id-CommonPhysicalChannelType-CTCH-SetupRqstTDD
                                                                   ProtocolIE-ID ::= 37
id-CommunicationControlPortID
                                                                   ProtocolTE-TD ::= 40
id-ConfigurationGenerationID
                                                                   ProtocolIE-ID ::= 43
id-CRNC-CommunicationContextID
                                                                   ProtocolIE-ID ::= 44
id-CriticalityDiagnostics
                                                                   ProtocolIE-ID ::= 45
id-DCHs-to-Add-FDD
                                                                   ProtocolIE-ID ::= 48
id-DCH-AddList-RL-ReconfPrepTDD
                                                                   ProtocolIE-ID ::= 49
id-DCHs-to-Add-TDD
                                                                   ProtocolIE-ID ::= 50
id-DCH-DeleteList-RL-ReconfPrepFDD
                                                                   ProtocolIE-ID ::= 52
id-DCH-DeleteList-RL-ReconfPrepTDD
                                                                   ProtocolIE-ID ::= 53
id-DCH-DeleteList-RL-ReconfRqstFDD
                                                                   ProtocolIE-ID ::= 54
id-DCH-DeleteList-RL-ReconfRqstTDD
                                                                   ProtocolIE-ID ::= 55
```

id-DCH-FDD-Information	ProtocolIE-ID ::= 56
id-DCH-TDD-Information	ProtocolIE-ID ::= 57
id-DCH-InformationResponse	ProtocolIE-ID ::= 59
id-FDD-DCHs-to-Modify	ProtocolIE-ID ::= 62
id-TDD-DCHs-to-Modify	ProtocolIE-ID ::= 63
id-DCH-ModifyList-RL-ReconfRqstTDD	ProtocolIE-ID ::= 65
id-DedicatedMeasurementObjectType-DM-Rprt	ProtocolIE-ID ::= 67
id-DedicatedMeasurementObjectType-DM-Rqst	ProtocolIE-ID ::= 68
id-DedicatedMeasurementObjectType-DM-Rsp	ProtocolIE-ID ::= 69
id-DedicatedMeasurementType	ProtocolIE-ID ::= 70
id-DL-CCTrCH-InformationItem-RL-SetupRqstTDD	ProtocolIE-ID ::= 72
id-DL-CCTrCH-InformationList-RL-AdditionRqstTDD	ProtocolIE-ID ::= 73
id-DL-CCTrCH-InformationList-RL-SetupRqstTDD	ProtocolIE-ID ::= 76
id-DL-DPCH-InformationItem-RL-AdditionRqstTDD	ProtocolIE-ID ::= 77
id-DL-DPCH-InformationList-RL-SetupRqstTDD	ProtocolIE-ID ::= 79
id-DL-DPCH-Information-RL-ReconfPrepFDD	ProtocolIE-ID ::= 81
id-DL-DPCH-Information-RL-ReconfRqstFDD	ProtocolIE-ID ::= 82
id-DL-DPCH-Information-RL-SetupRqstFDD	ProtocolIE-ID ::= 83
id-DL-ReferencePowerInformationItem-DL-PC-Rqst	ProtocolIE-ID ::= 84
id-DLReferencePower	ProtocolIE-ID ::= 85
id-DLReferencePowerList-DL-PC-Rqst	ProtocolIE-ID ::= 86
id-DSCH-AddItem-RL-ReconfPrepFDD	ProtocolIE-ID ::= 87
id-DSCHs-to-Add-FDD	ProtocolIE-ID ::= 89
id-DSCH-DeleteItem-RL-ReconfPrepFDD	ProtocolIE-ID ::= 91
id-DSCH-DeleteList-RL-ReconfPrepFDD	ProtocolIE-ID ::= 93
id-DSCHs-to-Add-TDD	ProtocolIE-ID ::= 96
id-DSCH-Information-DeleteList-RL-ReconfPrepTDD	ProtocolIE-ID ::= 98
id-DSCH-Information-ModifyList-RL-ReconfPrepTDD	ProtocolIE-ID ::= 100
id-DSCH-InformationResponse	ProtocolIE-ID ::= 105
id-DSCH-FDD-Information	ProtocolIE-ID ::= 106
id-DSCH-TDD-Information	ProtocolIE-ID ::= 107
id-DSCH-ModifyItem-RL-ReconfPrepFDD	ProtocolIE-ID ::= 108
id-DSCH-ModifyList-RL-ReconfPrepFDD	ProtocolIE-ID ::= 112
id-End-Of-Audit-Sequence-Indicator	ProtocolIE-ID ::= 113
id-FACH-Information	ProtocolIE-ID ::= 116
id-FACH-InformationItem-ResourceStatusInd	ProtocolIE-ID ::= 117
id-FACH-ParametersList-CTCH-ReconfRqstTDD	ProtocolIE-ID ::= 120
id-FACH-ParametersListIE-CTCH-SetupRqstFDD	ProtocolIE-ID ::= 121
id-FACH-ParametersListIE-CTCH-SetupRqstTDD	ProtocolIE-ID ::= 122
id-IndicationType-ResourceStatusInd	ProtocolIE-ID ::= 123
id-Local-Cell-ID	ProtocolIE-ID ::= 124
id-Local-Cell-Group-InformationItem-AuditRsp	ProtocolIE-ID ::= 2
id-Local-Cell-Group-InformationItem-ResourceStatusInd	ProtocolIE-ID ::= 3
id-Local-Cell-Group-InformationItem2-ResourceStatusInd	ProtocolIE-ID ::= 4
id-Local-Cell-Group-InformationList-AuditRsp	ProtocolIE-ID ::= 5
id-Local-Cell-InformationItem-AuditRsp	ProtocolIE-ID ::= 125
id-Local-Cell-InformationItem-ResourceStatusInd	ProtocolIE-ID ::= 126
id-Local-Cell-InformationItem2-ResourceStatusInd	ProtocolIE-ID ::= 127
id-Local-Cell-InformationList-AuditRsp	ProtocolIE-ID ::= 128
id-AdjustmentPeriod	ProtocolIE-ID ::= 129
id-MaxAdjustmentStep	ProtocolIE-ID ::= 130
id-MaximumTransmissionPower	ProtocolIE-ID ::= 131
id-MeasurementFilterCoefficient	ProtocolIE-ID ::= 132
id-MeasurementID	ProtocolIE-ID ::= 133

id-MessageStructure	ProtocolIE-ID ::= 115
id-MIB-SB-SIB-InformationList-SystemInfoUpdateRqst	ProtocolIE-ID ::= 134
id-NodeB-CommunicationContextID	ProtocolIE-ID ::= 143
id-NeighbouringCellMeasurementInformation	ProtocolIE-ID ::= 455
id-P-CCPCH-Information	ProtocolIE-ID ::= 144
id-P-CCPCH-InformationItem-ResourceStatusInd	ProtocolIE-ID ::= 145
id-P-CPICH-Information	ProtocolIE-ID ::= 146
id-P-CPICH-InformationItem-ResourceStatusInd	ProtocolIE-ID ::= 147
id-P-SCH-Information	ProtocolIE-ID ::= 148
id-PCCPCH-Information-Cell-ReconfRqstTDD	ProtocolIE-ID ::= 150
id-PCCPCH-Information-Cell-SetupRqstTDD	ProtocolIE-ID ::= 151
id-PCH-Parameters-CTCH-ReconfRqstTDD	ProtocolIE-ID ::= 155
id-PCH-ParametersItem-CTCH-SetupRqstFDD	ProtocolIE-ID ::= 156
id-PCH-ParametersItem-CTCH-SetupRqstTDD	ProtocolIE-ID ::= 157
id-PCH-Information	ProtocolIE-ID ::= 158
id-PDSCH-Information-AddListIE-PSCH-ReconfRqst	ProtocolIE-ID ::= 161
id-PDSCH-Information-ModifyListIE-PSCH-ReconfRqst	ProtocolIE-ID ::= 162
id-PDSCHSets-AddList-PSCH-ReconfRqst	ProtocolIE-ID ::= 163
id-PDSCHSets-DeleteList-PSCH-ReconfRqst	ProtocolIE-ID ::= 164
id-PDSCHSets-ModifyList-PSCH-ReconfRqst	ProtocolIE-ID ::= 165
id-PICH-Information	ProtocolIE-ID ::= 166
id-PICH-Parameters-CTCH-ReconfRqstTDD	ProtocolIE-ID ::= 168
id-PowerAdjustmentType	ProtocolIE-ID ::= 169
id-PRACH-Information	ProtocolIE-ID ::= 170
id-PrimaryCCPCH-Information-Cell-ReconfRqstFDD	ProtocolIE-ID ::= 175
id-PrimaryCCPCH-Information-Cell-SetupRgstFDD	ProtocolIE-ID ::= 176
id-PrimaryCPICH-Information-Cell-ReconfRqstFDD	ProtocolIE-ID ::= 177
id-PrimaryCPICH-Information-Cell-SetupRqstFDD	ProtocolIE-ID ::= 178
id-PrimarySCH-Information-Cell-ReconfRqstFDD	ProtocolIE-ID ::= 179
id-PrimarySCH-Information-Cell-SetupRgstFDD	ProtocolIE-ID ::= 180
id-PrimaryScramblingCode	ProtocolIE-ID ::= 181
id-SCH-Information-Cell-ReconfRgstTDD	ProtocolIE-ID ::= 183
id-SCH-Information-Cell-SetupRqstTDD	ProtocolIE-ID ::= 184
id-PUSCH-Information-AddListIE-PSCH-ReconfRgst	ProtocolIE-ID ::= 185
id-PUSCH-Information-ModifyListIE-PSCH-ReconfRqst	ProtocolIE-ID ::= 186
id-PUSCHSets-AddList-PSCH-ReconfRqst	ProtocolIE-ID ::= 187
id-PUSCHSets-DeleteList-PSCH-ReconfRqst	ProtocolIE-ID ::= 188
id-PUSCHSets-ModifyList-PSCH-ReconfRqst	ProtocolIE-ID ::= 189
id-RACH-Information	ProtocolIE-ID ::= 190
id-RACH-ParametersItem-CTCH-SetupRqstFDD	ProtocolIE-ID ::= 196
id-RACH-ParameterItem-CTCH-SetupRqstTDD	ProtocolIE-ID ::= 197
id-ReportCharacteristics	ProtocolIE-ID ::= 198
id-Reporting-Object-RL-FailureInd	ProtocolIE-ID ::= 199
id-Reporting-Object-RL-RestoreInd	ProtocolIE-ID ::= 200
id-RL-InformationItem-DM-Rprt	ProtocolIE-ID ::= 202
id-RL-InformationItem-DM-Rgst	ProtocolIE-ID ::= 203
id-RL-InformationItem-DM-Rsp	ProtocolIE-ID ::= 204
id-RL-InformationItem-RL-AdditionRqstFDD	ProtocolIE-ID ::= 205
id-RL-informationItem-RL-DeletionRqst	ProtocolIE-ID ::= 206
id-RL-InformationItem-RL-FailureInd	ProtocolIE-ID ::= 207
id-RL-InformationItem-RL-PreemptRequiredInd	ProtocolIE-ID ::= 286
id-RL-InformationItem-RL-ReconfPrepFDD	ProtocolIE-ID ::= 208
id-RL-InformationItem-RL-ReconfigstFDD	ProtocolIE-ID ::= 209
id-RL-InformationItem-RL-RestoreInd	ProtocoliE-ID ::= 210
TO THE THIRD CONTROL THE POST CHILD	11000001111 10 210

id-RL-InformationItem-RL-SetupRqstFDD	ProtocolIE-ID ::= 211
id-RL-InformationList-RL-AdditionRqstFDD	ProtocolIE-ID ::= 212
id-RL-informationList-RL-DeletionRqst	ProtocolIE-ID ::= 213
id-RL-InformationList-RL-PreemptRequiredInd	ProtocolIE-ID ::= 237
id-RL-InformationList-RL-ReconfPrepFDD	ProtocolIE-ID ::= 214
id-RL-InformationList-RL-ReconfRqstFDD	ProtocolIE-ID ::= 215
id-RL-InformationList-RL-SetupRqstFDD	ProtocolIE-ID ::= 216
id-RL-InformationResponseItem-RL-AdditionRspFDD	ProtocolIE-ID ::= 217
id-RL-InformationResponseItem-RL-ReconfReady	ProtocolIE-ID ::= 218
id-RL-InformationResponseItem-RL-ReconfRsp	ProtocolIE-ID ::= 219
id-RL-InformationResponseItem-RL-SetupRspFDD	ProtocolIE-ID ::= 220
id-RL-InformationResponseList-RL-AdditionRspFDD	ProtocolIE-ID ::= 221
id-RL-InformationResponseList-RL-ReconfReady	ProtocolIE-ID ::= 222
id-RL-InformationResponseList-RL-ReconfRsp	ProtocolIE-ID ::= 223
id-RL-InformationResponseList-RL-SetupRspFDD	ProtocolIE-ID ::= 224
id-RL-InformationResponse-RL-AdditionRspTDD	ProtocolIE-ID ::= 225
id-RL-InformationResponse-RL-SetupRspTDD	ProtocolIE-ID ::= 226
id-RL-Information-RL-AdditionRqstTDD	ProtocolIE-ID ::= 227
id-RL-Information-RL-ReconfRqstTDD	ProtocolIE-ID ::= 228
id-RL-Information-RL-ReconfPrepTDD	ProtocolIE-ID ::= 229
id-RL-Information-RL-SetupRqstTDD	ProtocolIE-ID ::= 230
id-RL-ReconfigurationFailureItem-RL-ReconfFailure	ProtocolIE-ID ::= 236
id-RL-Set-InformationItem-DM-Rprt	ProtocolIE-ID ::= 238
id-RL-Set-InformationItem-DM-Rsp	ProtocolIE-ID ::= 240
id-RL-Set-InformationItem-RL-FailureInd	ProtocolIE-ID ::= 241
id-RL-Set-InformationItem-RL-RestoreInd	ProtocolIE-ID ::= 242
id-S-CCPCH-Information	ProtocolIE-ID ::= 247
id-S-CPICH-Information	ProtocolIE-ID ::= 249
id-SCH-Information	ProtocolIE-ID ::= 251
id-S-SCH-Information	ProtocolIE-ID ::= 253
id-Secondary-CCPCHListIE-CTCH-ReconfRqstTDD	ProtocolIE-ID ::= 257
id-Secondary-CCPCH-parameterListIE-CTCH-SetupRqstTDD	ProtocolIE-ID ::= 258
id-Secondary-CCPCH-Parameters-CTCH-ReconfRqstTDD	ProtocolIE-ID ::= 259
id-SecondaryCPICH-InformationItem-Cell-ReconfRqstFDD	ProtocolIE-ID ::= 260
id-SecondaryCPICH-InformationItem-Cell-SetupRqstFDD	ProtocolIE-ID ::= 261
id-SecondaryCPICH-InformationList-Cell-ReconfRqstFDD	ProtocolIE-ID ::= 262
id-SecondaryCPICH-InformationList-Cell-SetupRqstFDD	ProtocolIE-ID ::= 263
id-SecondarySCH-Information-Cell-ReconfRqstFDD	ProtocolIE-ID ::= 264
id-SecondarySCH-Information-Cell-SetupRqstFDD	ProtocolIE-ID ::= 265
id-SegmentInformationListIE-SystemInfoUpdate	ProtocolIE-ID ::= 266
id-SFN	ProtocolIE-ID ::= 268
id-ShutdownTimer	ProtocolIE-ID ::= 269
id-Start-Of-Audit-Sequence-Indicator	ProtocolIE-ID ::= 114
id-Successful-RL-InformationRespItem-RL-AdditionFailureFDD	ProtocolIE-ID ::= 270
id-Successful-RL-InformationRespItem-RL-SetupFailureFDD	ProtocolIE-ID ::= 271
id-SyncCase	ProtocolIE-ID ::= 274
id-SyncCaseIndicatorItem-Cell-SetupRqstTDD-PSCH	ProtocolIE-ID ::= 275
id-T-Cell	ProtocolIE-ID ::= 276
id-TimeSlotConfigurationList-Cell-ReconfRqstTDD	ProtocolIE-ID ::= 277
id-TimeSlotConfigurationList-Cell-SetupRqstTDD	ProtocolIE-ID ::= 278
id-TransmissionDiversityApplied	ProtocolIE-ID ::= 279
id-TypeOfError	ProtocolIE-ID ::= 508
id-UARFCNforNt	ProtocolIE-ID ::= 280
id-UARFCNforNd	ProtocolIE-ID ::= 281

id-UARFCNforNu	ProtocolIE-ID ::= 282
id-UL-CCTrCH-InformationItem-RL-SetupRqstTDD	ProtocolIE-ID ::= 284
id-UL-CCTrCH-InformationList-RL-AdditionRqstTDD	ProtocolIE-ID ::= 285
id-UL-CCTrCH-InformationList-RL-SetupRqstTDD	ProtocolIE-ID ::= 288
id-UL-DPCH-InformationItem-RL-AdditionRqstTDD	ProtocolIE-ID ::= 289
id-UL-DPCH-InformationList-RL-SetupRqstTDD	ProtocolIE-ID ::= 291
id-UL-DPCH-Information-RL-ReconfPrepFDD	ProtocolIE-ID ::= 293
id-UL-DPCH-Information-RL-ReconfRqstFDD	ProtocolIE-ID ::= 294
id-UL-DPCH-Information-RL-SetupRqstFDD	ProtocolIE-ID ::= 295
id-Unsuccessful-RL-InformationRespItem-RL-AdditionFailureFDD	ProtocolIE-ID ::= 296
id-Unsuccessful-RL-InformationRespItem-RL-SetupFailureFDD	ProtocolIE-ID ::= 297
id-Unsuccessful-RL-InformationResp-RL-AdditionFailureTDD	ProtocolIE-ID ::= 300
id-Unsuccessful-RL-InformationResp-RL-SetupFailureTDD	ProtocolIE-ID ::= 301
id-USCH-Information-Add	ProtocolIE-ID ::= 302
id-USCH-Information-DeleteList-RL-ReconfPrepTDD	ProtocolIE-ID ::= 304
id-USCH-Information-ModifyList-RL-ReconfPrepTDD	ProtocolIE-ID ::= 306
id-USCH-InformationResponse	ProtocolIE-ID ::= 309
id-USCH-Information	ProtocolIE-ID ::= 310
id-Active-Pattern-Sequence-Information	ProtocolIE-ID ::= 315
id-AICH-ParametersListIE-CTCH-ReconfRqstFDD	ProtocolIE-ID ::= 316
id-AdjustmentRatio	ProtocolIE-ID ::= 317
id-AP-AICH-Information	ProtocolIE-ID ::= 320
id-AP-AICH-ParametersListIE-CTCH-ReconfRqstFDD	ProtocolIE-ID ::= 322
id-FACH-ParametersListIE-CTCH-ReconfRqstFDD	ProtocolIE-ID ::= 323
id-CauseLevel-PSCH-ReconfFailureTDD	ProtocolIE-ID ::= 324
id-CauseLevel-RL-AdditionFailureFDD	ProtocolIE-ID ::= 325
id-CauseLevel-RL-AdditionFailureTDD	ProtocolIE-ID ::= 326
id-CauseLevel-RL-ReconfFailure	ProtocolIE-ID ::= 327
id-CauseLevel-RL-SetupFailureFDD	ProtocolIE-ID ::= 328
id-CauseLevel-RL-SetupFailureTDD	ProtocolIE-ID ::= 329
id-CDCA-ICH-Information	ProtocolIE-ID ::= 330
id-CDCA-ICH-ParametersListIE-CTCH-ReconfRqstFDD	ProtocolIE-ID ::= 332
id-Closed-Loop-Timing-Adjustment-Mode	ProtocolIE-ID ::= 333
id-CommonPhysicalChannelType-CTCH-ReconfRqstFDD	ProtocolIE-ID ::= 334
id-Compressed-Mode-Deactivation-Flag	ProtocolIE-ID ::= 335
id-CPCH-Information	ProtocolIE-ID ::= 336
id-CPCH-Parameters-CTCH-SetupRsp	ProtocolIE-ID ::= 342
id-CPCH-ParametersListIE-CTCH-ReconfRqstFDD	ProtocolIE-ID ::= 343
id-DL-CCTrCH-InformationAddList-RL-ReconfPrepTDD	ProtocolIE-ID ::= 345
id-DL-CCTrCH-InformationDeleteItem-RL-ReconfRgstTDD	ProtocolIE-ID ::= 347
id-DL-CCTrCH-InformationDeleteList-RL-ReconfPrepTDD	ProtocoliE-ID ::= 347
id-DL-CCTrCH-InformationDeleteList-RL-ReconfreeDDD	ProtocolIE-ID ::= 349
_	ProtocoliE-ID ::= 350
id-DL-CCTrCH-InformationModifyItem-RL-ReconfRqstTDD	ProtocoliE-ID ::= 350
id-DL-CCTrCH-InformationModifyList-RL-ReconfPrepTDD	
id-DL-CCTrCH-InformationModifyList-RL-ReconfRqstTDD	ProtocolIE-ID ::= 352
id-DL-DPCH-InformationAddListIE-RL-ReconfPrepTDD	ProtocolIE-ID ::= 353
id-DL-DPCH-InformationModify-AddListIE-RL-ReconfPrepTDD	ProtocolIE-ID ::= 355
id-DL-DPCH-InformationModify-DeleteListIE-RL-ReconfPrepTDD	ProtocolIE-ID ::= 356
id-DL-DPCH-InformationModify-ModifyListIE-RL-ReconfPrepTDD	ProtocolIE-ID ::= 357
id-DL-TPC-Pattern01Count	ProtocolIE-ID ::= 358
id-DPC-Mode	ProtocolIE-ID ::= 450
id-DPCHConstant	ProtocolIE-ID ::= 359
id-DSCH-FDD-Common-Information	ProtocolIE-ID ::= 94
id-EnhancedDSCHPC	ProtocolIE-ID ::= 110

id-EnhancedDSCHPCIndicator	ProtocolIE-ID ::= 111
id-FACH-ParametersList-CTCH-SetupRsp	ProtocolIE-ID ::= 362
id-Limited-power-increase-information-Cell-SetupRqstFDD	ProtocolIE-ID ::= 369
id-PCH-Parameters-CTCH-SetupRsp	ProtocolIE-ID ::= 374
id-PCH-ParametersItem-CTCH-ReconfRqstFDD	ProtocolIE-ID ::= 375
id-PCPCH-Information	ProtocolIE-ID ::= 376
id-PICH-ParametersItem-CTCH-ReconfRqstFDD	ProtocolIE-ID ::= 380
id-PRACHConstant	ProtocolIE-ID ::= 381
id-PRACH-ParametersListIE-CTCH-ReconfRqstFDD	ProtocolIE-ID ::= 383
id-PUSCHConstant	ProtocolIE-ID ::= 384
id-RACH-Parameters-CTCH-SetupRsp	ProtocolIE-ID ::= 385
id-SSDT-CellIDforEDSCHPC	ProtocolIE-ID ::= 443
id-Synchronisation-Configuration-Cell-ReconfRqst	ProtocolIE-ID ::= 393
id-Synchronisation-Configuration-Cell-SetupRqst	ProtocolIE-ID ::= 394
id-Transmission-Gap-Pattern-Sequence-Information	ProtocolIE-ID ::= 395
id-UL-CCTrCH-InformationAddList-RL-ReconfPrepTDD	ProtocolIE-ID ::= 396
id-UL-CCTrCH-InformationDeleteItem-RL-ReconfRqstTDD	ProtocolIE-ID ::= 397
id-UL-CCTrCH-InformationDeleteList-RL-ReconfPrepTDD	ProtocolIE-ID ::= 398
id-UL-CCTrCH-InformationDeleteList-RL-ReconfRqstTDD	ProtocolIE-ID ::= 399
id-UL-CCTrCH-InformationModifyItem-RL-ReconfRqstTDD	ProtocolIE-ID ::= 400
id-UL-CCTrCH-InformationModifyList-RL-ReconfPrepTDD	ProtocolIE-ID ::= 401
id-UL-CCTrCH-InformationModifyList-RL-ReconfRqstTDD	ProtocolIE-ID ::= 402
id-UL-DPCH-InformationAddListIE-RL-ReconfPrepTDD	ProtocolIE-ID ::= 403
id-UL-DPCH-InformationModify-AddListIE-RL-ReconfPrepTDD	ProtocolIE-ID ::= 405
id-UL-DPCH-InformationModify-DeleteListIE-RL-ReconfPrepTDD	ProtocolIE-ID ::= 406
id-UL-DPCH-InformationModify-ModifyListIE-RL-ReconfPrepTDD	ProtocolIE-ID ::= 407
id-Unsuccessful-PDSCHSetItem-PSCH-ReconfFailureTDD	ProtocolIE-ID ::= 408
id-Unsuccessful-PUSCHSetItem-PSCH-ReconfFailureTDD	ProtocolIE-ID ::= 409
id-CommunicationContextInfoItem-Reset	ProtocolIE-ID ::= 412
id-CommunicationControlPortInfoItem-Reset	ProtocolIE-ID ::= 414
id-ResetIndicator	ProtocolIE-ID ::= 416
id-TFCI2-Bearer-Information-RL-SetupRqstFDD	ProtocolIE-ID ::= 417
id-TFCI2-BearerSpecificInformation-RL-ReconfPrepFDD	ProtocolIE-ID ::= 418
id-TFCI2-BearerInformationResponse	ProtocolIE-ID ::= 419
id-TimingAdvanceApplied	ProtocolIE-ID ::= 287
id-CFNReportingIndicator	ProtocolIE-ID ::= 6
id-SFNReportingIndicator	ProtocolIE-ID ::= 11
id-InnerLoopDLPCStatus	ProtocolIE-ID ::= 12
id-TimeslotISCPInfo	ProtocoliE-ID ::= 283
id-PICH-ParametersItem-CTCH-SetupRqstTDD	ProtocoliE-ID ::= 167
id-PRACH-ParametersItem-CTCH-SetupRqstTDD	ProtocolIE-ID ::= 20
id-CCTrCH-InformationItem-RL-FailureInd	ProtocoliE-ID ::= 46
id-CCTrCH-InformationItem-RL-RestoreInd	ProtocoliE-ID ::= 47
id-CauseLevel-SyncAdjustmntFailureTDD	ProtocolIE-ID ::= 420
id-CellAdjustmentInfo-SyncAdjustmntRqstTDD	ProtocolIE-ID ::= 421
id-CellAdjustmentInfoItem-SyncAdjustmentRqstTDD	ProtocolIE-ID ::= 494
id-CellSyncBurstInfoList-CellSyncReconfRqstTDD	ProtocolIE-ID ::= 482
id-CellSyncBurstTransInit-CellSyncInitiationRqstTDD	ProtocolIE-ID ::= 422
id-CellSyncBurstMeasureInit-CellSyncInitiationRqstTDD	ProtocolIE-ID ::= 423
id-CellSyncBurstTransReconfiguration-CellSyncReconfRqstTDD	ProtocolIE-ID ::= 424
id-CellSyncBurstMeasReconfiguration-CellSyncReconfRqstTDD	ProtocolIE-ID ::= 425
id-CellSyncBurstTransInfoList-CellSyncReconfRqstTDD	ProtocolIE-ID ::= 426
id-CellSyncBurstMeasInfoList-CellSyncReconfRqstTDD	ProtocolIE-ID ::= 427
id-CellSyncBurstTransReconfInfo-CellSyncReconfRqstTDD	ProtocolIE-ID ::= 428

id-CellSyncInfo-CellSyncReprtTDD	ProtocolIE-ID ::= 429
id-CSBTransmissionID	ProtocolIE-ID ::= 430
id-CSBMeasurementID	ProtocolIE-ID ::= 431
id-IntStdPhCellSyncInfoItem-CellSyncReprtTDD	ProtocolIE-ID ::= 432
id-NCyclesPerSFNperiod	ProtocolIE-ID ::= 433
id-NRepetitionsPerCyclePeriod	ProtocolIE-ID ::= 434
id-SyncFrameNumber	ProtocolIE-ID ::= 437
id-SynchronisationReportType	ProtocolIE-ID ::= 438
id-SynchronisationReportCharacteristics	ProtocolIE-ID ::= 439
id-Unsuccessful-cell-InformationRespItem-SyncAdjustmntFailureTDD	ProtocolIE-ID ::= 440
id-LateEntranceCellSyncInfoItem-CellSyncReprtTDD	ProtocolIE-ID ::= 119
id-ReferenceClockAvailability	ProtocolIE-ID ::= 435
id-ReferenceSFNoffset	ProtocolIE-ID ::= 436
id-InformationExchangeID	ProtocolIE-ID ::= 444
id-InformationExchangeObjectType-InfEx-Rqst	ProtocolIE-ID ::= 445
id-InformationType	ProtocolIE-ID ::= 446
id-InformationReportCharacteristics	ProtocolIE-ID ::= 447
id-InformationExchangeObjectType-InfEx-Rsp	ProtocolIE-ID ::= 448
id-InformationExchangeObjectType-InfEx-Rprt	ProtocolIE-ID ::= 449
id-IPDLParameter-Information-Cell-ReconfRqstFDD	ProtocolIE-ID ::= 451
id-IPDLParameter-Information-Cell-SetupRqstFDD	ProtocolIE-ID ::= 452
id-IPDLParameter-Information-Cell-ReconfRqstTDD	ProtocolIE-ID ::= 453
id-IPDLParameter-Information-Cell-SetupRqstTDD	ProtocolIE-ID ::= 454
id-DL-DPCH-LCR-Information-RL-SetupRqstTDD	ProtocolIE-ID ::= 74
id-DL-DPCH-LCR-InformationList-RL-SetupRqstTDD	ProtocolIE-ID ::= 75
id-DwPCH-LCR-Information	ProtocolIE-ID ::= 78
id-DwPCH-LCR-Information-AuditRsp	ProtocolIE-ID ::= 80
id-DwPCH-LCR-InformationList-AuditRsp	ProtocolIE-ID ::= 90
id-DwPCH-LCR-Information-Cell-SetupRqstTDD	ProtocolIE-ID ::= 97
id-DwPCH-LCR-Information-Cell-ReconfRqstTDD	ProtocolIE-ID ::= 99
id-DwPCH-LCR-Information-ResourceStatusInd	ProtocolIE-ID ::= 101
id-maxFACH-Power-LCR-CTCH-SetupRqstTDD	ProtocolIE-ID ::= 154
id-maxFACH-Power-LCR-CTCH-ReconfRqstTDD	ProtocolIE-ID ::= 174
id-FPACH-LCR-Information	ProtocolIE-ID ::= 290
id-FPACH-LCR-Information-AuditRsp	ProtocolIE-ID ::= 292
id-FPACH-LCR-InformationList-AuditRsp	ProtocolIE-ID ::= 22
id-FPACH-LCR-InformationList-ResourceStatusInd	ProtocolIE-ID ::= 311
id-FPACH-LCR-Parameters-CTCH-SetupRqstTDD	ProtocolIE-ID ::= 312
id-FPACH-LCR-ParametersItem-CTCH-SetupRqstTDD	ProtocolIE-ID ::= 313
id-FPACH-LCR-Parameters-CTCH-ReconfRqstTDD	ProtocolIE-ID ::= 314
id-PCCPCH-LCR-Information-Cell-SetupRqstTDD	ProtocolIE-ID ::= 456
id-PCH-Power-LCR-CTCH-SetupRqstTDD	ProtocolIE-ID ::= 457
id-PCH-Power-LCR-CTCH-ReconfRqstTDD	ProtocolIE-ID ::= 458
id-PICH-LCR-Parameters-CTCH-SetupRqstTDD	ProtocolIE-ID ::= 459
id-PICH-LCR-ParametersItem-CTCH-SetupRqstTDD	ProtocolIE-ID ::= 460
id-PRACH-LCR-ParametersList-CTCH-SetupRqstTDD	ProtocolIE-ID ::= 461
id-PRACH-LCR-ParametersListIE-CTCH-SetupRqstTDD	ProtocolIE-ID ::= 462
id-RL-InformationResponse-LCR-RL-SetupRspTDD	ProtocolIE-ID ::= 463
id-Secondary-CCPCH-LCR-parameterListIE-CTCH-SetupRqstTDD	ProtocolIE-ID ::= 464
id-Secondary-CCPCH-LCR-parameterList-CTCH-SetupRqstTDD	ProtocolIE-ID ::= 465
id-TimeSlot	ProtocolIE-ID ::= 495
id-TimeSlotConfigurationList-LCR-Cell-ReconfRqstTDD	ProtocolIE-ID ::= 466
<pre>id-TimeSlotConfigurationList-LCR-Cell-SetupRqstTDD id-TimeslotISCP-LCR-InfoList-RL-SetupRqstTDD</pre>	ProtocolIE-ID ::= 467 ProtocolIE-ID ::= 468
TA TIMESTOCIOCE DEN INTODISC NA SECUPNYSCIDA	110000011E-1D 400

```
id-TimeSlotLCR-CM-Rqst
                                                                    ProtocolIE-ID ::= 469
id-UL-DPCH-LCR-Information-RL-SetupRgstTDD
                                                                    ProtocolIE-ID ::= 470
id-UL-DPCH-LCR-InformationList-RL-SetupRgstTDD
                                                                    ProtocolIE-ID ::= 471
id-DL-DPCH-InformationItem-LCR-RL-AdditionRgstTDD
                                                                    ProtocolIE-ID ::= 472
id-UL-DPCH-InformationItem-LCR-RL-AdditionRgstTDD
                                                                    ProtocolIE-ID ::= 473
id-TimeslotISCP-InformationList-LCR-RL-AdditionRgstTDD
                                                                    ProtocolIE-ID ::= 474
id-DL-DPCH-LCR-InformationAddList-RL-ReconfPrepTDD
                                                                    ProtocolIE-ID ::= 475
id-DL-DPCH-LCR-InformationAddListIE-RL-ReconfPrepTDD
                                                                    ProtocolIE-ID ::= 476
id-DL-DPCH-LCR-InformationModify-AddList-RL-ReconfPrepTDD
                                                                    ProtocolTE-TD ::= 477
id-DL-DPCH-LCR-InformationModify-AddListIE-RL-ReconfPrepTDD
                                                                    ProtocolIE-ID ::= 478
id-DL-Timeslot-LCR-InformationModify-ModifyList-RL-ReconfPrepTDD
                                                                    ProtocolIE-ID ::= 479
id-TimeslotISCPInfoList-LCR-DL-PC-RqstTDD
                                                                    ProtocolIE-ID ::= 480
id-UL-DPCH-LCR-InformationAddListIE-RL-ReconfPrepTDD
                                                                    ProtocolIE-ID ::= 481
id-UL-DPCH-LCR-InformationModify-AddList
                                                                    ProtocolIE-ID ::= 483
id-UL-DPCH-LCR-InformationModify-AddListIE-RL-ReconfPrepTDD
                                                                    ProtocolIE-ID ::= 484
id-UL-TimeslotLCR-Information-RL-ReconfPrepTDD
                                                                    ProtocolIE-ID ::= 485
                                                                    ProtocolIE-ID ::= 510
id-UL-SIRTarget
id-PDSCH-AddInformation-LCR-PSCH-ReconfRqst
                                                                    ProtocolIE-ID ::= 486
id-PDSCH-AddInformation-LCR-AddListIE-PSCH-ReconfRqst
                                                                    ProtocolIE-ID ::= 487
id-PDSCH-ModifyInformation-LCR-PSCH-ReconfRqst
                                                                    ProtocolIE-ID ::= 488
id-PDSCH-ModifyInformation-LCR-ModifyListIE-PSCH-ReconfRqst
                                                                    ProtocolIE-ID ::= 489
id-PUSCH-AddInformation-LCR-PSCH-ReconfRqst
                                                                    ProtocolIE-ID ::= 490
id-PUSCH-AddInformation-LCR-AddListIE-PSCH-ReconfRqst
                                                                    ProtocolIE-ID ::= 491
id-PUSCH-ModifyInformation-LCR-PSCH-ReconfRgst
                                                                    ProtocolIE-ID ::= 492
id-PUSCH-ModifyInformation-LCR-ModifyListIE-PSCH-ReconfRqst
                                                                    ProtocolIE-ID ::= 493
id-timeslotInfo-CellSyncInitiationRgstTDD
                                                                    ProtocolIE-ID ::= 496
id-SyncReportType-CellSyncReprtTDD
                                                                    ProtocolIE-ID ::= 497
id-PUSCH-Info-DM-Rgst
                                                                    ProtocolIE-ID ::= 505
id-PUSCH-Info-DM-Rsp
                                                                    ProtocolIE-ID ::= 506
id-PUSCH-Info-DM-Rprt
                                                                    ProtocolIE-ID ::= 507
id-InitDL-Power
                                                                    ProtocolIE-ID ::= 509
id-cellSyncBurstRepetitionPeriod
                                                                    ProtocolIE-ID ::= 511
id-ReportCharacteristicsType-OnModification
                                                                    ProtocolIE-ID ::= 512
id-SFNSFNMeasurementValueInformation
                                                                    ProtocolIE-ID ::= 513
id-SFNSFNMeasurementThresholdInformation
                                                                    ProtocolIE-ID ::= 514
id-TUTRANGPSMeasurementValueInformation
                                                                    ProtocolIE-ID ::= 515
id-TUTRANGPSMeasurementThresholdInformation
                                                                    ProtocolIE-ID ::= 516
id-Rx-Timing-Deviation-Value-LCR
                                                                    ProtocolIE-ID ::= 520
id-RL-InformationResponse-LCR-RL-AdditionRspTDD
                                                                    ProtocolIE-ID ::= 51
```

END

9.3.7 Container Definitions

```
DEFINITIONS AUTOMATIC TAGS ::=
BEGIN
__ *********************
-- IE parameter types from other modules.
__ ********************
IMPORTS
   maxProtocolExtensions.
   maxPrivateIEs,
   maxProtocolIEs,
   Criticality,
   Presence,
   PrivateIE-ID,
   ProtocolIE-ID
FROM NBAP-CommonDataTypes;
__ ********************
-- Class Definition for Protocol IEs
__ **********************
NBAP-PROTOCOL-IES ::= CLASS {
         ProtocolIE-ID
                            UNIQUE,
   &criticality Criticality,
   &Value,
   &presence Presence
WITH SYNTAX {
         &id
   CRITICALITY &criticality
   TYPE
            &Value
   PRESENCE &presence
__ *********************
-- Class Definition for Protocol IEs
NBAP-PROTOCOL-IES-PAIR ::= CLASS {
            ProtocolIE-ID
                               UNIQUE,
   &firstCriticality Criticality,
   &FirstValue,
   &secondCriticality Criticality,
   &SecondValue,
   &presence
               Presence
```

```
WITH SYNTAX {
  ID
            &id
   FIRST CRITICALITY &firstCriticality
   FIRST TYPE
            &FirstValue
   SECOND CRITICALITY &secondCriticality
   SECOND TYPE
               &SecondValue
   PRESENCE
               &presence
  ****************
-- Class Definition for Protocol Extensions
__ *********************
NBAP-PROTOCOL-EXTENSION ::= CLASS {
       ProtocolIE-ID
   &criticality
              Criticality,
   &Extension,
   &presence
               Presence
WITH SYNTAX {
  ID &id
   CRITICALITY &criticality
   EXTENSION &Extension
   PRESENCE
            &presence
__ ********************
-- Class Definition for Private IEs
__ ***********************************
NBAP-PRIVATE-IES ::= CLASS {
       PrivateIE-ID,
   &criticality Criticality,
   &Value,
   &presence
               Presence
WITH SYNTAX {
   ID &id
   CRITICALITY &criticality
   TYPE &Value
   PRESENCE &presence
__ **********************************
-- Container for Protocol IEs
__ ********************
ProtocolIE-Container {NBAP-PROTOCOL-IES : IEsSetParam} ::=
```

536

```
SEQUENCE (SIZE (0..maxProtocolIEs)) OF
   ProtocolIE-Field {{IEsSetParam}}
ProtocolIE-Single-Container {NBAP-PROTOCOL-IES : IEsSetParam} ::=
   ProtocolIE-Field {{IEsSetParam}}
ProtocolIE-Field {NBAP-PROTOCOL-IES : IESSetParam} ::= SEQUENCE {
   id NBAP-PROTOCOL-IES.&id ({IEsSetParam}),
   criticality NBAP-PROTOCOL-IES.&criticality ({IEsSetParam}{@id}),
   value NBAP-PROTOCOL-IES. & Value ({IEsSetParam}{@id})
    *****************
-- Container for Protocol IE Pairs
ProtocolIE-ContainerPair {NBAP-PROTOCOL-IES-PAIR : IEsSetParam} ::=
   SEQUENCE (SIZE (0..maxProtocolIEs)) OF
   ProtocolIE-FieldPair {{IEsSetParam}}
ProtocolIE-FieldPair {NBAP-PROTOCOL-IES-PAIR : IESSetParam} ::= SEQUENCE {
       NBAP-PROTOCOL-IES-PAIR.&id
                                                ({IEsSetParam}),
   firstCriticality NBAP-PROTOCOL-IES-PAIR.&firstCriticality
                                                              ({IEsSetParam}{@id}),
   firstValue NBAP-PROTOCOL-IES-PAIR.&FirstValue ({IEsSetParam}{@id}),
   secondCriticality NBAP-PROTOCOL-IES-PAIR. & secondCriticality ({IEsSetParam}{@id}),
   secondValue NBAP-PROTOCOL-IES-PAIR.&SecondValue ({IEsSetParam}{@id})
    -- Container Lists for Protocol IE Containers
  *****************
ProtocolIE-ContainerList {INTEGER : lowerBound, INTEGER : upperBound, NBAP-PROTOCOL-IES : IEsSetParam} ::=
   SEQUENCE (SIZE (lowerBound..upperBound)) OF
   ProtocolIE-Container {{IEsSetParam}}
ProtocolIE-ContainerPairList {INTEGER : lowerBound, INTEGER : upperBound, NBAP-PROTOCOL-IES-PAIR : IESSetParam} ::=
   SEQUENCE (SIZE (lowerBound..upperBound)) OF
   ProtocolIE-ContainerPair {{IEsSetParam}}
   ****************
-- Container for Protocol Extensions
ProtocolExtensionContainer {NBAP-PROTOCOL-EXTENSION : ExtensionSetParam} ::=
   SEQUENCE (SIZE (1..maxProtocolExtensions)) OF
   ProtocolExtensionField {{ExtensionSetParam}}
```

```
ProtocolExtensionField {NBAP-PROTOCOL-EXTENSION : ExtensionSetParam} ::= SEQUENCE {
          NBAP-PROTOCOL-EXTENSION.&id ({ExtensionSetParam}),
   criticality NBAP-PROTOCOL-EXTENSION.&criticality ({ExtensionSetParam}{@id}),
   extensionValue NBAP-PROTOCOL-EXTENSION.&Extension ({ExtensionSetParam}{@id})
  ****************
-- Container for Private IEs
__ ********************
PrivateIE-Container {NBAP-PRIVATE-IES : IEsSetParam} ::=
   SEQUENCE (SIZE (1..maxPrivateIEs)) OF
   PrivateIE-Field {{IEsSetParam}}
PrivateIE-Field {NBAP-PRIVATE-IES : IEsSetParam} ::= SEQUENCE {
              NBAP-PRIVATE-IES.&id
   ({IEsSetParam}),
   criticality
                     NBAP-PRIVATE-IES.&criticality
   ({IEsSetParam}{@id}),
              NBAP-PRIVATE-IES.&Value
   ({IEsSetParam}{@id})
END
```

9.4 Message Transfer Syntax

NBAP shall use the ASN.1 Basic Packed Encoding Rules (BASIC-PER) Aligned Variant as transfer syntax as specified in ref. [11].

The following encoding rules apply in addition to what has been specified in X.691 [11]:

When a bitstring value is placed in a bit-field as specified in 15.6 to 15.11 in [11], the leading bit of the bitstring value shall be placed in the leading bit of the bit-field, and the trailing bit of the bitstring value shall be placed in the trailing bit of the bit-field.

NOTE - When using the "bstring" notation, the leading bit of the bitstring value is on the left, and the trailing bit of the bitstring value is on the right. The term 'leading bit' is to be interpreted as equal to the term 'first bit' defined in [12].

9.5 Timers

 $T_{Preempt}$

- Specifies the maximum time that a Node B may wait for pre-emption of resources for establishment or reconfiguration of Radio Links.

Handling of unknown, unforeseen and erroneous protocol data

10.1 General

Protocol Error cases can be divided into three classes:

- Transfer Syntax Error
- Abstract Syntax Error
- Logical Error

Protocol errors can occur in the following functions within a receiving node:

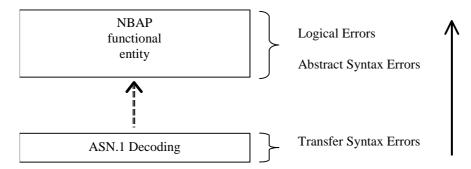


Figure 38: Protocol Errors in NBAP.

The information stated in subclauses 10.2, 10.3 and 10.4, to be included in the message used when reporting an error, is what at minimum shall be included. Other optional information elements within the message may also be included, if available. This is also valid for the case when the reporting is done with a response message. The latter is an exception to what is stated in subclause 4.1.

10.2 Transfer Syntax Error

A Transfer Syntax Error occurs when the receiver is not able to decode the received physical message. Transfer syntax errors are always detected in the process of ASN.1 decoding. If a Transfer Syntax Error occurs, the receiver should initiate Error Indication procedure with appropriate cause value for the Transfer Syntax protocol error.

Examples for Transfer Syntax Errors are:

- Violation of value ranges in ASN.1 definition of messages. e.g.: If an IE has a defined value range of 0 to 10 (ASN.1: INTEGER (0..10)), and 12 will be received, then this will be treated as a transfer syntax error.
- Violation in list element constraints. e.g.: If a list is defined as containing 1 to 10 elements, and 12 elements will be received, than this case will be handled as a transfer syntax error.
- Missing mandatory elements in ASN.1 SEQUENCE definitions (as sent by the originator of the message).
- Wrong order of elements in ASN.1 SEQUENCE definitions (as sent by the originator of the message).

10.3 Abstract Syntax Error

10.3.1 General

An Abstract Syntax Error occurs when the receiving functional NBAP entity:

- 1. receives IEs or IE groups that cannot be understood (unknown id);
- 2. receives IEs for which the logical range is violated (e.g.: ASN.1 definition: 0 to 15, the logical range is 0 to 10 (values 11 to 15 are undefined), and 12 will be received; this case will be handled as an abstract syntax error using criticality information sent by the originator of the message);
- 3. does not receive IEs or IE groups but according to the specified presence of the concerning object, the IEs or IE groups should have been present in the received message;
- 4. receives IEs or IE groups that are defined to be part of that message in wrong order or with too many occurrences of the same IE or IE group;
- 5. receives IEs or IE groups but according to the conditional presence of the concerning object and the specified condition, the IEs or IE groups should not have been present in the received message.

Cases 1 and 2 (not comprehended IE/IE group) are handled based on received Criticality information. Case 3 (missing IE/IE group) is handled based on Criticality information and Presence information for the missing IE/IE group specified in the version of the specification used by the receiver. Case 4 (IEs or IE groups in wrong order or with too many occurrences) and Case 5 (erroneously present conditional IEs or IE groups) result in rejecting the procedure.

If an Abstract Syntax Error occurs, the receiver shall read the remaining message and shall then for each detected Abstract Syntax Error that belong to cases 1-3 act according to the Criticality Information and Presence Information for the IE/IE group due to which Abstract Syntax Error occurred in accordance with subclauses 10.3.4 and 10.3.5. The handling of cases 4 and 5 is specified in subclause 10.3.6.

10.3.2 Criticality Information

In the NBAP messages there is criticality information set for individual IEs and/or IE groups. This criticality information instructs the receiver how to act when receiving an IE or an IE group that is not comprehended, i.e. the entire item (IE or IE group) which is not (fully or partially) comprehended shall be treated in accordance with its own criticality information as specified in subclause 10.3.4.

In addition, the criticality information is used in case of the missing IE/IE group abstract syntax error (see subclause 10.3.5).

The receiving node shall take different actions depending on the value of the Criticality Information. The three possible values of the Criticality Information for an IE/IE group are:

- Reject IE
- Ignore IE and Notify Sender
- Ignore IE

The following rules restrict when a receiving entity may consider an IE, an IE group or an EP not comprehended (not implemented), and when action based on criticality information is applicable:

- 1. IE or IE group: When one new or modified IE or IE group is implemented for one EP from a standard version, then other new or modified IEs or IE groups specified for that EP in that standard version shall be considered comprehended by the receiving entity (some may still remain unsupported).
 - Note that this restriction is applicable to a sending entity for constructing messages.
- 2. EP: The comprehension of different EPs within a standard version or between different standard versions is not mandated. Any EP that is not supported may be considered not comprehended, even if another EP from that standard version is comprehended, and action based on criticality shall be applied.

When the criticality information cannot even be decoded in a not comprehended IE or IE group, the Error Indication procedure shall be initiated with an appropriate cause value.

10.3.3 Presence Information

For many IEs/IE groups which are optional according to the ASN.1 transfer syntax, NBAP specifies separately if the presence of these IEs/IE groups is optional or mandatory with respect to RNS application by means of the presence field of the concerning object of class NBAP-PROTOCOL-IES, NBAP-PROTOCOL-IES-PAIR, NBAP-PROTOCOL-EXTENSION or NBAP-PRIVATE-IES.

The presence field of the indicated classes supports three values:

- 1. Optional;
- 2. Conditional;
- Mandatory.

If an IE/IE group is not included in a received message and the presence of the IE/IE group is mandatory or the presence is conditional and the condition is true according to the version of the specification used by the receiver, an abstract syntax error occurs due to a missing IE/IE group.

If an IE/IE group is included in a received message and the presence of the IE/IE group is conditional and the condition is false according to the version of the specification used by the receiver, an abstract syntax error occurs due to this erroneously present conditional IE/IE group.

10.3.4 Not comprehended IE/IE group

10.3.4.1 Procedure ID

The receiving node shall treat the different types of received criticality information of the *Procedure ID* according to the following:

Reject IE:

- If a message is received with a *Procedure ID* marked with "*Reject IE*" which the receiving node does not comprehend, the receiving node shall reject the procedure using the Error Indication procedure.

Ignore IE and Notify Sender:

- If a message is received with a *Procedure ID* marked with "*Ignore IE and Notify Sender*" which the receiving node does not comprehend, the receiving node shall ignore the procedure and initiate the Error Indication procedure.

Ignore IE:

- If a message is received with a *Procedure ID* marked with "*Ignore IE*" which the receiving node does not comprehend, the receiving node shall ignore the procedure.

When using the Error Indication procedure to reject a procedure or to report an ignored procedure it shall include the *Procedure ID* IE, the *Triggering Message* IE, and the *Procedure Criticality* IE in the *Criticality Diagnostics* IE.

10.3.4.1A Type of Message

When the receiving node cannot decode the *Type of Message* IE, the Error Indication procedure shall be initiated with an appropriate cause value.

10.3.4.2 IEs other than the Procedure ID and Type of Message

The receiving node shall treat the different types of received criticality information of an IE/IE group other than the *Procedure ID* according to the following:

Reject IE:

- If a message *initiating* a procedure is received containing one or more IEs/IE groups marked with "*Reject IE*" which the receiving node does not comprehend; none of the functional requests of the message shall be executed. The receiving node shall reject the procedure and report the rejection of one or more IEs/IE groups using the message normally used to report unsuccessful outcome of the procedure. In case the information received in the initiating message was insufficient to determine a value for all IEs that are required to be present in the message used to report the unsuccessful outcome of the procedure, the receiving node shall instead terminate the procedure and initiate the Error Indication procedure.
- If a message *initiating* a procedure that does not have a message to report unsuccessful outcome is received containing one or more IEs/IE groups marked with "*Reject IE*" which the receiving node does not comprehend, the receiving node shall terminate the procedure and initiate the Error Indication procedure.
- If a *response* message is received containing one or more IEs/IE groups marked with "*Reject IE*" that the receiving node does not comprehend, the receiving node shall consider the procedure as unsuccessfully terminated and initiate local error handling.

Ignore IE and Notify Sender:

- If a message *initiating* a procedure is received containing one or more IEs/IE groups marked with "*Ignore IE and Notify Sender*" which the receiving node does not comprehend, the receiving node shall ignore the content of the not comprehended IEs/IE groups, continue with the procedure as if the not comprehended IEs/IE groups were not received (except for the reporting) using the understood IEs/IE groups and report in the response message of the procedure that one or more IEs/IE groups have been ignored. In case the information received in the initiating message was insufficient to determine a value for all IEs that are required to be present in the response message, the receiving node shall instead terminate the procedure and initiate the Error Indication procedure.
- If a message *initiating* a procedure that does not have a message to report the outcome of the procedure is received containing one or more IEs/IE groups marked with "*Ignore IE and Notify Sender*" which the receiving node does not comprehend, the receiving node shall ignore the content of the not comprehended IEs/IE groups, continue with the procedure as if the not comprehended IEs/IE groups were not received (except for the reporting) using the understood IEs/IE groups, and initiate the Error Indication procedure to report that one or more IEs/IE groups have been ignored.
- If a *response* message is received containing one or more IEs/IE groups marked with "*Ignore IE and Notify Sender*" which the receiving node does not comprehend, the receiving node shall ignore the content of the not comprehended IEs/IE groups, continue with the procedure as if the not comprehended IEs/IE groups were not received (except for the reporting) using the understood IEs/IE groups and initiate the Error Indication procedure.

Ignore IE:

- If a message *initiating* a procedure is received containing one or more IEs/IE groups marked with "*Ignore IE*" which the receiving node does not comprehend, the receiving node shall ignore the content of the not comprehended IEs/IE groups and continue with the procedure as if the not comprehended IEs/IE groups were not received using the understood IEs/IE groups.

- If a *response* message is received containing one or more IEs/IE groups marked with "*Ignore IE*" which the receiving node does not comprehend, the receiving node shall ignore the content of the not comprehended IEs/IE groups and continue with the procedure as if the not comprehended IEs/IE groups were not received using the understood IEs/IE groups.

When reporting not comprehended IEs/IE groups marked with "Reject IE" or "Ignore IE and Notify Sender" using a response message defined for the procedure, the Information Element Criticality Diagnostics IE shall be included in the Criticality Diagnostics IE for each reported IE/IE group. In the Information Element Criticality Diagnostics IE the Repetition Number IE shall be included and in addition, if the not comprehended IE/IE group is not at message hierarchy level 1 (top level; see annex C) also the Message Structure IE shall be included.

When reporting not comprehended IEs/IE groups marked with "Reject IE" or "Ignore IE and Notify Sender" using the Error Indication procedure, the Procedure ID IE, the Triggering Message IE, Procedure Criticality IE, the Transaction ID IE, and the Information Element Criticality Diagnostics IE shall be included in the Criticality Diagnostics IE for each reported IE/IE group. In the Information Element Criticality Diagnostics IE the Repetition Number IE shall be included and in addition, if the not comprehended IE/IE group is not at message hierarchy level 1 (top level; see annex C) also the Message Structure IE shall be included.

10.3.5 Missing IE or IE group

The receiving node shall treat the missing IE/IE group according to the criticality information for the missing IE/IE group in the received message specified in the version of this specification used by the receiver:

Reject IE:

- If a received message *initiating* a procedure is missing one or more IEs/IE groups with specified criticality "*Reject IE*"; none of the functional requests of the message shall be executed. The receiving node shall reject the procedure and report the missing IEs/IE groups using the message normally used to report unsuccessful outcome of the procedure. In case the information received in the initiating message was insufficient to determine a value for all IEs that are required to be present in the message used to report the unsuccessful outcome of the procedure, the receiving node shall instead terminate the procedure and initiate the Error Indication procedure.
- If a received message *initiating* a procedure that does not have a message to report unsuccessful outcome is missing one or more IEs/IE groups with specified criticality "*Reject IE*", the receiving node shall terminate the procedure and initiate the Error Indication procedure.
- If a received *response* message is missing one or more IEs/IE groups with specified criticality "*Reject IE*, the receiving node shall consider the procedure as unsuccessfully terminated and initiate local error handling.

Ignore IE and Notify Sender:

- If a received message *initiating* a procedure is missing one or more IEs/IE groups with specified criticality "*Ignore IE and Notify Sender*", the receiving node shall ignore that those IEs are missing and continue with the procedure based on the other IEs/IE groups present in the message and report in the response message of the procedure that one or more IEs/IE groups were missing. In case the information received in the initiating message was insufficient to determine a value for all IEs that are required to be present in the response message, the receiving node shall instead terminate the procedure and initiate the Error Indication procedure.
- If a received message *initiating* a procedure that does not have a message to report the outcome of the procedure is missing one or more IEs/IE groups with specified criticality "*Ignore IE and Notify Sender*", the receiving node shall ignore that those IEs are missing and continue with the procedure based on the other IEs/IE groups present in the message and initiate the Error Indication procedure to report that one or more IEs/IE groups were missing.
- If a received *response* message is missing one or more IEs/IE groups with specified criticality "*Ignore IE and Notify Sender*", the receiving node shall ignore that those IEs are missing and continue with the procedure based on the other IEs/IE groups present in the message and initiate the Error Indication procedure to report that one or more IEs/IE groups were missing.

Ignore IE:

- If a received message *initiating* a procedure is missing one or more IEs/IE groups with specified criticality "*Ignore IE*", the receiving node shall ignore that those IEs are missing and continue with the procedure based on the other IEs/IE groups present in the message.

- If a received *response* message is missing one or more IEs/IE groups with specified criticality "*Ignore IE*", the receiving node shall ignore that those IEs/IE groups are missing and continue with the procedure based on the other IEs/IE groups present in the message.

When reporting missing IEs/IE groups with specified criticality "Reject IE" or "Ignore IE and Notify Sender" using a response message defined for the procedure, the Information Element Criticality Diagnostics IE shall be included in the Criticality Diagnostics IE for each reported IE/IE group. In the Information Element Criticality Diagnostics IE the Repetition Number IE shall be included and in addition, if the missing IE/IE group is not at message hierarchy level 1 (top level; see annex C) also the Message Structure IE shall be included.

When reporting missing IEs/IE groups with specified criticality "Reject IE" or "Ignore IE and Notify Sender" using the Error Indication procedure, the Procedure ID IE, the Triggering Message IE, Procedure Criticality IE, the Transaction ID IE, and the Information Element Criticality Diagnostics IE shall be included in the Criticality Diagnostics IE for each reported IE/IE group. In the Information Element Criticality Diagnostics IE the Repetition Number IE shall be included and in addition, if the missing IE/IE group is not at message hierarchy level 1 (top level; see annex C) also the Message Structure IE shall be included.

10.3.6 IEs or IE groups received in wrong order or with too many occurrences or erroneously present

If a message with IEs or IE groups in wrong order or with too many occurrences is received or if IEs or IE groups with a conditional presence are present when the condition is not met (i.e. erroneously present), the receiving node shall behave according to the following:

- If a message *initiating* a procedure is received containing IEs or IE groups in wrong order or with too many occurrences or erroneously present, none of the functional requests of the message shall be executed. The receiving node shall reject the procedure and report the cause value "Abstract Syntax Error (Falsely Constructed Message)" using the message normally used to report unsuccessful outcome of the procedure. In case the information received in the initiating message was insufficient to determine a value for all IEs that are required to be present in the message used to report the unsuccessful outcome of the procedure, the receiving node shall instead terminate the procedure and initiate the Error Indication procedure.
- If a message *initiating* a procedure that does not have a message to report unsuccessful outcome is received containing IEs or IE groups in wrong order or with too many occurrences or erroneously present, the receiving node shall terminate the procedure and initiate the Error Indication procedure, and use cause value "Abstract Syntax Error (Falsely Constructed Message)".
- If a *response* message is received containing IEs or IE groups in wrong order or with too many occurrences or erroneously present, the receiving node shall consider the procedure as unsuccessfully terminated and initiate local error handling.

When determining the correct order only the IEs specified in the specification version used by the receiver shall be considered.

10.4 Logical Error

Logical error situations occur when a message is comprehended correctly, but the information contained within the message is not valid (i.e. semantic error), or describes a procedure which is not compatible with the state of the receiver. In these conditions, the following behaviour shall be performed (unless otherwise specified) as defined by the class of the elementary procedure, irrespective of the criticality of the IEs/IE groups containing the erroneous values.

Class 1:

Where the logical error occurs in a request message of a class 1 procedure, and the procedure has a failure message, the failure message shall be sent with an appropriate cause value.

Typical cause values are:

- Protocol Causes:
 - 1. Semantic Error

2. Message not compatible with receiver state

Where the logical error is contained in a request message of a class 1 procedure, and the procedure does not have a failure message, the procedure shall be terminated and the ERROR INDICATION procedure shall be initiated with an appropriate cause value. The *Procedure ID* IE, the *Triggering Message* IE and the *Transaction ID* IE within the *Criticality Diagnostics* IE shall then be included in order to identify the message containing the logical error.

Where the logical error exists in a response message of a class 1 procedure, the procedure shall be considered as unsuccessfully terminated and local error handling shall be initiated.

Class 2:

Where the logical error occurs in a message of a class 2 procedure, the procedure shall be terminated and the ERROR INDICATION procedure shall be initiated with an appropriate cause value. The *Procedure ID* IE, the *Triggering Message* IE and the *Transaction ID* IE within the *Criticality Diagnostics* IE shall then be included in order to identify the message containing the logical error.

10.5 Exceptions

The error handling for all the cases described hereafter shall take precedence over any other error handling described in the other subclause of clause 10.

- If any type of error (Transfer Syntax Error, Abstract Syntax Error or Logical Error) is detected in the ERROR INDICATION message, it shall not trigger the Error Indication procedure in the receiving Node but local error handling.
- In case a response message, failure message or ERROR INDICATION message needs to be returned, but the information necessary to determine the receiver of that message is missing, the procedure shall be considered as unsuccessfully terminated and local error handling shall be initiated.

Annex A (normative):

Allocation and Pre-emption of Radio Links in the Node B

A.1 Deriving Allocation Information for a Radio Link

A.1.1 Establishment of a New Radio Link

The Allocation Information for a Radio Link in the case of establishment of a new Radio Link shall be derived as follows:

- The latest received Allocation/Retention Priority IE for each transport channel shall be used.

Note: The *Allocation/Retention Priority* IE for a transport channel may have been received in a) the procedure that establishes the first Radio Link for the Node B Communication Context in the Node B or

- b) a procedure adding or modifying the transport channel.
- If the *Priority Level* IE in the *Allocation/Retention Priority* IE for all transport channels that are intended to use the Radio Link is set to "no priority", the pre-emption capability of the Radio Link shall be set to "shall not trigger pre-emption".
- If the *Priority Level* IE in the *Allocation/Retention Priority* IE for one or more of the transport channels that are intended to use the Radio Link is not set to "no priority", the allocation priority and the pre-emption capability of the Radio Link shall be set according to the following:
 - The transport channels that have the *Priority Level* IE in the *Allocation/Retention Priority* IE set to "no priority" shall be excluded when setting the allocation priority and pre-emption capability of a Radio Link.
 - The allocation priority for a Radio Link shall be set to highest priority level, given by the *Priority Level* IE in the *Allocation/Retention Priority* IE, for all non excluded transport channels that are intended to use the Radio Link.
 - If all non-excluded transport channels that are intended to use a Radio Link to be established have the preemption capability, given by the *Pre-emption Capability* IE in the *Allocation/Retention Priority* IE, set to "shall not trigger pre-emption", the pre-emption capability of the Radio Link shall be set to "shall not trigger pre-emption".

If one or more non-excluded transport channels that are intended to use the Radio Link to be established have the value of the *Pre-emption Capability* IE in the *Allocation/Retention Priority* IE set to "may trigger pre-emption", the pre-emption capability of the Radio Link shall be set to "may trigger pre-emption".

The derived allocation priority and pre-emption capability are only valid during this allocation/retention process.

A.1.2 Modification of an Existing Radio Link

The Allocation Information for a Radio Link in the case of modification of a Radio Link (addition or modification of transport channels using the Radio Link) shall be derived as follows:

- The latest received Allocation/Retention Priority IE for each transport channel shall be used.

Note: The *Allocation/Retention Priority* IE for a transport channel may have been received in a) the procedure that establishes the first Radio Link for the Node B Communication Context in the Node

b) a previous procedure adding or modifying the transport channel, or

c) the current procedure adding or modifying the transport channel.

- If the *Priority Level* IE in the *Allocation/Retention Priority* IE for all transport channels to be added or modified in the Radio Link is set to "no priority", the pre-emption capability of the Radio Link to be modified shall be set to "shall not trigger pre-emption".
- If the *Priority Level* IE in the *Allocation/Retention Priority* IE for one or more of the transport channels to be added or modified in the Radio Link is not set to "no priority", the allocation priority of and the pre-emption capability of the Radio Link to be modified shall be set according to the following:
 - The transport channels to be added or modified that have the *Priority Level* IE in the *Allocation/Retention Priority* IE set to "no priority" shall be excluded when setting the allocation priority and pre-emption capability of a Radio Link to be modified.
 - The allocation priority for a Radio Link to be modified shall be set to highest priority level, given by the *Priority Level* IE in the *Allocation/Retention Priority* IE, for all the non-excluded transport channels that are to be added or modified.
 - If all non-excluded transport channels that are to be added or modified in the Radio Link have the preemption capability, given by the *Pre-emption Capability* IE in the *Allocation/Retention Priority* IE, set to "shall not trigger pre-emption", the pre-emption capability of the Radio Link to be modified shall be set to "shall not trigger pre-emption".
 - If one or more of the non-excluded transport channels to be added or modified in the Radio Link have the value of the *Pre-emption Capability* IE in the *Allocation/Retention Priority* IE set to "may trigger pre-emption", the pre-emption capability of the Radio Link to be modified shall be set to "may trigger pre-emption".

The derived allocation priority and pre-emption capability are only valid during this allocation/retention process.

A.2 Deriving Retention Information for a Radio Link

The Retention Information for an existing Radio Link shall be derived as follows:

- The latest received Allocation/Retention Priority IE for each transport channel shall be used.

Note: The *Allocation/Retention Priority* IE for a transport channel may have been received in

a) the procedure that establishes the first Radio Link for the Node B Communication Context in the Node B or

- b) a procedure adding or modifying the transport channel.
- If the *Priority Level* IE in the *Allocation/Retention Priority* IE for one or more transport channels using the Radio Link is set to "no priority", the pre-emption vulnerability of the Radio Link shall be set to "not pre-emptable".
- If the *Priority Level* IE in the *Allocation/Retention Priority* IE for all the transport channels using the Radio Link is not set to "no priority", the retention priority of the Radio Link and the pre-emption vulnerability of the Radio Link shall be set according to the following:
 - The retention priority for a Radio Link shall be set to highest priority level, given by the *Priority Level* IE in the *Allocation/Retention Priority* IE, for all transport channels that uses the Radio Link.
 - If all transport channels that uses the Radio Link have the pre-emption vulnerability, given by the *Pre-emption Vulnerability* IE in the *Allocation/Retention Priority* IE, set to "pre-emptable", the pre-emption vulnerability of the Radio Link shall be set to "pre-emptable".

 If one or more transport channels that uses the Radio Link have the value of the *Pre-emption Vulnerability* IE in the *Allocation/Retention Priority* IE set to "not pre-emptable", the pre-emption vulnerability of the Radio Link shall be set to "not pre-emptable".

The derived retention priority and pre-emption vulnerability are valid until they are changed, or until the Radio Link is deleted. When new transport channels are added to or deleted from the Radio Link or when existing transport channels are modified with regards to the *Allocation/Retention Priority* IE, the retention information shall be derived again according to above.

A.3 The Allocation/Retention Process

The Node B shall establish or modify the resources for a Radio Link according to:

- The value of the Allocation Information (allocation priority and pre-emption capability) of the Radio Link to be established or modified. The Allocation Information is derived according to clause A.1.
- The value of the Retention Information (retention priority and pre-emption vulnerability) of existing Radio Links. The Retention Information derived according to clause A.2.
- The resource situation in the cell.

Whilst the process and the extent of the pre-emption functionality is operator dependent, the pre-emption indicators (pre-emption capability and pre-emption vulnerability) shall be treated as follows:

- -. If the pre-emption capability for a Radio Link to be established or modified is set to "may trigger preemption" and the resource situation so requires, the Node B may trigger the pre-emption process in clause A.4 to free resources for this allocation request.
- -. If the pre-emption capability for a Radio Link to be established or modified is set to "shall not trigger preemption", then this allocation request shall not trigger the pre-emption process in clause A.4.
- -. If the pre-emption vulnerability for an existing Radio Link is set to "pre-emptable", then this Radio Link shall be included in the pre-emption process in clause A.4.
- -. If the pre-emption vulnerability for an existing Radio Link is set to "not pre-emptable", then this Radio Link shall not be included in the pre-emption process in clause A.4.

A.4 The Pre-emption Process

The pre-emption process shall only pre-empt Radio Links with lower retention priority than the allocation priority of the Radio Link to be established or modified. The Radio Links to be pre-empted shall be selected in ascending order of the retention priority.

When the pre-emption process detects that one or more Radio Links have to be pre-empted to free resources for a Radio Link(s) to be established or modified, the Node B shall initiate the Radio Link Pre-emption procedure for all the Node B Communication Contexts having Radio Links selected for pre-emption and start the $T_{Preempt}$ timer.

When enough resources are freed to establish or modify the Radio Link(s) according to the request, the Node B shall stop the $T_{Preempt}$ timer and complete the procedure that triggered the pre-emption process in accordance with the "Successful Operation" subclause of the procedure.

If the T_{Preempt} timer expires, the Node B shall regard the procedure that triggered the pre-emption process as failed and complete the procedure in accordance with the "Unsuccessful Operation" subclause of the procedure.

Annex B (informative): Measurement reporting

When the *Report Characteristics* IE is set to 'Event A' (figure B.1), the Measurement Reporting procedure is initiated when the measured entity rises above the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the value zero shall be used for the hysteresis time.

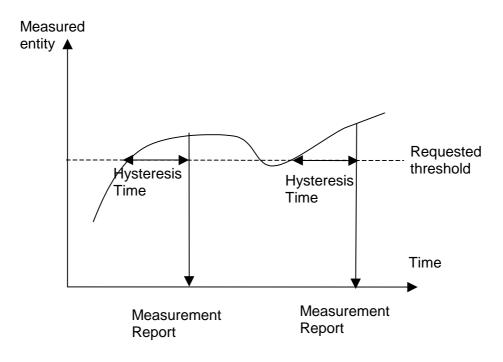


Figure B.1: Event A reporting with Hysteresis Time specified

When the *Report Characteristics* IE is set to 'Event B' (figure B.2), the Measurement Reporting procedure is initiated when the measured entity falls below the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the value zero shall be used for the hysteresis time.

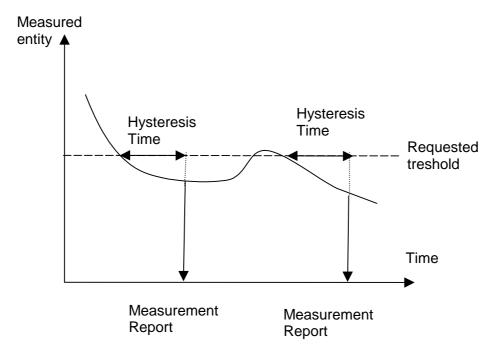


Figure B.2: Event B reporting with Hysteresis Time specified

When the *Report Characteristics* IE is set to 'Event C' (figure B.3), the Measurement Reporting procedure is initiated always when the measured entity rises by an amount greater than the requested threshold within the requested time. The reporting in figure B.3 is initiated if the Rising Time T1 is less than the requested time.

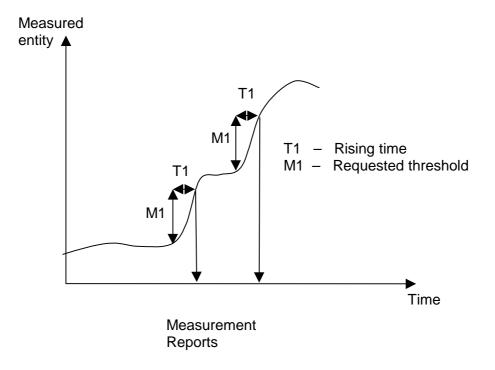


Figure B.3: Event C reporting

When the *Report Characteristics* IE is set to 'Event D' (figure B.4), the Measurement Reporting procedure is initiated always when the measured entity falls by an amount greater than the requested threshold within the requested time. The reporting in figure B.4 is initiated if the Falling Time T1 is less than the requested time.

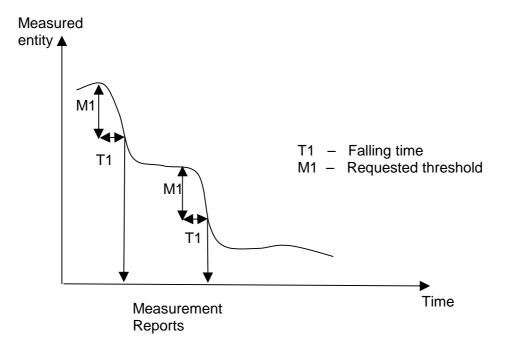


Figure B.4: Event D reporting

When the *Report Characteristics* IE is set to 'Event E' (figure B.5), the Measurement Reporting procedure (Report A) is initiated always when the measured entity rises above the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (T1 in figure B.5). If *Report Periodicity* IE is provided Node B shall also initiate Measurement Reporting procedure periodically. The periodic reporting continues although the measured entity falls below the 'Measurement Threshold 1' and is terminated by the Report B.

When the Report A conditions have been met and the measured entity falls below the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time' (T1) Measurement Reporting procedure (Report B) is initiated and the periodic reporting is terminated.


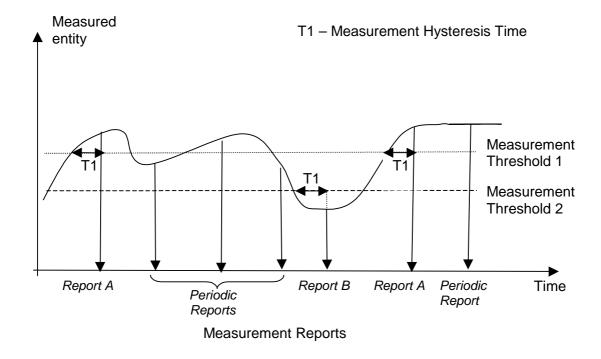


Figure B.5: Event E reporting with Hysteresis Time specified and Periodic Reporting requested

When the *Report Characteristics* IE is set to 'Event F' (figure B.6), the Measurement Reporting procedure (Report A) is initiated always when the measured entity falls below the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (T1 in figure B.6). If *Report Periodicity* IE is provided Node B shall also initiate Measurement Reporting procedure periodically. The periodic reporting continues although the measured entity rises above the 'Measurement Threshold 1' and is terminated by the Report B.

When the Report A conditions have been met and the measured entity rises above the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time' (T1) Measurement Reporting procedure (Report B) is initiated and the periodic reporting is terminated.

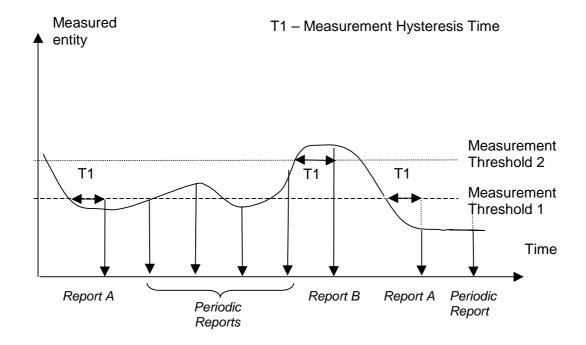

Measurement Reports

Figure B.6: Event F reporting with Hysteresis Time specified and Periodic Reporting requested

Annex C (informative): Guidelines for Usage of the Criticality Diagnostics IE

C.1 EXAMPLE MESSAGE Layout

Assume the following message format:

IE/Group Name	Presence	Range	IE type and	Semantics description	Criticality	Assigned Criticality
			referenc e			
Message Type	М				YES	reject
Transaction ID	M				_	
Α	M				YES	reject
В	M				YES	reject
>E		1 <maxe></maxe>			EACH	ignore
>>F		1 <maxf></maxf>			-	
>>>G		03,			EACH	ignore
>>H		1 <maxh></maxh>			EACH	ignore
>>>G		03,			EACH	ignore and
						notify
>>G	M				YES	reject
>>J		1 <maxj></maxj>			-	
>>>G		03,			EACH	reject
С	M				YES	reject
>K		1 <maxk></maxk>			EACH	ignore and notify
>>L		1 <maxl></maxl>			-	
>>>M	0				-	
D	M				YES	reject

Note 1. The IEs F, J, and L do not have assigned criticality. The IEs F, J, and L are consequently realised as the ASN.1 type SEQUENCE OF of "ordinary" ASN.1 type, e.g. INTEGER. On the other hand, the repeatable IEs with assigned criticality are realised as the ASN.1 type SEQUENCE OF of an IE object, e.g. ProtocolIE-Single-Container.

For the corresponding ASN.1 layout, see subclause C.4.

C.2 Example on a Received EXAMPLE MESSAGE

Assume further more that a received message based on the above tabular format is according to the figure below.


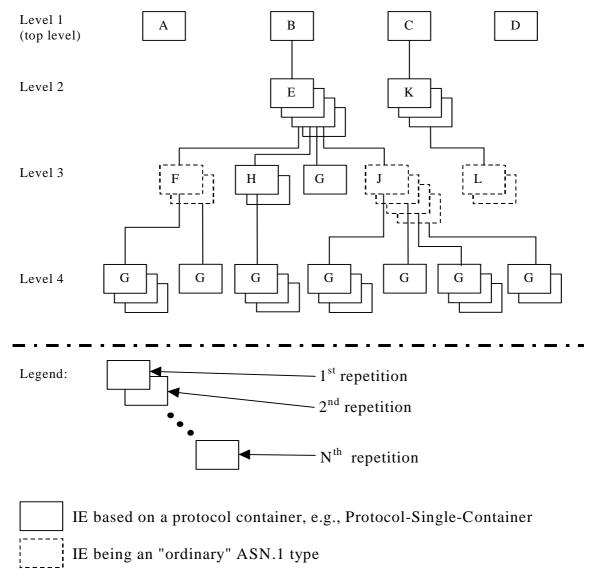


Figure C.1: Example of content of a received NBAP message based on the EXAMPLE MESSAGE

C.3 Content of Criticality Diagnostics

C.3.1 Example 1

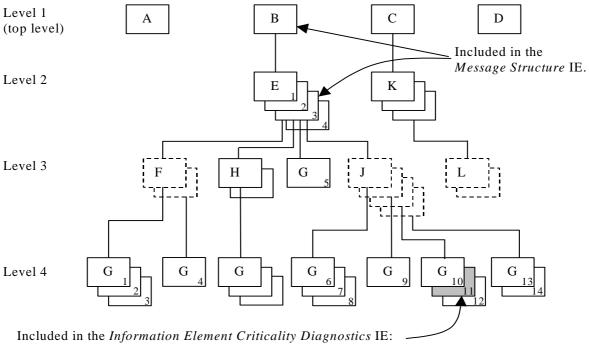

- a) IE ID IE
- b) Repetition Number IE


Figure C.2: Example of a received NBAP message containing a not comprehended IE

If there is an error within the instance marked as grey in the IE G in the IE J shown in the figure C.2 above, this will be reported within the *Information Element Criticality Diagnostics* IE within the *Criticality Diagnostics* IE as follows:

IE name	Value	Comment				
IE Criticality	reject	Criticality for IE on the reported level, i.e. level 4.				
IE ID	id-G	E ID from the reported level, i.e. level 4.				
Repetition	11	Repetition number on the reported level, i.e. level 4.				
Number		(Since the IE E (level 2) is the lowest level included in the Message Structure IE this is				
		the eleventh occurrence of IE G within the IE E (level 2).				
Type of Error	not					
	underst					
	ood					
Message Structur	e, first repe	etition				
>IE ID	id-B	IE ID from level 1.				
Message Structur	Message Structure, second repetition					
>IE ID	id-E	IE ID from the lowest level above the reported level, i.e. level 2.				
>Repetition	3	Repetition number from the lowest level above the reported level, i.e. level 2.				
Number						

- Note 2. The IE J on level 3 cannot be included in the *Message Structure* IE since they have no criticality of their own.
- Note 3. The repetition number of the reported IE indicates the number of repetitions of IE G received up to the detected erroneous repetition, counting all occurrences of the IE G below the same instance of the previous level with assigned criticality (instance 3 of IE E on level 2).

C.3.2 Example 2

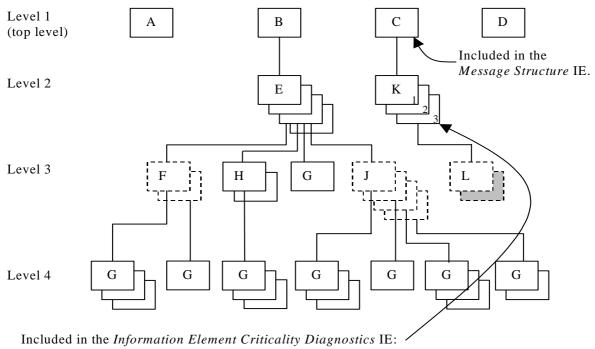

- a) IE ID IE
- b) Repetition Number IE


Figure C.3: Example of a received NBAP message containing a not comprehended IE

If there is an error within the second instance (marked as grey) in the sequence (IE L in the tabular format) on level 3 below IE K in the structure shown in the figure C.3 above, this will be reported within the *Information Element Criticality Diagnostics* IE within the *Criticality Diagnostics* IE as follows:

IE name	Value	Comment
IE Criticality	ignore	Criticality for IE on the reported level, i.e. level 2.
	and	
	notify	
IE ID	id-K	IE ID from the reported level, i.e. level 2.
Repetition	3	Repetition number on the reported level, i.e. level 2.
Number		
Type of Error	not	
	underst	
	ood	
Message Structu	re, first repe	etition
>IE ID	id-C	IE ID from the lowest level above the reported level, i.e. level 1.

Note 4. The IE L on level 3 cannot be reported individually included in the *Message Structure* IE since it has no criticality of its own.

C.3.3 Example 3

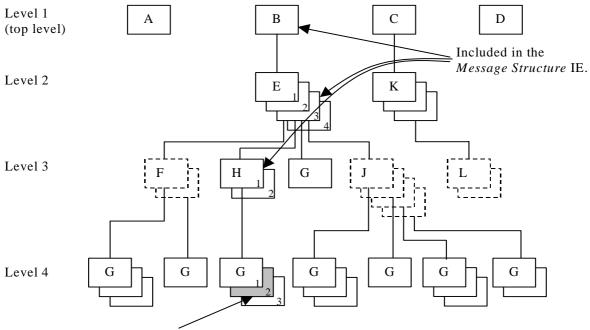

Included in the Information Element Criticality Diagnostics IE:

- a) IE ID IE
- b) Repetition Number IE


Figure C.4: Example of a received NBAP message containing a not comprehended IE

If there is an error within the instance marked as grey in the IE G in the IE H shown in the figure C.4 above, this will be reported within the *Information Element Criticality Diagnostics* IE within the *Criticality Diagnostics* IE as follows:

IE name	Value	Comment				
IE Criticality	reject	Criticality for IE on the reported level, i.e. level 4.				
IE ID	id-G	IE ID from the reported level, i.e. level 4.				
Repetition Number	2	Repetition number on the reported level, i.e. level 4.				
Type of Error	not					
	underst					
	ood					
Message Structure, first repetition						
>IE ID	id-B	IE ID from level 1.				
Message Structur	e, second	repetition				
>IE ID	id-E	IE ID from level 2.				
>Repetition	3	Repetition number from level 2.				
Number						
Message Structure, third repetition						
>IE ID	id-H	IE ID from the lowest level above the reported level, i.e. level 3.				
>Repetition	1	Repetition number from the lowest level above the reported level, i.e. level 3.				
Number						

Note 5. The repetition number of level 4 indicates the number of repetitions of IE G received up to the detected erroneous repetition, counted below the same instance of the previous level with assigned criticality (instance 1 of IE H on level 3).

C.3.4 Example 4

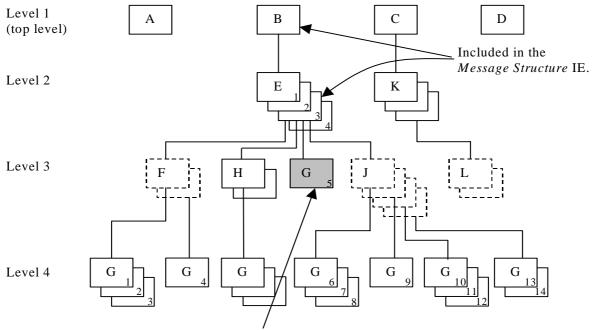

Included in the Information Element Criticality Diagnostics IE:

- a) IE ID IE
- b) Repetition Number IE


Figure C.5: Example of a received NBAP message containing a not comprehended IE

If there is an error within the instance marked as grey in the IE G in the IE E shown in the figure C.5 above, this will be reported within the *Information Element Criticality Diagnostics* IE within the *Criticality Diagnostics* IE as follows:

IE name	Value	Comment					
IE Criticality	reject	Criticality for IE on the reported level, i.e. level 3.					
IE ID	id-G	E ID from the reported level, i.e. level 3.					
Repetition	5	Repetition number on the reported level, i.e. level 3.					
Number		(Since the IE E (level 2) is the lowest level included in the Message Structure IE this is					
		the fifth occurrence of IE G within the IE E (level 2).					
Type of Error	not						
	underst						
	ood						
Message Structur	e, first repe	etition					
>IE ID	id-B	IE ID from level 1.					
Message Structur	e, second	repetition					
>IE ID	id-E	IE ID from the lowest level above the reported level, i.e. level 2.					
>Repetition	3	Repetition number from the lowest level above the reported level, i.e. level 2.					
Number							

Note 6. The repetition number of the reported IE indicates the number of repetitions of IE G received up to the detected erroneous repetition, counting all occurrences of the IE G below the same instance of the previous level with assigned criticality (instance 3 of IE E on level 2).

C.3.5 Example 5

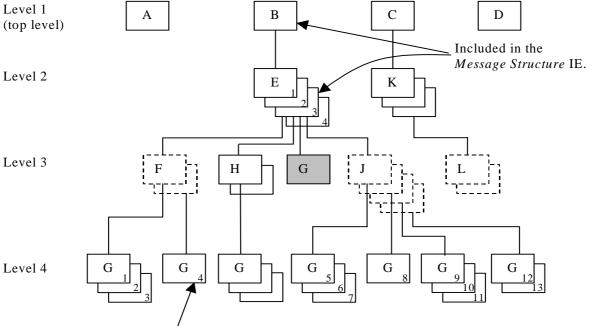

Included in the Information Element Criticality Diagnostics IE:

- a) IE ID IE
- b) Repetition Number IE

Figure C.6: Example of a received NBAP message with a missing IE

If the instance marked as grey in the IE G in the IE E shown in the figure C.6 above, is missing this will be reported within the *Information Element Criticality Diagnostics* IE within the *Criticality Diagnostics* IE as follows:

IE name	Value	Comment				
IE Criticality	reject	Criticality for IE on the reported level, i.e. level 3.				
IE ID	id-G	IE ID from the reported level, i.e. level 3.				
Repetition Number	4	Repetition number up to the missing IE on the reported level, i.e. level 3. (Since the IE E (level 2) is the lowest level included in the <i>Message Structure</i> IE there have been four occurrences of IE G within the IE E (level 2) up to the missing occurrence.				
Type of Error	missing					
Message Structur	e, first repe	etition				
>IE ID	id-B	IE ID from level 1.				
Message Structur	e, second	repetition				
>IE ID	id-E	IE ID from the lowest level above the reported level, i.e. level 2.				
>Repetition Number	3	Repetition number from the lowest level above the reported level, i.e. level 2.				

Note 7. The repetition number of the reported IE indicates the number of repetitions of IE G received up to but not including the missing occurrence, counting all occurrences of the IE G below the same instance of the previous level with assigned criticality (instance 3 of IE E on level 2).

C.4 ASN.1 of EXAMPLE MESSAGE

```
ExampleMessage ::= SEQUENCE {
                                                       \{\{\texttt{ExampleMessage-IEs}\}\},
                         ProtocolIE-Container
    ProtocolIEs
    {\tt ProtocolExtensionS} \ \ {\tt ProtocolExtensionContainer} \ \ \{\{{\tt ExampleMessage-Extensions}\}\} \ \ \ {\tt OPTIONAL},
}
ExampleMessage-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-A CRITICALITY reject TYPE A PRESENCE mandatory} | 
 { ID id-B CRITICALITY reject TYPE B PRESENCE mandatory} | 
 { ID id-C CRITICALITY reject TYPE C PRESENCE mandatory} | 
 { ID id-D CRITICALITY reject TYPE D PRESENCE mandatory} ,
}
B ::= SEQUENCE {
                       E-List,
    iE-Extensions ProtocolExtensionContainer { {B-ExtIEs} } OPTIONAL,
B-Extles NBAP-PROTOCOL-EXTENSION ::= {
E-List ::= SEQUENCE (SIZE (1..maxE)) OF ProtocolIE-Single-Container { {E-IEs} }
E-IES NBAP-PROTOCOL-IES ::= {
   { ID id-E CRITICALITY ignore TYPE E PRESENCE mandatory }
E ::= SEQUENCE {
                       F-List,
    h
                      H-List,
    g
                      G-List1,
                      J-List,
    iE-Extensions ProtocolExtensionContainer { {E-ExtIEs} } OPTIONAL,
}
E-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
F-List ::= SEQUENCE (SIZE (1..maxF)) OF F
F ::= SEQUENCE {
                       G-List2 OPTIONAL,
    iE-Extensions ProtocolExtensionContainer { {F-ExtIEs} } OPTIONAL,
F-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
 \texttt{G-List2} ::= \texttt{SEQUENCE} \ (\texttt{SIZE} \ (1...3, \ \ldots)) \ \texttt{OF} \ \texttt{ProtocolIE-Single-Container} \ \left\{ \ \left\{ \texttt{G2-IEs} \right\} \ \right\} 
G2-IES NBAP-PROTOCOL-IES ::= {
    H-List ::= SEQUENCE (SIZE (1..maxH)) OF ProtocolIE-Single-Container { {H-IEs} }
H-IES NBAP-PROTOCOL-IES ::= {
    { ID id-H CRITICALITY ignore TYPE H PRESENCE mandatory }
H ::= SEQUENCE {
                       G-List3 OPTIONAL,
                                          ProtocolExtensionContainer { {H-ExtIEs} } OPTIONAL,
    iE-Extensions
H-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
```

```
G-List3 ::= SEQUENCE (SIZE (1..3, ...)) OF ProtocolIE-Single-Container \{ \{G3\text{-}IEs\} \}
G3-IES NBAP-PROTOCOL-IES ::= {
   { ID id-G CRITICALITY notify TYPE G PRESENCE mandatory }
G-List1 ::= ProtocolIE-Single-Container { {G1-IEs} }
G1-IES NBAP-PROTOCOL-IES ::= {
   J-List ::= SEQUENCE (SIZE (1..maxJ)) OF J
J ::= SEQUENCE {
                  G-List4 OPTIONAL,
   iE-Extensions ProtocolExtensionContainer { {J-ExtIEs} } OPTIONAL,
J-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
G-List4 ::= SEQUENCE (SIZE (1..3, ...)) OF ProtocolIE-Single-Container { G4-IEs} }
G4-IES NBAP-PROTOCOL-IES ::= {
   C ::= SEQUENCE {
                   K-List,
   \verb|ie-Extensions| & \verb|ProtocolExtensionContainer| & \verb|\{C-ExtIEs\}| & \verb|OPTIONAL|, \\
C-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
K-List ::= SEQUENCE (SIZE (1..maxK)) OF ProtocolIE-Single-Container { {K-IEs} }
K-IES NBAP-PROTOCOL-IES ::= {
   { ID id-K CRITICALITY notify TYPE K PRESENCE mandatory }
K ::= SEQUENCE {
                   L-List,
   \begin{tabular}{ll} \hline iE-ExtensionS & ProtocolExtensionContainer $\{ \ \{K-ExtIEs\} \ \}$ & OPTIONAL, \\ \hline \end{tabular}
K-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
L-List ::= SEQUENCE (SIZE (1..maxL)) OF L
L ::= SEQUENCE {
                  M OPTIONAL,
   iE-Extensions ProtocolExtensionContainer { {L-ExtIEs} } OPTIONAL,
L-ExtIEs NBAP-PROTOCOL-EXTENSION ::= {
ExampleMessage-Extensions NBAP-PROTOCOL-EXTENSION ::= {
```

Annex D (informative): Change history

	1	T -			ge history
TSG RAN#	Version	CR	Tdoc RAN	New Version	Subject/Comment
RAN_06	-	-	RP-99764	3.0.0	Approved at TSG RAN #6 and placed under Change Control
RAN_07	3.0.0	-	-	3.1.0	Approved at TSG RAN #7
RAN_08	3.1.0	-	RP-000250	3.2.0	Approved at TSG RAN #8
RAN_08	3.1.0	-	RP-000251	3.2.0	Approved at TSG RAN #8
RAN_08	3.1.0	-	RP-000252	3.2.0	Approved at TSG RAN #8
RAN_08	3.1.0	-	RP-000253	3.2.0	Approved at TSG RAN #8
RAN_09	3.2.0	165 168- 170, 173- 178, 180- 189	RP-000386	3.3.0	Approved at TSG RAN #9
RAN_09	3.2.0	190- 200, 203 205 207 208 211 214 218- 219	RP-000387	3.3.0	Approved at TSG RAN #9
RAN_09	3.2.0	221 222 224- 228 233 244, 246	RP-000388	3.3.0	Approved at TSG RAN #9
RAN_09	3.2.0	247- 248	RP-000389	3.3.0	Approved at TSG RAN #9
RAN_10	3.3.0	250- 324	RP-000627 RP-000628 RP-000630 RP-000697	3.4.0	Approved at TSG RAN #10
RAN_10	3.4.0			3.4.1	Correct of headers
RAN_11	3.4.1	325- 330, 333- 336, 339- 342, 344, 346- 348, 350- 356, 365, 367- 371, 377- 379, 383, 385- 386, 386, 388	RP-010125 RP-010126	3.5.0	Approved at TSG RAN #11

Date	TCC #	TCC Date	CD	Rev	Change history	Old	Mass
March 01	TSG #	TSG Doc. RP-010160	CR	Rev	Subject/Comment Approved at TSG RAN #11 and placed under Change Control	Old	New 4.0.0
March	111	KF-010100	387		Approved at 136 KAN #11 and placed under Change Control		4.0.0
March 01	11	RP-010166			Approved at TSG RAN #11 and placed under Change Control	-	4.0.0
March 01	11	RP-010159			Approved at TSG RAN #11 and placed under Change Control	-	4.0.0
			374,				
	4.4	DD 040404	381		1 . TOO DAN ###		400
March 01	11	RP-010164	358, 359		Approved at TSG RAN #11 and placed under Change Control	-	4.0.0
March 01	11	RP-010167	362		Approved at TSG RAN #11 and placed under Change Control		4.0.0
06/2001	12	RP-010383			Approved at TSG RAN #12	4.0.0	4.1.0
			392,		7,77	1.0.0	
			394,				
			396,				
			398, 400,				
			402,				
			404,				
			406				
06/2001	12	RP-010384	412,		Approved at TSG RAN #12	4.0.0	4.1.0
			416,				
			421, 423,				
			427,				
			431,				
			433,				
			437,				
			439, 441				
06/2001	12	RP-010385	449.		Approved at TSG RAN #12	4.0.0	4.1.0
00/2001	12	100000	456,		Approved at 100 trait #12	7.0.0	7.1.0
			462,				
			464,				
00/000/		DD 010000	467				
06/2001	12	RP-010396	413, 414,		Approved at TSG RAN #12	4.0.0	4.1.0
			415,				
			416,				
			417,				
			418,				
			419, 450,				
			451,				
			452,				
			453,				
			454,				
09/2001	13	RP-010587	465 410	2	Ambiguity in CM handling	4.1.0	4.2.0
09/2001	13	RP-010587		_	Correction to Information Block Deletion	4.1.0	4.2.0
09/2001	13	RP-010587			Clarification of the AICH power	4.1.0	4.2.0
09/2001	13	RP-010587	479	1	Transport bearer replacement clarification	4.1.0	4.2.0
09/2001	13	RP-010587		1	Corrections to the PDSCH Code Mapping IE	4.1.0	4.2.0
09/2001	13				Correction to the handling of DL Code Information in RL	4.1.0	4.2.0
		RP-010587	484	1	Reconfiguration procedures		ļ
09/2001	13	DD 040507	105	1	Correction to the Error handling of the ERROR INDICATION	4.1.0	4.2.0
09/2001	13	RP-010587 RP-010587		1	message Correct max Codes discrepancy between tabular and ASN.1	4.1.0	4.2.0
09/2001	13	RP-010587			S-CCPCH Corrections for TDD	4.1.0	4.2.0
09/2001	13	RP-010587		1	Nbap criticality	4.1.0	4.2.0
09/2001	13	RP-010588		1	Clarification of Abnormal Conditions/Unsuccessful Operation	4.1.0	4.2.0
09/2001	13	RP-010588			Error handling of erroneously present conditional IEs	4.1.0	4.2.0
09/2001	13	RP-010588		1	Correction for maxNrOfCPCHs	4.1.0	4.2.0
09/2001	13	RP-010588		1	Correction for N_EOT	4.1.0	4.2.0
09/2001	13	RP-010588			Bitstrings ordering	4.1.0	4.2.0
09/2001	13	RP-010588			Mapping of TFCS to TFCI	4.1.0	4.2.0
09/2001 09/2001	13 13	RP-010588 RP-010588		-	Correction of implementation of RAN#12 CRs	4.1.0	4.2.0
09/2001	13	RP-010588		1	TDD Channelisation code range definition Clarification of chapter 10	4.1.0	4.2.0
09/2001	13	RP-010588		 	Clarification of use of Diversity Control Indicator	4.1.0	4.2.0
09/2001	13	RP-010588		3	Clarification of coordinated DCHs	4.1.0	4.2.0
09/2001	13	1 310000	5_0	_	Allowed Combinations of Dedicated Measurement Type and the	4.1.0	4.2.0
		RP-010599	468	2	Reporting Characteristics Type		
		RP-010599			Support of 8PSK modulation for LCR TDD	4.1.0	4.2.0

00/0004	140	DD 040500	470		DDO Marte to Dark's Link Addition was a disco	1440	1400
09/2001	13 13	RP-010599			DPC Mode in Radio Link Addition procedure	4.1.0	4.2.0
09/2001		RP-010599			Correction on NBAP function	4.1.0	4.2.0
	13	RP-010599		1	Adding protocol container in CHOICE type IE	4.1.0	4.2.0
09/2001 09/2001	13 13	RP-010599 RP-010599		1	Clarification of Abnormal Conditions/Unsuccessful Operation Corrections to position reporting	4.1.0	4.2.0
09/2001	13	RP-010599	313	1	CR to 25.433 v4.1.0: RX timing deviation as dedicated	4.1.0 4.1.0	4.2.0
09/2001	13	RP-010599	518	2	measurement for 1.28Mcps TDD	4.1.0	4.2.0
09/2001	13	RP-010599		1	Clarification on the Time Slot LCR	4.1.0	4.2.0
10/2001	-	-	-	-	Editorial correction to correct the header	4.2.0	4.2.1
12/2001	14	RP-010897	530	2	CR on Priority range	4.2.1	4.3.0
12/2001	14	RP-010862		_	Bitstrings ordering	4.2.1	4.3.0
12/2001	14				Added UTRAN modes in the IE Type and Reference and	4.2.1	4.3.0
		RP-010862	536		Semantics Description in IEs in NBAP messages		
12/2001	14				Alignment to RAN4 spec for Transmitted Code Power	4.2.1	4.3.0
		RP-010862	538		Measurement		
12/2001	14	RP-010862	540		Correction the Clause 10 Error Handling	4.2.1	4.3.0
12/2001	14	RP-010862	542		Clarification of TrCh Ordering in TFCS	4.2.1	4.3.0
12/2001	14	RP-010862			Addition of SIB15.4 and SIB18 to tabular	4.2.1	4.3.0
12/2001	14	RP-010862			Transmit Diversity for TDD	4.2.1	4.3.0
12/2001	14	RP-010862			Clarification for the definition of the ASN.1 constants	4.2.1	4.3.0
12/2001	14	RP-010862		1	Terminology Corrections	4.2.1	4.3.0
12/2001	14	RP-010863		1	Rel-4 specific terminology corrections	4.2.1	4.3.0
12/2001	14	RP-010863	562		Procedure Code Criticality in Error Indication	4.2.1	4.3.0
12/2001	14	DD 01005			Clarification for the Power Adjustment Type IE in the DL POWER	4.2.1	4.3.0
40/000:	4.4	RP-010863			CONTROL REQUEST message	401	400
12/2001	14	RP-010863		1	Forward Compatibility for DL Power Balancing	4.2.1	4.3.0
12/2001	14	RP-010863		_	Reconfiguration clarification	4.2.1	4.3.0
12/2001	14	RP-010863		2	Addition of amendment to clarify the PER encoding of bitstrings	4.2.1	4.3.0
12/2001	14 14	RP-010863		2	Transport Bearer replacement clarification for the DSCH case	4.2.1	4.3.0
12/2001 12/2001	14	RP-010863		4	Clarification of the Transaction ID CPCH-related corrections	4.2.1 4.2.1	4.3.0
12/2001	14	RP-010863 RP-010863		1	Correction of S field length	4.2.1	4.3.0
12/2001	14	RP-010863		1	Correction of S field length Correction of drift rate resolution	4.2.1	4.3.0
12/2001	14	RP-010874		<u> </u>	Cell Parameter ID IE definition for 1.28Mcps TDD	4.2.1	4.3.0
12/2001	14	1010074	J+1		Amendment of the RADIO LINK ADDITION RESPONSE TDD	4.2.1	4.3.0
12/2001	1 -	RP-010874	548		message for LCR TDD	7.2.1	4.5.0
12/2001	14	RP-010874		2	SFN-SFN quality indication	4.2.1	4.3.0
12/2001	14				Correction to SFN-SFN Observed Time Difference Measurement	4.2.1	4.3.0
		RP-010912	545	1	report mapping		
03/2002	15				Incorrect Physical Shared Channel TDD Procedure definition in	4.3.0	4.4.0
		RP-020174	591	1	ASN.1		
03/2002	15				Removal of criticality information for Transaction ID in the ERROR	4.3.0	4.4.0
		RP-020174			INDICATION message		
03/2002	15	RP-020174	600		Clarification to measurement unit at Higher Layer Filtering.	4.3.0	4.4.0
03/2002	15	DD 0001-1			Correction of the Limited Power Increase in Synchronised Radio	4.3.0	4.4.0
00/0000	4.5	RP-020174			Link Reconfiguration Preparation	400	4.4.0
03/2002	15	RP-020174		1	Correction to physical channels which SCTD can be applied (lub)	4.3.0	4.4.0
03/2002	15	RP-020182	585	1	Corrections to the Information Exchange Initiation procedure	4.3.0	4.4.0
03/2002	15	RP-020182	586	1	Correction to UE position measurements quality and threshold	4.3.0	4.4.0
00/2002	'	131 020102	500	'	information	7.0.0	7.7.0
03/2002	15	RP-020182	587	1	Correction to UE position measurements change and deviation limit	4.3.0	4.4.0
					formulas		
03/2002	15	RP-020182	601	1	Modification of the T_utran-gps length	4.3.0	4.4.0
00/							.
03/2002	15	RP-020182	606		Amendment of the COMMON MEASUREMENT INITIATION	4.3.0	4.4.0
					REQUEST message		
03/2002	15	RP-020182	600	1	ASN.1 and tabular amendments for LCR TDD	4.3.0	4.4.0
03/2002	15	KP-020182	609	'	AON. 1 and tabular amendments for LCK TDD	4.3.0	4.4.0
03/2002	15	RP-020182	610		Midamble shift LCR in the PHYSICAL SAHRED SCHANNEL	4.3.0	4.4.0
00/2002	'3	131 020102	510		RECONFIGURATION REQUEST [TDD] message	7.5.0	7.4.0
					The state of the s		
03/2002	15	RP-020182	617		NBAP Rapporteur corrections	4.3.0	4.4.0
			L	L	.,		
03/2002	15	RP-020231	628	2	Removing of channel coding option "no coding" for FDD	4.3.0	4.4.0

History

Document history						
V4.0.0	March 2001	Publication				
V4.1.0	June 2001	Publication				
V4.2.0	September 2001	Publication				
V4.3.0	December 2001	Publication				
V4.4.0	March 2002	Publication				