ETSI TS 132 393 V8.0.0 (2009-01)

Technical Specification

Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS);

LTE;


Telecommunication management;

Delta synchronization Integration Reference Point (IRP):

Common Object Request Broker Architecture (CORBA)

Solution Set (SS)

(3GPP TS 32.393 version 8.0.0 Release 8)

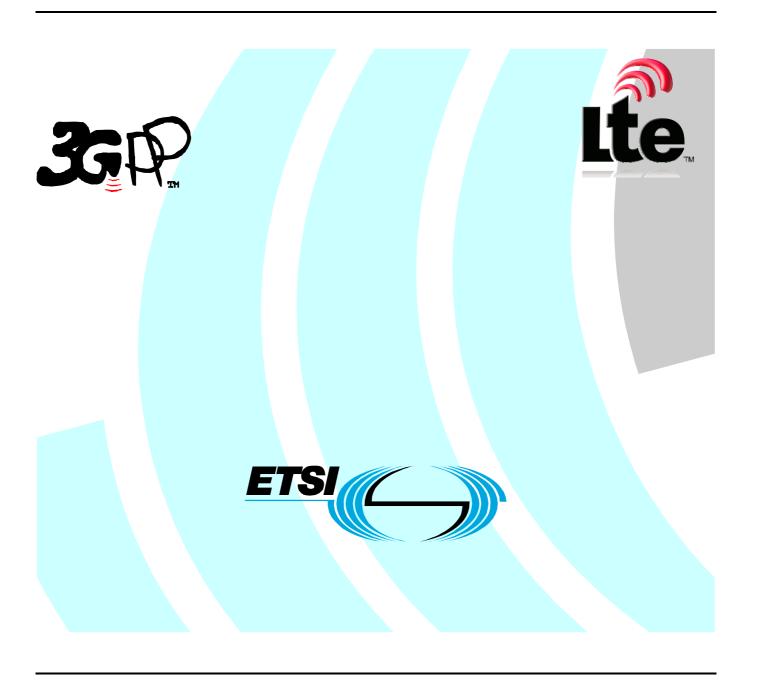

Reference RTS/TSGS-0532393v800 Keywords

GSM, LTE, UMTS

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: http://www.etsi.org

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2009. All rights reserved.

DECTTM, **PLUGTESTS**TM, **UMTS**TM, **TIPHON**TM, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP[™] is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **LTE**[™] is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

 $\textbf{GSM} \\ \textbf{@} \text{ and the GSM logo are Trade Marks registered and owned by the GSM Association}.$

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under http://webapp.etsi.org/key/queryform.asp.

Contents

Intel	llectual Property Rights	2
Fore	eword	2
	eword	
	oduction	
1	Scope	
2	References	5
3	Definitions and abbreviations	5
3.1	Definitions	
3.2	Abbreviations	<i>6</i>
4	Architectural features	6
5	Mapping	6
5.1	General mappings	
5.2	Operation and notification mapping	6
5.3	Operation parameter mapping	
5.4	Notification parameter mapping	8
Ann	nex A (normative): IDL specifications	12
A.1	IDL specification (file name "DeltaSynchronizationConstDefs.idl")	12
A.2	IDL specification (file name "DeltaSynchronizationSystem.idl")	16
A.3	IDL specification (file name "DeltaSynchronizationNotifications.idl")	18
Ann	nex B (informative): Change history	21
Hista		22

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

The present document is part of a TS-family covering the 3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Telecommunication management; as identified below:

32.391:	Delta Synchronization Integration Reference Point (IRP); Requirements.
32.392:	Delta Synchronization Integration Reference Point (IRP); Information Service (IS).
32.393:	Delta Synchronization Integration Reference Point (IRP); Common Object Request Broker Architecture (CORBA) Solution Set.
32.395:	Delta Synchronization Integration Reference Point (IRP); eXtensible Markup Language (XML) file format definition.

The Itf-N interface is built up by a number of IRPs and a related Name Convention, which realise the functional capabilities over this interface. The basic structure of the IRPs is defined in 3GPP TS 32.101 [1] and 3GPP TS 32.102 [2].

IRPManagers (typically Network Management Systems) and IRPAgents (typically EMs or NEs) synchronize their data concerning alarms or configuration data. In certain scenarios this synchronization is lost or not done. This IRP provides functionality to significantly reduces the amount of data which needs to be transferred in order to re-establish synchronization.

1 Scope

The purpose of Delta Synchronization IRP is to define an interface through which an IRPManager can request only those data which changed (i.e. changed, were created or deleted) from a synchronization point onwards.

The present document is the "CORBA Solution Set" of Delta Synchronization IRP for the IRP whose semantics is specified in Delta Synchronization IRP: Information Service (3GPP TS 32.392 [5]).

2 References

The following documents contain provisions that, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document in the same Release as the present document.
- [1] 3GPP TS 32.101: "Telecommunication management; Principles and high level requirements". 3GPP TS 32.102: "Telecommunication management; Architecture". [2] [3] 3GPP TS 32.302: "Telecommunication management; Configuration Management (CM); Notification Integration Reference Point (IRP): Information Service (IS)". [4] 3GPP TS 32.391: "Configuration Management (CM); Delta Synchronization Integration Reference Point (IRP): Requirements". [5] 3GPP TS 32.392: "Configuration Management (CM); Delta Synchronization Integration Reference Point (IRP): Information Service (IS)". [6] 3GPP TS 32.622: "Telecommunication management; Configuration Management (CM); Generic network resources Integration Reference Point (IRP): Network Resource Model (NRM)". [7] 3GPP TS 32.312: "Telecommunication management; Generic Integration Reference Point (IRP)
- management; Information Service (IS)".
- [8] 3GPP TS 32.602: "Telecommunication management; Configuration Management (CM); Basic CM Integration Reference Point (IRP) management; Information Service (IS)".
- [9] 3GPP TS 32.303: "Telecommunication management; Configuration Management (CM); Notification Integration Reference Point (IRP): Common Object Request Broker Architecture (CORBA) Solution Set (SS)".
- [10] OMG TC Document telecom/98-11-01: "OMG Notification Service". http://www.omg.org/technology/documents/

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TS 32.101 [1], 3GPP TS 32.102 [2] and 3GPP TS 32.391 [4] apply.

IRP: See 3GPP TS 32.101 [1].

IRPAgent: See 3GPP TS 32.102 [2].

IRPManager: See 3GPP TS 32.102 [2].

Changed: See 3GPP TS 32.391 [4].

Changed instance: See 3GPP TS 32.391 [4].

Delta Synchronisation: See 3GPP TS 32.391 [4].

Delta Synchronisation Point: See 3GPP TS 32.391 [4].

Full Synchronisation: See 3GPP TS 32.391 [4].

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

EM Element Manager

IRP Integration Reference Point

IS Information Service (see 3GPP TS 32.101 [1])

Itf-N Interface N
NE Network Element
SS Solution Set

4 Architectural features

The overall architectural feature of Delta Synchronization IRP is specified in 3GPP TS 32.382 [5].

5 Mapping

5.1 General mappings

Not applicable.

5.2 Operation and notification mapping

The Delta Synchronization IS defines semantics of operations visible across the Itf-N. Table 5.2-1 indicates mapping of these operations and notifications to their equivalents defined in this SS.

Table 5.2-1: Mapping from IS Operation to SS equivalents

IS Operation / Notification (3GPP TS 32.392)	SS Method	Qualifier
manageDeltaSynchronization	manageDeltaSynchronization	M
getAvailableDeltaSynchPoints	getAvailableDeltaSynchPoints	0
triggerDeltaSynchOfCMData	triggerDeltaSynchOfCMData	0
triggerDeltaSynchOfAlarms	triggerDeltaSynchOfAlarms	0
notifyStatusOfDeltaSynchronization	notifyStatusOfDeltaSynchronization	M
notifyNewDeltaSynchPoint	notifyNewDeltaSynchPoint	0

5.3 Operation parameter mapping

The Delta Synchronization IS defines semantics of parameters carried in operations across the Itf-N. The following tables indicate the mapping of these parameters, as per operation, to their equivalents defined in this SS.

Table 5.3-1: Mapping from IS manageDeltaSynchronization parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
managerReference	DeltaSynchronizationConstDefs::ManagerReference	М
manageDeltaSynchForAlarmData	DeltaSynchronizationConstDefs::ManageDeltaSynchForXDataConditional	CM
manageDeltaSynchForCMData	DeltaSynchronizationConstDefs::ManageDeltaSynchForXDataConditional	CM
status	Exceptions:	М
	DeltaSynchronizationConstDefs::ManageDeltaSynchronization,	
	GenericIRPManagementSystem::ParameterNotSupported,	
	GenericIRPManagementSystem::InvalidParameter,	
	GenericIRPManagementSystem::ValueNotSupported,	
	GenericIRPManagementSystem::OperationNotSupported	

Table 5.3-2: Mapping from IS getAvailableDeltaSynchPoints parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
managerReference	DeltaSynchronizationConstDefs::ManagerReferenceOpt	0
synchPointsForCMDataRequested	DeltaSynchronizationConstDefs::SynchPointsRequestedConditional	CM
synchPointsForAlarmDataRequested	DeltaSynchronizationConstDefs::SynchPointsRequestedConditional	CM
synchPointListForAlarms	DeltaSynchronizationConstDefs::SynchPointListConditional	CM
synchPointListForCMData	DeltaSynchronizationConstDefs::SynchPointListConditional	CM
status	Exceptions: DeltaSynchronizationConstDefs::DeltaSynchNotSupportedForCMData, DeltaSynchronizationConstDefs::DeltaSynchNotSupportedForAlarmData, DeltaSynchronizationConstDefs::DeltaSynchNotActive, DeltaSynchronizationConstDefs::DeltaSynchForCMDataDeactivated, DeltaSynchronizationConstDefs::DeltaSynchForAlarmDataDeactivated, GenericIRPManagementSystem::ParameterNotSupported, GenericIRPManagementSystem::ValueNotSupported, GenericIRPManagementSystem::ValueNotSupported,	M

Table 5.3-3: Void

Table 5.3-4: Mapping from IS triggerDeltaSynchOfCMData parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier		
managerReference	DeltaSynchronizationConstDefs::ManagerReferenceOpt	0		
dataRequested	DeltaSynchronizationConstDefs::CMDataRequestedOpt	0		
baseMOInstance KernelCmConstDefs::DNOpt				
scope	KernelCmConstDefs::ScopeTypeOpt	0		
synchPoint	DeltaSynchronizationConstDefs::SynchPoint	М		
deltaLists	DeltaSynchronizationConstDefs::DeltaListsConditional	CM		
newSynchPoint	DeltaSynchronizationConstDefs::SynchPointConditional	CM		
status	Exceptions: DeltaSynchronizationConstDefs::TriggerDeltaSynchOfCMData, DeltaSynchronizationConstDefs::SynchronizationPointTooLongAgo, DeltaSynchronizationConstDefs::TooManyChangesFullSynchronizationRecommended DeltaSynchronizationConstDefs::SynchPointUnknown, DeltaSynchronizationConstDefs::DeltaSynchNotSupportedForCMData, DeltaSynchronizationConstDefs::DeltaSynchForCMDataDeactivated, DeltaSynchronizationConstDefs::DeltaSynchNotActive, GenericIRPManagementSystem::ParameterNotSupported, GenericIRPManagementSystem::InvalidParameter, GenericIRPManagementSystem::ValueNotSupported, GenericIRPManagementSystem::OperationNotSupported	M		

Table 5.3-5: Mapping from IS triggerDeltaSynchOfAlarms parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier		
managerReference	DeltaSynchronizationConstDefs::ManagerReference	М		
dataRequested	DeltaSynchronizationConstDefs::AlarmDataRequested	М		
paseMOInstance KernelCmConstDefs::DN				
scope	KernelCmConstDefs::ScopeTypeOpt	0		
synchPoint	DeltaSynchronizationConstDefs::SynchPoint	М		
deltaLists	DeltaSynchronizationConstDefs::DeltaListsConditional	CM		
newSynchPoint	DeltaSynchronizationConstDefs::SynchPointConditional	CM		
status	Exceptions: DeltaSynchronizationConstDefs::TriggerDeltaSynchOfAlarms, DeltaSynchronizationConstDefs::SynchronizationPointTooLongAgo,	M		
	DeltaSynchronizationConstDefs::TooManyChangesFullSynchronizationRecommended DeltaSynchronizationConstDefs::SynchPointUnknown, DeltaSynchronizationConstDefs::DeltaSynchNotSupportedForAlarms, DeltaSynchronizationConstDefs::DeltaSynchForAlarmsNotActive, DeltaSynchronizationConstDefs::DeltaSynchNotActive, GenericIRPManagementSystem::ParameterNotSupported, GenericIRPManagementSystem::InvalidParameter, GenericIRPManagementSystem::ValueNotSupported, GenericIRPManagementSystem::OperationNotSupported			

5.4 Notification parameter mapping

The delta synchronization Information Service defines semantics of parameters carried in notifications. The following table indicates the mapping of these parameters to their OMG CORBA Structured Event (defined in OMG Notification Service [n2!!]) equivalents. The composition of OMG Structured Event, as defined in the OMG Notification Service [n2!!], is:

```
Header
Fixed Header
domain_name
type_name
event_name
Variable Header

Body
filterable_body_fields
remaining_body
```

The following tables list all OMG Structured Event attributes in the second column. The first column identifies the delta synchronization Information Service defined notification parameters.

Table 5.4-1: Mapping for notifyStatusOfDeltaSynchronization

IS Parameters	OMG CORBA Structured Event attribute	Qualifier	Comment
There is no corresponding IS attribute.	domain_name	М	It carries the IRP document version number string. See clause 3.1. It indicates the syntax and semantics of the Structured Event as defined by the present document.
notificationType	type_name	М	This is the NotifyDeltaSynchOfInstancesDeactivated of module DeltaSynchronizationNotifications.
There is no corresponding IS attribute.	event_name	М	It carries no information.
There is no corresponding IS attribute.	Variable Header		
objectClass, objectInstance	One NV pair of filterable_body_fields	М	NV stands for name-value pair. Order arrangement of NV pairs is not significant. The name of NV-pair is always encoded in string.
			Name of this NV pair is the MANAGED_OBJECT_INSTANCE of interface AttributeNameValue of module NotificationIRPConstDefs.
			Value of NV pair is a string. See corresponding table in Notification IRP: CORBA SS (3GPP TS 32.303 [1]).
notificationId	One NV pair of remaining_body	М	Name of NV pair is the NOTIFICATION_ID of interface AttributeNameValue of module NotificationIRPConstDefs.
			Value of NV pair is a long. See corresponding table in Notification IRP: CORBA SS (3GPP TS 32.303 [1]).
eventTime	One NV pair of filterable_body_fields	М	Name of NV pair is the EVENT_TIME of interface AttributeNameValue of module NotificationIRPConstDefs.
			Value of NV pair is IRPTime. See corresponding table in Notification IRP: CORBA SS (3GPP TS 32.303 [1]).
systemDN	One NV pair of filterable_body_fields	М	Name of NV pair is the SYSTEM_DN of interface AttributeNameValue of module NotificationIRPConstDefs.
			Value of NV pair is a string. See corresponding table in Notification IRP: CORBA SS (3GPP TS 32.303 [1]).
managerReference	One NV pair of remaining_body	М	Name of NV pair is the MANAGER_REFERENCE of interface notifyDeltaSynchOfInstancesDeactivated of module DeltaSynchronizationNotifications.
			Value of NV pair is ManagerReference of module DeltaSynchronizationConstDefs.
deltaSynchStatusForCMData	One NV pair of remaining_body	М	Name of NV pair is the DELTA_SYNCH_STATUS_FOR_CMDATA of interface notifyDeltaSynchOfInstancesDeactivated of module DeltaSynchronizationNotifications.
			Value of NV pair is DeltaSynchStatus of module DeltaSynchronizationConstDefs.
deltaSynchStatusForAlarmData	One NV pair of remaining_body	М	Name of NV pair is the DELTA_SYNCH_STATUS_FOR_ALARM_DATA of interface notifyDeltaSynchOfInstancesDeactivated of module DeltaSynchronizationNotifications.
			Value of NV pair is DeltaSynchStatus of module DeltaSynchronizationConstDefs.

Table 5.4-2: Mapping for notifyNewDeltaSynchPoint

IS Parameters	OMG CORBA	Qualifier	Comment
	Structured Event attribute	Quaimer	Comment
There is no corresponding IS attribute.	domain_name	М	It carries the IRP document version number string. See subclause 3.1. It indicates the syntax and semantics of the Structured Event as defined by the present document.
notificationType	type_name	М	This is the NotifyDeltaSynchOfAlarmsDeactivated of module DeltaSynchronizationNotifications.
There is no corresponding IS attribute.	event_name	М	It carries no information.
There is no corresponding IS attribute.	Variable Header		
objectClass, objectInstance	One NV pair of filterable_body_fields	M	NV stands for name-value pair. Order arrangement of NV pairs is not significant. The name of NV-pair is always encoded in string.
			Name of this NV pair is the MANAGED_OBJECT_INSTANCE of interface AttributeNameValue of module NotificationIRPConstDefs.
			Value of NV pair is a string. See corresponding table in Notification IRP: CORBA SS (3GPP TS 32.303 [1]).
notificationId	One NV pair of remaining_body	М	Name of NV pair is the NOTIFICATION_ID of interface AttributeNameValue of module NotificationIRPConstDefs.
			Value of NV pair is a long. See corresponding table in Notification IRP: CORBA SS (3GPP TS 32.303 [1]).
eventTime	One NV pair of filterable_body_fields	M	Name of NV pair is the EVENT_TIME of interface AttributeNameValue of module NotificationIRPConstDefs. Value of NV pair is IRPTime. See corresponding table in
systemDN	One NV pair of filterable_body_fields	M	Notification IRP: CORBA SS (3GPP TS 32.303 [1]). Name of NV pair is the SYSTEM_DN of interface AttributeNameValue of module NotificationIRPConstDefs.
			Value of NV pair is a string. See corresponding table in Notification IRP: CORBA SS (3GPP TS 32.303 [1]).
newSynchPoint	One NV pair of remaining_body	М	Name of NV pair is the NEW_DELTA_SYNCH_POINT of interface notifyDeltaSynchOfAlarmsDeactivated of module DeltaSynchronizationNotifications.
			Value of NV pair is SynchPoint of module DeltaSynchronizationConstDefs.
requestedSynchPoint	One NV pair of remaining_body	М	Name of NV pair is the REQUESTED_SYNCH_POINT of interface notifyDeltaSynchOfAlarmsDeactivated of module DeltaSynchronizationNotifications.
			Value of NV pair is SynchPoint of module DeltaSynchronizationConstDefs.
deltaSynchPointType	One NV pair of remaining_body	М	Name of NV pair is the DELTA_SYNCH_POINT_TYPE of interface notifyDeltaSynchOfAlarmsDeactivated of module DeltaSynchronizationNotifications.
			Value of NV pair is DeltaSynchPointType of module DeltaSynchronizationConstDefs.

triggeredByAgentOrManager	One NV pair of remaining_body	Name of NV pair is the TRIGGERED_BY_AGENT_OR_MANAGER of interface notifyDeltaSynchOfAlarmsDeactivated of module DeltaSynchronizationNotifications.
		Value of NV pair is TriggeredByAgentOrManager of module DeltaSynchronizationConstDefs.
agentOrManagerReference	One NV pair of remaining_body	Name of NV pair is the AGENT_OR_MANAGER_REFERENCE of interface notifyDeltaSynchOfAlarmsDeactivated of module DeltaSynchronizationNotifications. Value of NV pair is AgentOrManagerReference of
		module DeltaSynchronizationConstDefs.

Annex A (normative): IDL specifications

A.1 IDL specification (file name "DeltaSynchronizationConstDefs.idl")

```
// File: DeltaSynchronizationConstDefs.idl
#ifndef _DELTA_SYNCHRONIZATION_CONST_DEFS_IDL_
#define _DELTA_SYNCHRONIZATION_CONST_DEFS_IDL_
#include <TimeBase.idl>
#include <DeltaSynchronizationConstDefs.idl>
#include <GenericIRPManagementConstDefs.idl>
#include <KernelCmConstDefs.idl>
#include <FileTransferIRPConstDefs.idl>
//FileTransferIRPConstDefs::FileLocation value;
// This statement must appear after all include statements
#pragma prefix "3gppsa5.org"
/* ## Module: DeltaSynchronizationConstDefs */
module DeltaSynchronizationConstDefs
^{\prime\star} definition of types used in several operations for Delta Synchronization: ^{\star\prime}
/* types used in several operations: */
typedef string ManagerReference;
typedef string AgentOrManagerReference;
{\tt ManagerReferenceConditional\ is\ a\ type\ carrying\ an\ optional\ parameter.}
The boolean shall be TRUE, if the condition described in TS 32.392 is fulfilled. In this case the
value is present. Otherwise the value is be absent.
union ManagerReferenceConditional switch (boolean)
     case TRUE: ManagerReference value;
{\tt ManagerReferenceOpt\ is\ a\ type\ carrying\ an\ optional\ parameter.}
The boolean shall be TRUE, if the operation request uses this parameter. In this case the value is
present. Otherwise the value is absent.
union ManagerReferenceOpt switch (boolean)
      case TRUE: ManagerReference value;
```

```
enum ManageDeltaSynchForXData {ACTIVATE, DEACTIVATE};
{\tt ManageDeltaSynchForXDataConditional is a type carrying a conditional parameter.}
The boolean shall be TRUE, if the condition described in TS 32.392 is fulfilled. In this case the
value is present. Otherwise the value is absent.
union ManageDeltaSynchForXDataConditional switch (boolean)
     case TRUE: ManageDeltaSynchForXData value;
typedef TimeBase::UtcT SynchPoint;
{\tt SynchPointConditional\ is\ a\ type\ carrying\ a\ conditional\ parameter.}
The boolean shall be TRUE, if the condition described in TS 32.392 is fulfilled. In this case the
value is present. Otherwise the value is absent.
union SynchPointConditional switch (boolean)
     case TRUE: SynchPoint value;
SynchPointOpt is a type carrying an optional parameter.
The boolean shall be TRUE, if the operation request uses this parameter. In this case the value is
present. Otherwise the value is absent.
union SynchPointOpt switch (boolean)
     case TRUE: SynchPoint value;
ScopeTypeOpt is a type carrying an optional parameter.
The boolean shall be TRUE, if the operation request uses this parameter. In this case the value is
present. Otherwise the value is absent.
union ScopeTypeOpt switch (boolean)
     case TRUE: KernelCmConstDefs::ScopePara value;
{\tt Base MOInstance Opt \ is \ a \ type \ carrying \ an \ optional \ parameter.}
The boolean shall be TRUE, if the operation request uses this parameter. In this case the value is
present. Otherwise the value is absent.
union BaseMOInstanceOpt switch (boolean)
     case TRUE: GenericIRPManagementConstDefs::DN value;
enum Status {SUCCESS, FAILURE};
/* types used in operation manageDeltaSynchronization
enum ActivatedStatus {ACTIVATED, DEACTIVATED };
typedef ActivatedStatus ManageDeltaSynchMode;
/* types used in operation getAvailableDeltaSynchPoints */
typedef boolean SynchPointsRequested;
SynchPointsRequestedConditional is a type carrying a conditional parameter.
The boolean shall be TRUE, if the condition described in TS 32.392 is fulfilled. Otherwise the value
may be absent.
```

```
*/
union SynchPointsRequestedConditional switch (boolean)
      case TRUE: SynchPointsRequested value;
typedef sequence <SynchPoint> SynchPointList;
SynchPointListConditional is a type carrying an optional parameter.
The boolean shall be TRUE, if the condition described in TS 32.392 is fulfilled. In this case the
value is present. Otherwise the value is be absent.
union SynchPointListConditional switch (boolean)
     case TRUE: SynchPointList value;
/*************************
/* types used in operation triggerDeltaSynchOfCMData and
      in operation triggerDeltaSynchOfAlarmData
/***************************
AttributeListConditional is a type carrying a conditional parameter.
The boolean shall be TRUE, if the operation's dnsOnly=FALSE. In this case the value is present.
Otherwise the value is absent.
union AttributeListConditional switch (boolean)
   case TRUE: GenericIRPManagementConstDefs::MOAttributeSet value;
struct ListedInstance
   GenericIRPManagementConstDefs::DN moInstance; /* DN is a string; */
  AttributeListConditional attributeList;
typedef sequence <ListedInstance> ListOfInstances;
struct DeltaListsWithRealLists
  TimeBase::UtcT startTime;
  TimeBase::UtcT endTime;
  ListOfInstances listOfCreatedInstances;
  ListOfInstances listOfChangedInstances;
  ListOfInstances listOfDeletedInstances;
struct AlarmDeltaListsWithRealLists
  TimeBase::UtcT startTime;
  TimeBase::UtcT endTime;
  AlarmIRPConstDefs::AlarmInformationSeq listOfNewAlarms;
  AlarmIRPConstDefs::AlarmInformationSeq listOfChangedAlarms;
  AlarmIRPConstDefs::AlarmInformationIdSeq listOfDeletedAlarms;
   };
typedef sequence <FileTransferIRPConstDefs::FileLocation> FileLocationList;
struct DeltaListsWithFileReferences
  TimeBase::UtcT startTime;
  TimeBase::UtcT endTime;
  FileTransferIRPConstDefs::FileLocationList fileList;
/st if several files are used, then they shall be processed by the IRPmanager in sequence, i.e. first
file first, second file as second, ... */
  };
```

```
enum DeltaListContentChoice {REAL LISTS, FILE REFERENCES};
//The CmDeltaList may contain a list of ListOfInstances or a list of filenames
  union CmDeltaLists switch (DeltaListContentChoice)
     case REAL LISTS: DeltaListsWithRealLists deltaListRealLists;
     case FILE REFERENCES: DeltaListsWithFileReferences deltaListFileReferences;
  };
//The AlarmDeltaLists may contain a list of ListOfInstances or a list of filenames
  union AlarmDeltaLists switch (DeltaListContentChoice)
     case REAL LISTS: AlarmDeltaListsWithRealLists deltaListRealLists;
     case FILE REFERENCES: DeltaListsWithFileReferences deltaListFileReferences;
  };
CmDeltaListsConditional is a type carrying a conditional parameter.
The boolean shall be TRUE, if the condition described in TS 32.392 is fulfilled. In this case
the value is present. Otherwise the value is be absent.
union CmDeltaListsConditional switch (boolean)
  {
  case TRUE: CmDeltaLists value;
AlarmDeltaListsConditional is a type carrying a conditional parameter.
The boolean shall be TRUE, if the condition described in TS 32.392 is fulfilled. In this case
the value is present. Otherwise the value is absent.
union AlarmDeltaListsConditional switch (boolean)
  case TRUE: AlarmDeltaLists value;
/* types used in operation triggerDeltaSynchOfAlarmData
/****************************
enum AlarmDataRequested { ALARM_IDS_ONLY, COMPLETE_ALARM_INFORMATION };
AlarmDataRequestedOpt is a type carrying an optional parameter.
The boolean shall be TRUE, if the operation request uses this parameter. In this case the value
is present. Otherwise the value is absent.
union AlarmDataRequestedOpt switch (boolean)
     case TRUE: AlarmDataRequested value;
/****************************
/* types used in operation triggerDeltaSynchOfCMData
enum CMDataRequested { DNS ONLY, COMPLETE DATA SET };
{\tt CMDataRequestedOpt} \  \, {\tt is \ a \ type \ carrying \ an \ optional \ parameter.}
The boolean shall be TRUE, if the operation request uses this parameter. In this case the value
is present. Otherwise the value is absent.
union CMDataRequestedOpt switch (boolean)
     case TRUE: CMDataRequested value;
     };
/* definition of types in notifications for Delta Synchronization
enum DeltaSynchPointType { DELTA_SYNCH_POINT_FOR_ALARM, DELTA_SYNCH_POINT_FOR_CM_DATA };
```

A.2 IDL specification (file name "DeltaSynchronizationSystem.idl")

```
//File: DeltaSynchronizationSystem.idl
#ifndef _DELTA_SYNCHRONIZATION_SYSTEM_IDL_
#define _DELTA_SYNCHRONIZATION_SYSTEM_IDL_
#include <KernelCmConstDefs.idl>
#include <DeltaSynchronizationConstDefs.idl>
#include <GenericIRPManagementSystem.idl>
#include <AlarmIRPConstDefs.idl>
#include <AlarmIRPSystem.idl>
#include <NotificationLogIRPSystem.idl>
// This statement must appear after all include statements
#pragma prefix "3gppsa5.org"
/* ## Module: DeltaSynchronizationSystem */
module DeltaSynchronizationSystem
   If the system fails to complete an operation, then it can provide a reason
   to qualify the exception. The semantics carried in this reason are outside
   the scope of the present document.
   exception ManageDeltaSynchronization { string reason; };
   exception GetAvailableDeltaSynchPoints { string reason; };
   exception TriggerDeltaSynchOfCMData { string reason; };
exception TriggerDeltaSynchOfAlarms { string reason; };
   exception SynchronizationPointTooLongAgo { string reason; };
   exception TooManyChangesFullSynchronizationRecommended { string reason; };
   exception DeltaSynchNotSupportedForCMData { string reason; };
   exception DeltaSynchNotSupportedForAlarmData { string reason; };
   exception DeltaSynchNotActive { string reason; };
   exception DeltaSynchForCMDataDeactivated { string reason; };
   exception DeltaSynchForAlarmDataDeactivated { string reason; };
   exception SynchPointTooLongAgo{ string reason; };
   exception SynchPointUnknown { string reason; };
   exception DeltaSynchNotSupportedForAlarms { string reason; };
   exception DeltaSynchForAlarmsNotActive { string reason; };
   interface DeltaSynchGenericParts
```

```
DeltaSynchronizationConstDefs::Status manageDeltaSynchronization
   /* for the purpose of this operation see 3GPP TS 32.392 */
      in DeltaSynchronizationConstDefs::ManagerReference managerReference,
      \hbox{in DeltaSynchronizationConstDefs::} \\ \texttt{ManageDeltaSynchForXDataConditional}
          manageDeltaSynchForAlarmData.
      \verb|in DeltaSynchronizationConstDefs:: ManageDeltaSynchForXDataConditional| \\
          manageDeltaSynchForCMData
   raises
      ManageDeltaSynchronization,
      GenericIRPManagementSystem::ParameterNotSupported,
      GenericIRPManagementSystem::InvalidParameter,
      GenericIRPManagementSystem:: ValueNotSupported,
      {\tt GenericIRPM} an agement {\tt System::OperationNotSupported}
      );
   DeltaSynchronizationConstDefs::Status getAvailableDeltaSynchPoints
   /* for the purpose of this operation see 3GPP TS 32.392 */
      in DeltaSynchronizationConstDefs::ManagerReferenceOpt managerReference,
      in DeltaSynchronizationConstDefs::SynchPointsRequestedConditional
         synchPointsForCMDataRequested,
      in DeltaSynchronizationConstDefs::SynchPointsRequestedConditional
         synchPointsForAlarmDataRequested,
      out DeltaSynchronizationConstDefs::SynchPointListConditional synchPointListForAlarms,
      out DeltaSynchronizationConstDefs::SynchPointListConditional synchPointListForCMData
   raises
      GetAvailableDeltaSynchPoints,
      DeltaSynchNotSupportedForCMData,
      DeltaSynchNotSupportedForAlarmData,
      DeltaSynchNotActive,
      DeltaSynchForCMDataDeactivated,
      DeltaSynchForAlarmDataDeactivated,
      GenericIRPManagementSystem::ParameterNotSupported,
      GenericIRPManagementSystem::InvalidParameter,
      GenericIRPManagementSystem::ValueNotSupported,
      GenericIRPManagementSystem::OperationNotSupported
};
interface DeltaSvnchOfCMData
   DeltaSynchronizationConstDefs::Status triggerDeltaSynchOfCMData
   /* for the purpose of this operation see 3GPP TS 32.392 */
      in DeltaSynchronizationConstDefs::ManagerReferenceOpt managerReference,
      \verb|in DeltaSynchronizationConstDefs:: CMDataRequestedOpt cmDataRequested|,\\
      in DeltaSynchronizationConstDefs::BaseMOInstanceOpt baseMOInstance,
      in DeltaSynchronizationConstDefs::ScopeTypeOpt scope,
      in DeltaSynchronizationConstDefs::SynchPoint synchPoint,
      out DeltaSynchronizationConstDefs::CmDeltaListsConditional deltaLists,
      out DeltaSynchronizationConstDefs::SynchPointConditional newSynchPoint
   raises
      TriggerDeltaSynchOfCMData,
      SynchronizationPointTooLongAgo,
      {\tt TooManyChangesFullSynchronizationRecommended,}
      SynchPointUnknown,
      DeltaSynchNotSupportedForCMData,
      DeltaSynchForCMDataDeactivated,
      DeltaSvnchNotActive,
      GenericIRPManagementSystem::ParameterNotSupported,
      GenericIRPManagementSystem::InvalidParameter,
      GenericIRPManagementSystem::ValueNotSupported,
      GenericIRPManagementSystem::OperationNotSupported
```

```
};
   interface DeltaSynchOfAlarmData
      DeltaSynchronizationConstDefs::Status triggerDeltaSynchOfAlarms
      /* for the purpose of this operation see 3GPP TS 32.392 */
         \verb|in DeltaSynchronizationConstDefs:: \verb|ManagerReferenceOpt managerReference||, \\
         in DeltaSynchronizationConstDefs::AlarmDataRequestedOpt alarmDataRequested,
         in DeltaSynchronizationConstDefs::BaseMOInstanceOpt baseMOInstance,
         in DeltaSynchronizationConstDefs::ScopeTypeOpt scope,
         in DeltaSynchronizationConstDefs::SynchPoint synchPoint,
         out DeltaSynchronizationConstDefs::AlarmDeltaListsConditional deltaLists,
         out DeltaSynchronizationConstDefs::SynchPointConditional newSynchPoint
      raises
         TriggerDeltaSynchOfAlarms,
         SynchronizationPointTooLongAgo,
         {\tt TooManyChangesFullSynchronizationRecommended,}
         SynchPointUnknown,
         DeltaSynchNotSupportedForAlarms,
         DeltaSynchForAlarmsNotActive,
         DeltaSynchNotActive,
         GenericIRPManagementSystem::ParameterNotSupported,
         GenericIRPManagementSystem::InvalidParameter,
         GenericIRPManagementSystem:: ValueNotSupported,
         GenericIRPManagementSystem::OperationNotSupported
         );
   };
   interface DeltaSynchIRPSystem : DeltaSynchGenericParts, DeltaSynchOfCMData,
      DeltaSynchOfAlarmData, GenericIRPManagementSystem::GenericIRPManagement{};
#endif // DELTA SYNCHRONIZATION SYSTEM IDL
```

A.3 IDL specification (file name "DeltaSynchronizationNotifications.idl")

```
//File: DeltaSynchronizationNotifications.idl
#ifndef _DELTA_SYNCHRONIZATION_NOTIFICATIONS_IDL_
#define _DELTA_SYNCHRONIZATION_NOTIFICATIONS_IDL
#include <DeltaSynchronizationConstDefs.idl>
#include <NotificationIRPNotifications.idl>
// This statement must appear after all include statements
#pragma prefix "3gppsa5.org"
/* ## Module: DeltaSynchronizationNotifications
This contains the specification of notifications of Delta Synchronization.
______
{\tt module\ DeltaSynchronizationNotifications}
   /* Constant definitions for the NotifyDeltaSynchOfInstancesDeactivated notification */
   interface notifyDeltaSynchOfInstancesDeactivated: NotificationIRPNotifications::Notify
     const string EVENT_TYPE = "notifyStatusOfDeltaSynchronization";
      * This constant defines the name of the ManagerReference property,
      * which is transported in the filterable_body fields.
      * The data type for the value of this property is
      {\tt * DeltaSynchronizationConstDefs::} {\tt ManagerReferenceConditional.}
```

```
const string MANAGER REFERENCE =
      DeltaSynchronizationConstDefs::AttributeNameValue::MANAGER REFERENCE;
   * This constant defines the name of the DeltaSynchStatusForCMData property,
   * which is transported in the filterable body fields.
   * The data type for the value of this property is
   * \ \texttt{DeltaSynchronizationConstDefs::DeltaSynchStatus.}
   const string DELTA_SYNCH_STATUS_FOR_CMDATA =
     DeltaSynchronizationConstDefs::AttributeNameValue::DELTA SYNCH STATUS FOR CMDATA;
   * This constant defines the name of the DeltaSynchStatusForAlarmData property,
   * which is transported in the filterable body fields.
   * The data type for the value of this property is
   * DeltaSynchronizationConstDefs::DeltaSynchStatus.
   const string DELTA SYNCH STATUS FOR ALARM CMDATA =
     DeltaSynchronizationConstDefs::AttributeNameValue::DELTA SYNCH STATUS FOR ALARM DATA;
};
/* Constant definitions for the notifyNewDeltaSynchPoint notification */
interface notifyNewDeltaSynchPoint: NotificationIRPNotifications::Notify
   const string EVENT_TYPE = "notifyNewDeltaSynchPoint";
   * This constant defines the name of the AgentOrManagerReference property,
   * which is transported in the filterable_body fields.
   \boldsymbol{\ast} The data type for the value of this property is
   * DeltaSynchronizationConstDefs::AgentOrManagerReference.
   const string AGENT OR MANAGER REFERENCE =
     DeltaSynchronizationConstDefs::AttributeNameValue::AGENT OR MANAGER REFERENCE;
   * This constant defines the name of the NewDeltaSynchPoint property,
   \mbox{\ensuremath{\star}} which is transported in the filterable_body fields.
   * The data type for the value of this property is
   * DeltaSynchronizationConstDefs::SynchPoint.
   const string NEW DELTA SYNCH POINT =
     DeltaSynchronizationConstDefs::AttributeNameValue::NEW_DELTA_SYNCH_POINT;
   * This constant defines the name of the RequestedSynchPoint property,
   * which is transported in the filterable_body fields.
   * The data type for the value of this property is
   * DeltaSynchronizationConstDefs::SynchPoint.
   const string REQUESTED SYNCH POINT =
     DeltaSynchronizationConstDefs::AttributeNameValue::REQUESTED_SYNCH_POINT;
   * This constant defines the name of the DeltaSynchPointType property,
   * which is transported in the filterable body fields.
   * The data type for the value of this property is
   * DeltaSynchronizationConstDefs:: DeltaSynchPointType.
   const string DELTA_SYNCH_POINT_TYPE =
     DeltaSynchronizationConstDefs::AttributeNameValue::DELTA SYNCH POINT TYPE;
   * This constant defines the name of the TriggeredByAgentOrManager property,
   * which is transported in the filterable_body fields.
   * The data type for the value of this property is
   * DeltaSynchronizationConstDefs::TriggeredBy.
   const string TRIGGERED_BY_AGENT_OR_MANAGER =
      DeltaSynchronizationConstDefs::AttributeNameValue::TRIGGERED BY AGENT OR MANAGER;
};
```

```
};
#endif // _DELTA_SYNCHRONIZATION_NOTIFICATIONS_IDL_
```

Annex B (informative): Change history

	Change history									
Date	TSG#	TSG Doc.	CR	R	Subject/Comment Cat Old No			New		
Mar 2007	SA_35	SP-070054	-		Submitted to SA#35 for Information		1.0.0			
Jun 2007	SA_36	SP-070285			Submitted to SA#36 for Approval		2.0.0	7.0.0		
Sep 2007	SA_37	SP-070612	0001		Remove operation setDeltaSynchPoint - Align with IS in 32.392	F	7.0.0	7.1.0		
Sep 2007	SA_37	SP-070612	0002		Corrections to IDL Definitions	F	7.0.0	7.1.0		
Dec 2008	SA_42				Upgrade to Release 8		7.1.0	8.0.0		

History

	Document history						
V8.0.0	January 2009	Publication					