### ETSI TS 132 602 V16.0.0 (2020-08)



Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE:

Telecommunication management;
Configuration Management (CM);
Basic CM Integration Reference Point (IRP);
Information Service (IS)
(3GPP TS 32.602 version 16.0.0 Release 16)



# Reference RTS/TSGS-0532602vg00 Keywords GSM,LTE,UMTS

#### **ETSI**

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

#### Important notice

The present document can be downloaded from: <u>http://www.etsi.org/standards-search</u>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at <a href="https://www.etsi.org/deliver">www.etsi.org/deliver</a>.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<a href="https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx">https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx</a>

If you find errors in the present document, please send your comment to one of the following services: https://portal.etsi.org/People/CommitteeSupportStaff.aspx

#### **Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2020. All rights reserved.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M<sup>™</sup> logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

### Intellectual Property Rights

#### **Essential patents**

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (https://ipr.etsi.org/).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

#### **Trademarks**

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

### **Legal Notice**

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under http://webapp.etsi.org/key/queryform.asp.

### Modal verbs terminology

In the present document "shall", "shall not", "should", "should not", "may", "need not", "will", "will not", "can" and "cannot" are to be interpreted as described in clause 3.2 of the <u>ETSI Drafting Rules</u> (Verbal forms for the expression of provisions).

"must" and "must not" are NOT allowed in ETSI deliverables except when used in direct citation.

### Contents

Intell	lectual Property Rights	2
Legal	al Notice	2
Moda	lal verbs terminology	2
Forev	word	5
Introd	oduction	5
	Scope	
1	•	
2	References	6
3	Definitions and abbreviations	
3.1 3.2	Definitions	
4	System overview	
4.1 4.2	System Context	
	•	
5	Modelling approach	10
6	Model	
6.1	Imported information entities and local labels	
6.2	Class diagram	
6.2.1 6.2.2		
6.3	Inheritance	
6.3.1		
6.3.1.		
6.3.2		
6.3.2.		
6.4	Information relationship definitions	
6.4.1	Void	12
7	Interface Definition	12
7.1	Class diagram	
7.2	Generic rules	12
7.3	Interface PassiveCmIRPOperations#1	
7.3.1	5 ( )	
7.3.1.		
7.3.1.2 7.3.1.2	1	
7.3.1.4	<u> </u>	
7.3.1.		
7.3.1.	.6 Exceptions	15
7.4	Interface PassiveCmIRPOperations#2	
7.4.1		
7.4.1.		
7.4.1 7.4.1	1	
7.4.1 7.4.1.		
7.4.1.		
7.4.1.		
7.5	Interface BasicCmIRPOperations	
7.5.1		
7.5.1.		
7.5.1.	1	
7.5.1.	<u>.</u>	
7.5.1.	.4 Pre-condition	18

7.5.1.5	Post-condition	
7.5.1.6	Exceptions	
7.6	Interface ActiveCmIRPOperations	
7.6.1	createMO $(0)$	19
7.6.1.1	Definition	19
7.6.1.2	Input Parameters	19
7.6.1.3	Output Parameters	20
7.6.1.4	Pre-condition	20
7.6.1.5	Post-condition	20
7.6.1.6	Exceptions	21
7.6.2	deleteMO $(0)$	22
7.6.2.1	Definition	22
7.6.2.2	Input Parameters	22
7.6.2.3	Output Parameters	22
7.6.2.4	Pre-condition	22
7.6.2.5	Post-condition	23
7.6.2.6	Exceptions	23
7.6.3	setMOAttributes(0)	23
7.6.3.1	Definition	23
7.6.3.2	Input Parameters	24
7.6.3.3	Output Parameters	26
7.6.3.4	Pre-condition	26
7.6.3.5	Post-condition	26
7.6.3.6	Exceptions	27
Annex	A (informative): Change history	28
History	· · · · · · · · · · · · · · · · · · ·	29

### **Foreword**

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

### Introduction

The present document is part of a TS-family covering the 3<sup>rd</sup> Generation Partnership Project: Technical Specification Group Services and System Aspects; Telecommunication management; as identified below:

- 32.601: "Configuration Management (CM); Basic CM Integration Reference Point (IRP); Requirements"
- 32.602: "Configuration Management (CM); Basic CM Integration Reference Point (IRP): Information Service (IS)"
- 32.606: "Configuration Management (CM); Basic CM Integration Reference Point (IRP); Solution Set (SS) definitions"

Configuration Management (CM), in general, provides the operator with the ability to assure correct and effective operation of the 3G network as it evolves. CM actions have the objective to control and monitor the actual configuration on the Network Elements (NEs) and network resources , and they may be initiated by the operator or by functions in the Operations Systems (OSs) or NEs.

CM actions may be requested as part of an implementation programme (e.g. additions and deletions), as part of an optimisation programme (e.g. modifications), and to maintain the overall Quality of Service (QoS). The CM actions are initiated either as single actions on single NEs of the 3G network, or as part of a complex procedure involving actions on many resources/objects in one or several NEs.

### 1 Scope

The present document defines a component of an Integration Reference Point (IRP) through which an 'IRPAgent' (typically an Element Manager or Network Element) can communicate basic Configuration Management related information to one or several 'IRPManagers' (typically Network Managers).

The function of this Basic CM IRP Information Service is to define an interface for the retrieval and modification of Configuration Management Information.

This Basic CM IRP IS is aligned with ITU-T M.3700 [15] in that ITU-T M.3700 is a subset of the Basic CM IRP IS in terms of the definitions of operations for the retrieval and modification of Configuration Management Information.

### 2 References

The following documents contain provisions, which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

I of a non spe	territories, the mest version appress.
[1]	3GPP TS 32.101: "Telecommunication management; Principles and high level requirements".
[2]	3GPP TS 32.102: "Telecommunication management; Architecture".
[3]	Void
[4]	3GPP TS 32.312: "Telecommunication management; Generic Integration Reference Point (IRP) management; Information Service (IS)".
[5]	3GPP TS 32.300: "Telecommunication management; Configuration Management (CM); Name convention for Managed Objects".
[6]	3GPP TS 32.600: "Telecommunication management; Configuration Management (CM); Concept and high-level requirements".

- [7] ITU-T Recommendation X.710 (1997): "Common Management Information Service".
- [8] Void
- [9] Void
- [10] Void
- [11] 3GPP TS 32.662: "Telecommunication management; Configuration Management (CM); Kernel CM Information Service (IS)".
- [12] Void
- [13] Void
- [14] 3GPP TS 32.150: "Telecommunication management; Integration Reference Point (IRP) Concept and definitions".
- [15] ITU-T M.3700 (01/2010): "Telecommunication Management, Including TMN and Network Maintenance; Integrated services digital networks; Common management services Object management Protocol neutral requirements and analysis".

- [16] 3GPP TS 28.622: "Telecommunication management; Generic Network Resource Model (NRM) Integration Reference Point (IRP); Information Service (IS)".
- [17] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".

### 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [17], 3GPP TS 32.101 [1], 3GPP TS 32.102 [2] and 3GPP TS 32.600 [6] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [17], 3GPP TS 32.101 [1], 3GPP TS 32.102 [2] and 3GPP TS 32.600 [6].

Association: Association used to model relationships between Managed Objects.

NOTE 1: Associations can be implemented in several ways, such as:

- a) name bindings,
- b) reference attributes, and
- c) association objects.

This IRP stipulates that containment associations shall be expressed through name bindings, but it does not stipulate the implementation for other types of associations as a general rule. These are specified as separate entities in the object models (UML diagrams). Currently however, all (non-containment) associations are modelled by means of reference attributes of the participating MOs.

**Managed Object (MO)**: software object that encapsulates the manageable characteristics and behaviour of a particular network resource.

NOTE 2: The MO is instance of a MO class defined in a MIM/NRM. An MO class has attributes that provide information used to characterize the objects that belong to the class. Furthermore, an MO class can have operations that represent the behaviour relevant for that class. An MO class may support notifications that provide information about an event occurrence within a network resource.

**Management Information Base (MIB)**: A MIB is an instance of an NRM and has some values on the defined attributes and associations specific for that instance.

NOTE 3: In the context of the present document, an MIB consists of:

- a) a Name space (describing the MO containment hierarchy in the MIB through Distinguished Names),
- b) a number of Managed Objects with their attributes and
- c) a number of Associations between these MOs. Also note that TMN (ITU-T Recommendation X.710 [7]) defines a concept of a Management Information Tree (also known as a Naming Tree) that corresponds to the name space (containment hierarchy) portion of this MIB definition. Figure 3.1 depicts the relationships between a Name space and a number of participating MOs (the shown association is of a non-containment type)




Figure 3.1: Relationships between a Name space and a number of participating MOs

Name space: A name space is a collection of names. The IRP name convention (see 3GPP TS 32.300 [5]) restricts the name space to a hierarchical containment structure, including its simplest form - the one-level, flat name space. All Managed Objects in a MIB shall be included in the corresponding name space and the MIB/name space shall only support a strict hierarchical containment structure (with one root object). A Managed Object that contains another is said to be the superior (parent); the contained Managed Object is referred to as the subordinate (child). The parent of all MOs in a single name space is called a Local Root. The ultimate parent of all MOs of all managed systems is called the Global Root.

Network resource: See definition in 3GPP TS 28.622 [16].

Network Resource Model (NRM): See definition in 3GPP TS 28.622 [16].

### 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [17] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [17].

DN Distinguished Name (see 3GPP TS 32.300 [5])

MO Managed Object

RDN Relative Distinguished Name (see 3GPP TS 32.300 [5])

SS Solution Set

### 4 System overview

### 4.1 System Context

The general definition of the System Context for the present IRP is found in 3GPP TS 32.150 [14] subclause 4.7.

In addition, the set of related IRP(s) relevant to the present IRP is shown in the two diagrams below.




Figure 4.1: System Context A




Figure 4.2: System Context B

### 4.2 Compliance rules

For general definitions of compliance rules related to qualifiers (Mandatory/Optional/Conditional) for *operations*, *notifications and parameters* (of operations and notifications) please refer to 3GPP TS 32.150 [14].

An IRPAgent that incorporates vendor-specific extensions shall support normal communication with a 3GPP SA5-compliant IRPManager with respect to all Mandatory and Optional managed object classes, attributes, associations, operations, parameters and notifications without requiring the IRPManager to have any knowledge of the extensions.

#### Given that

- rules for vendor-specific extensions remain to be fully specified, and
- many scenarios under which IRPManager and IRPAgent interwork may exist,

it is recognised that the IRPManager, even though it is not required to have knowledge of vendor-specific extensions, may be required to be implemented with an awareness that extensions can exist and behave accordingly.

### 5 Modelling approach

See 3GPP TS 32.150 [14].

### 6 Model

### 6.1 Imported information entities and local labels

Label reference	Local label
32 312 [4] information object class ManagedGenericIRP	ManagedGenericIRP


### 6.2 Class diagram

This clause introduces classes that relates to this interface specification. The intent is to identify the information required for the BasicCMIRP implementation of its operations and notification. This clause provides the overview of all classes in UML. Subsequent clauses provide more detailed specification of various aspects of these classes.

### 6.2.1 Relationships



#### 6.2.2 Inheritance



### 6.3 Class Definitions

### 6.3.1 BasicCmIRP

#### 6.3.1.1 Definition

The SupportIOC BasicCmIRP represents the basic configuration management capabilities specified by this specification. This class inherits from ManagedGenericIRP specified in TS 32.312 [4].

### 6.3.2 ManagedEntity

#### 6.3.2.1 Definition


The ProxyClass ManagedEntity represents the role that can be played by an instance of an IOC defined in NRMs, e.g. Generic NRM, Core NRM, UTRAN NRM or GERAN NRM. ManagedEntity is used in the specification of Basic CM IRP operations to represent an instance of an IOC defined in these NRMs.

### 6.4 Information relationship definitions

### 6.4.1 Void

### 7 Interface Definition

### 7.1 Class diagram

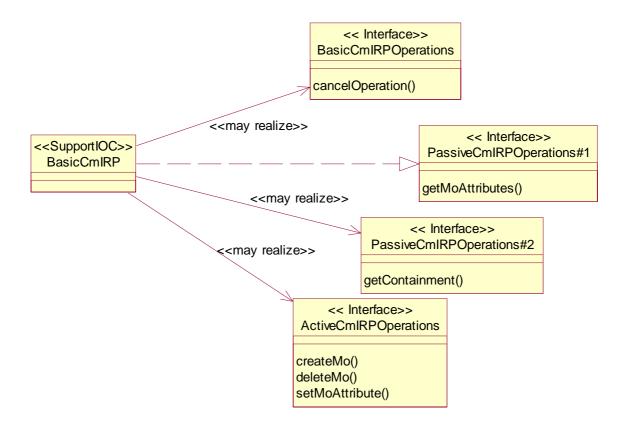

### 7.2 Generic rules

**Rule 1**: Each operation with at least one input parameter supports a pre-condition valid\_input\_parameter which indicates that all input parameters shall be valid with regards to their information type. Additionally, each such operation supports an exception operation\_failed\_invalid\_input\_parameter which is raised when pre-condition valid\_input\_parameter is false. The exception has the same entry and exit state.

Rule 2: Each operation with at least one optional input parameter supports a set of pre-conditions supported\_optional\_input\_parameter\_xxx where "xxx" is the name of the optional input parameter and the pre-condition indicates that the operation supports the named optional input parameter. Additionally, each such operation supports an exception operation\_failed\_unsupported\_optional\_input\_parameter\_xxx which is raised when (a) the pre-condition supported\_optional\_input\_parameter\_xxx is false and (b) the named optional input parameter is carrying information. The exception has the same entry and exit state.

**Rule 3**: Each operation shall support a generic exception operation\_failed\_internal\_problem that is raised when an internal problem occurs and that the operation cannot be completed. The exception has the same entry and exit state.

### 7.3 Interface PassiveCmIRPOperations#1

### 7.3.1 getMoAttributes (M)

### 7.3.1.1 Definition

This operation is invoked by IRPManager to request the retrieval of management information (Managed Object attribute names and values) from the MIB maintained by IRPAgent. One or several Managed Objects may be retrieved - based on the containment hierarchy. This operation provides functionality that is similar to that provided by the M-GET service defined by CMIS (ITU-T Recommendation X.710 [7]).

A SS may choose to split this operation in several operations (e.g. operations to get "handlers" or "iterators" to Managed Objects fulfilling the scope/filter criteria and other operations to retrieve attribute names/values from these "handlers").

### 7.3.1.2 Input Parameters

Name	Qualifier	Information Type	Comment
invokeIdentifierIn	С	A unique identifier that is SS dependent.	This parameter identifies the current invocation. This parameter is used in the cancelOperation
			operation to cancel an on-going getMOAttributes operation.
baseObjectInstance	М	DN	The MO instance that is to be used as the starting point for the selection of managed objects to which the filter (when supplied) is to be applied. This is a full DN according to 3GPP TS 32.300 [5].
scope		SEQUENCE < ENUM {     BASE_ONLY, BASE_NTH_LEVEL,     BASE_SUBTREE,     BASE_ALL},     Level>  Note: the Level contains valid information if BASE_NTH_LEVEL or BASE_SUBTREE is used.	This parameter defines how many levels of the containment hierarchy to select for the filter. The selection starts from the base object given by the baseObjectInstance parameter. Its level is considered to be at zero.  The levels of selection that may be performed are:  BASE_ONLY: select the base object value of Level is ignored;; BASE_NTH_LEVEL: select all nth level (indicated by the value of Level) subordinate objects; BASE_SUBTREE: select the base object and all of its subordinates down to and including the nth level; BASE_ALL: select the base object and all of its subordinates; value of Level is ignored.
filter	М	See Comment.	This parameter defines a filter test to be applied to the selected (see scope) MOs. If the filter is empty, all selected MOs are used.  The actual syntax and capabilities of the filter is SS specific. However, each SS should support a filter consisting of one or several assertions that may be grouped using the logical operators AND, OR and NOT. Each assertion is a logical expression of attribute existence, attribute value comparison ("equal to X, less than Y" etc.) and MO Class.
attributeListIn	М	LIST OF attribute n ame.	This parameter identifies the attributes to be returned by this operation. An empty list means "Return all attributes".

### 7.3.1.3 Output Parameters

Name	Qualifier	Matching Information	Comment
invokeIdentifierOut	M (Note)	invokeIdentifierIn from the input parameters of this operation	This parameter identifies the current invocation in both IRPManager and IRPAgent. This parameter can be used together with the cancelOperation operation to cancel an on-going getMOAttributes operation.
managedObjectClass	M	ManagedEntity class	For each returned MO: The class of the MO.
managedObjectInstance M		ManagedEntity DN	For each returned MO: The name of the MO. This is a full DN according to 3GPP TS 32.300 [5].
attributeListOut	M	LIST OF SEQUENCE< attribute name, attribute value >	For each returned MO: A list of name/value pairs for MO.
status	M	ENUM (OperationSucceeded, OperationFailed)	An operation may fail because of a specified or unspecified reason.
NOTE: This parameter is meaningful only if the IRPAgent supports the cancelOperation.			

### 7.3.1.4 Pre-condition

baseObjectExists

Assertion Name	Definition
baseObjectExists	The ManagedEntity instance specified by the baseObjectInstance parameter exists.

### 7.3.1.5 Post-condition

None specific

### 7.3.1.6 Exceptions

Name	Definition
operationFailed	Condition: Pre-condition is false or post-condition is false.
	Returned Information: The output parameter status.
	Exit state: Entry state.
duplicateInvocation	Condition: The invoke identifier specified was allocated to another operation
	Returned Information: The output parameter status.
	Exit state: Entry state.
	Note: This exception is conditional and applies only to SSs where it is meaningful.
resourceLimitation	Condition: Operation not performed due to resource limitation.
	Returned Information: The output parameter status.
	Exit state: Entry state.
operationCancelled	Condition: Operation cancelled by cancelOperation operation.
	Returned Information: The output parameter status.
	Exit state: Entry state.
complexityLimitation	Condition: Operation not performed because a parameter was too complex.
	Returned Information: The output parameter status.
	Exit state: Entry state.

### 7.4 Interface PassiveCmIRPOperations#2

### 7.4.1 getContainment(O)

### 7.4.1.1 Definition

This operation is intended for retrieval of the containment relations from the MIB.

### 7.4.1.2 Input Parameters

Name	Qualifier	Information Type	Comment
invokeIdentifierIn	С	A unique identifier that is SS	This parameter identifies the current invocation in both IRPManager and IRPAgent. This parameter can
		dependent.	be used together with the cancelOperation operation to cancel an on-going getContainment
			operation.
baseObject	M	DN	The MO instance that is to be used as the starting point for the selection of managed objects to which the
Instance			filter (when supplied) is to be applied. This is a full DN according to 3GPP TS 32.300 [5].
scope	0	See corresponding parameter in	See corresponding parameter in getMOAttributes.
		getMOAttributes.	

### 7.4.1.3 Output Parameters

The output parameter containment of the operation shall contain a list of all Managed Object instances in the MIB maintained by IRPAgent (or a subset starting from a given base object) including containment information (naming tree).

The structure and format of the output parameter containment are SS dependent.

Name	Qualifier	Matching Information	Comment
	М	LIST OF ManagedEntity DN.	A list of DN of all Managed Object instances that satisfy the scope.
invokeIdentifierOut	M (Note)		This parameter identifies the current invocation This parameter is used in
		parameters of this operation	cancelOperation operation to cancel an on-going getContainment operation.
status		ENUM (OperationSucceeded, OperationFailed)	An operation may fail because of a specified or unspecified reason.
NOTE: This parameter is meaningful only if the IRPAgent supports the cancelOperation.			

### 7.4.1.4 Pre-condition

baseObjectExists

Assertion Name	Definition
baseObjectExists	The ManagedEntity instance specified by the baseObjectInstance parameter exists.

### 7.4.1.5 Post-condition

None specific

### 7.4.1.6 Exceptions

Name	Definition
operationFailed	Condition: Pre-condition is false or post-condition is false.
	Returned Information: The output parameter status.
	Exit state: Entry state.
duplicateInvocation	Condition: The invoke identifier specified was allocated to another operation
	Returned Information: The output parameter status.
	Exit state: Entry state.
	<b>Note:</b> This exception is conditional and applies only to SSs where it is meaningful.
resourceLimitation	<b>Condition:</b> Operation not performed due to resource limitation.
	Returned Information: The output parameter status.
	Exit state: Entry state.
operationCancelled	Condition: Operation cancelled by cancelOperation operation.
	Returned Information: The output parameter status.
	Exit state: Entry state.
complexityLimitation	<b>Condition:</b> Operation not performed because a parameter was too complex.
	Returned Information: The output parameter status.
	Exit state: Entry state.

### 7.5 Interface BasicCmIRPOperations

### 7.5.1 cancelOperation(O)

### 7.5.1.1 Definition

IRPManager invokes this operation to cancel an on-going Basic CM IRP operation it issued before. Presently the Basic CM IRP operations that can be cancelled by invoking cancelOperation are getMOAttributes and getContainment.

### 7.5.1.2 Input Parameters

Name	Qualifier	Information Type	Comment
invokeIdentifierIn	М	A unique identifier that is SS dependent.	This parameter identifies an on-going Basic CM IRP operation to be cancelled.

### 7.5.1.3 Output Parameters

Name	Qualifier	Matching Information	Comment
status	M	ENUM (OperationSucceeded, OperationFailed)	An operation may fail because of a specified or unspecified reason.

### 7.5.1.4 Pre-condition

operationExits

Assertion Name	Definition
operationExits	The operation identified by the invokeIdentifierIn is ongoing.

### 7.5.1.5 Post-condition

operationCancelled

Assertion Name	Definition
operationCancelled The operation identified by the invokeIdentifierIn is cancelled.	

### 7.5.1.6 Exceptions

Name	Definition	
operationFailed	Condition: Pre-condition is false or post-condition is false.	
	Returned Information: The output parameter status.	
	Exit state: Entry state.	

### 7.6 Interface ActiveCmIRPOperations

### 7.6.1 createMO (O)

#### 7.6.1.1 Definition

This operation is invoked by IRPManager to request the IRPAgent to create a Managed Object instance in the MIB maintained by the IRPAgent. This operation will create only one Managed Object instance. This operation provides functionality that is similar to that provided by the M-CREATE service defined by CMIS (ITU-T Recommendation X.710 [7]).

The IRPManager supplies the values of all attributes that are supported, i.e. a) attribute whose Support Qualifier is M and b) attribute whose Support Qualifier is O and supported by the agreement between IRPManager and IRPAgent, except in the following cases:

- 1) If the attribute has a default value specified. In such case, if IRPManager supplies a value, the supplied value is used; otherwise, the default value is used; else
- 2) if the attribute is specified as capable of carrying a null value or carrying no information. In such case, if IRPManager supplies a (non-null) value, the supplied value is used; otherwise, the null value is used; else
- 3) if the attribute does not have a default value specified and is specified as incapable of carrying null value or incapable of carrying no information. In such case, if there is a vendor defined default value, then that value will be used.

### 7.6.1.2 Input Parameters

Name	Qualifier	Information Type	Comment
managedObjectClass	М	class	This parameter specifies the class of the new managed object instance.
managedObjectInstance	М		This parameter specifies the instance of the managed object that is to be created and registered. This is a full DN according to 3GPP TS 32.300 [5].
referenceObjectInstance	0		This parameter may have a null value. When this parameter is supplied, it must specify an existing instance of a managed object, called the reference object, of the same class as the new object to be created. Attribute values associated with the reference object instance become the default values for those not specified by the attributeListIn parameter.
attributeListIn		SEQUENCE< attribute name, attribute value>	This parameter may have a null value. When this parameter is supplied, it contains a list of name/value pairs specifying attribute identifiers and their values to be assigned to the new managed object. These values override the values for the corresponding attributes derived from either the reference object (if the referenceObjectInstance parameter is supplied) or the default value set specified in the definition of the managed object's class.

### 7.6.1.3 Output Parameters

Name	Qualifier	Matching Information	Comment
attributeListOut	M	LIST OF SEQUENCE< attribute name, attribute	This list of name/value pairs contains the attributes of the new managed object and the actual
		value>	value assigned to each.
status	M	ENUM (OperationSucceeded, OperationFailed)	An operation may fail because of a specified or unspecified reason.

### 7.6.1.4 Pre-condition

managedEntityDoesNotExist

Assertion Name	Definition	
managedEntityDoesNotExist	A ManagedEntity instance with the same DN as the object specified for creation does not exist.	

### 7.6.1.5 Post-condition

 ${\tt managedEntityCreated}\ AND\ {\tt objectCreationNotificationEmitted}$ 

Assertion Name	Definition
managedEntityCreated	The ManagedEntity instance has been created with the supplied DN.
objectCreationNotificationEmitted	An object creation notification (as defined in TS 32.662 [11]) is emitted for the created instance, if notifiable. Notifiable here means that the notification is supported and not suppressed.

### 7.6.1.6 Exceptions

Name	Definition
operationFailed	Condition: Pre-condition is false or post-condition is false.
	Returned Information: The output parameter status.
	Exit state: Entry state.
objectClassSpecificationMissmatched	Condition: The object class named by ObjectClassIdentifier input parameter does not match the object class of the
	managed object specified by a non-null referenceObjectInstance input parameter.
	Returned Information: The output parameter status.
	Exit state: Entry state.
InvalidObjectInstance	Condition: The object instance name specified implied a violation of the naming rules;
	Returned Information: The output parameter status.
	Exit state: Entry state.
createNotAllowed	Condition: The object to be created may not be created over the ltf-N.
	Returned Information: The output parameter status.
	Exit state: Entry state.
noSuchObjectClass	Condition: The class of the specified managed object is not recognized.
	Returned Information: The output parameter status.
	Exit state: Entry state.
classInstanceConflict	Condition: The specified managed object instance may not be created as member of the specified class.
	Returned Information: The output parameter status.
	Exit state: Entry state.
noSuchAttribute	Condition: A specified attribute is not recognized or is not valid for specified object class.
	Returned Information: The output parameter status.
	Exit state: Entry state.
invalidAttributeValue	Condition: Value specified for an attribute is not valid for that attribute.
	Returned Information: The output parameter status.
	Exit state: Entry state.
missingAttributeValue	Condition: One or more required attribute values were not supplied and default values are not available.
	Returned Information: The output parameter status.
	Exit state: Entry state.
parentObjectDoesNotExist	Condition: The parent MO instance of the ManagedEntity specified to be created does not exist.
	Returned Information: The output parameter status.
	Exit state: Entry state.

21

### 7.6.2 deleteMO (O)

#### 7.6.2.1 Definition

This operation is invoked by IRPManager to request the deletion of one or more Managed Object instances from the MIB maintained by IRPAgent. This operation provides functionality that is similar to that provided by the M-DELETE service defined by CMIS (ITU-T Recommendation X.710 [7]).

### 7.6.2.2 Input Parameters

Name	Qualifier	Information Type	Comment
baseObjectInstance	M	DN	The MO instance that is to be used as the starting point for the selection of managed objects to which
			the filter (when supplied) is to be applied. This is a full DN according to 3GPP TS 32.300 [5].
scope	M	See corresponding parameter in	See corresponding parameter in getMOAttributes.
		getMOAttributes.	
filter	М	See comment.	See corresponding parameter in getMOAttributes.

### 7.6.2.3 Output Parameters

Name	Qualifier	Matching Information	Comment
deletionList	M	LIST OF SEQUENCE < ManagedEntity DN,	If the base object alone is specified, then this parameter is optional; otherwise it contains a list of
		ManagedEntity class name>	managedObjectInstance/managedObjectClass pairs identifying the managed objects deleted.
status	M	ENUM (OperationSucceeded,	An operation may fail because of a specified or unspecified reason. The operation is partially
		OperationFailed,	successful if some, but not all, objects selected to be deleted are actually deleted.
		OperationPartiallySucceeded)	

In lieu of a synchronization parameter, best effort synchronization will apply; that is, all managed objects selected for this operation will perform the operation if possible regardless of whether some managed objects fail to perform it.

### 7.6.2.4 Pre-condition

 ${\tt baseObjectExists}~AND~{\tt allChildrenOfObjectsToBeDeletedSpecifiedForDeletion}$ 

Assertion Name	Definition
baseObjectExists	The ManagedEntity instance specified by the baseObjectInstance parameter exists.
allChildrenOfObjectsToBeDeletedSpecifiedForDeletion	For any ManagedEntity instance specified for deletion, all of its dependant ManagedEntity instances must be specified for deletion.

#### 7.6.2.5 Post-condition

 $(\texttt{selectedObjectsDeleted}\ OR\ \texttt{someSelectedObjectsDeleted})\ AND\ \texttt{objectDeletionNotificationEmitted}$ 

Assertion Name	Definition
selectedObjectsDeleted	All of the ManagedEntity instances selected for deletion are deleted.
someSelectedObjectsDeleted	Some but not all of the selected ManagedEntity instances were deleted and for any of the ManagedEntity instances
	deleted all of the child ManagedEntity instances of that ManagedEntity instance is deleted.
objectDeletionNotificationEmitted	An object deletion notification (as defined in TS 32.662 [11]) is emitted for each notifiable deleted object. Notifiable here means that the notification is supported and not suppressed. An object deletion notification of a managed object containing a sub-tree implies deletion of all managed objects in the sub-tree. IRPAgent should make the best effort to reduce the number of object deletion notifications, for example by sending only one notification for the sub-tree root object in the event of a successful deletion of an entire sub-tree.

### 7.6.2.6 Exceptions

Name	Definition				
operationFailed	Condition: Pre-condition is false or post-condition is false.				
	Returned Information: The output parameter status.				
	Exit state: Entry state.				
invalid0bjectInstance	Condition: The object instance name specified implied a violation of the naming rules;				
	Returned Information: The output parameter status.				
	Exit state: Entry state.				
deleteNotAllowed	Condition: Some of the object instances to be deleted may not be deleted over the ltf-N.				
	Returned Information: The output parameter status.				
	Exit state: Entry state.				
resourceLimitation	Condition: Operation not performed due to resource limitation.				
	Returned Information: The output parameter status.				
	Exit state: Entry state.				
complexityLimitation	Condition: Operation not performed because a parameter was too complex.				
	Returned Information: The output parameter status.				
	Exit state: Entry state.				

### 7.6.3 setMOAttributes (O)

### 7.6.3.1 Definition

This operation is invoked by IRPManager to request the modification of management information (Managed Object attribute values) in the MIB maintained by IRPAgent. Attributes of one or several Managed Objects may be modified - based on the containment hierarchy. This operation provides functionality that is similar to that provided by the M-SET service defined by CMIS (ITU-T Recommendation X.710 [7]).

7.6.3.2 Input Parameters

Name	Qualifier	Information Type	Comment
baseObjectInstance		DN	The MO instance that is to be used as the starting point for the selection of managed objects to which the filter (when supplied) is to be applied. This is a full DN according to 3GPP TS 32.300 [5].
scope	M	See corresponding parameter in getMOAttributes.	See corresponding parameter in getMOAttributes.
filter	M	See comment	See corresponding parameter in getMOAttributes.
	M	See comment  LIST OF SEQUENCE <attribute [attribute="" add="" default)="" enum(replace,="" identifier,="" remove="" set="" to="" values,="" values],="">  See Comment for when attribute values are require and when they are optional.</attribute>	See corresponding parameter in getMOAttributes.  This parameter contains a set of attribute modification specifications, each of which contains:  1). attribute identifier: the identifier of the attribute whose value(s) is(are) to be modified.  2). attribute value: the value(s) to be used in the modification of the attribute. The use of this parameter is defined by the modify operator. This parameter is optional when the set to default modify operator is specified and if supplied, shall be ignored.  3). modify operator: the way in which the attribute values(s) (if supplied) is(are) to be applied to the attribute. The possible operators are:  a) replace: the attribute value(s) specified shall be used to replace the current values(s) of the attribute;  b) add values: the attribute values(s) specified shall be added to the current value(s) of the of the attribute. This operator shall only be applied to a set-valued attribute and shall perform a set union (in the mathematical sense) between the current values(s) of the attribute value(s) specified. Value(s) specified in the attribute value parameter which is(are) already in the current values of the attribute shall not cause an error to be returned.  c) remove values: the attribute value(s) specified shall be removed from the current values(s) of the attribute. This operator shall only be applied to a set-valued attribute and shall perform a set difference (in the mathematical sense) between the current value(s) of the attribute and the attribute values(s) specified. Value(s) specified in the attribute value parameter which is(are) not in the current value(s) of the attribute shall not cause an error to be returned;  d) set to default: when this operator is applied to a single-valued attribute, the value of the attribute shall be set to its default value. When this operator is applied to a set-valued attribute, the value(s) of the attribute shall be assigned. If there is no default value defined, an error shall be returned.  Note: Set is used here in the mathematica
			The modificationList parameter contains a single set of attribute modification specifications and this same set is applied to each MO instance to be modified

25

### 7.6.3.3 Output Parameters

Name	Qualifier	Matching Information	Comment
modificationListOut		attribute name, attribute value >>	This parameter will provide for each managed object instance the full DN of the managed object instance, the managedObjectClass, and a list of name/value pairs with the values of all the attributes of the modified managed object instance after modification. The form of this information is SS dependant and may be provided in one or many data structures.
status	М	OperationPartiallySucceeded)	An operation may fail because of a specified or unspecified reason and no attributes have been updated. The operation is only successful if all specified attributes of all selected objects are actually modified. Otherwise, the operation is partially successful.

In lieu of a synchronization parameter, best effort synchronization will apply; that is, all managed objects selected for this operation will perform the operation if possible regardless of whether some managed objects fail to perform it.

### 7.6.3.4 Pre-condition

baseObjectExists

Assertion Name	Definition
baseObjectExists	The ManagedEntity instance specified by the baseObjectInstance parameter exists.

### 7.6.3.5 Post-condition

 $(\verb|selectedObjectsModified|) AND \verb| attributeValueChangeNotificationEmitted|) and \verb| attributeValueChangeNotificationEmitted| and \verb| attributeValueChangeNotificationEmitted|) and \verb| attributeValueChangeNotificationEmitted| and attributeValueChangeNotificationEmitted| attribut$ 

Assertion Name	Definition
selectedObjectsModified	All of the attributes of all of the ManagedEntity instances selected for modification are modified as specified.
someSelectedObjectsModified	Some attributes of some of the selected ManagedEntity instances were modified but not all attributes of all selected ManagedEntity instances.
attributeValueChangeNotificationEmitted	A notifyAttributeValueChange notification (as defined in TS 32.662 [11]) is emitted for the notifiable attributes of each modified object instance. Notifiable here means that the notification is supported and not suppressed.

### 7.6.3.6 Exceptions

Name	Definition
operationFailed	Condition: Pre-condition is false or post-condition is false.
	Returned Information: The output parameter status.
	Exit state: Entry state.
modifyNotAllowed	Condition: The object to be modified may not be modified over the ltf-N.
	Returned Information: The output parameter status.
	Exit state: Entry state.
noSuchAttribute	Condition: A specified attribute is not recognized or is not valid for specified object class.
	Returned Information: The output parameter status.
	Exit state: Entry state.
invalidAttributeValue	Condition: Value specified for an attribute is not valid for that attribute.
	Returned Information: The output parameter status.
	Exit state: Entry state.
missingAttributeValue	Condition: One or more required attribute values were not supplied and default values are not available.
	Returned Information: The output parameter status.
	Exit state: Entry state.
resourceLimitation	Condition: Operation not performed due to resource limitation.
	Returned Information: The output parameter status.
	Exit state: Entry state.
complexityLimitation	Condition: Operation not performed because a parameter was too complex.
	Returned Information: The output parameter status.
	Exit state: Entry state.

27

## Annex A (informative): Change history

	Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	
Jun 2001	SA_12	SP-010283			New document 32.602 based on 32.106-5 V3.1.0 2.		4.0.0	
					Approved at TSG SA #12 and placed under Change Control			
Sep 2001	SA_13	SP-010476	001		Replace the current parameter invokeldentifier with the two	4.0.0	4.1.0	
					parameters invokeldentifierIn and invokeldentifierOut in the			
					operations getMoAttributes() and getContainment()			
Sep 2002	SA_17	SP-020483	002		Add Active CM and new methodology, Remove CM Notifications	4.1.0	5.0.0	
					(moved to Kernel CM - 32.66x)			
Mar 2002	SA_19	SP-030144	003		Add post-condition for notifications of each activeCM operation and	5.0.0	5.1.0	
					one exception for createMO			
Dec 2003	SA_22	SP-030630	005		Correction of System Context	5.1.0	5.2.0	
Mar 2004	SA_23	SP-040119	007		Correction of System Context	5.2.0	5.3.0	
Mar 2004	SA_23	SP-040105			Automatic upgrade to Rel-6 (no CR)	5.3.0	6.0.0	
Mar 2005	SA_27	SP-050044	800		Apply Generic System Context	6.0.0	6.1.0	
Jun 2007	SA_36				Automatic upgrade to Rel-7 (no CR) at freeze of Rel-7. Deleted	6.1.0	7.0.0	
					reference to CMIP SS, discontinued from R7 onwards.			
Dec 2008	SA_42				Upgrade to Release 8	7.1.0	8.0.0	
Dec 2009	SA_46	SP-090718	010		Clarify scope parameter for getMoAttributes operation	8.0.0	8.1.0	
Dec 2009	SA_46	SP-090719	009		Align with standard usage of inheritance in class diagram	8.1.0	9.0.0	
2011-03	-	-	-	-	Update to Rel-10 version (MCC)	9.0.0	10.0.0	
2012-09	-	-	-	-	Update to Rel-11 version (MCC)	10.0.0	11.0.0	
2012-12	SA_58	SP-120783	011	-	add reference to ITU-T Rec	11.0.0	11.1.0	
2012.02	CA FO	SP-130060	012	1	Correct getMoAttributes operation description	11.1.0	11.2.0	
2013-03	SA_59	SP-130058	013	1	Clarify create object operation	11.2.0	12.0.0	
2016-01					Update to Rel-13(MCC)	12.0.0	13.0.0	

	Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version	
2017-03	SA#75					Promotion to Release 14 without technical change	14.0.0	
2018-06	-	=	-	-	-	Update to Rel-15 version (MCC)	15.0.0	
2019-09	SA#85	SP-190752	0014	-	F	Correction of NR definition to avoid misalignment with RAN2	15.1.0	
2020-07	-	-	-	-	-	Update to Rel-16 version (MCC)	16.0.0	

### History

Document history					
V16.0.0	August 2020	Publication			