ETSI TS 132 614 V6.0.1 (2004-12)

Technical Specification

Digital cellular telecommunications system (Phase 2+);

Universal Mobile Telecommunications System (UMTS);

Telecommunication management;


Configuration Management (CM);

Bulk CM Integration Reference Point (IRP):

Common Management Information Protocol (CMIP)

Solution Set (SS)

(3GPP TS 32.614 version 6.0.1 Release 6)

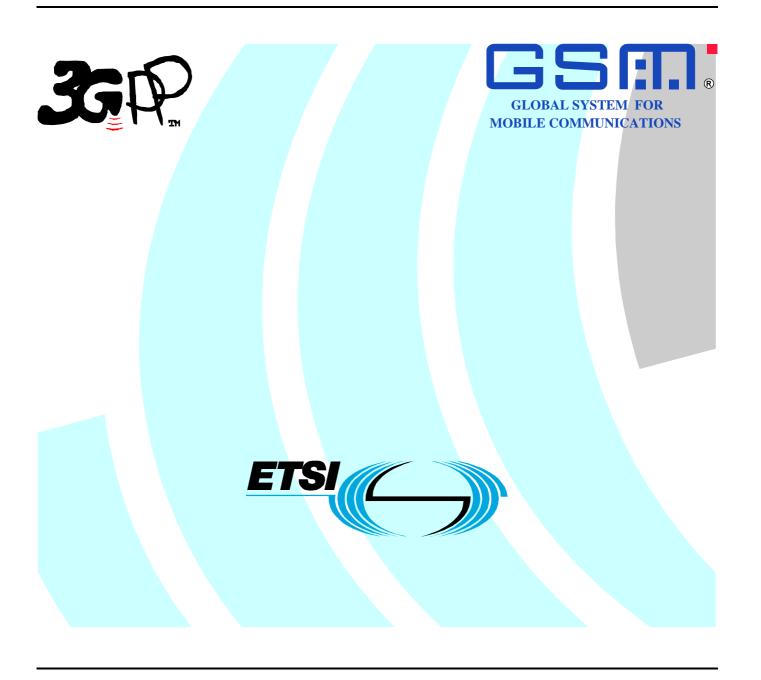

Reference
RTS/TSGS-0532614v601

Keywords
GSM, UMTS

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: <u>http://www.etsi.org</u>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2004.
All rights reserved.

DECTTM, **PLUGTESTS**TM and **UMTS**TM are Trade Marks of ETSI registered for the benefit of its Members. **TIPHON**TM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members. **3GPP**TM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under http://webapp.etsi.org/key/queryform.asp.

Contents

Intellectual Property Rights		
Forew	ord	2
Forew	vord	5
Introd	uction	5
	Scope	
	References	
3	Definitions, symbols and abbreviations	7
3.1	Definitions	
3.2	Abbreviations	7
4	Basic aspects	7
4.1	Explanation	7
4.2	Mapping	8
4.2.1	Mapping of Operations	8
4.2.2	Mapping of Operation Parameters	8
4.2.2.1		
4.2.2.2	± ± ±	
4.2.2.3	11 0	
4.2.2.4	11 1	
4.2.2.5	± ± ±	
4.2.2.6	11 0	
4.2.2.7	11 0	
4.2.2.8		
4.2.2.9		
4.2.2.1		
4.2.2.1	Tr &	
4.2.2.1	Tr &	
4.2.2.1	3 Mapping of Parameters of the Operation preactivate	11
4.2.3	Mapping of Notifications	11
4.2.4	Mapping of Notification Parameters/Attributes	11
4.2.4.1		
4.2.4.2	11 0	
	GDMO Definitions	
5.1	Actions	13
5.1.1		13
5.1.2	2 endSession (M)	13
5.1.3		14
5.1.4	1 ' '	
5.1.5		
5.1.6		
5.1.7		
5.1. <i>7</i>	* '	
5.1.9	8	
5.1.1		
5.1.1	6 , ,	
5.1.1		
5.1.1	13 preactivate (M)	20
5.2	Notifications	
5.2.1	sessionStateChanged (M)	21
5.2.2		
5.3	Attributes	
5.3.1		
5.3.2		

5.3.3	sessionLogStatus	.23
6 ASN.	1 definitions	24
Annex A (ir	nformative): Change history	.28
History		29

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

The present document is part of a TS-family covering the 3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Telecommunication management; as identified below:

32.611:	"Configuration Management (CM); Bulk CM Integration Reference Point (IRP): Requirements".
32.612:	"Configuration Management (CM); Bulk CM Integration Reference Point (IRP): Information Service (IS)".
32.613:	"Configuration Management (CM); Bulk CM Integration Reference Point (IRP): Common Object Request Broker Architecture (CORBA) Solution Set (SS)".
32.614:	"Configuration Management (CM); Bulk CM Integration Reference Point (IRP): Common Management Information Protocol (CMIP) Solution Set (SS)".
32.615:	"Configuration Management (CM); Bulk CM Integration Reference Point (IRP): eXtensible Markup Language (XML) file format definition".

Configuration Management (CM), in general, provides the operator with the ability to assure correct and effective operation of the 3G network as it evolves. CM actions have the objective to control and monitor the actual configuration on the Network Element (NEs) and Network Resources (NRs), and they may be initiated by the operator or functions in the Operations Systems (OSs) or NEs.

CM actions may be requested as part of an implementation programme (e.g. additions and deletions), as part of an optimisation programme (e.g. modifications), and to maintain the overall Quality of Service (QoS). The CM actions are initiated either as a single action on a NE of the 3G network or as part of a complex procedure involving actions on many NEs.

1 Scope

The present document specifies the Common Management Information Protocol (CMIP) Solution Set (SS) for the Bulk CM Integration Reference Point (IRP): Information Service defined in TS 32.612 [4]. In detail:

- Clause 4 contains an introduction to some concepts that are the base for some specific aspects of the CMIP interfaces.
- Clause 5 contains the GDMO definitions for the Alarm Management over the CMIP interfaces

Clause 6 contains the ASN.1 definitions supporting the GDMO definitions provided in clause 5.

This Solution Set specification is related to 3GPP TS 32.612 V6.0.X.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.
- [1] 3GPP TS 32.101: "Telecommunication management; Principles and high level requirements".
- [2] 3GPP TS 32.102: "Telecommunication management; Architecture".
- [3] 3GPP TS 32.304: "Telecommunication management; Configuration Management (CM); Notification Integration Reference Point (IRP): Common Management Information Protocol (CMIP) Solution Set (SS)".
- [4] 3GPP TS 32.612: "Telecommunication management; Configuration Management (CM); Bulk CM Integration Reference Point (IRP): Information Service (IS)".
- [5] ITU-T Recommendation X.710 (1991): "Common Management Information Service Definition for CCITT Applications".
- [6] ITU-T Recommendation X.721 (02/92): "Information Technology Open Systems Interconnection Structure of Management Information: Definition of Management Information".
- [7] ITU-T Recommendation X.730 (01/92): "Information Technology Open Systems Interconnection Systems Management: Object Management Function".
- [8] ITU-T Recommendation X.733 (02/92): "Information Technology Open Systems Interconnection Alarm Reporting Function".
- [9] ITU-T Recommendation M.3100 (07/95): "Maintenance Telecommunications Management Network Generic Network Information Model".
- [10] 3GPP TS 32.600: "Telecommunication management; Configuration Management (CM); Concept and high-level requirements".
- [11] 3GPP TS 32.602: "Telecommunication management; Configuration Management (CM); Basic CM Integration Reference Point (IRP): Information Service (SS)".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TS 32.600 [10] and TS 32.602 [11] apply.

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CMIP Common Management Information Protocol

DN Distinguished Name

GDMO Guidelines for the Definition of Managed Objects

IDL Interface Definition Language

IEC International Electro-technical Commission
ISO International Standards Organization

ITU-T International Telecommunication Union, Telecommunication Sector

MIB Management Information Base
MIM Management Information Model

MIT Management Information Tree (or Naming Tree)

MOC Managed Object Class
MOI Managed Object Instance
NE Network Element
NR Network Resource

NRM Network Resource Model

TMN Telecommunications Management Network

4 Basic aspects

4.1 Explanation

A technology-independent IRP Information Service is specified in the TS 32.612 [4] for the configuration management of 3G networks by using bulk data transfer, i.e. Bulk CM IRP IS. This technical specification provides a CMIP solution set of the Bulk CM IRP.

Within a CMIP TMN a network manager may use the operations and notifications defined in this TS to upload files containing managed information about the current configuration status of a concerned 3G network from the related element manager or to download files containing management commands to change the configuration of a concerned 3G network to the corresponding element manager. The concepts and the procedures of uploading and downloading are specified in the TS 32.612 [4]. The syntax and the semantic of files to upload or to download are defined in the TS 32.615.

4.2 Mapping

The sub-clauses below provide mapping tables between the technology-independent operations and notifications defined in TS 32.612 [4] and the CMIP actions and notifications specified in this document.

4.2.1 Mapping of Operations

The table below shows the mapping relation between the technology-independent operations defined in TS 32.612 [4] and the CMIP actions specified in this document.

Table 1: Mapping of operations

technology-independent operations defined in TS 32.612 [4]	CMIP actions specified in this document	Qualifiers of the CMIP actions specified in this document
startSession	startSession	M
endSession	endSession	M
upload	upload	M
download	download	M
validate	validate	0
preactivate	preactivate	0
activate	activate	M
fallback	fallback	M
abortSessionOperation	abortSessionOperation	M
getSessionIds	getSessionIds	M
getSessionStatus	getSessionStatus	M
getSessionLog	getSessionLog	M
getBulkCMIRPVersion	getBulkCMIRPVersion	M

4.2.2 Mapping of Operation Parameters

The following sub-clauses map the parameters of each technology-independent operations defined in the TS 32.612 [4] to the parameters of the corresponding CMIP actions specified in this document.

4.2.2.1 Mapping of Parameters of the Operation startSession

Table 2: Mapping of parameters of the operation startSession

parameters of the technology- independent operation 'startSession' defined in the TS 32.612 [4]	parameters of the CMIP action 'startSession' specified in this document	Qualifier of the parameters of the CMIP action 'startSession' specified in this document
sessionId	sessionId	Action information, M
status	status	Action response, M

4.2.2.2 Mapping of Parameters of the Operation endSession

Table 3: Mapping of parameters of the operation endSession

parameters of the technology- independent operation 'endSession' defined in the TS 32.612 [4]	parameters of the CMIP action 'endSession' specified in this document	Qualifier of the parameters of the CMIP action 'endSession' specified in this document
sessionId	sessionId	Action information, M
status	status	Action response, M

4.2.2.3 Mapping of Parameters of the Operation upload

Table 4: Mapping of parameters of the operation upload

parameters of the technology- independent operation 'upload' defined in the TS 32.612 [4]	parameters of the CMIP action 'upload' specified in this document	Qualifier of the parameters of the CMIP action 'upload' specified in this document
sessionId	sessionId	Action information, M
uploadDataFile	uploadDataFile	Action information, M
baseObjectInstance	baseObjectInstance	Action information, M
scope	scope	Action information, M
filter	filter	Action information, M
status	status	Action response, M

4.2.2.4 Mapping of Parameters of the Operation download

Table 5: Mapping of parameters of the operation download#

parameters of the technology- independent operation 'download' defined in the TS 32.612 [4]	parameters of the CMIP action 'download' specified in this document	Qualifier of the parameters of the CMIP action 'download' specified in this document
sessionId	sessionId	Action information, M
downloadDataFile	downloadDataFile	Action information, M
status	status	Action response, M

4.2.2.5 Mapping of Parameters of the Operation activate

Table 6: Mapping of parameters of the operation activate

parameters of the technology- independent operation 'activate' defined in the TS 32.612 [4]	parameters of the CMIP action 'activate' specified in this document	Qualifier of the parameters of the CMIP action 'activate' specified in this document
sessionId	sessionId	Action information, M
activationMode	activationMode	Action information, O
fallbackEnabled	saveFallback	Action information, M
status	status	Action response, M

4.2.2.6 Mapping of Parameters of the Operation fallback

Table 7: Mapping of parameters of the operation fallback

parameters of the technology- independent operation 'fallback' defined in the TS 32.612 [4]	parameters of the CMIP action 'fallback' specified in this document	Qualifier of the parameters of the CMIP action 'fallback' specified in this document
sessionId	sessionId	Action information, M
status	status	Action response, M

4.2.2.7 Mapping of Parameters of the Operation abortSessionOperation

Table 8: Mapping of parameters of the operation abortSessionOperation

parameters of the technology- independent operation 'abortSessionOperation' defined in the TS 32.612 [4]	parameters of the CMIP action 'abortSessionOperation' specified in this document	Qualifier of the parameters of the CMIP action 'abortSessionOperation' specified in this document
sessionId	sessionId	Action information, M
status	status	Action response, M

4.2.2.8 Mapping of Parameters of the Operation getSessionIds

Table 9: Mapping of parameters of the operation getSessionIds

parameters of the technology- independent operation 'getSessionIds' defined in the TS 32.612 [4]	parameters of the CMIP action 'getSessionIds' specified in this document	Qualifier of the parameters of the CMIP action 'getSessionIds' specified in this document
sessionIdList	sessionIdList	Action response, M
status	status	Action response, M

4.2.2.9 Mapping of Parameters of the Operation getSessionStatus

Table 10: Mapping of parameters of the operation getSessionStatus

parameters of the technology- independent operation 'getSessionStatus' defined in the TS 32.612 [4]	parameters of the CMIP action 'getSessionStatuss' specified in this document	Qualifier of the parameters of the CMIP action 'getSessionStatus' specified in this document	
sessionIdList	sessionIdList	Action information, M	
sessionState	sessionState	Action response, M	
status	status	Action response, M	

4.2.2.10 Mapping of Parameters of the Operation getSessionLog

Table 11: Mapping of parameters of the operation getSessionLog

parameters of the technology- independent operation 'getSessionLog' defined in the TS 32.612 [4]	parameters of the CMIP action 'getSessionLog' specified in this document	Qualifier of the parameters of the CMIP action 'getSessionLog' specified in this document
sessionIdList	sessionIdList	Action information, M
logFileReference	logFileReference	Action information, M
contentType	contentType	Action information, M
status	status	Action response, M

4.2.2.11 Mapping of Parameters of the Operation getBulkCmIRPVersion

Table 12: Mapping of parameters of the operation getBulkCmlRPVersion

parameters of the technology- independent operation 'getBulkCmIRPVersion' defined in the TS 32.612 [4]	parameters of the CMIP action 'getBulkCmIRPVersion' specified in this document	Qualifier of the parameters of the CMIP action 'getBulkCmIRPVersion' specified in this document
sessionIdList	sessionIdList	Action information, M
status	status	Action response, M

4.2.2.12 Mapping of Parameters of the Operation validate

Table 13: Mapping of parameters of the operation validate

parameters of the technology- independent operation 'validate' defined in the TS 32.612 [4]	parameters of the CMIP action 'validate' specified in this document	Qualifier of the parameters of the CMIP action 'validate' specified in this document		
sessionId	sessionId	Action information, M		
activationMode	activationMode	Action information, O		
status	status	Action response, M		

4.2.2.13 Mapping of Parameters of the Operation preactivate

Table 14: Mapping of parameters of the operation preactivate

parameters of the technology- independent operation 'preactivate' defined in the TS 32.612 [4]	parameters of the CMIP action 'preactivate' specified in this document	Qualifier of the parameters of the CMIP action 'preactivate' specified in this document
sessionId	sessionId	Action information, M
verificationMode	verificationMode	Action information, O
activationMode	activationMode	Action information, O
fallbackEnabled	saveFallback	Action information, M
status	status	Action response, M

4.2.3 Mapping of Notifications

The table below shows the mapping relation between the technology-independent notifications defined in TS 32.612 [4] and the CMIP notifications specified in this document.

Table 13: Mapping of Notifications

technology-independent notifications defined in TS 32.612 [4]	CMIP notifications specified in this document	Qualifiers of the CMIP notifications specified in this document	
notifySessionStateChanged	sessionStateChanged	M	
notifyGetSessionLogEnded	getSessionLogEnded	M	

4.2.4 Mapping of Notification Parameters/Attributes

The following sub-clauses map the parameters/attributes of each technology-independent notifications defined in the TS 32.612 [4] to the parameters/attributes of the corresponding CMIP notifications specified in this document.

4.2.4.1 Mapping of Parameters/Attributes of the Notification sessionStateChanged

Table 14: Mapping of parameters/attributes of the notification sessionStateChanged

technology-independent Parameters/Attributes of the notification 'notifySessionStateChanged' defined in TS 32.612 [4]	Parameters/Attributes of the CMIP notification 'sessionStateChanged' specified in this document	Qualifiers of the Parameters/Attributes of the CMIP notification 'sessionStateChanged' specified in this document
managedObjectClass	managedObjectClass	0
managedObjectInstance	managedObjectInstance	0
notificationId	notificationIdentifier (Rec. X.721 1992E)	0
eventTime	eventTime	M
systemDN	Not used in this CMIP SS	
eventType	eventType	M
sessionId	sessionId	M
sourceIndicator	sourceIndicator	0
sessionState	sessionState	M

4.2.4.2 Mapping of Parameters/Attributes of the Notification getSessionLogEnded

Table 15: Mapping of Parameters/Attributes of the Notification getSessionLogEnded

technology-independent Parameters/Attributes of the notification 'notifySessionStateChanged' defined in TS 32.612 [4]	Parameters/Attributes of the CMIP notification 'sessionStateChanged' specified in this document	Qualifiers of the Parameters/Attributes of the CMIP notification 'sessionStateChanged' specified in this document
managedObjectClass	managedObjectClass	0
managedObjectInstance	managedObjectInstance	0
notificationId	notificationIdentifier (Rec. X.721 1992E)	0
eventTime	eventTime	M
systemDN	Not used in this CMIP SS	
eventType	eventType	M
sessionId	sessionId	M
sourceIndicator	sourceIndicator	0
sessionLogStatus	sessionLogStatus	M

-- 5 GDMO Definitions

- --Please do not remove the "—" in front of the headline numbering, as it is the CMIP code
- --for a comment. This way the whole chapter can be put directly into a compiler.

-- 5.1 Actions

-- 5.1.1 startSession (M)

startSession ACTION

BEHAVIOUR

startSessionBehaviour;

MODE

CONFIRMED;

WITH INFORMATION SYNTAX

TS32-614TypeModule.Common;

WITH REPLY SYNTAX

TS32-614TypeModule.CommonReply;

REGISTERED AS {ts32-614Action 1};

startSessionBehaviour BEHAVIOUR

DEFINED AS

"A Manager invokes this operation to start a session state machine as defined in TS 32.612 [4] and initialise temporary entities to be related with bulk data configuration sessionId in an Agent.

The 'Action information' contains the following data:

sessionId

This mandatory parameter identifies the new session and process to be associated with a bulk data operation e.g. upload or download.

The 'Action response' is composed of the following data:

status

It contains the results of this action. Possible values: noError (0), error (the value indicates the reason of the error).";

-- 5.1.2 endSession (M)

endSession ACTION

BEHAVIOUR

endSessionBehaviour;

MODE

CONFIRMED;

WITH INFORMATION SYNTAX

TS32-614TypeModule.Common;

WITH REPLY SYNTAX

TS32-614TypeModule.CommonReply;

REGISTERED AS {ts32-614Action 2};

endSessionBehaviour BEHAVIOUR

DEFINED AS

"A Manager invokes this operation to end a session state machine as defined in TS32.612 [4] and delete all temporary entities and their related bulk data configuration for a specified sessionId in an Agent. The deletion will be rejected if the configuration state is in a working state: e.g. uploading (including getting a log), downloading or activating.

The 'Action information' contains the following data:

sessionId

This mandatory parameter identifies this specific session and process associated with an earlier bulk data operation e.g. upload or download.

The 'Action response' is composed of the following data:

status

It contains the results of this action. Possible values: noError (0), error (the value indicates the reason of the error).";

-- 5.1.3 upload (M)

```
upload ACTION
BEHAVIOUR
uploadBehaviour;
MODE
CONFIRMED;
WITH INFORMATION SYNTAX
TS32-614TypeModule.Upload;
WITH REPLY SYNTAX
TS32-614TypeModule.CommonReply;
REGISTERED AS {ts32-614Action 3};
```

uploadBehaviour BEHAVIOUR

DEFINED AS

"A Manager invokes this operation to request an Agent to create a file containing bulk configuration data (as defined in 3GPP TS 32.615 and in Claus 8 of the TS 32.612 [4]) and transfer the file to the indicated globally unique data file reference.

The 'Action information' contains the following data:

sessionId

This mandatory parameter identifies this specific session and process associated with the requested bulk data upload.

• uploadDataFileReference

This mandatory parameter specifies a globally unique file reference to where the specified scope of bulk data is to be uploaded and stored.

• baseObjectInstance

This mandatory parameter specifies a MO where the search starts. This is a full Distinguished Name.

scope

This mandatory parameter defines how many levels of the containment hierarchy to search (i.e. apply the filter defined below). The search starts from the MO given by the baseObjectInstance parameter. The levels of search that may be performed are:

- 1. the base object alone (default);
- 2. the n-th level subordinates of the base object;

- 3. the base object and all of its subordinates down to and including the n-th level;
- 4. the base object and all of its subordinates.
- filter

This mandatory parameter defines a filter test to be applied to the scoped Managed Object(s). If the filter is empty, all of the managed objects included by the scope are selected.

The 'Action response' is composed of the following data:

status

It contains the results of this action. Possible values: noError (0), error (the value indicates the reason of the error).";

-- 5.1.4 download (M)

download ACTION

BEHAVIOUR

downloadBehaviour;

MODE

CONFIRMED;

WITH INFORMATION SYNTAX

TS32-614TypeModule.Download;

WITH REPLY SYNTAX

TS32-614TypeModule.CommonReply;

REGISTERED AS {ts32-614Action 4};

downloadBehaviour BEHAVIOUR

DEFINED AS

"A Manager invokes this operation to request an Agent to activate previously downloaded bulk configuration data (as defined in 3GPP TS 32.615 and in Claus 8 of the TS 32.612 [4]). Activate means that operations specified in a previously downloaded configuration file, for example create, delete and modify of managed objects are carried out on the live network i.e. mobile subscribers are affected by the downloaded configuration.

The 'Action information' contains the following data:

sessionId

This mandatory parameter identifies this specific session and process associated with the requested bulk data download.

• downloadDataFileReference

This mandatory parameter identifies specifies a globally unique file reference from where the data to be fetched and download from.

The 'Action response' is composed of the following data:

status

It contains the results of this action. Possible values: noError (0), error (the value indicates the reason of the error).";

-- 5.1.5 activate (M)

activate ACTION
BEHAVIOUR

activateBehaviour;

MODE

CONFIRMED;

WITH INFORMATION SYNTAX

TS32-614TypeModule.Activate;

WITH REPLY SYNTAX

TS32-614TypeModule.CommonReply;

REGISTERED AS {ts32-614Action 5};

activateBehaviour BEHAVIOUR

DEFINED AS

"A Manager invokes this operation to request an Agent to activate previously downloaded bulk configuration data (as defined in 3GPP TS 32.615 and in Claus 8 of the TS 32.612 [4]). Activate means that operations specified in a previously downloaded configuration file, for example create, delete and modify of managed objects are carried out on the live network i.e. mobile subscribers are affected by the downloaded configuration.

The 'Action information' contains the following data:

sessionId

This mandatory parameter identifies this specific session and process associated with an earlier bulk data download that is required to be activated.

saveFallback

This mandatory parameter indicates whether or not it is required to initialise and enable fallback option prior to the activation.

The 'Action response' is composed of the following data:

status

It contains the results of this action. Possible values: noError (0), error (the value indicates the reason of the error).";

-- 5.1.6 fallback (M)

fallback ACTION

BEHAVIOUR

fallbackBehaviour;

MODE

CONFIRMED;

WITH INFORMATION SYNTAX

TS32-614TypeModule.Common;

WITH REPLY SYNTAX

TS32-614TypeModule.CommonReply;

REGISTERED AS {ts32-614Action 6};

fallbackBehaviour BEHAVIOUR

DEFINED AS

"A Manager invokes this operation to request an Agent to activate a fallback area if a previously ordered activation has failed.

The 'Action information' contains the following data:

sessionId

This mandatory parameter identifies this specific session and process associated with an earlier bulk data operation e.g. upload or download for which the current log is required.

The 'Action response' is composed of the following data:

status

It contains the results of this action. Possible values: noError (0), error (the value indicates the reason of the error).";

-- 5.1.7 abortSessionOperation (M)

abortSessionOperation ACTION

BEHAVIOUR

abortSessionOperationBehaviour;

MODE

CONFIRMED:

WITH INFORMATION SYNTAX

TS32-614TypeModule.Common;

WITH REPLY SYNTAX

TS32-614TypeModule.CommonReply;

REGISTERED AS {ts32-614Action 7};

abortSessionOperationBehaviour BEHAVIOUR

DEFINED AS

"A Manager invokes this operation to request an Agent to abort a currently activate asynchronous operation. The abort will cause the session state machine to exit the current state and enter a new state, see clause 9 of TS 32.612 [4].

The 'Action information' contains the following data:

sessionId

This mandatory parameter identifies this specific session and process associated with an earlier bulk data operation e.g. upload or download for which the abort is required.

The 'Action response' is composed of the following data:

status

It contains the results of this action. Possible values: noError (0), error (the value indicates the reason of the error).";

-- 5.1.8 getSessionIds (M)

getSessionId ACTION

BEHAVIOUR

getSessionIdBehaviour;

MODE

CONFIRMED:

WITH REPLY SYNTAX

TS32-614TypeModule.GetSessionIdsReply;

REGISTERED AS {ts32-614Action 8};

getSessionIdBehaviour BEHAVIOUR

DEFINED AS

"A Manager invokes this operation to request an Agent to return a list of all its currently open sessionIds.

The 'Action response' is composed of the following data:

sessionIdList

This mandatory parameter is a list of all the sessionID an Agent currently has open i.e. started with startSession and not ended with endSession operations.

status

It contains the results of this action. Possible values: noError (0), error (the value indicates the reason of the error).";

-- 5.1.9 getSessionStatus (M)

getSessionStatus ACTION

BEHAVIOUR

getSessionStatusBehaviour;

MODE

CONFIRMED;

WITH INFORMATION SYNTAX

TS32-614TypeModule.Common;

WITH REPLY SYNTAX

TS32-614TypeModule.GetSessionStatusReply;

REGISTERED AS {ts32-614Action 9};

getSessionStatusBehaviour BEHAVIOUR

DEFINED AS

"A Manager invokes this operation to request an Agent to send the current state of the bulk data configuration file operation. The IRPAgent returns the current state. See clause 9 of TS 32.612 [4].

The 'Action information' contains the following data:

sessionId

This mandatory parameter identifies this specific session and process associated with an earlier bulk data operation e.g. upload or download for which the current status is required.

The 'Action response' is composed of the following data:

• sessionState

This mandatory parameter indicates current state of the configuration file operation. See clause 7.3.5 of TS 32.612 [4].

status

It contains the results of this action. Possible values: noError (0), error (the value indicates the reason of the error).";

-- 5.1.10 getSessionLog (M)

getSessionLog ACTION

BEHAVIOUR

getSessionLogBehaviour;

MODE

CONFIRMED;

WITH INFORMATION SYNTAX

TS32-614TypeModule.GetSessionLog;

WITH REPLY SYNTAX

TS32-614TypeModule.CommonReply;

REGISTERED AS {ts32-614Action 10};

getSessionLogBehaviour BEHAVIOUR

DEFINED AS

"A Manager invokes this operation to request an Agent to provide a log of the results from activities associated with bulk data configuration file sessionId operations.

The 'Action information' contains the following data:

sessionId

This mandatory parameter identifies this specific session and process associated with an earlier bulk data operation e.g. upload or download for which the current log is required.

• logFileReference

This mandatory parameter specifies the address and file name where the result is to be placed in the Manager.

contentType

This mandatory parameter identifies if retrieved file should include (1) complete log including errors, (2) only errors.

The 'Action response' is composed of the following data:

status

It contains the results of this action. Possible values: noError (0), error (the value indicates the reason of the error).";

-- 5.1.11 getBulkCmIRPVersion (M)

```
getBulkCmIRPVersion ACTION
BEHAVIOUR
getBulkCmIRPVersionBehaviour;
MODE
CONFIRMED;
WITH REPLY SYNTAX
TS32-614TypeModule.GetBulkCmIRPVersionReply;
REGISTERED AS {ts32-614Action 11};
```

getBulkCmIRPVersionBehaviour BEHAVIOUR

DEFINED AS

"A Manager invokes this operation when it wishes to find out the Bulk CM IRP SS versions supported by an Agent. The Agent shall respond with a list of supported Bulk CM IRP SS versions.

sessionIdList

This mandatory parameter is a list of all the sessionID an Agent currently has open i.e. started with startSession and not ended with endSession operations.

status

It contains the results of this action. Possible values: noError (0), error (the value indicates the reason of the error).";

-- 5.1.12 validate (M)

```
validate ACTION
BEHAVIOUR
validateBehaviour;
MODE
CONFIRMED;
WITH INFORMATION SYNTAX
TS32-614TypeModule.Validate;
WITH REPLY SYNTAX
TS32-614TypeModule.CommonReply;
REGISTERED AS {ts32-614Action 12};
```

validateBehaviour BEHAVIOUR

DEFINED AS

"An IRPManager invokes this operation to request an IRPAgent to validate previously downloaded bulk configuration data. Use of this optional operation enables an IRPManager to detect errors with regard to the previously downloaded bulk configuration data before requesting preactivation or activation.

sessionId

Identifies this specific session and process associated with the requested bulk data download.

activationMode

Identifies whether a specific activation mode is required.

status

indicates (a) start of operation is successful or (b) operation failed because of specified or unspecified reasons.";

-- 5.1.13 preactivate (M)

```
preactivate ACTION
BEHAVIOUR
preactivateBehaviour;
MODE
CONFIRMED;
WITH INFORMATION SYNTAX
TS32-614TypeModule.Preactivate;
WITH REPLY SYNTAX
TS32-614TypeModule.CommonReply;
REGISTERED AS {ts32-614Action 13};
```

preactivateBehaviour BEHAVIOUR

DEFINED AS

"An IRPManager invokes this operation to request an IRPAgent to preactivate previously downloaded bulk configuration data that may have optionally been validated. The principal functions of the preactivate operation is to validate the configuration data changes in the context of current operational data and to pre-process the configuration data changes. Use of this operation enables the IRPManager to prepare the activation of the downloaded bulk configuration data at the EM or NE level before requesting its effective activation. The actions shall fall short of executing the bulk configuration data changes in the network and impacting service. (The actions may for example be to validate the configuration data changes in the context of current operational data or to pre-process the configuration data changes). Performing such actions prior to activate may help identify any potential problems prior to executing the changes on a live a network and may minimise activation elapse time.

sessionId

Identifies this specific session and process associated with an earlier bulk data download that is required to be activated.

• verificationMode

Selects the mode of checking (full or limited).

activationMode

Identifies which specific activation mode is required: leastServiceImpact or leastElapseTime

saveFallback

Indicates whether or not it is required to initialise and enable fallback option prior to the preactivation. This option is only open for the first preactivate operation of a session. For any subsequent preactivate operation retries within a session the fallbackEnabled parameter must be set to indicate it is not required to initialise fallback otherwise the pre-activate operation retry shall fail

status

Indicates (a) start of operation is successful or (b) operation failed because of specified or unspecified reasons.":

-- 5.2 Notifications

-- 5.2.1 sessionStateChanged (M)

sessionStateChanged NOTIFICATION

BEHAVIOUR

sessionStateChangedBehaviour;

WITH INFORMATION SYNTAX

TS32-614TypeModule.SessionStateChangedInfo

AND ATTRIBUTE IDS

```
notificationIdentifier "Recommendation X.721 1992E" : notificationIdentifier, sessionId sessionId, sourceIndicator "Recommendation X.721 1992E" : sourceIndicator, sessionState sessionState;
```

REGISTERED AS {ts32-614Notification 1};

sessionStateChangedBehaviour BEHAVIOUR

DEFINED AS

"An Agent notifies a Manager that a state change has occurred on a bulk data configuration file sessionID operation subscribed to by the IRPManager.

The 'Event Information' field contains the following data:

• notificationIdentifier

This ITU-T X.721 standardised parameter, together with MOI (Managed Object Instance), unambiguously identifies this notification.

• sessionId

This mandatory parameter identifies this specific session and process associated with an earlier bulk data operation e.g. upload or download for which the current status is required.

• sourceIndicator

This optional when present, indicates the source of the operation that led to the generation of this notification. It can have one of the following values:

- 1 resource operation: The notification was generated in response to an internal operation of the resource;
- 2 management operation: The notification was generated in response to a management operation applied across the managed object boundary external to the managed object;
- 3 unknown: It is not possible to determine the source of the operation. parameter identifies this specific session and process associated with an earlier bulk data operation e.g. upload or download for which the current status is required.

sessionState

This mandatory parameter indicates state transition that caused the Notification. See subclause 8.1 of TS 32.612 [4].";

-- 5.2.2 getSessionLogEnded (M)

getSessionLogEnded NOTIFICATION

BEHAVIOUR

getSessionLogEndedBehaviour;

WITH INFORMATION SYNTAX

TS32-614TypeModule.GetSessionLogEndedInfo

AND ATTRIBUTE IDS

notificationIdentifier "Recommendation X.721 1992E": notificationIdentifier,

sessionId sessionId.

sourceIndicator "Recommendation X.721 1992E": sourceIndicator,

sessionState sessionState;

REGISTERED AS {ts32-614Notification 2};

getSessionLogEndedBehaviour BEHAVIOUR

DEFINED AS

" An Agent notifies a Manager that a requested GetSessionLog for a bulk data configuration file sessionId operation subscribed to by the Manager has ended successfully or unsuccessfully.

The 'Event Information' field contains the following data:

• notificationIdentifier

This ITU-T X.721 standardised parameter, together with MOI (Managed Object Instance), unambiguously identifies this notification.

sessionId

This mandatory parameter identifies this specific session and process associated with an earlier bulk data operation e.g. upload or download for which the current status is required.

sourceIndicator

This optional when present, indicates the source of the operation that led to the generation of this notification. It can have one of the following values:

- 1 resource operation: The notification was generated in response to an internal operation of the resource;
- 2 management operation: The notification was generated in response to a management operation applied across the managed object boundary external to the managed object;
- 3 unknown: It is not possible to determine the source of the operation. parameter identifies this specific session and process associated with an earlier bulk data operation e.g. upload or download for which the current status is required.

sessionLogStatus

This mandatory parameter indicates event that caused the Notification i.e. Get log completed, Get Log Failed.";

-- 5.3 Attributes

-- 5.3.1 sessionId

sessionId ATTRIBUTE

WITH ATTRIBUTE SYNTAX TS32-614TypeModule.SessionId;

MATCHES FOR EQUALITY;

BEHAVIOUR

sessionIdBehaviour BEHAVIOUR DEFINED AS

[&]quot;This attribute identifies a specific session.";;

REGISTERED AS {ts32-614Attribute 1};

-- 5.3.2 sessionState

sessionState ATTRIBUTE

WITH ATTRIBUTE SYNTAX TS32-614TypeModule.SessionState;

MATCHES FOR EQUALITY;

BEHAVIOUR

sessionStateBehaviour BEHAVIOUR DEFINED AS

" This attribute indicates the current state of the configuration data file operation . See Subclause 7.3.5 of 3GPP TS 32.612.";

REGISTERED AS {ts32-614Attribute 2};

-- 5.3.3 sessionLogStatus

sessionLogStatus ATTRIBUTE

WITH ATTRIBUTE SYNTAX TS32-614TypeModule.SessionLogStatus;

MATCHES FOR EQUALITY;

BEHAVIOUR

sessionLogStatusBehaviour BEHAVIOUR DEFINED AS

"This attribute indicates event that caused a getSessionLogEnded Notification, i.e. Get log completed, Get Log Failed.";;

REGISTERED AS {ts32-614Attribute 3};

6 ASN.1 definitions

```
TS32-614TypeModule { ccitt (0) identified-organization (4) etsi (0)
        mobileDomain (0) umts-Operation-Maintenance (3) ts-32-614 (614)
          informationModel (0) asn1Module (2) version2 (2)}
   DEFINITIONS IMPLICIT TAGS ::=
   BEGIN
   -- EXPORTS everything
   IMPORTS
   NotificationIdentifier, SourceIndicator
   FROM Attribute-ASN1Module {joint-iso-ccitt ms(9) smi(3) part2(2) asn1Module(2) 1}
   CMISFilter, ObjectInstance, Scope
   FROM CMIP-1 {joint-iso-ccitt ms(9) cmip(1) modules(0) protocol(3)};
   -- 3GPP TS 32.614 related Object Identifiers
   baseNodeUMTS OBJECT IDENTIFIER ::= {itu-t(0) identified-organization(4) etsi(0) mobileDomain(0)
                      umts-Operation-Maintenance(3)}
   ts32-614 OBJECT IDENTIFIER ::= { baseNodeUMTS ts32-614(614)}
   ts32-614InfoModel OBJECT IDENTIFIER ::= { ts32-614 informationModel(0)}
                         OBJECT IDENTIFIER ::= { ts32-614InfoModel managedObjectClass(3)}
  ts32-614ObjectClass
   ts32-614Package
                      OBJECT IDENTIFIER ::= { ts32-614InfoModel package(4)}
   ts32-614Parameter
                         OBJECT IDENTIFIER ::= { ts32-614InfoModel parameter(5)}
   ts32-614NameBinding OBJECT IDENTIFIER ::= { ts32-614InfoModel nameBinding(6)}
   ts32-614Attribute
                         OBJECT IDENTIFIER ::= { ts32-614InfoModel attribute(7)}
   ts32-614Action
                                OBJECT IDENTIFIER ::= {ts32-614InfoModel action (9)}
   ts32-614Notification
                                      OBJECT IDENTIFIER ::= {ts32-614InfoModel notification (10)}
   -- Start of 3GPP SA5 own definitions
  ErrorCauses ::= ENUMERATED
      noError (0),
                                      -- operation / notification successfully performed
      wrongSessionId (1),
                                      -- the value of the parameter SessionId is not known for the Agent
      unspecifiedErrorReason (255)
                                      -- operation failed, specific error unknown
   SaveFallback ::= ENUMERATED
      enable (0),
                                      -- enable the fallback option
      disable (1)
                                      -- disable the fallback option
   SessionId ::= GraphicString
   Version ::= GraphicString
   SessionState ::= ENUMERATED
      idle(0),
      uploadInProgress
                                      (1),
      uploadCompleted
                                      (2),
```

```
uploadFailed
                                      (3),
   downloadInProgress
                                      (4),
   downloadCompleted
                                      (5),
   downloadFailed
                                      (6),
   activationInProgress
                                      (7),
   activationCompleted
                                      (8),
   activationFailed
                                      (9),
   activationPartlyRealised
                                      (10),
   fallbackInProgress
                                      (11),
   fallbackCompleted
                                      (12),
   fallbackFailed
                                      (13),
   fallbackPartlyRealised
                                      (14),
   validationInProgress
                                      (15),
   validationFailed
                                      (16),
   validationCompleted
                                      (17),
   preactivationInProgress
                                      (18),
   preactivationFailed
                                      (19),
   preactivationPartlyRealised
                                      (20),
   preactivationCompleted (21)}
SessionLogStatus ::= ENUMERATED
   getLogFailed
                        (0),
   getLogCompleted
                        (1)
ContentType ::= ENUMERATED
   completeLog (0),
                                      -- complete log including errors
   errorLog (1)
                                      -- only error log
}
FileReference ::= GraphicString
ActivationMode ::= ENUMERATED
   notSupported (0),
                                      -- the optional parameter is not supported
   leastServiceImpact (1),
                                      -- the IRPAgent shall optimise the execution of the activation in a way that
                                        minimises disruption to network services. Elapse time to complete the
                                        activation is of secondary importance
                                      -- the IRPAgent shall optimise the execution of the activation in a way that
   leastElapseTime (2)
                                        minimises the elapse time for completing the execution of the activation.
                                        During the execution, disruption of network services is of secondary
                                        importance
VerificationMode ::= ENUMERATED
   notSupported (0),
                                      -- the optional parameter is not supported
   fullChecking (1),
                                      -- the checking should be as complete as possible with the intent of achieving
                                        the greatest assurance that the subsequent activation operation will be
                                        successful
                                      -- checking that can be performed by the IRPAgent rapidly is still performed,
   limitedChecking (2)
                                        but further checking that may cause significant delays to execute should be
                                        omitted
Common ::= SEQUENCE
                     SessionId
   sessionId
```

```
CommonReply ::= SEQUENCE
   status
                   ErrorCauses
Download ::= SEQUENCE
   sessionId
                                   SessionId,
   download Data File Reference \\
                                   FileReference
Upload ::= SEQUENCE
   sessionId
                                   SessionId,
   uploadDataFileReference
                                   FileReference,
                                   ObjectInstance, -- ITU-T X.711
   baseObjectInstance
   scope
                                   Scope, -- ITU-T X.711
   filter
                                   CMISFilter -- ITU-T X.711
Validate ::= SEQUENCE
   sessionId
                      SessionId,
                      ActivationMode
   activationMode
Preactivate ::= SEQUENCE
   sessionId
                      SessionId,
   verificationMode
                      VerificationMode,
   activationMode
                      ActivationMode,
   saveFallback
                      SaveFallback
Activate ::= SEQUENCE
   session Id \\
                      SessionId,
   saveFallback
                      SaveFallback,
   activationMode
                      ActivationMode
GetSessionIdsReply ::= SEQUENCE
                      SEQUENCE OF sessionId SessionId,
   sessionIdList
                      ErrorCauses
   status
GetSessionStatusReply ::= SEQUENCE
   sessionState
                   SessionState,
                   ErrorCauses
   status
GetSessionLog ::= SEQUENCE
                      SessionId,
   sessionId
```

```
logFileReference
                      FileReference,
   contentType
                      ContentType,
                      ErrorCauses
   status
GetBulkCmIRPVersionReply ::= SEQUENCE
   versionList
                         SEQUENCE OF Version,
   status
                         ErrorCauses
SessionStateChangedInfo ::= SEQUENCE
   notificationIdentifier
                                NotificationIdentifier OPTIONAL, --ITU-T X.721
   sessionId
                         SessionId,
   sourceIndicator
                         SourceIndicator, -- ITU-T X.721
                         SessionState
   sessionState
{\bf GetSessionLogEndedInfo} ::= {\tt SEQUENCE}
   notificationIdentifier
                                NotificationIdentifier OPTIONAL, --ITU-T X.721
   sessionId
                         SessionId,
                         SourceIndicator, -- ITU-T X.721
   sourceIndicator
   sessionLogStatus
                             SessionLogStatus
```

END -- of module TS32-614TypeModule

Annex A (informative): Change history

	Change history						
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
Jun 2001	S_12	SP-010283			Approved at TSG SA #12 and placed under Change Control	2.0.0	4.0.0
Sep 2001	S_13	SP-010478	001		Correction due to TS renumbering	4.0.0	4.1.0
Jun 2002	S_16	SP-020296	002		Correction of behaviour for IS parameter "saveFallback" of IS operation "activate"	4.1.0	4.2.0
Dec 2002	S_18	SP-020746	003		Correction of ASN.1/GDMO sources	4.2.0	4.3.0
Dec 2002	S_18	SP-020746	004		Alignment with the Rel-5 version of the Information Service in 32.612	4.3.0	5.0.0
Mar 2004	S_23	SP-040105			Automatic upgrade to Rel-6 (no CR)	5.0.0	6.0.0
Dec 2004					Word XP "Open and Repair" & added the TS-family to Introduction. Reference updates. Editorial cosmetics	6.0.0	6.0.1

History

Document history				
V6.0.1	December 2004	Publication		