## ETSI TS 132 313 V8.0.0 (2009-01)

Technical Specification

Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS);


LTE;

Telecommunication management;

Generic Integration Reference Point (IRP) management; Common Object Request Broker Architecture (CORBA)

**Solution Set (SS)** 

(3GPP TS 32.313 version 8.0.0 Release 8)

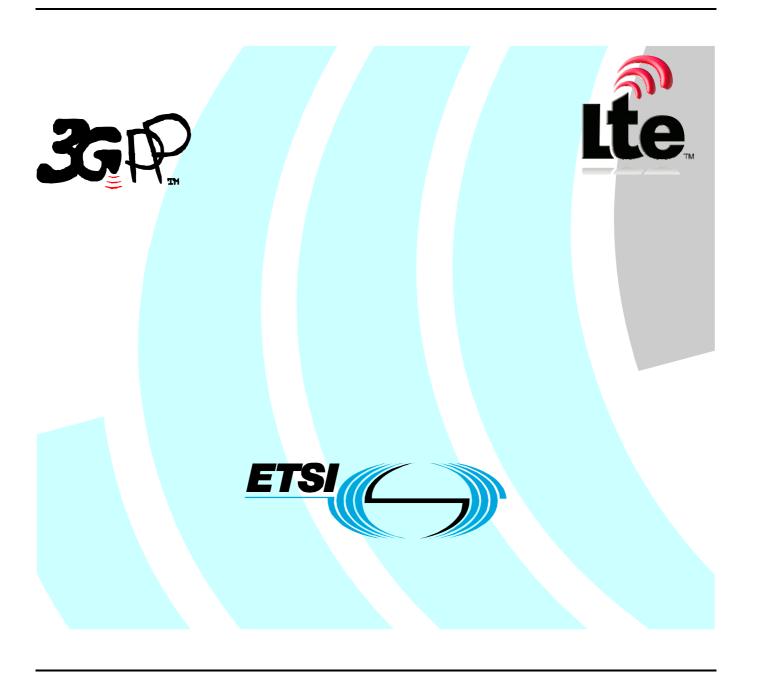

#### Reference RTS/TSGS-0532313v800 Keywords

GSM, LTE, UMTS

## **ETSI**

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

#### Important notice

Individual copies of the present document can be downloaded from: http://www.etsi.org

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI\_support.asp

#### Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

> © European Telecommunications Standards Institute 2009. All rights reserved.

**DECT**<sup>TM</sup>, **PLUGTESTS**<sup>TM</sup>, **UMTS**<sup>TM</sup>, **TIPHON**<sup>TM</sup>, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

**3GPP**<sup>™</sup> is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. LTE™ is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners. GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

#### **Foreword**

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <a href="http://webapp.etsi.org/key/queryform.asp">http://webapp.etsi.org/key/queryform.asp</a>.

## Contents

Intell	lectual Property Rights	2
Forev	word	2
Forev	word	4
Intro	oduction	4
1	Scope	
2	References	
3	Definitions and abbreviations	
3.1	Definitions	5
3.2	Abbreviations	5
4 • • • • • •	Architectural Features	
	ract IOC	
5.	Mapping	
5.1 5.2	Operation mapping	
Anne	ex A (normative): IDL specifications	
A.1	IDL specification (file name 'GenericIRPManagementConstDefs.idl')	
A.2		
Anno	ex B (informative): Change history	12
Histo	orv	13

#### **Foreword**

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

#### where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

#### Introduction

The present document is part of a TS-family covering the 3<sup>rd</sup> Generation Partnership Project; Technical Specification Group Services and System Aspects; Telecommunication management; as identified below:

32.311:	Generic Integration Reference Point (IRP) management; Requirements
32.312:	Generic Integration Reference Point (IRP) management; Information Service (IS)
32.313:	Generic Integration Reference Point (IRP) management; Common Object Request Broker Architecture (CORBA) Solution Set (SS)

## 1 Scope

The present document specifies the CORBA Solution Set for Generic Integration Reference Point (IRP) management whose capabilities are specified in 3GPP TS 32.312 [1], the Generic IRP management: Information Service.

This Solution Set specification is related to TS 32.312 V8.0.X.

#### 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.
- [1] 3GPP TS 32.312: "Telecommunication management; Generic Integration Reference Point (IRP) management: Information Service (IS)".
- [2] 3GPP TS 32.311: "Telecommunication management; Generic Integration Reference Point (IRP) management; Requirements".
- [3] 3GPP TS 32.111-2: "Telecommunication management; Alarm Integration Reference Point (IRP); Information Service (IS)".
- [4] 3GPP TS 32.302: "Telecommunication management; Configuration Management (CM); Notification Integration Reference Point (IRP): Information Service (IS)".

### 3 Definitions and abbreviations

#### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in TS 32.312 [1] apply.

IRP document version number string (or "IRPVersion"): See 3GPP TS 32.311 [2] subclause 3.1.

#### 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CORBA Common Object Request Broker Architecture
IDL Interface Definition Language
IRP Integration Reference Point
IOC Information Object Class
OMG Object Management Group

SS Solution Set

## 4 Architectural Features

The overall architectural feature of this IRP is specified in 3G TS 32.312 [1]. This clause specifies features that are specific to the CORBA SS.

#### **Abstract IOC**

The capabilities of the Generic IRP management: IS [1] are captured by the definition of an IOC called ManagedGenericIRP. This IOC is an abstract class and is mapped to a MOC of the same name. The MOC is intended for inheritance by other MOCs specified in Interface IRPs such as AlarmIRP [3], NotificationIRP [4], etc.

## 5. Mapping

### 5.1 Operation mapping

Generic IRP management: IS [1] defines semantics of operation visible across the Itf-N. Table 1 indicates mapping of these operations to their equivalents defined in this SS.

Table 5.1: Mapping from IS Notification/Operation to SS equivalents

IS Operation TS 32.312 [1]	SS Method	Qualifier
getIRPVersion	get_irp_versions	M
getOperationProfile	get_interface_irp_operation_profile	0
getNotificationProfile	get_interface_irp_notification_profile	0

### 5.2 Operation parameter mapping

Generic IRP management: IS [1] defines semantics of parameters carried in operations across the Itf-N. The following set of tables indicates the mapping of these parameters, as per operation, to their equivalents defined in this SS.

Table 5.2 Mapping from IS getIRPVersion parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
versionNumberSet	Return value of type GenericIRPManagementConstDefs::VersionNumberSet	M
status	Exceptions:	M
	GenericIRPManagementSystem::GetIRPVersions	

Table 5.3 Mapping from IS getOperationProfile parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
iRPVersion	GenericIRPManagementConstDefs::VersionNumber	M
	this_irp_version	
operationNameProfile,	Return value of type	M
operationParameterProfile	GenericIRPManagementConstDefs::MethodList	
status	Exceptions:	M
	GenericIRPManagementSystem::GetInterfaceIRPOperationsProfile,	
	GenericIRPManagementSystem::OperationNotSupported,	
	GenericIRPManagementSystem::InvalidParameter,	
	GenericIRPManagementSystem::ValueNotSupported	

Table 5.4 Mapping from IS getNotificationProfile parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
iRPVersion	GenericIRPManagementConstDefs::VersionNumber this_irp_version	М
notificationNameProfile,	Return value of type	М
notificationParameterProfile	GenericIRPManagementConstDefs::NotificationList	
status	Exceptions:	M
	GenericIRPManagementSystem::GetInterfaceIRPNotificationProfile,	
	GenericIRPManagementSystem::OperationNotSupported,	
	GenericIRPManagementSystem::InvalidParameter,	
	GenericIRPManagementSystem::ValueNotSupported	

## Annex A (normative): IDL specifications

## A.1 IDL specification (file name 'GenericIRPManagementConstDefs.idl')

```
//File: GenericIRPManagementConstDefs.idl
#ifndef _GENERIC_IRP_MANAGEMENT_CONST_DEFS_IDL_
#define _GENERIC_IRP_MANAGEMENT_CONST_DEFS_IDL_
#include <TimeBase.idl>
// This statement must appear after all include statements
#pragma prefix "3gppsa5.org"
/* ## Module: GenericIRPManagementConstDefs
This module contains definitions commonly used among all IRPs.
- -
module GenericIRPManagementConstDefs
    * Definition imported from CosTime.
    * The time refers to time in Greenwich Time Zone.
    \star It also consists of a time displacement factor in the form of minutes of
    \ensuremath{^{\star}} displacement from the Greenwich Meridian.
    typedef TimeBase::UtcT IRPTime;
    typedef string DN;
    typedef sequence <DN> DNList;
    enum Signal {OK, FULL FAILURE, PARTIAL FAILURE};
    enum Result {SUCCESS, FAILURE};
    * This holds a list of notification Ids
    typedef sequence <long> NotifIdSet;
    \star This holds identifiers of notifications that are correlated.
    struct CorrelatedNotification
        DN source; // Contains DN of MO that emitted the set of notifications
                  // DN string format in compliance with Name Convention for
                  // Managed Object.
                  \ensuremath{//} This may be a zero-length string. In this case, the \ensuremath{\mathrm{MO}}
                  // is identified by the value of the MOI attribute
                  // of the Structured Event, i.e., the notification.
        NotifIdSet notif_id_set; // Set of related notification ids
    };
    \star The VersionNumber is a string that identifies the IRP specification name
    * and its version number. See definition "IRP document version number
    * string" or "IRPVersion".
    * The VersionNumberSet is a sequence of such VersionNumber. It is returned
    \star by get_XXX_IRP_versions(). The sequence order has no significance.
    typedef string VersionNumber;
    typedef sequence <VersionNumber> VersionNumberSet;
    typedef string MethodName;
    typedef string ParameterName;
    typedef sequence <ParameterName> ParameterList;
    \boldsymbol{\star} The Method defines the structure to be returned as part of
    * get_supported_operations_profile(). The name shall be the actual method
    * name (ex. "attach push", "change subscription filter", etc.)
    * The parameter list contains a list of strings. Each string shall be
    * the actual parameter name (ex. "manager_reference", "filter", etc.)
    * /
    struct Method
        MethodName name:
```

```
ParameterList parameter_list;
   };
   * List of all methods and their associated parameters.
   typedef sequence <Method> MethodList;
   typedef string NotificationName;
   struct Notification
       NotificationName name;
       ParameterList parameter_list;
   }:
   typedef sequence <Notification> NotificationList;
   * Defines the name of an attribute of a Managed Object
   typedef string MOAttributeName;
   * Defines the value of an attribute of a Managed Object in form of a CORBA
   * Any. Apart from basic datatypes already defined in CORBA, the allowed
    * attribute value types are defined in the AttributeTypes module.
   typedef any MOAttributeValue;
   * Represents an attribute: "name" is the attribute name
    * and "value" is the attribute value.
   struct MOAttribute
       MOAttributeName name;
       MOAttributeValue value;
   typedef sequence <MOAttribute> MOAttributeSet;
   typedef string ManagerIdentifier;
   * The following are types carrying an optional parameter.
   * If the boolean is TRUE, then the value is present.
   * Otherwise the value is absent.
   union StringOpt switch (boolean)
   {
       case TRUE: string value;
   union ShortOpt switch (boolean)
   {
       case TRUE: short value;
   };
   union UnsignedShortOpt switch (boolean)
   {
       case TRUE: unsigned short value;
   };
   union LongOpt switch (boolean)
   {
       case TRUE: long value;
   };
   union UnsignedLongOpt switch (boolean)
       case TRUE: unsigned long value;
   union IRPTimeOpt switch (boolean)
    {
      case TRUE: GenericIRPManagementConstDefs::IRPTime value;
    };};
#endif // _GENERIC_IRP_MANAGEMENT_CONST_DEFS_IDL_
```

# A.2 IDL specification (file name 'GenericIRPManagementSystem.idl')

```
//File: GenericIRPManagementSystem.idl
#ifndef GENERIC IRP MANAGEMENT SYSTEM IDL
#define GENERIC IRP MANAGEMENT SYSTEM IDL
#include <GenericIRPManagementConstDefs.idl>
// This statement must appear after all include statements
#pragma prefix "3gppsa5.org"
module GenericIRPManagementSystem
   exception GetInterfaceIRPNotificationProfile { string reason; };
   exception GetInterfaceIRPOperationProfile { string reason; };
   exception GetIRPVersions { string reason; };
   Exception thrown when an unsupported optional parameter
   is passed with information.
   The parameter shall be the actual unsupported parameter name.
   exception ParameterNotSupported {
      GenericIRPManagementConstDefs::ParameterName parameter; };
   Exception thrown when an invalid parameter value is passed.
   The parameter shall be the actual parameter name.
   exception InvalidParameter {
      GenericIRPManagementConstDefs::ParameterName parameter; };
   Exception thrown when a valid but unsupported parameter value is passed.
   The parameter shall be the actual parameter name.
   exception ValueNotSupported {
      GenericIRPManagementConstDefs::ParameterName parameter; };
   Exception thrown when an unsupported optional method is called.
   exception OperationNotSupported {};
   interface GenericIRPManagement
      Return the list of all supported Interface IRP versions
      Each IRPVersion is defined by the rule in the definition
      "IRP document version number string" or "IRPVersion"
      (see subclause 3.1).
      GenericIRPManagementConstDefs::VersionNumberSet get irp versions
      )
      raises (GetIRPVersions);
      Return the list of all supported methods and their supported
      parameters for this Interface IRPVersion.
      GenericIRPManagementConstDefs::MethodList
         get_interface_irp_operation_profile
         in GenericIRPManagementConstDefs::VersionNumber this irp version
      raises (GetInterfaceIRPOperationProfile,
              OperationNotSupported,
              InvalidParameter,
              ValueNotSupported);
      Return the list of all supported notifications and their supported
```

# Annex B (informative): Change history

	Change history							
Date	TSG#	TSG Doc.	CR	Rev	Subject/Comment	Cat	Old	New
Dec 2004	S_26	SP-040795			Submitted to SA#26 for Approval		1.0.0	6.0.0
Jun 2005	S_28	SP-050288	0001		Correction of IDL syntax errors in GenericIRPManagement{ConstDefs System}.idl	F	6.0.0	6.1.0
Sep 2005	SA_29	SP-050461	0002		Align the CORBA SS IDL with TS 32.150 Style Guide	F	6.1.0	6.2.0
Sep 2006	SA_33	SP-060529	0003		Capture all CORBA common types in 32.313	F	6.2.0	6.3.0
Mar 2007	SA_35	SP-070035	0004		Correct the compiling errors in the CORBA IDL	F	6.3.0	6.4.0
Jun 2007	SA_36				Automatic upgrade to Rel-7 (no CR) at freeze of Rel-7. Deleted reference to CMIP SS, discontinued from R7 onwards.		6.4.0	7.0.0
Dec 2008	SA_42				Upgrade to Release 8		7.0.0	8.0.0

## History

Document history				
V8.0.0	January 2009	Publication		