

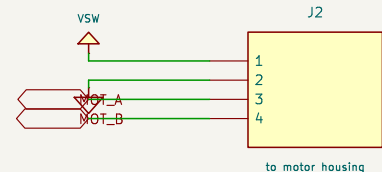
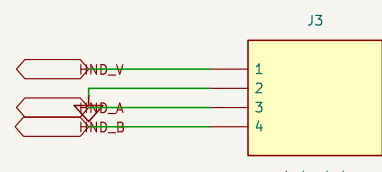



SUPPLY

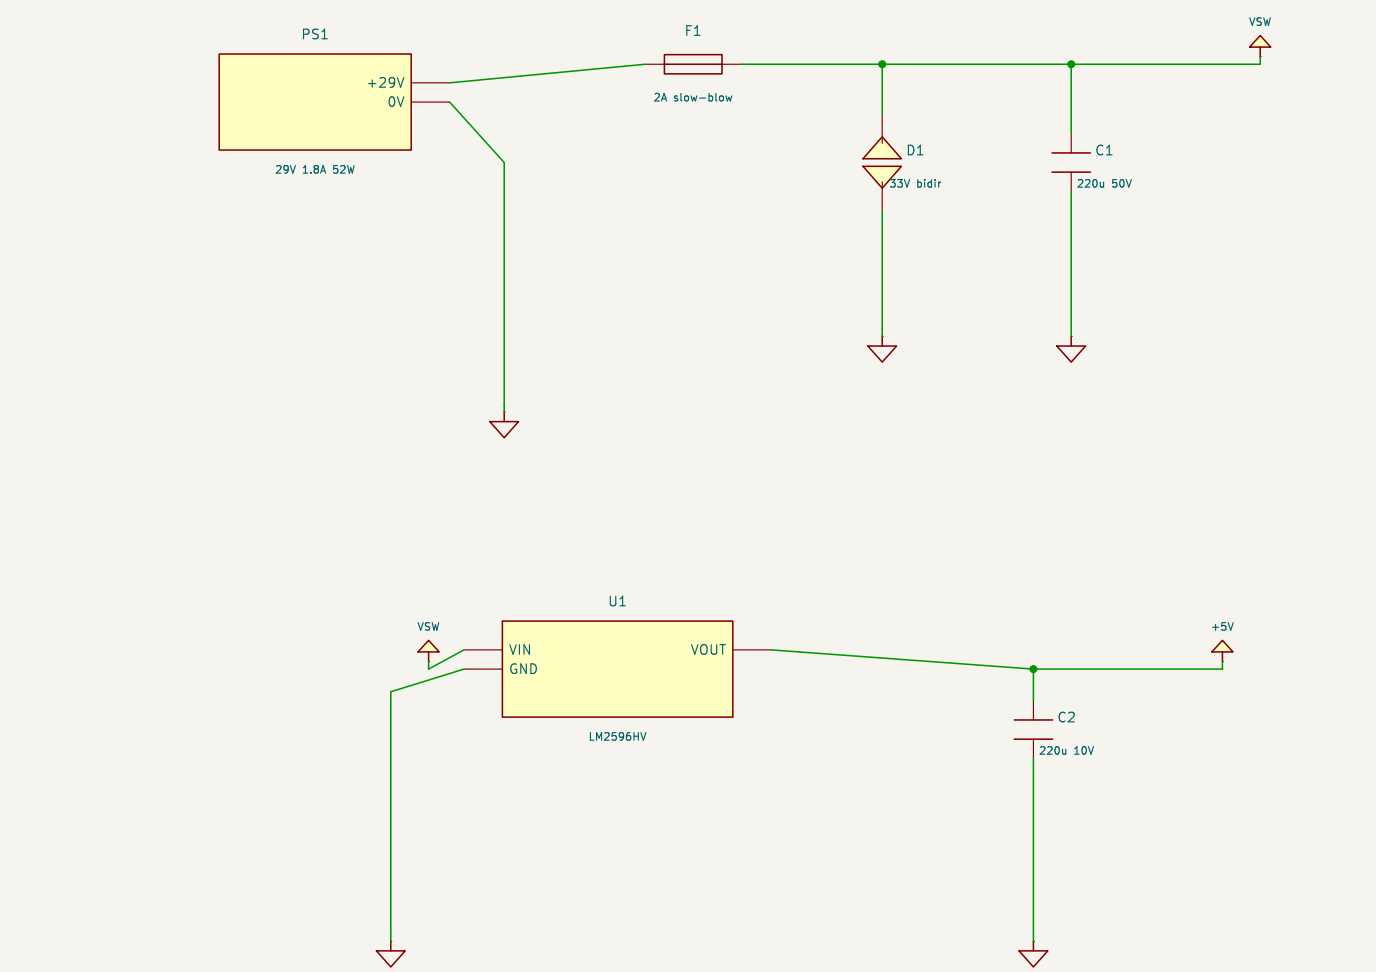


ROCKER SENSE (dry contacts in board mode)

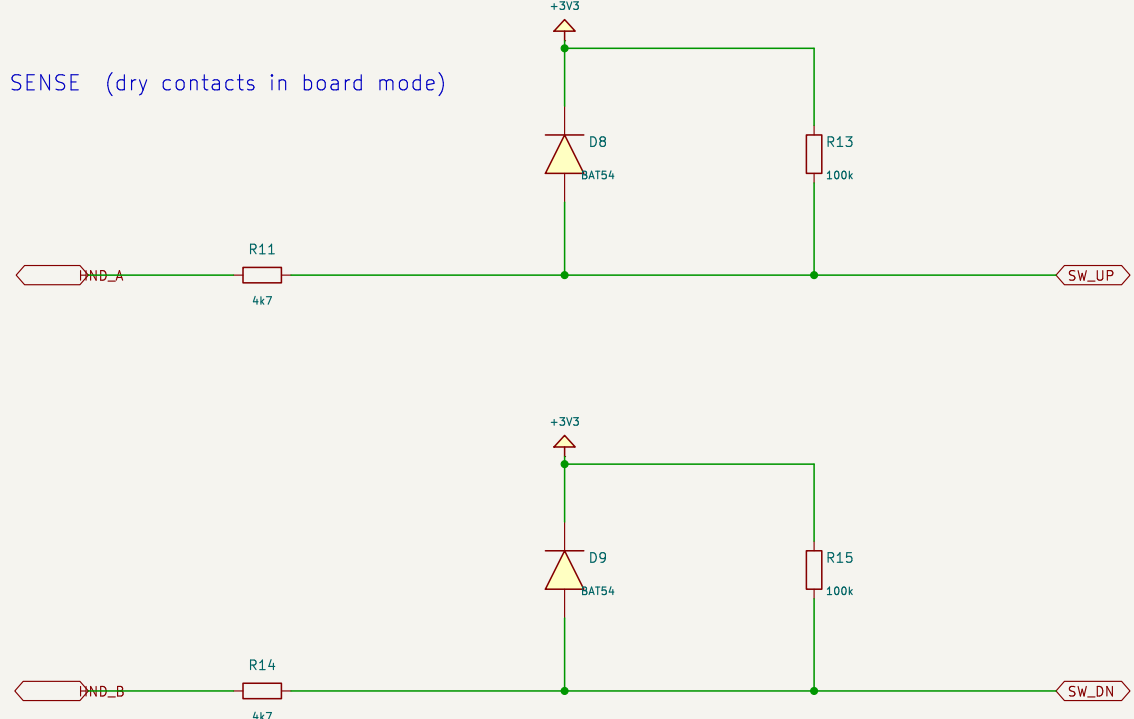


CONTROLLER

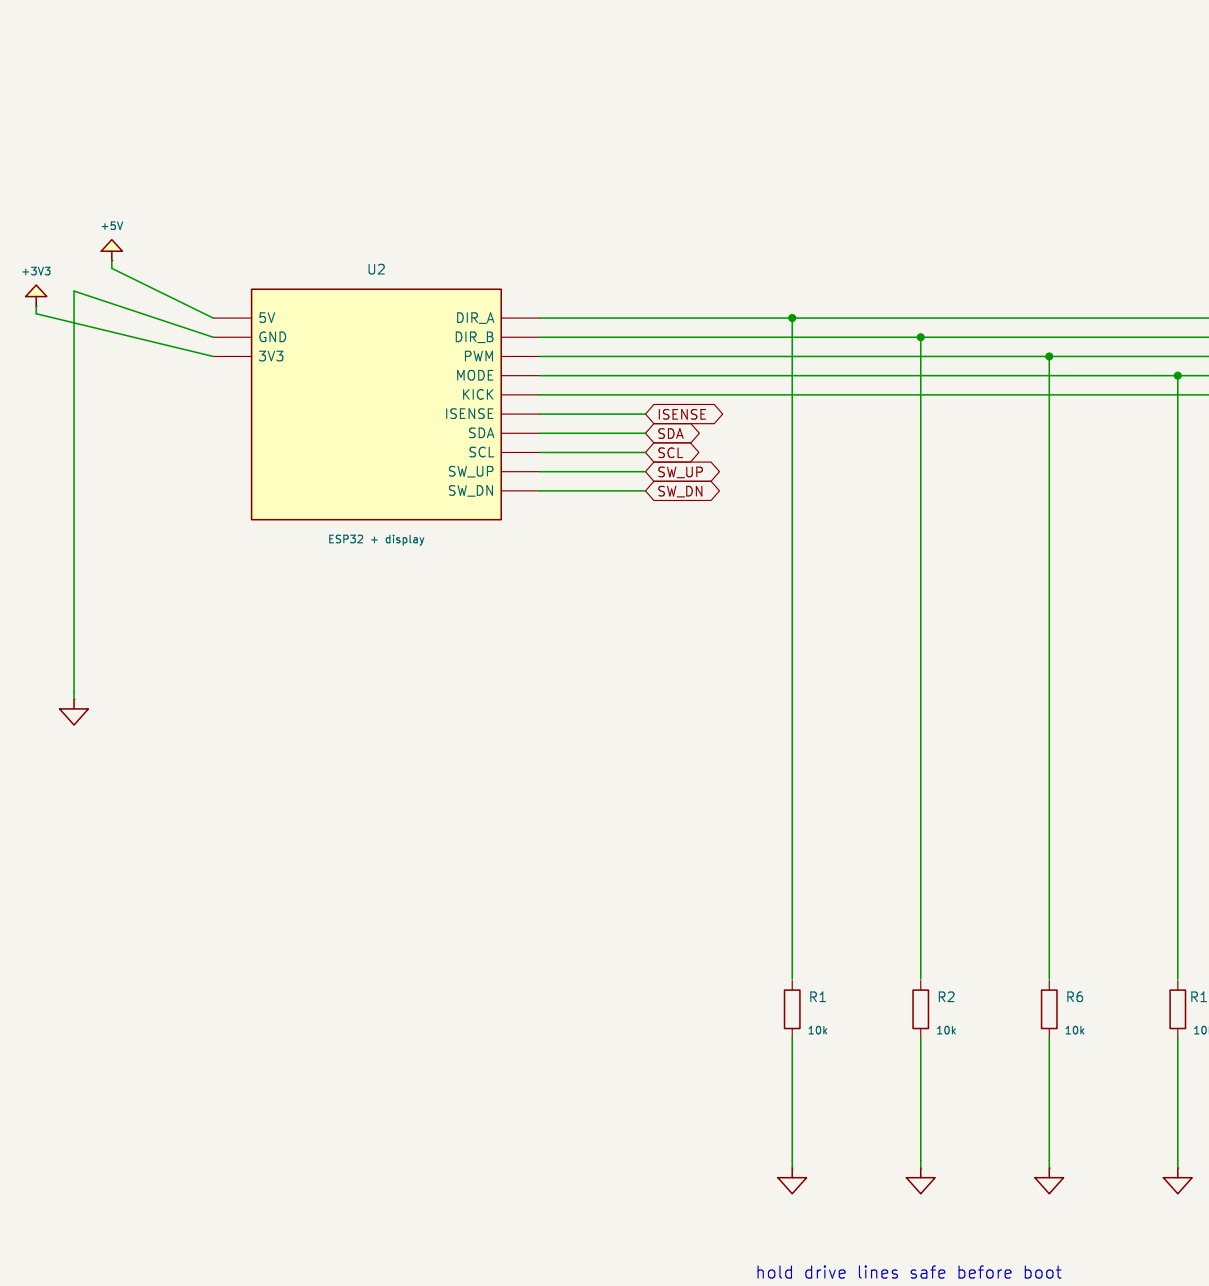


WATCHDOG + GATING

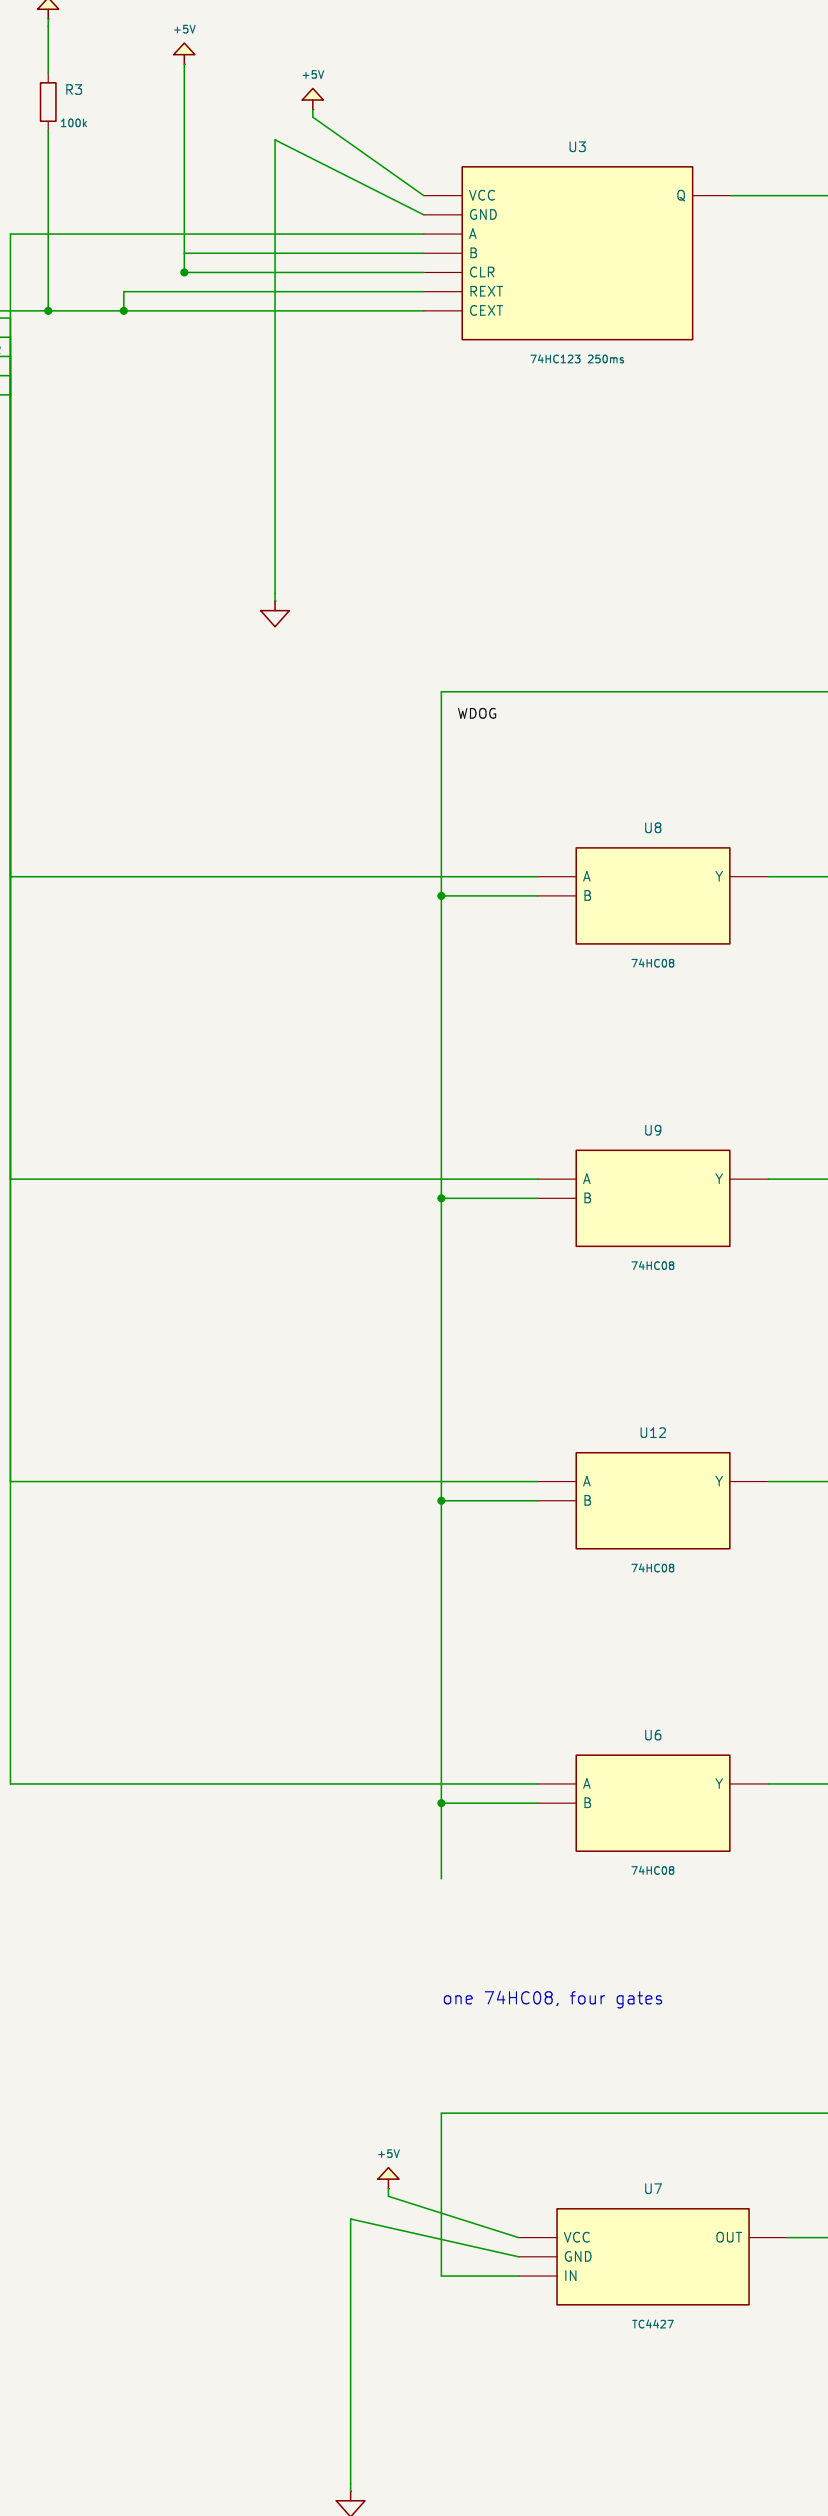

DRIVE

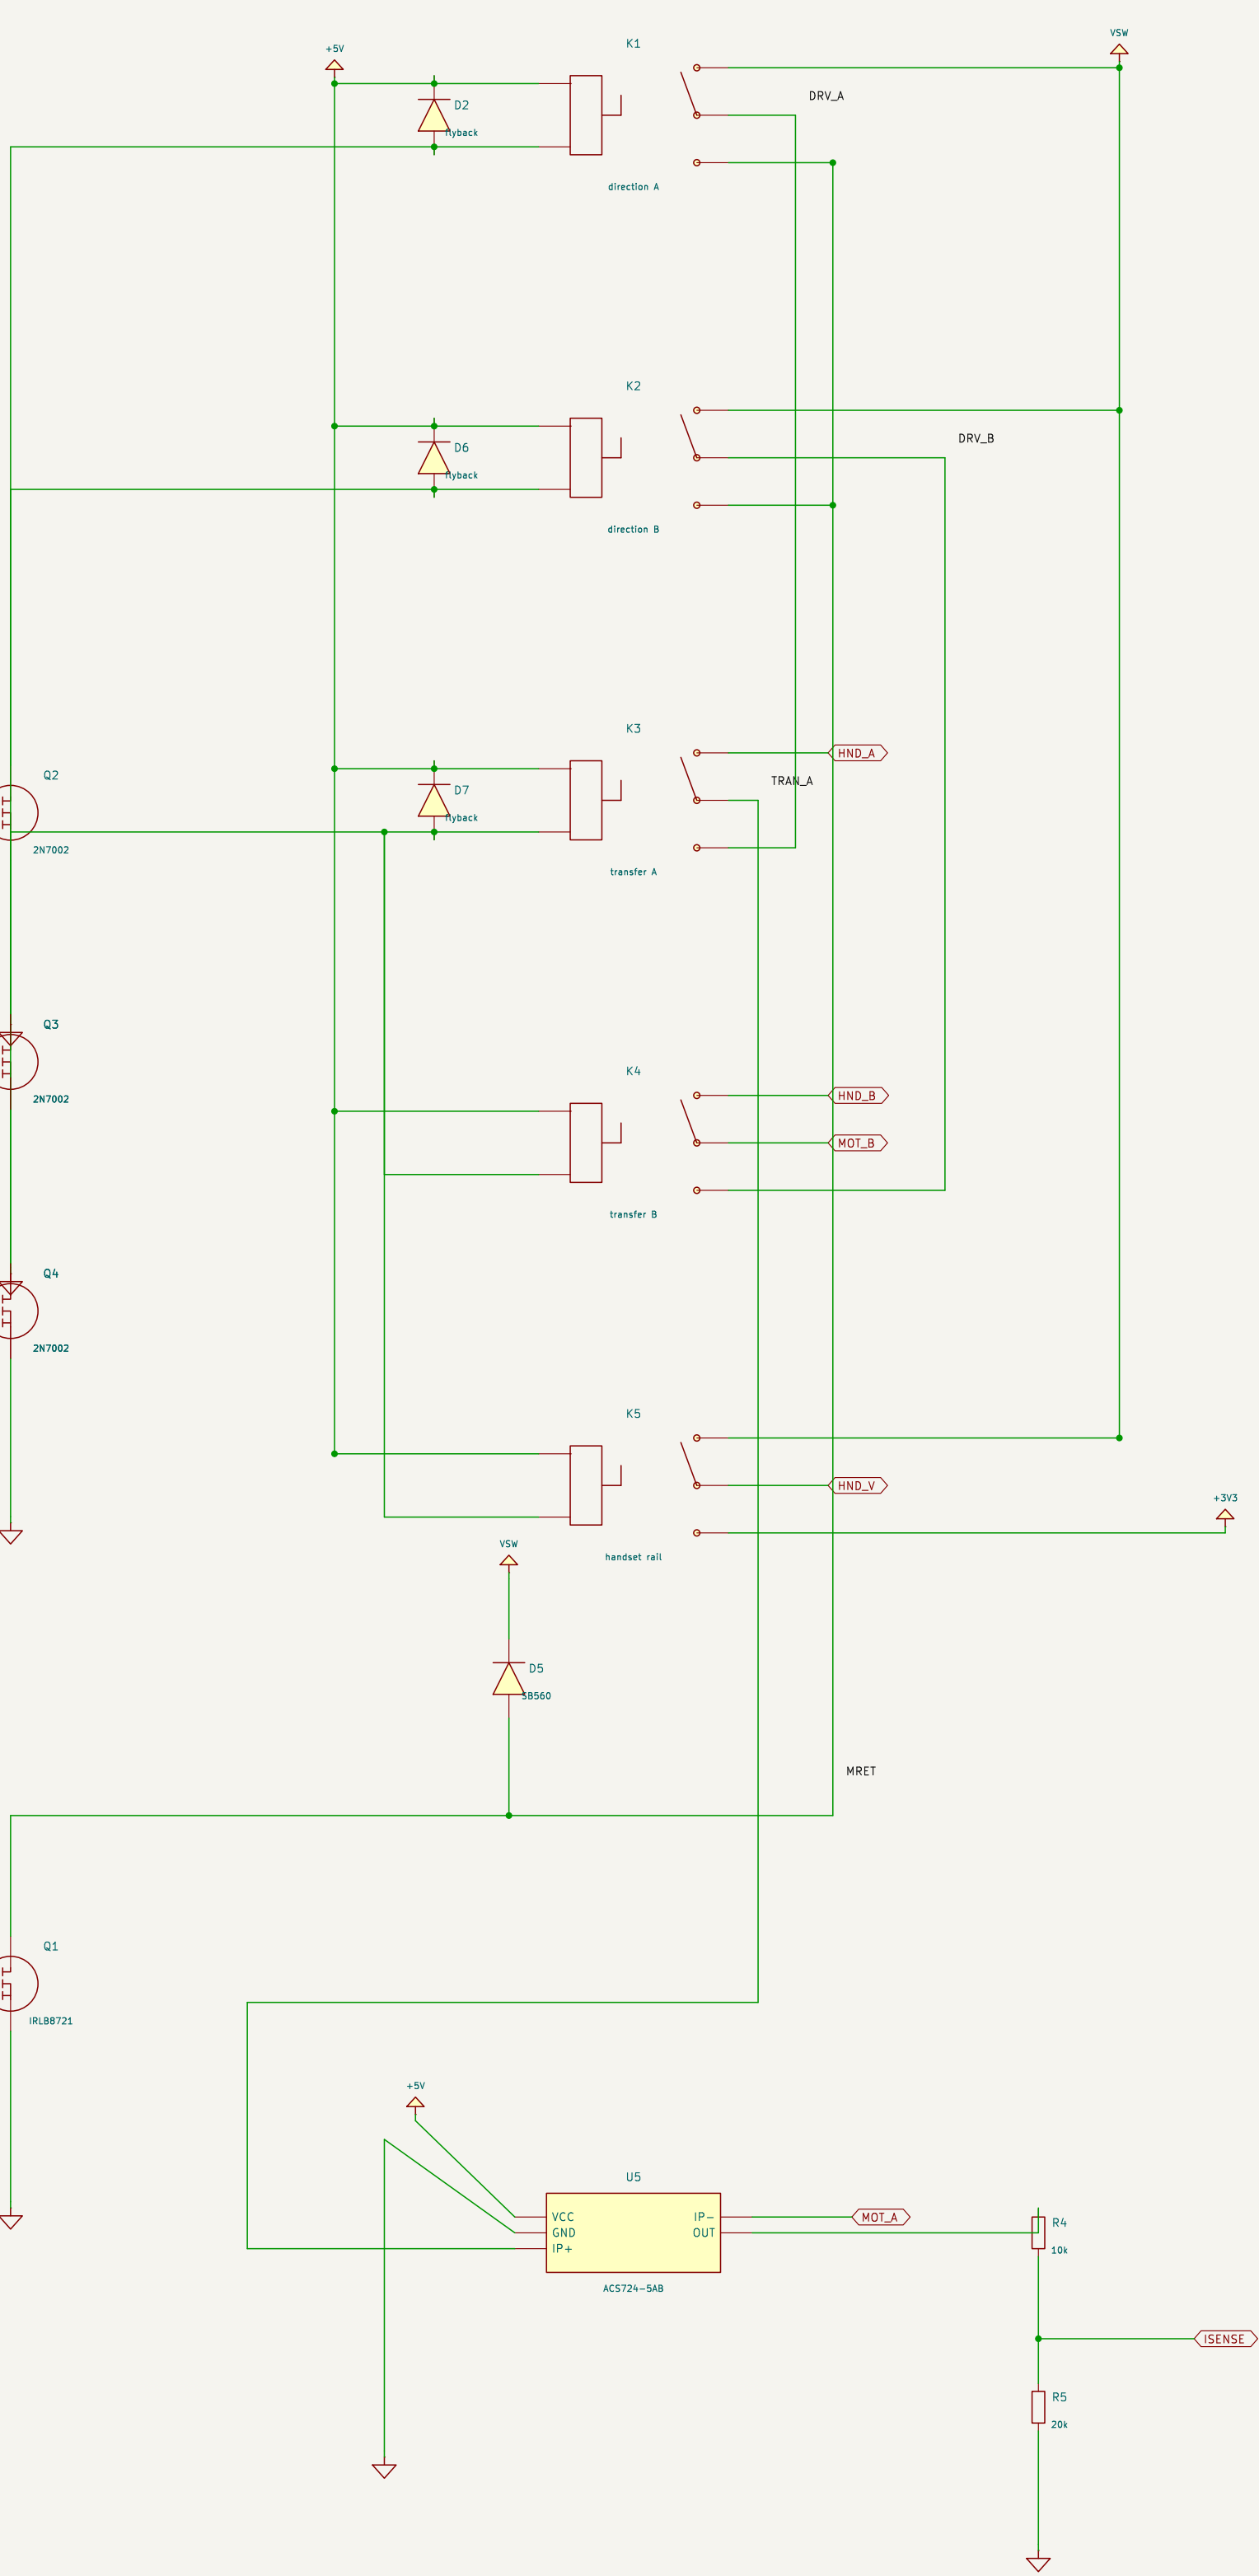

LEG (unmodified)

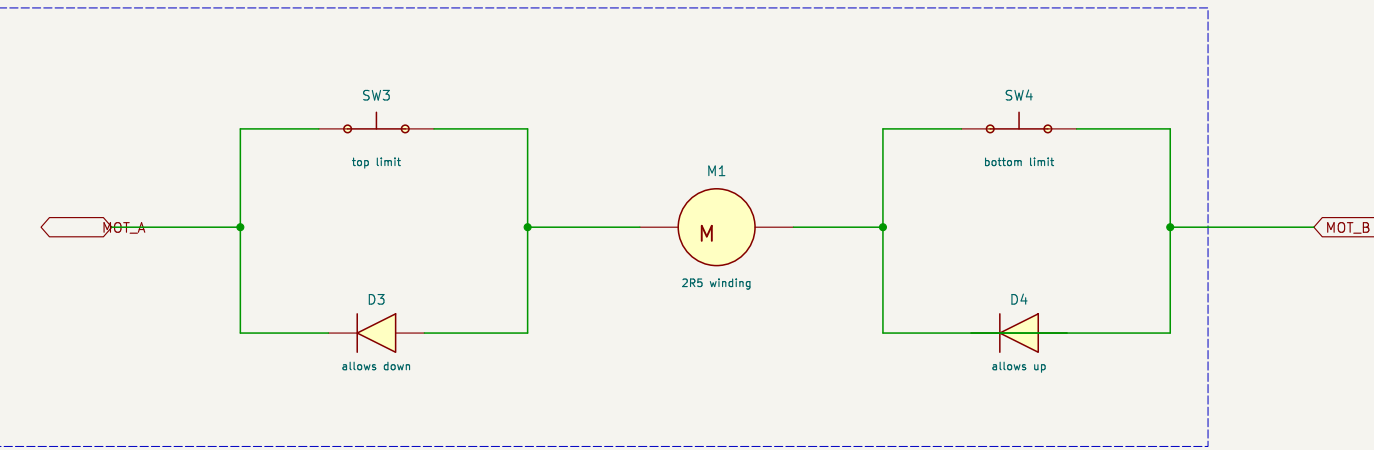

IN-LINE INTERCEPTOR. The handset keeps its factory wiring and still switches motor current in OEM mode. This board cuts into the 4-core cable between handset and motor housing; unplug it and rejoin the cable to return the desk to stock.

K3 / K4 / K5 share one coil node and act as a 3-pole transfer:
de-energised -> handset sees VSW and drives the winding (STOCK BEHAVIOUR)
energised -> handset sees +3V3 and is isolated from the winding
Power loss or a watchdog timeout drops the transfer and hands the desk back to the rockers.

K1 / K2 plus back at rest quickly as the SCM releases do. Both off -> both winding nodes on VSW

Handset unmodified: board sits in the 4-core cable			
Sheet: 1			
File: desk_inline.kicad_sch			
Title: Slangerup desk - in-line interceptor			
Size: A1	Date:	Rev:	
Kicad E.D.A. kicad-cv: 7.0.11+dfsg-1build4		1/1	