Measure the shelves.

Use a tape measure. Record the clear space available to a crate - not the outside size of the rack.

FRONT VIEW

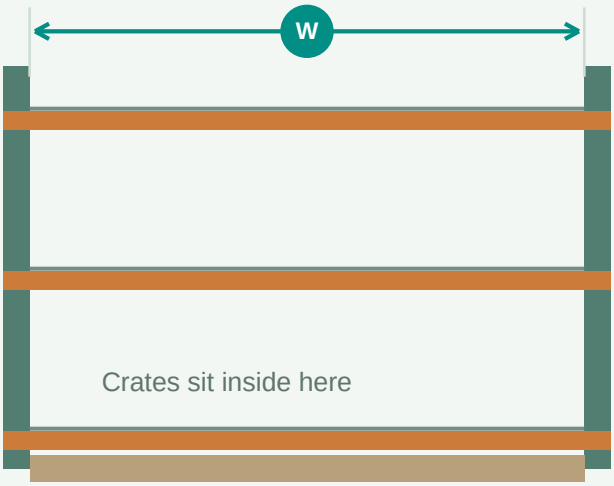

W = between the inside faces of the uprights

SIDE VIEW - DEPTH + HEIGHTS

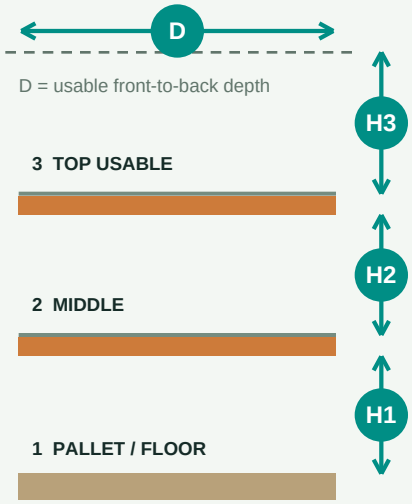

D = usable front-to-back depth

On A: measure H3 up to the unused highest shelf / its lowest beam.

Fill one line for each rack face below.

H1 / H2 / H3: from the supporting surface to the LOWEST underside above it.

AREA / FACE	W (in)	D (in)	H1 (in)	H2 (in)	H3 (in)
A - South wall / M1					
B - Warehouse face / M2					
C - Face 1 / M3					
C - Face 2 / M3					
D - Right wall / K1-K2					

Loaded crates & rack limits

Approved stack: _____ crates high

Heaviest full bin: _____ lb

Loaded bin + closed lid: L _____ W _____ H _____ inches

☐ Photo of rack weight-rating label(s).

☐ Photo of 24 meals in one bin, lid closed.

A: 3 sections. B: 5 warehouse sections only. C: 5 sections per face. Measure the tightest section; photograph differences.

Measure the room & aisles.

Match A, B, C and D to the live blueprint. Arrows show the exact edges to measure between.

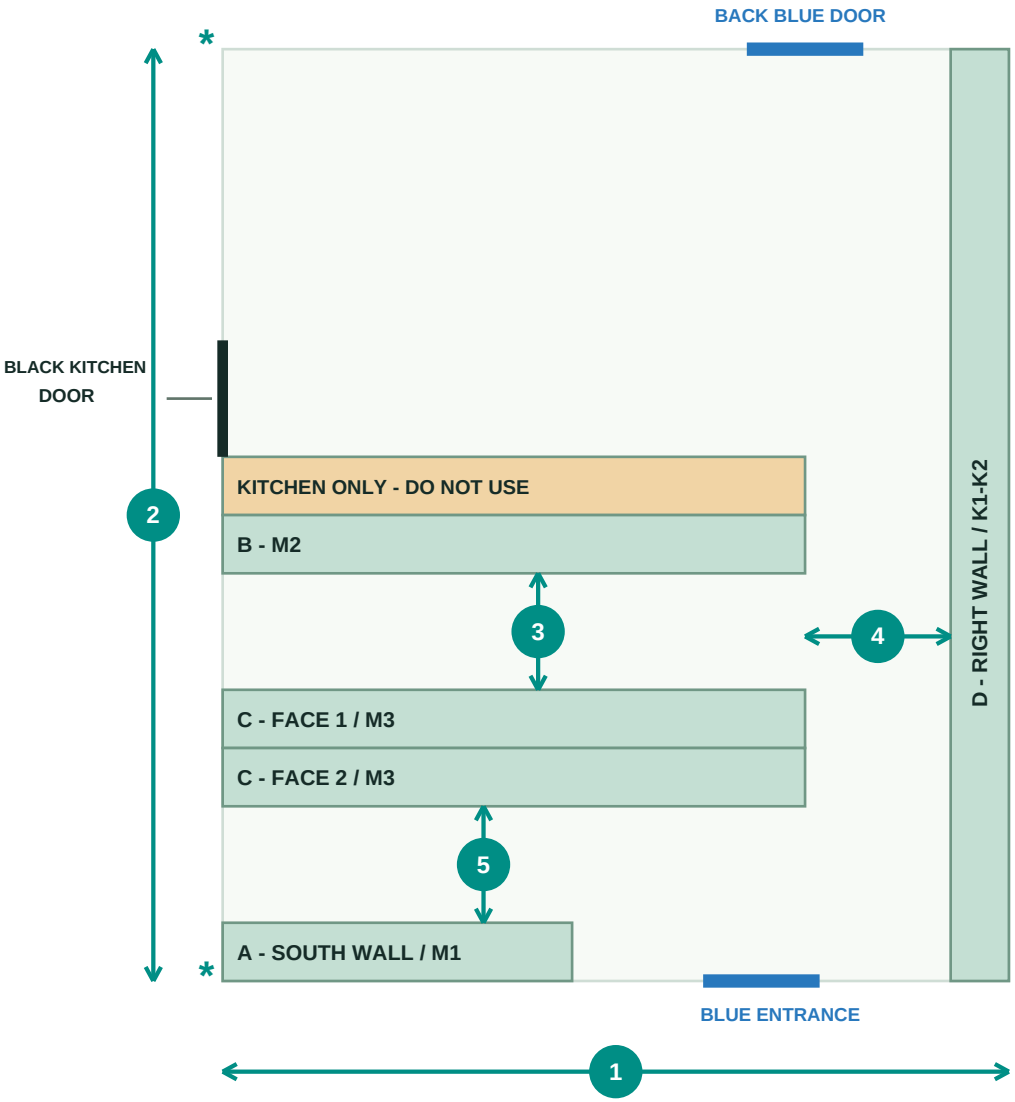

PLAN VIEW

B: all 5 warehouse sections.
C: all 5 on BOTH faces.
Kitchen side of B: DO NOT USE.

3 = B to C
4 = middle rack end to D
5 = C to A

Tape measure goes between the closest edges.

1 Inside room WIDTH
left wall to right wall — _____ in

2 Inside room LENGTH
front wall to back wall — _____ in

3 B to C clear aisle
rack edge to rack edge — _____ in

4 Middle racks to D
rack end to shelf edge — _____ in

5 C to A clear aisle
rack edge to rack edge — _____ in

Use actual clear space, not an estimate.

Door openings: measure clear width + corner-to-nearest-jamb offset.

Blue entrance - bottom-left *	Width		Offset from * corner	in
Back blue - top-left *	Width		Offset from * corner	in
Black kitchen - top-left *	Width		Offset from * corner	in