


mytunas / Model 02


01 — Exterior and internal arrangement. Front-coordinate plan; component rectangles show validated bounds.

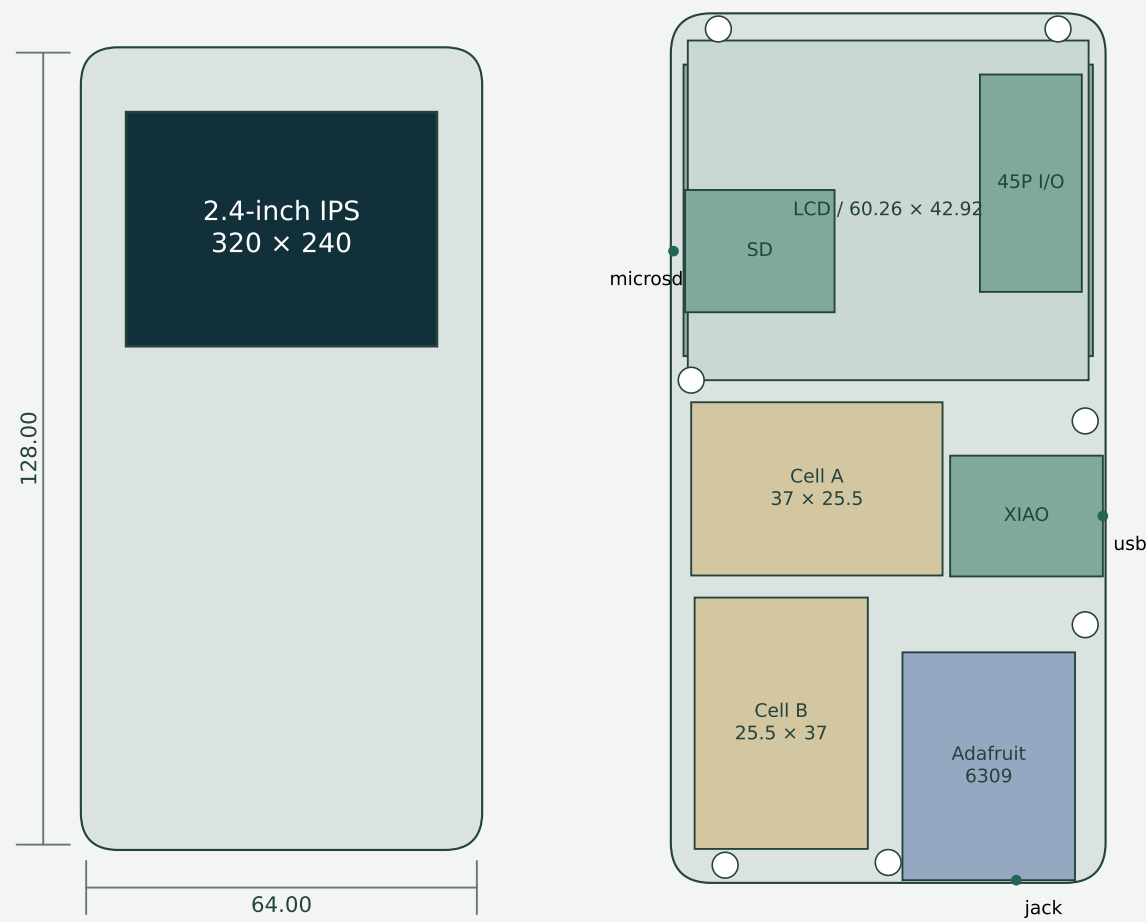

Feature	Dimension
Body	64 × 128 × 8.30
Corner radius	R6.00
Steel faces	0.40 each
Frame perimeter	Z0.55 to 7.75
Rear hard stops	Z7.90 contact plane
Display opening	49.56 × 37.32
Display centre	X0, Y35
USB opening	9.24 × 3.51 / rim profile
Headphone opening	Diameter 5.00
SD opening	11.50 × 1.50
Covers	Flush / removable prototype

Hole and port coordinates

02 — Datum: body centre X0/Y0; front exterior Z0. All dimensions in millimetres.

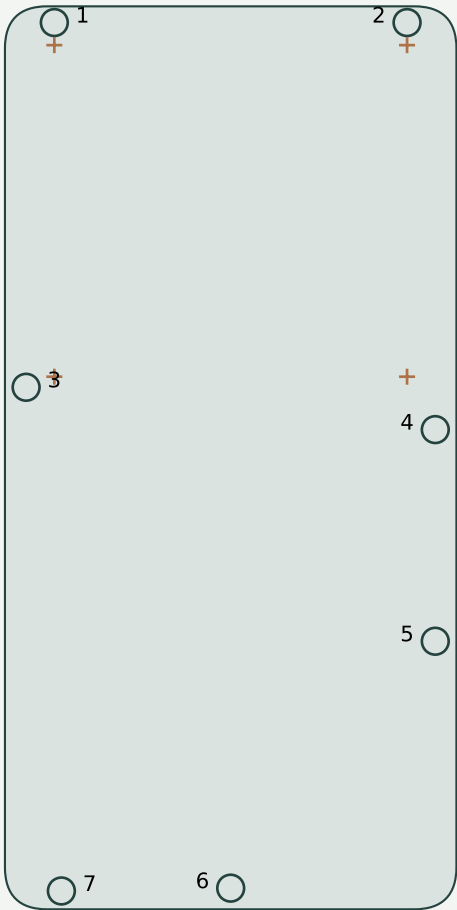


ID	X	Y	Fastener
1	-25.00	61.70	M1.6 × 5 / CSK
2	25.00	61.70	M1.6 × 5 / CSK
3	-29.00	10.00	M1.6 × 5 / CSK
4	29.00	4.00	M1.6 × 5 / CSK
5	29.00	-26.00	M1.6 × 5 / CSK
6	0.00	-61.00	M1.6 × 5 / CSK
7	-24.00	-61.40	M1.6 × 5 / CSK
C1	-25.00	11.50	M1.4 × 3 / carrier
C2	25.00	11.50	M1.4 × 3 / carrier
C3	-25.00	58.50	M1.4 × 3 / carrier
C4	25.00	58.50	M1.4 × 3 / carrier

Mouth centre	X	Y	Z
usb	31.6000	-9.9927	3.6050
jack	18.8592	-63.6000	4.4225
microsd	-31.6000	29.0000	6.4000

Depth sections and reserves

03 — Layer values are nominal allocations. Full published DAC height is retained.

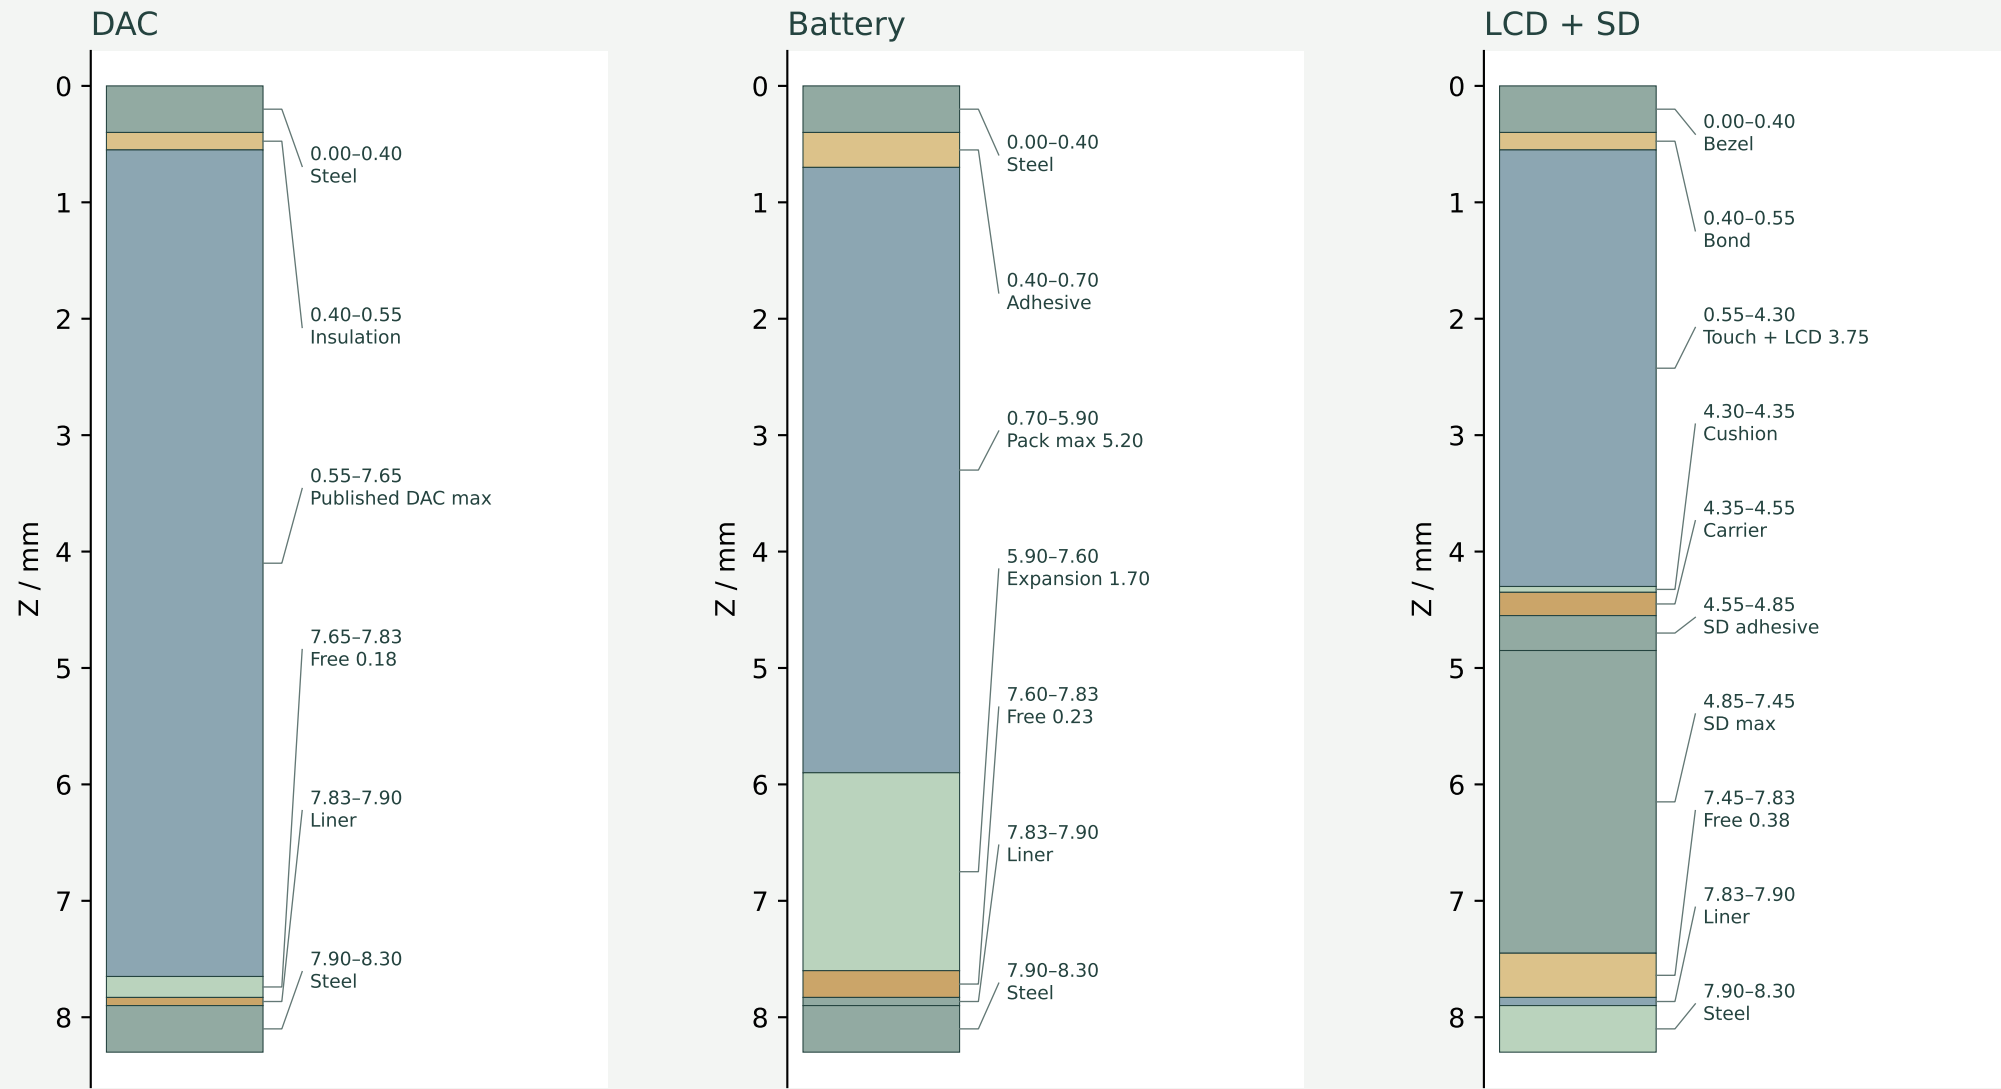

Manufacturing and assembly checkpoints

04 — STEP defines 3D geometry. DXF profiles are for the named sheet layers only.

Part / check	Specification	Process note
Frame	PA12 fit prototype; 1 connected body	Use STEP for ribs, pockets and pilots
Front / rear	0.40 mm stainless sheet	Deburr and insulate all internal edges
Retainer	0.20 mm stainless + bonded ribs	Keep cushion on LCD perimeter
Case fasteners	7 × M1.6 × 5, countersunk	Pilot 1.30; confirm screw supplier drawing
Carrier fasteners	4 × M1.4 × 3, nominal	Pilot 1.10; clearance 1.60
Board mounting	Finite adhesive pads + stops	Verify shear strength and plug cycles
Port covers	Silicone compression references	Retention and sealing remain unqualified
Assembly	Recess, lower, slide boards into ports	Install stops and batteries afterwards
Release gate	0.18 mm DAC clearance is tight	Requires tolerance stack and physical trial

Part measurement schedule

05 — Bounding dimensions and assembly position; holes and contours are defined by STEP.

Part	W × L × H	Minimum X, Y, Z
midframe	64.01 × 128.01 × 7.36	-32.00, -64.00, 0.55
front_bezel	64.01 × 128.01 × 0.41	-32.00, -64.00, -0.00
rear_shell	64.01 × 128.01 × 0.41	-32.00, -64.00, 7.90
front_bond	64.01 × 128.01 × 0.16	-32.00, -64.00, 0.40
rear_gasket	64.01 × 128.01 × 0.16	-32.00, -64.00, 7.75
touch_glass	59.96 × 42.62 × 1.25	-29.98, 13.69, 0.55
lcd	60.26 × 42.92 × 2.50	-30.13, 13.54, 1.80
display_adhesive	59.66 × 42.32 × 0.15	-29.83, 13.84, 0.40
display_carrier	59.00 × 50.00 × 0.20	-29.50, 10.00, 4.35
display_cushion	58.00 × 41.00 × 0.05	-29.00, 14.50, 4.30
carrier_rib_15	44.00 × 1.20 × 1.15	-24.00, 14.40, 4.60
carrier_rib_15_bond	44.00 × 1.20 × 0.05	-24.00, 14.40, 4.55
carrier_rib_56	44.00 × 1.20 × 1.15	-24.00, 55.40, 4.60
carrier_rib_56_bond	44.00 × 1.20 × 0.05	-24.00, 55.40, 4.55
audio	25.40 × 33.54 × 6.37	2.10, -63.60, 0.55
xiao	22.48 × 17.78 × 4.46	9.12, -18.89, 0.75
audio_insulator	25.40 × 31.75 × 0.15	2.10, -61.81, 0.40
xiao_insulator	20.90 × 17.70 × 0.35	9.15, -18.85, 0.40
xiao_insertion_stop	0.50 × 15.40 × 1.70	8.40, -16.45, 0.55
xiao_stop_adhesive	0.50 × 15.40 × 0.15	8.40, -16.45, 0.40

Part measurement schedule

06 — Bounding dimensions and assembly position; holes and contours are defined by STEP.

Part	W × L × H	Minimum X, Y, Z
dac_insertion_stop	25.00 × 0.60 × 1.70	2.30, -29.80, 0.55
dac_stop_adhesive	25.00 × 0.60 × 0.15	2.30, -29.80, 0.40
dac_retainer_1	3.70 × 3.70 × 7.25	23.11, -34.45, 0.55
dac_retainer_bond_1	3.70 × 3.70 × 0.10	23.11, -34.45, 7.80
dac_retainer_2	3.70 × 3.70 × 7.25	2.79, -61.12, 0.55
dac_retainer_bond_2	3.70 × 3.70 × 0.10	2.79, -61.12, 7.80
dac_retainer_3	3.70 × 3.70 × 7.25	23.11, -61.12, 0.55
dac_retainer_bond_3	3.70 × 3.70 × 0.10	23.11, -61.12, 7.80
rear_liner	60.40 × 124.40 × 0.07	-30.20, -62.20, 7.83
cell_A_envelope	37.00 × 25.50 × 5.20	-29.00, -18.75, 0.70
cell_A_envelope_adhesive	35.00 × 23.50 × 0.30	-28.00, -17.75, 0.40
cell_B_envelope	25.50 × 37.00 × 5.20	-28.50, -59.00, 0.70
cell_B_envelope_adhesive	23.50 × 35.00 × 0.30	-27.50, -58.00, 0.40
microsd_pcb	22.00 × 18.00 × 0.80	-29.90, 20.00, 4.85
microsd_socket	15.70 × 14.20 × 1.80	-30.85, 21.90, 5.65
microsd_card	15.00 × 11.00 × 1.00	-31.60, 23.50, 5.90
sd_mount_pad	20.00 × 16.00 × 0.30	-28.90, 21.00, 4.55
sd_stop_19_5	20.00 × 0.50 × 0.95	-28.00, 19.25, 4.60
sd_stop_19_5_bond	20.00 × 0.50 × 0.05	-28.00, 19.25, 4.55
sd_stop_38_5	20.00 × 0.50 × 0.95	-28.00, 38.25, 4.60

Part measurement schedule

07 — Bounding dimensions and assembly position; holes and contours are defined by STEP.

Part	W × L × H	Minimum X, Y, Z
sd_stop_38_5_bond	20.00 × 0.50 × 0.05	-28.00, 38.25, 4.55
sd_insertion_stop	0.60 × 17.00 × 0.95	-7.60, 20.50, 4.60
sd_insertion_stop_bond	0.60 × 17.00 × 0.05	-7.60, 20.50, 4.55
interface_pcb	15.00 × 32.00 × 0.80	13.50, 23.00, 4.85
interface_pad_24	7.00 × 1.40 × 0.30	14.50, 23.30, 4.55
interface_pad_54	7.00 × 1.40 × 0.30	14.50, 53.30, 4.55
display_zif	5.00 × 26.50 × 1.10	22.30, 25.75, 5.65
touch_zif	3.50 × 5.00 × 1.10	15.25, 24.50, 5.65
interface_control	6.00 × 12.00 × 1.10	14.00, 35.00, 5.65
pack_protection	24.00 × 3.00 × 1.40	-22.00, 8.50, 0.70
pack_protection_pad	23.00 × 2.50 × 0.30	-21.50, 8.75, 0.40
case_screw_1	3.21 × 3.21 × 5.01	-26.61, 60.09, 3.30
case_screw_2	3.21 × 3.21 × 5.01	23.39, 60.09, 3.30
case_screw_3	3.21 × 3.21 × 5.01	-30.61, 8.39, 3.30
case_screw_4	3.21 × 3.21 × 5.01	27.39, 2.39, 3.30
case_screw_5	3.21 × 3.21 × 5.01	27.39, -27.61, 3.30
case_screw_6	3.21 × 3.21 × 5.01	-1.61, -62.61, 3.30
case_screw_7	3.21 × 3.21 × 5.01	-25.61, -63.01, 3.30
carrier_screw_1	2.20 × 2.20 × 3.60	-26.10, 10.40, 1.55
carrier_screw_2	2.20 × 2.20 × 3.60	23.90, 10.40, 1.55

Part measurement schedule

08 — Bounding dimensions and assembly position; holes and contours are defined by STEP.

Part	W × L × H	Minimum X, Y, Z
carrier_screw_3	2.20 × 2.20 × 3.60	-26.10, 57.40, 1.55
carrier_screw_4	2.20 × 2.20 × 3.60	23.90, 57.40, 1.55
usb_cover	0.45 × 12.60 × 6.00	31.55, -16.29, 0.60
sd_cover	0.45 × 13.20 × 2.60	-32.00, 22.40, 5.10
jack_cover	6.50 × 0.45 × 6.50	15.61, -64.00, 1.17