


FORM 04 / COMPACT FIT PROTOTYPE


115 × 60 × 12.9 mm · repacked with unchanged components · no middle carrier

FRONT SHELL / INSIDE

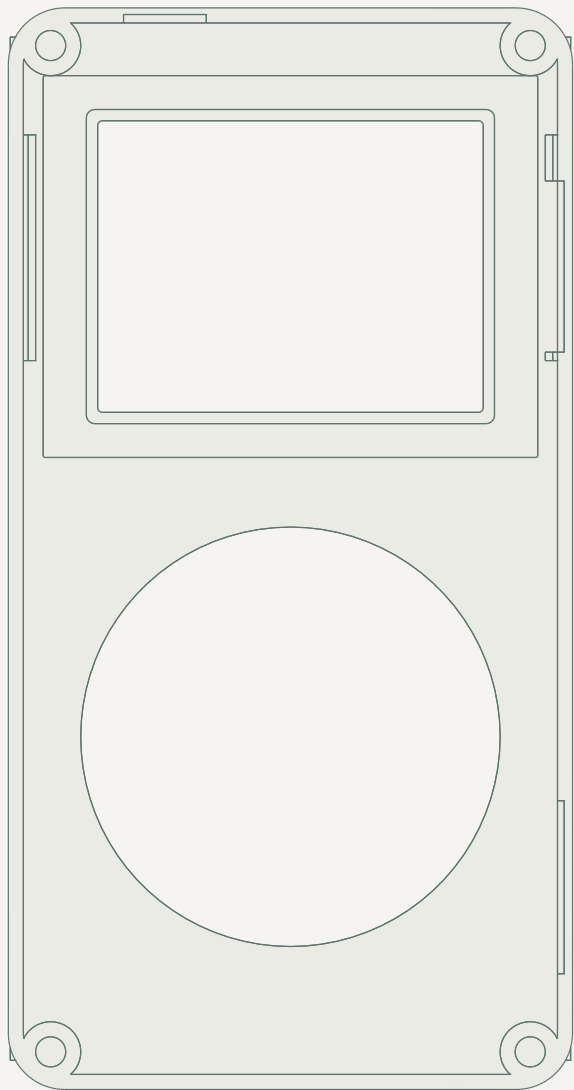


Lens recess, wheel aperture and local UI pads.
Four blind insert bosses; two locating tongues.

REAR SHELL / INSIDE

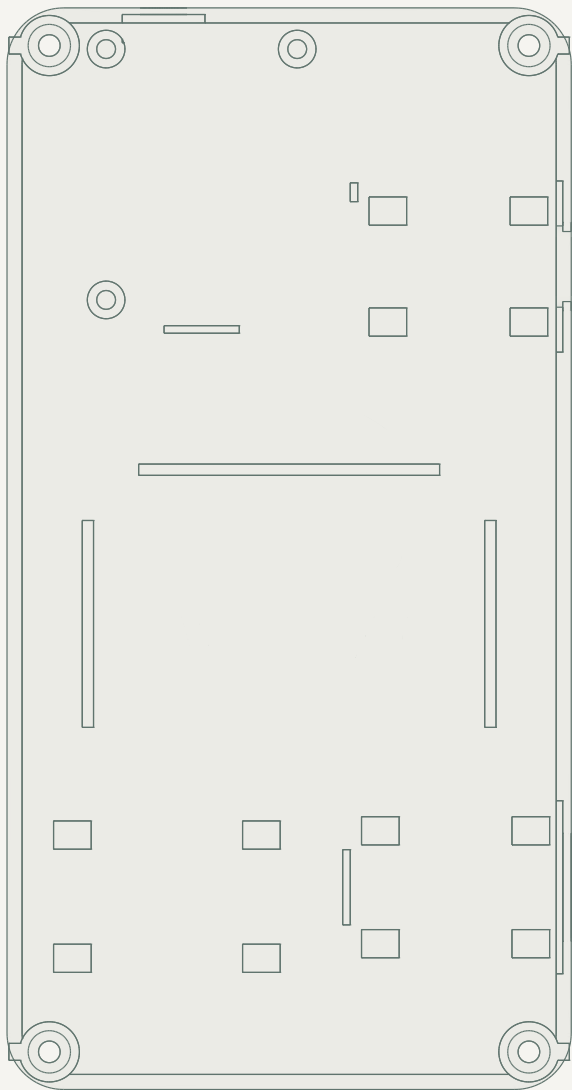

Board pads, insertion fences and 503040 battery guides.
Viewed through front; same X/Y on both drawings.

COMPONENT DEPTH RANGES

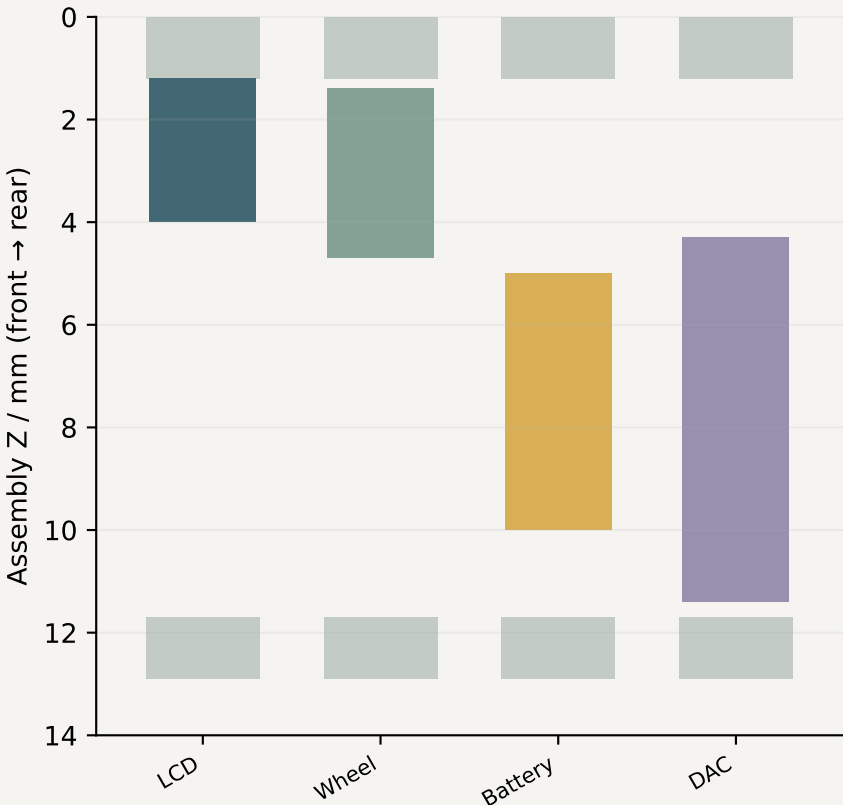

Clickwheel adapter to wall: 2.35 mm.
Battery to rear skin: 1.7 mm.
DAC to LCD / rear skin: 0.3 / 0.3 mm.
These gaps still need real-part verification.

115 x 60 x 12.9 mm; 0.2 mm thinner than 13.1 mm.
Battery entirely below LCD; no footprint growth.
Flipped upper DAC; 1.0 mm local LCD seat floor.

CAD/mesh checks passed. The component envelopes and connector positions remain provisional.

Print an empty-shell fit set first. Exact wheel/LCD geometry, flex routes, audio mounting and battery sample fit are still required.