



mytunas / touch

T03 / BATTERY ABOVE DAC / BOTTOM JACK / 64 × 128 × 8.3 mm

01 / METAL FRONT

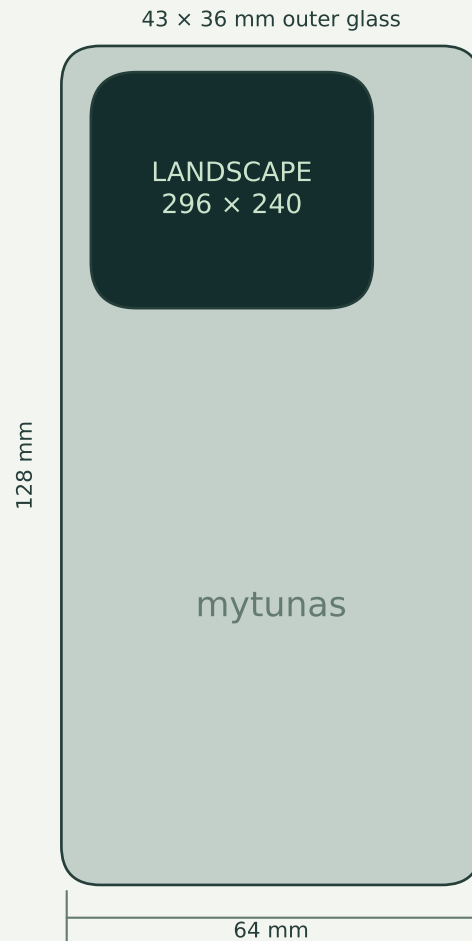

02 / PACKING — front-coordinate plan

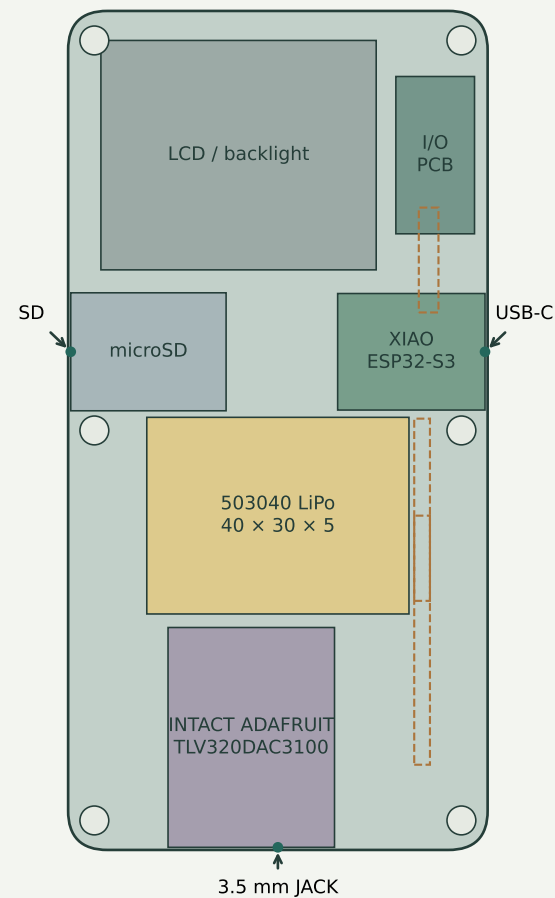

03 / THICKNESS LIMIT

8.3 mm aggressive prototype

0.4 mm steel front / 0.15 mm insulation
7.1 mm full Adafruit product height
0.18 mm clearance + 0.07 mm liner
0.4 mm steel rear

Separate battery bay

5 mm nominal protected pack
2.13 mm to the rear liner
1.7 mm of that reserved clear

Port alignment

USB right · SD left · headphones bottom
Actual board transforms set USB/jack axes
Blind pockets retain a 1 mm outer lip

Strict nominal checks

0 assembly collisions
0 reserved-space collisions
Connected, watertight shell / carrier meshes

Physical fit still required

Panel border and side tails estimated
SD assembly and interface PCB provisional
Unsealed ports; no water/dust rating

Metal faces + separate frame. Same coordinates as STEP and viewer; dimensions in millimetres.

Not a fabrication release: qualify plate flatness, deflection, insulation, tolerances and physical component fit.