


mytunas / touch

T02 / BATTERY ABOVE DAC / BOTTOM JACK / 52 × 132 × 10.4 mm

01 / FRONT



02 / PACKING — front-coordinate plan

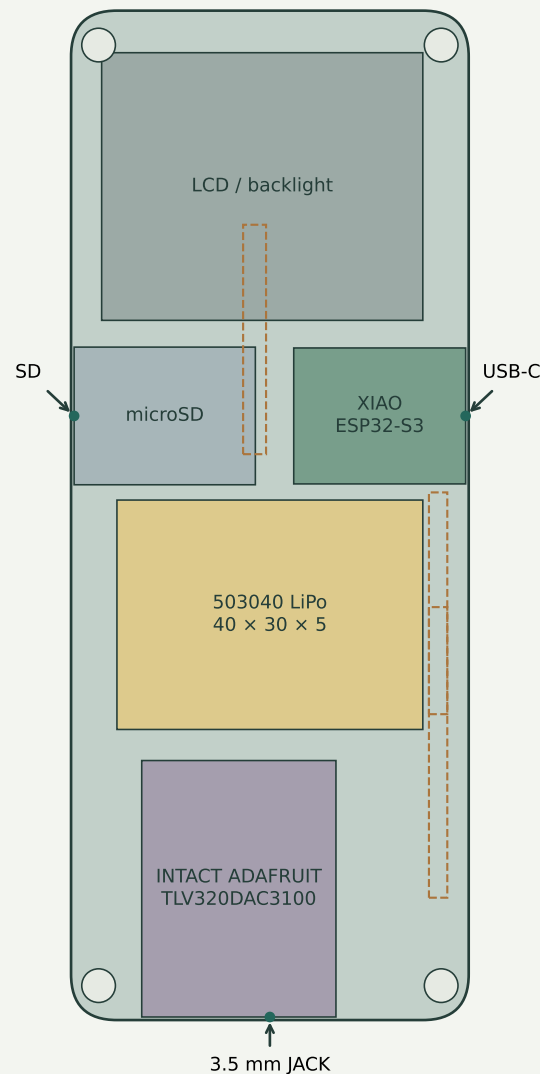

03 / THICKNESS LIMIT

10.4 mm practical target

- 1.2 mm front skin
- 0.6 mm board mounting height
- 7.1 mm full Adafruit product height
- 0.3 mm rear clearance
- 1.2 mm rear skin

Separate battery bay

- 5 mm nominal protected pack
- 2.4 mm to the rear skin
- 1.7 mm of that reserved clear

Port alignment

- USB right · SD left · headphones bottom
- Actual board transforms set USB/jack axes
- Blind pockets retain a 1 mm outer lip

Strict nominal checks

- 0 assembly collisions
- 0 reserved-space collisions
- Connected, watertight shell / carrier meshes

Physical fit still required

- Panel border and folded ribbons estimated
- SD assembly and interface PCB provisional
- Unsealed ports; no water/dust rating

Same parts and coordinates as the STEP assembly and interactive viewer. All dimensions in millimetres.

Prototype: sample measurements, flex folding, PCB selection and a physical fit test remain necessary.