



# mytunas / touch

T03 / BATTERY ABOVE DAC / BOTTOM JACK / 64 × 128 × 8.3 mm

## 01 / METAL FRONT

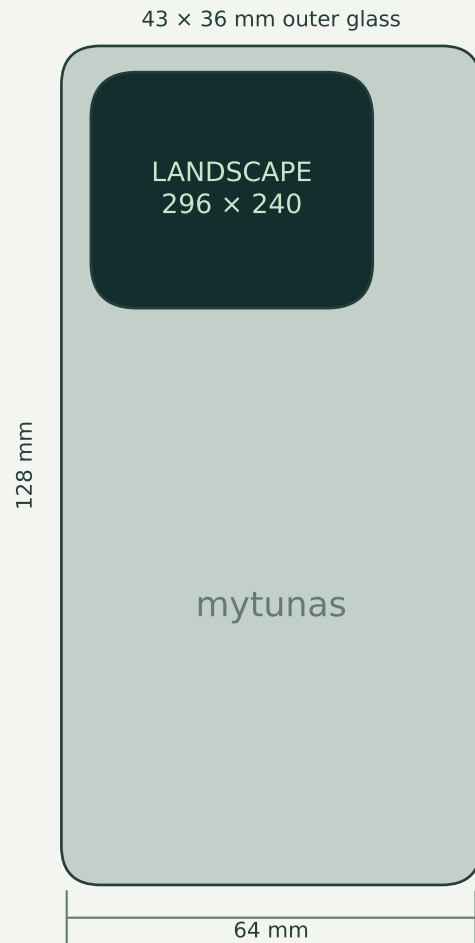

## 02 / PACKING — front-coordinate plan

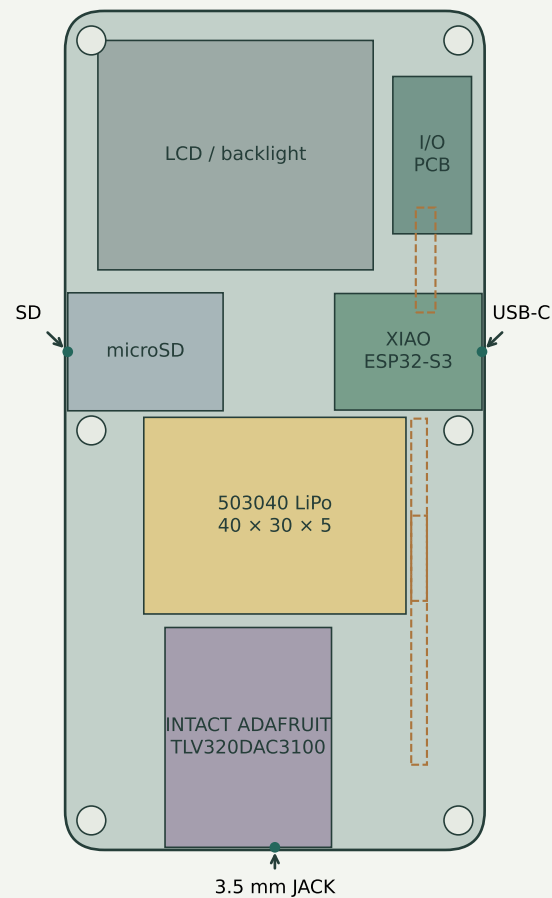

## 03 / THICKNESS LIMIT

### 8.3 mm aggressive prototype

0.4 mm steel front / 0.15 mm insulation  
7.1 mm full Adafruit product height  
0.18 mm clearance + 0.07 mm liner  
0.4 mm steel rear

### Separate battery bay

5 mm nominal protected pack  
2.13 mm to the rear liner  
1.7 mm of that reserved clear

### Port alignment

USB right · SD left · headphones bottom  
Actual board transforms set USB/jack axes  
Blind pockets retain a 1 mm outer lip

### Strict nominal checks

0 assembly collisions  
0 reserved-space collisions  
Connected, watertight shell / carrier meshes

### Physical fit still required

Panel border and side tails estimated  
SD assembly and interface PCB provisional  
Unsealed ports; no water/dust rating

Metal faces + separate frame. Same coordinates as STEP and viewer; dimensions in millimetres.

Not a fabrication release: qualify plate flatness, deflection, insulation, tolerances and physical component fit.