


FORM 04 / COMPACT FIT PROTOTYPE


134 × 72 × 13.4 mm · landscape screen · local mounts · no middle carrier

FRONT SHELL / INSIDE

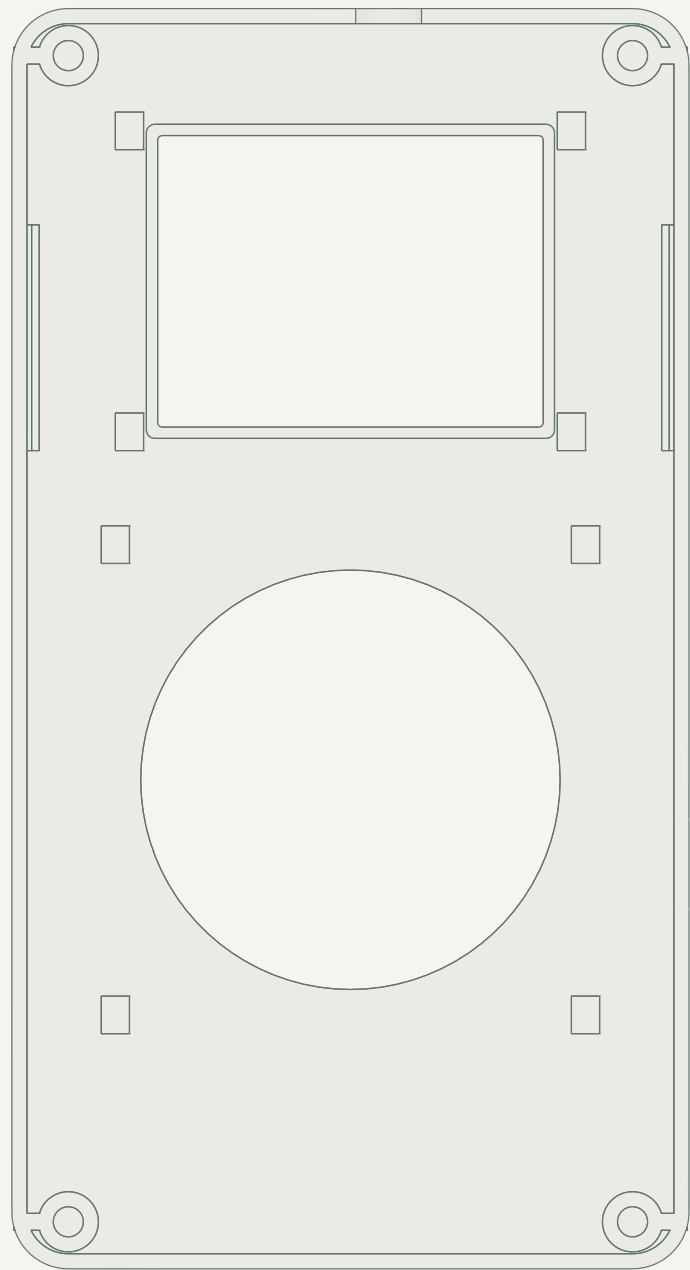


Lens recess, wheel aperture and local UI pads.
Four blind insert bosses; two locating tongues.

REAR SHELL / INSIDE

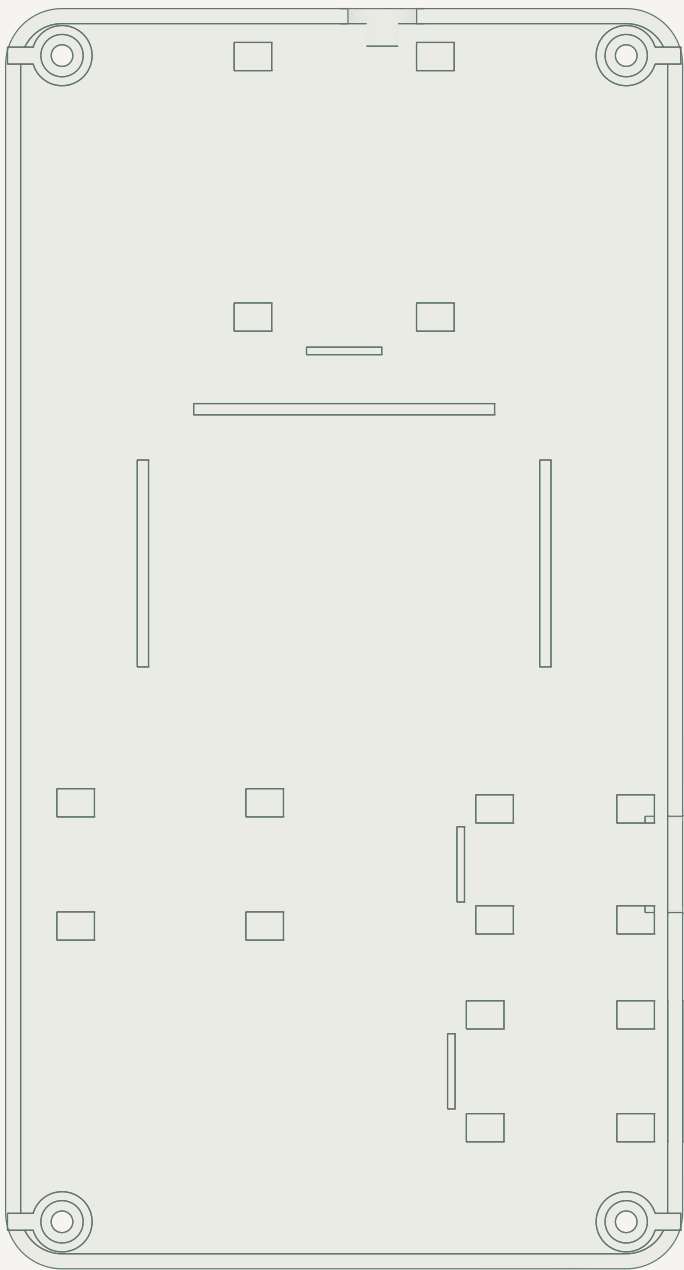

Board pads, insertion fences and 503040 battery guides.
Viewed through front; same X/Y on both drawings.

COMPONENT DEPTH RANGES

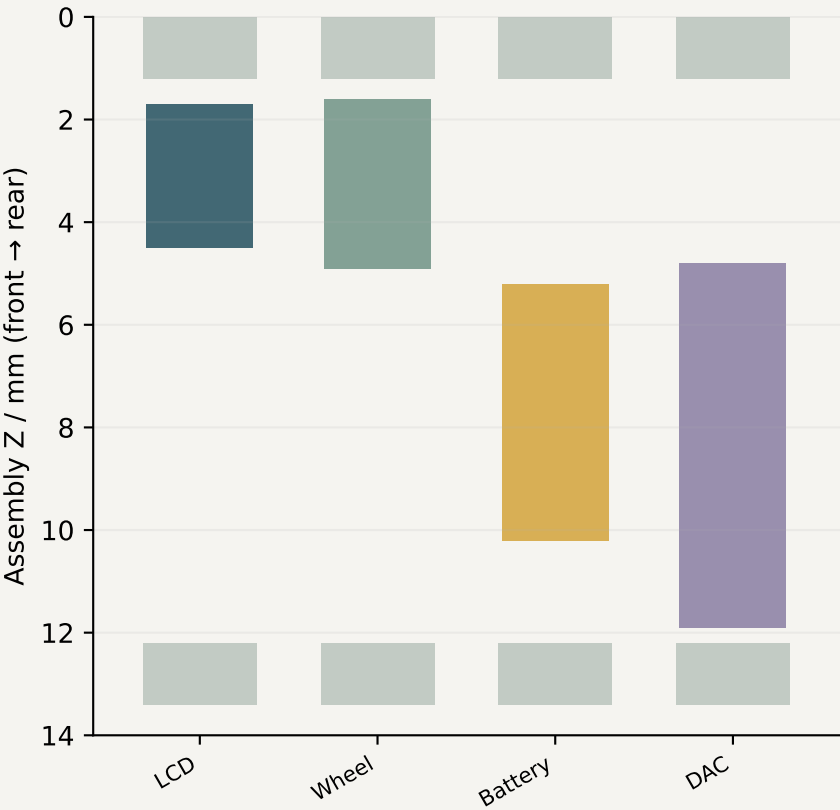

Clickwheel adapter to wall: 2.85 mm.
Battery to rear skin: 2.0 mm.
DAC to LCD / rear skin: 0.3 / 0.3 mm.
These gaps still need real-part verification.

600 mAh / 30% of P02 capacity.
0.9 mm thicker; combined DAC/headphone board.
Single jack opening follows the DAC at the top.

CAD/mesh checks passed. The component envelopes and connector positions remain provisional.

Print an empty-shell fit set first. Exact wheel/LCD geometry, flex routes, audio mounting and battery sample fit are still required.