

System Architectures

Centralized Chat System

NGUYEN Duc Tung
ICT.M7.003

TRAN Giang Son - DANIEL Hagimont
March 26, 2018

1 Introduction

In this project, I developed a functional IRC system, with the required architecture. I tried to prevent and handle as many runtime errors could happen as I can. The system supports broadcast in a channel, send private message (PM) to a specific client. It also provides commands for client and server to utilise the system.

Both server and client work with multiplexed, nonblocking TCP socket connection.

2 Client

The client firstly takes server hostname from STDIN or from arguments, and then try to connect. After successfully connected, the program creates two separated threads: input handling thread, and network handling thread. Input thread send messages from keyboard to network thread through a pipe.

The pseudo design is as follows:

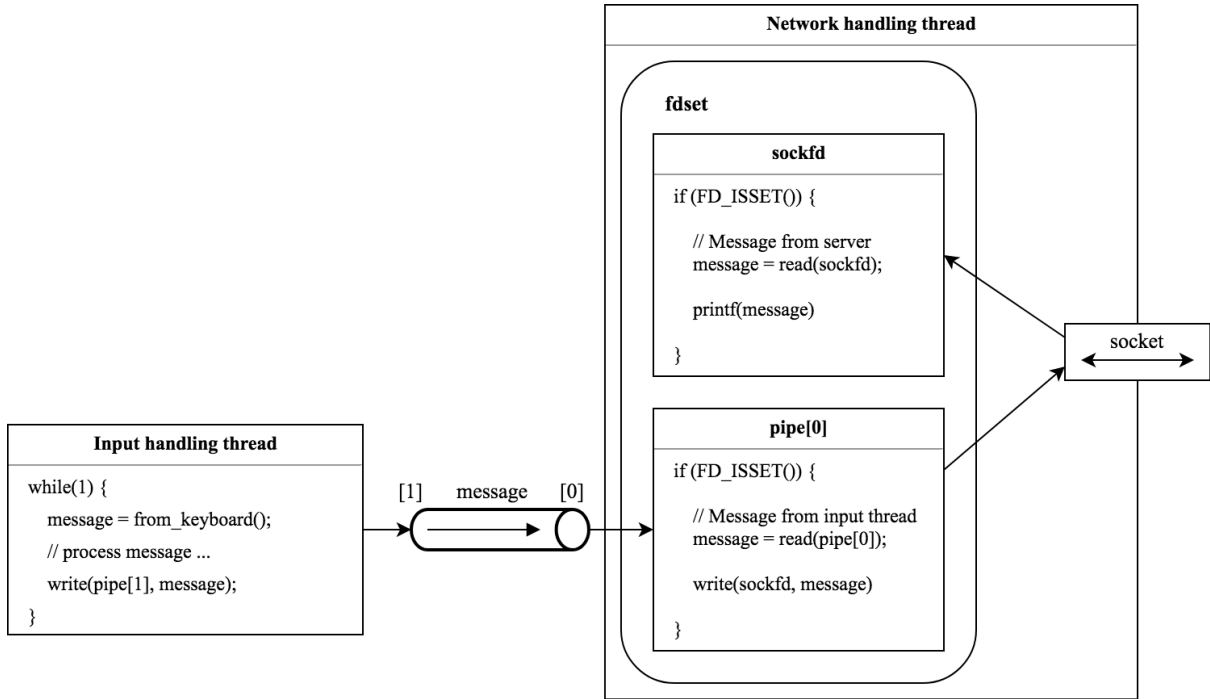


Figure 1: Client's thread diagram

2.1 Input handling thread

The input handling thread continuously getting message input from keyboard by user. The message runs through some processing such as remove '\n' at the end, ... After processed, message is sent to the pipe to be read by the network thread.

2.2 Network handling thread

The network handling thread have a **fdset** for multiplexed connection. The set include two file descriptors:

1. **pipe[0]**: The read-end of the pipe between input thread and this thread. It is signaled when there are messages from the input thread. If the messages are successfully received, it will be send to the server.
2. **sockfd**: The socket file descriptor, it is signaled when there are messages from the server or when the connection is closed. If there are messages, it will be printed to the terminal. Otherwise, the program will stop.