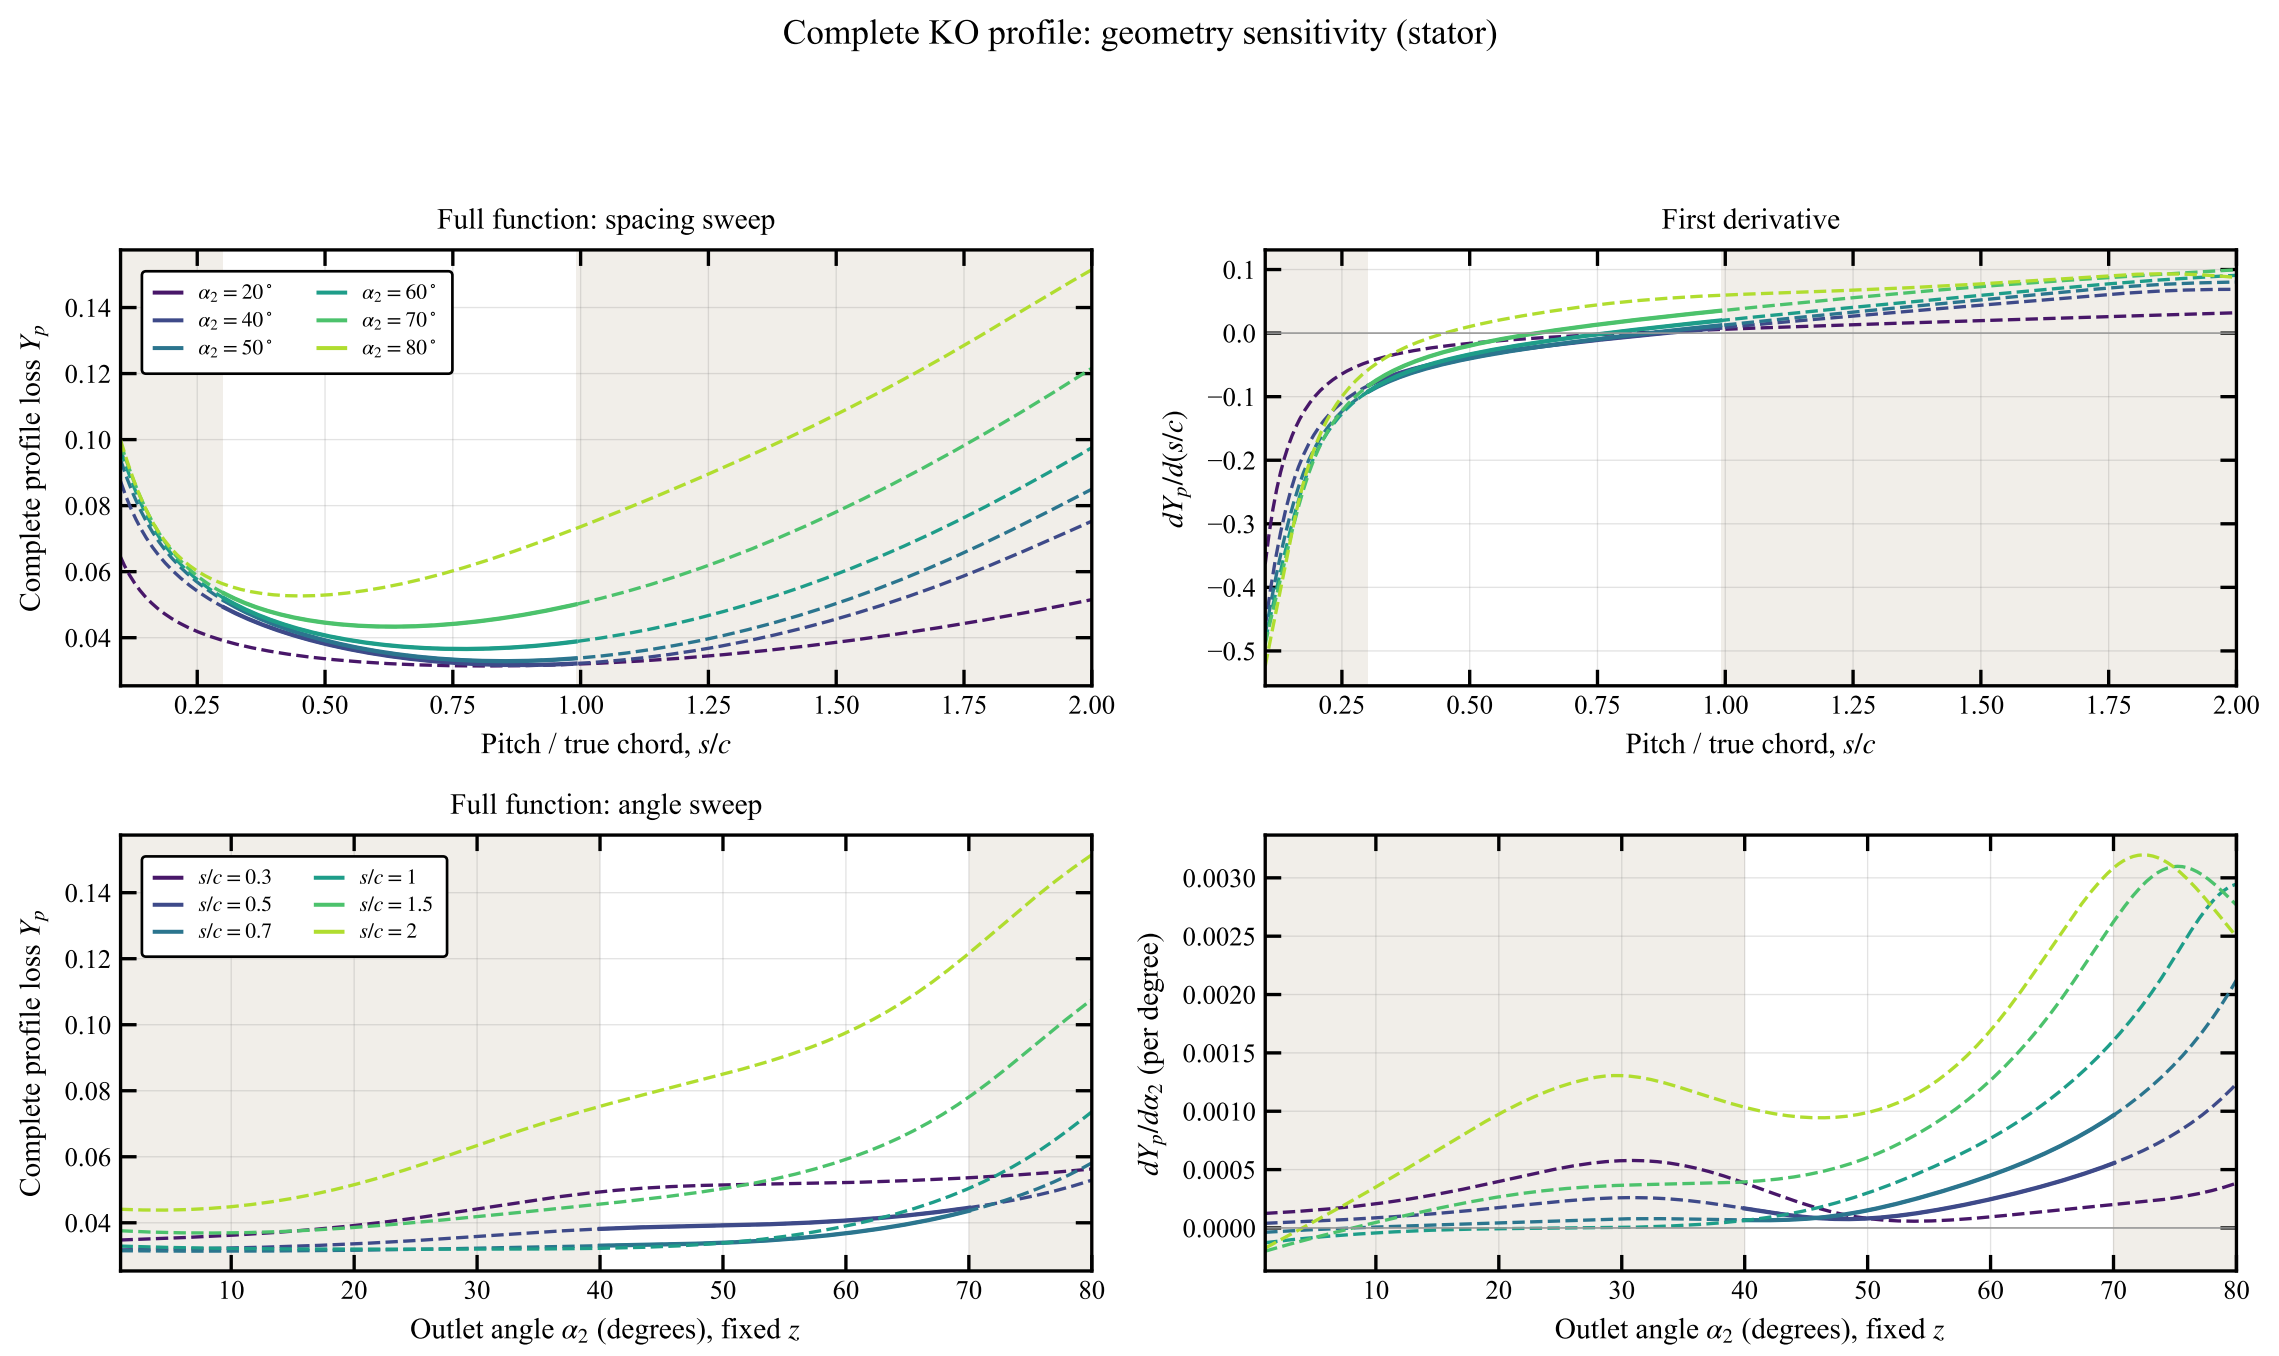

z = 0.5; thickness/chord = 0.2; Re = 500000; M1/M2 = 0.6/0.8; hub/tip = 0.8.
Tint: beyond the combined AM chart envelope. Dashed: either reference outside its trace-endpoint envelope.
The angle sweep varies the inlet metal angle to keep z fixed; no minimum outlet angle is imposed.