Shock loss with a positive hub/tip coordinate

Fixed inlet Mach 0.8 / inlet-to-exit pressure-head ratio = 1

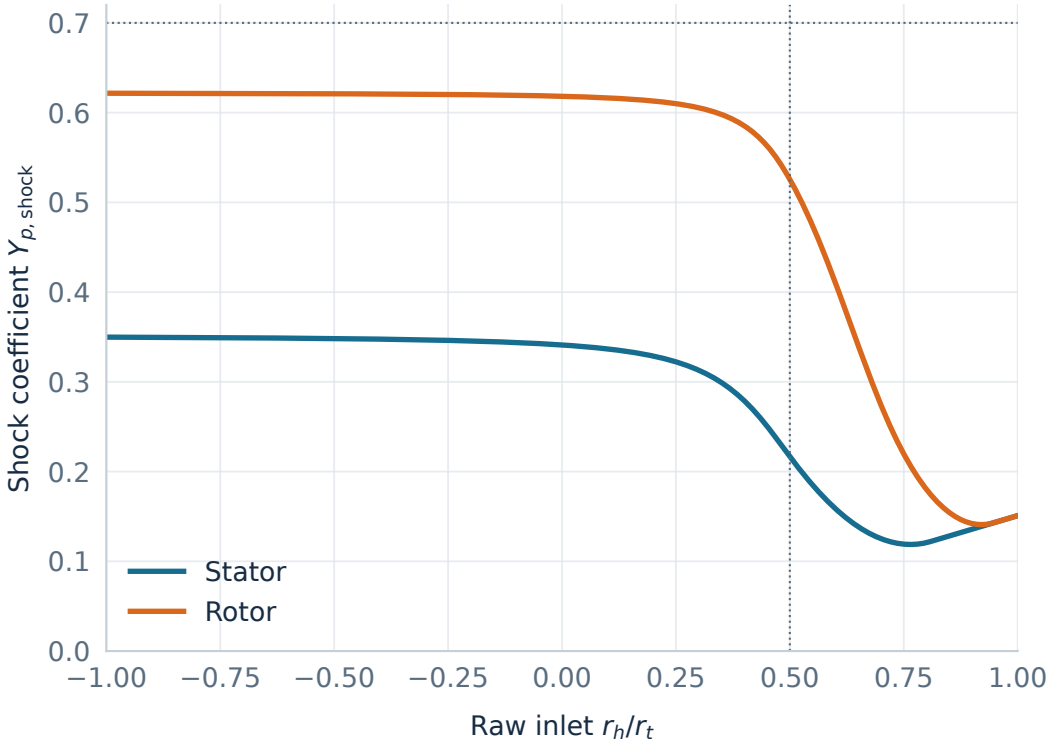

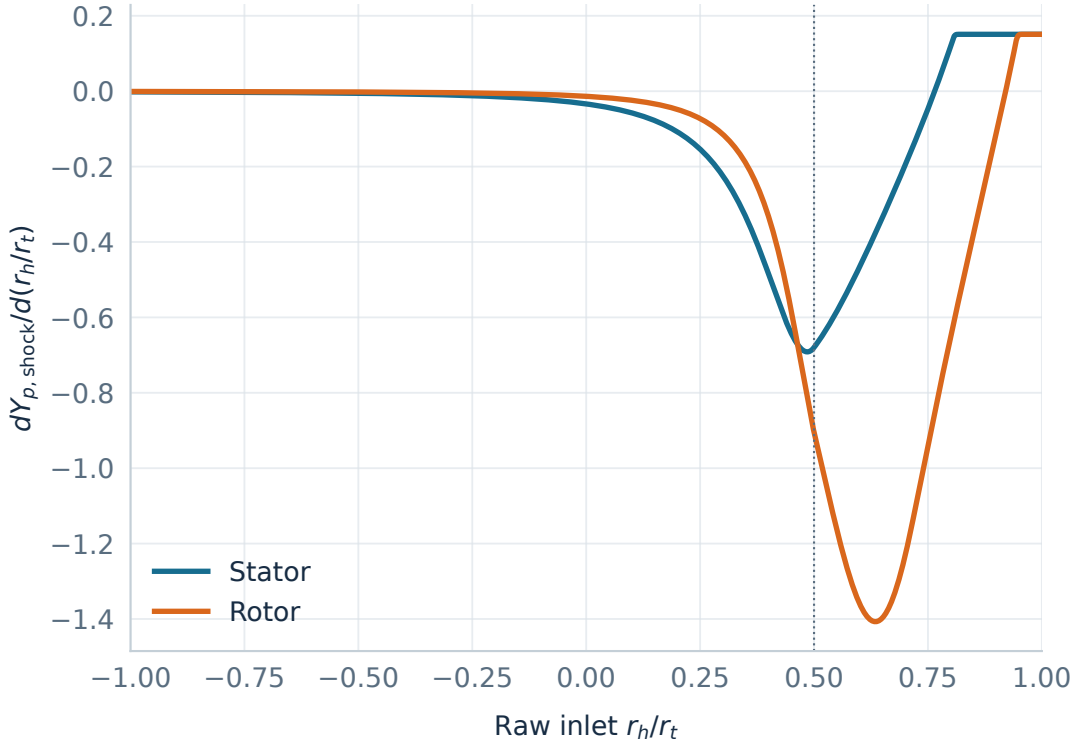

The same continued coordinate enters the hub-Mach fit and span weighting; signed geometry remains available.