Finite Reynolds correction at very low speed

Specific speed 1.05 / effective Reynolds limit = fifty million

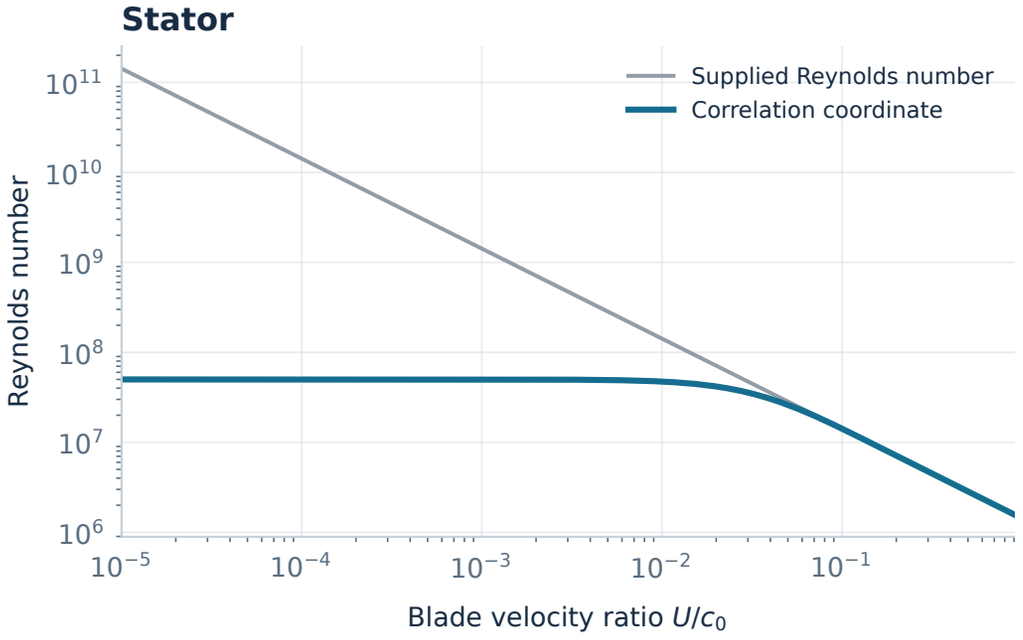

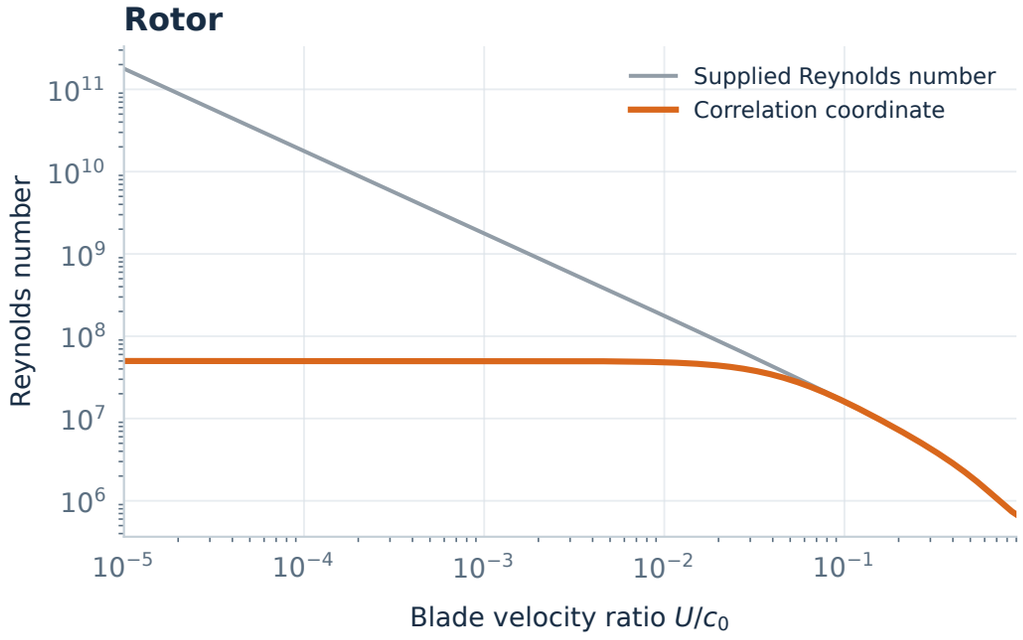

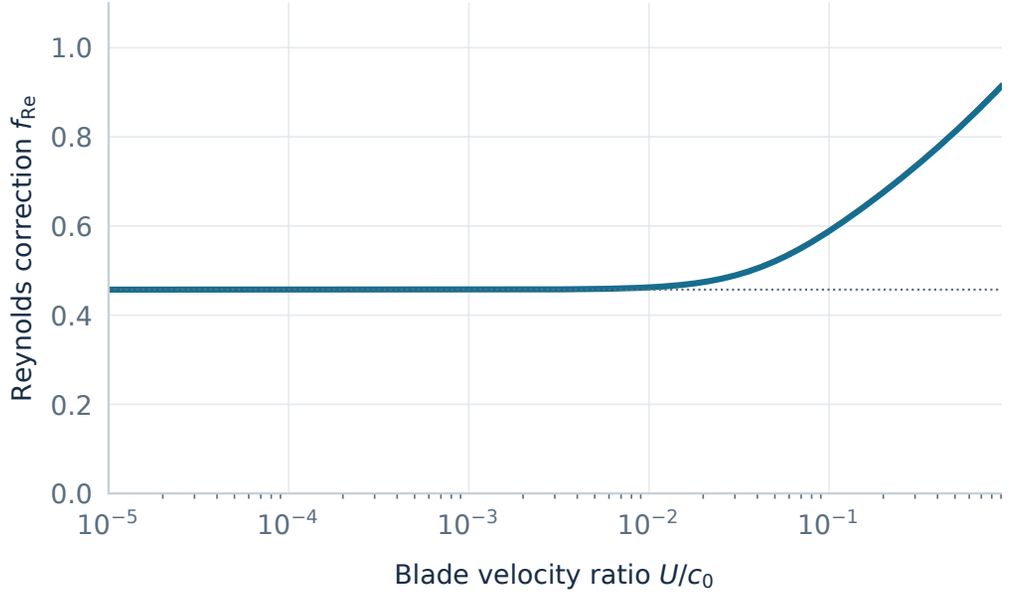

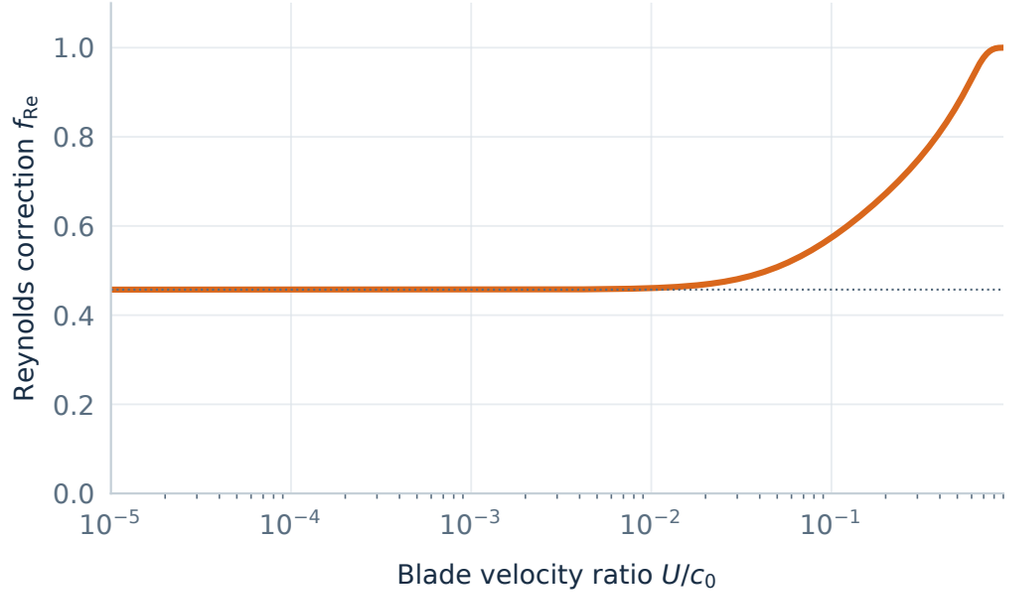

Dotted line: $f_{Re} \to 50^{-0.2} = 0.457305$. Both reference-profile and shock contributions retain this multiplier.