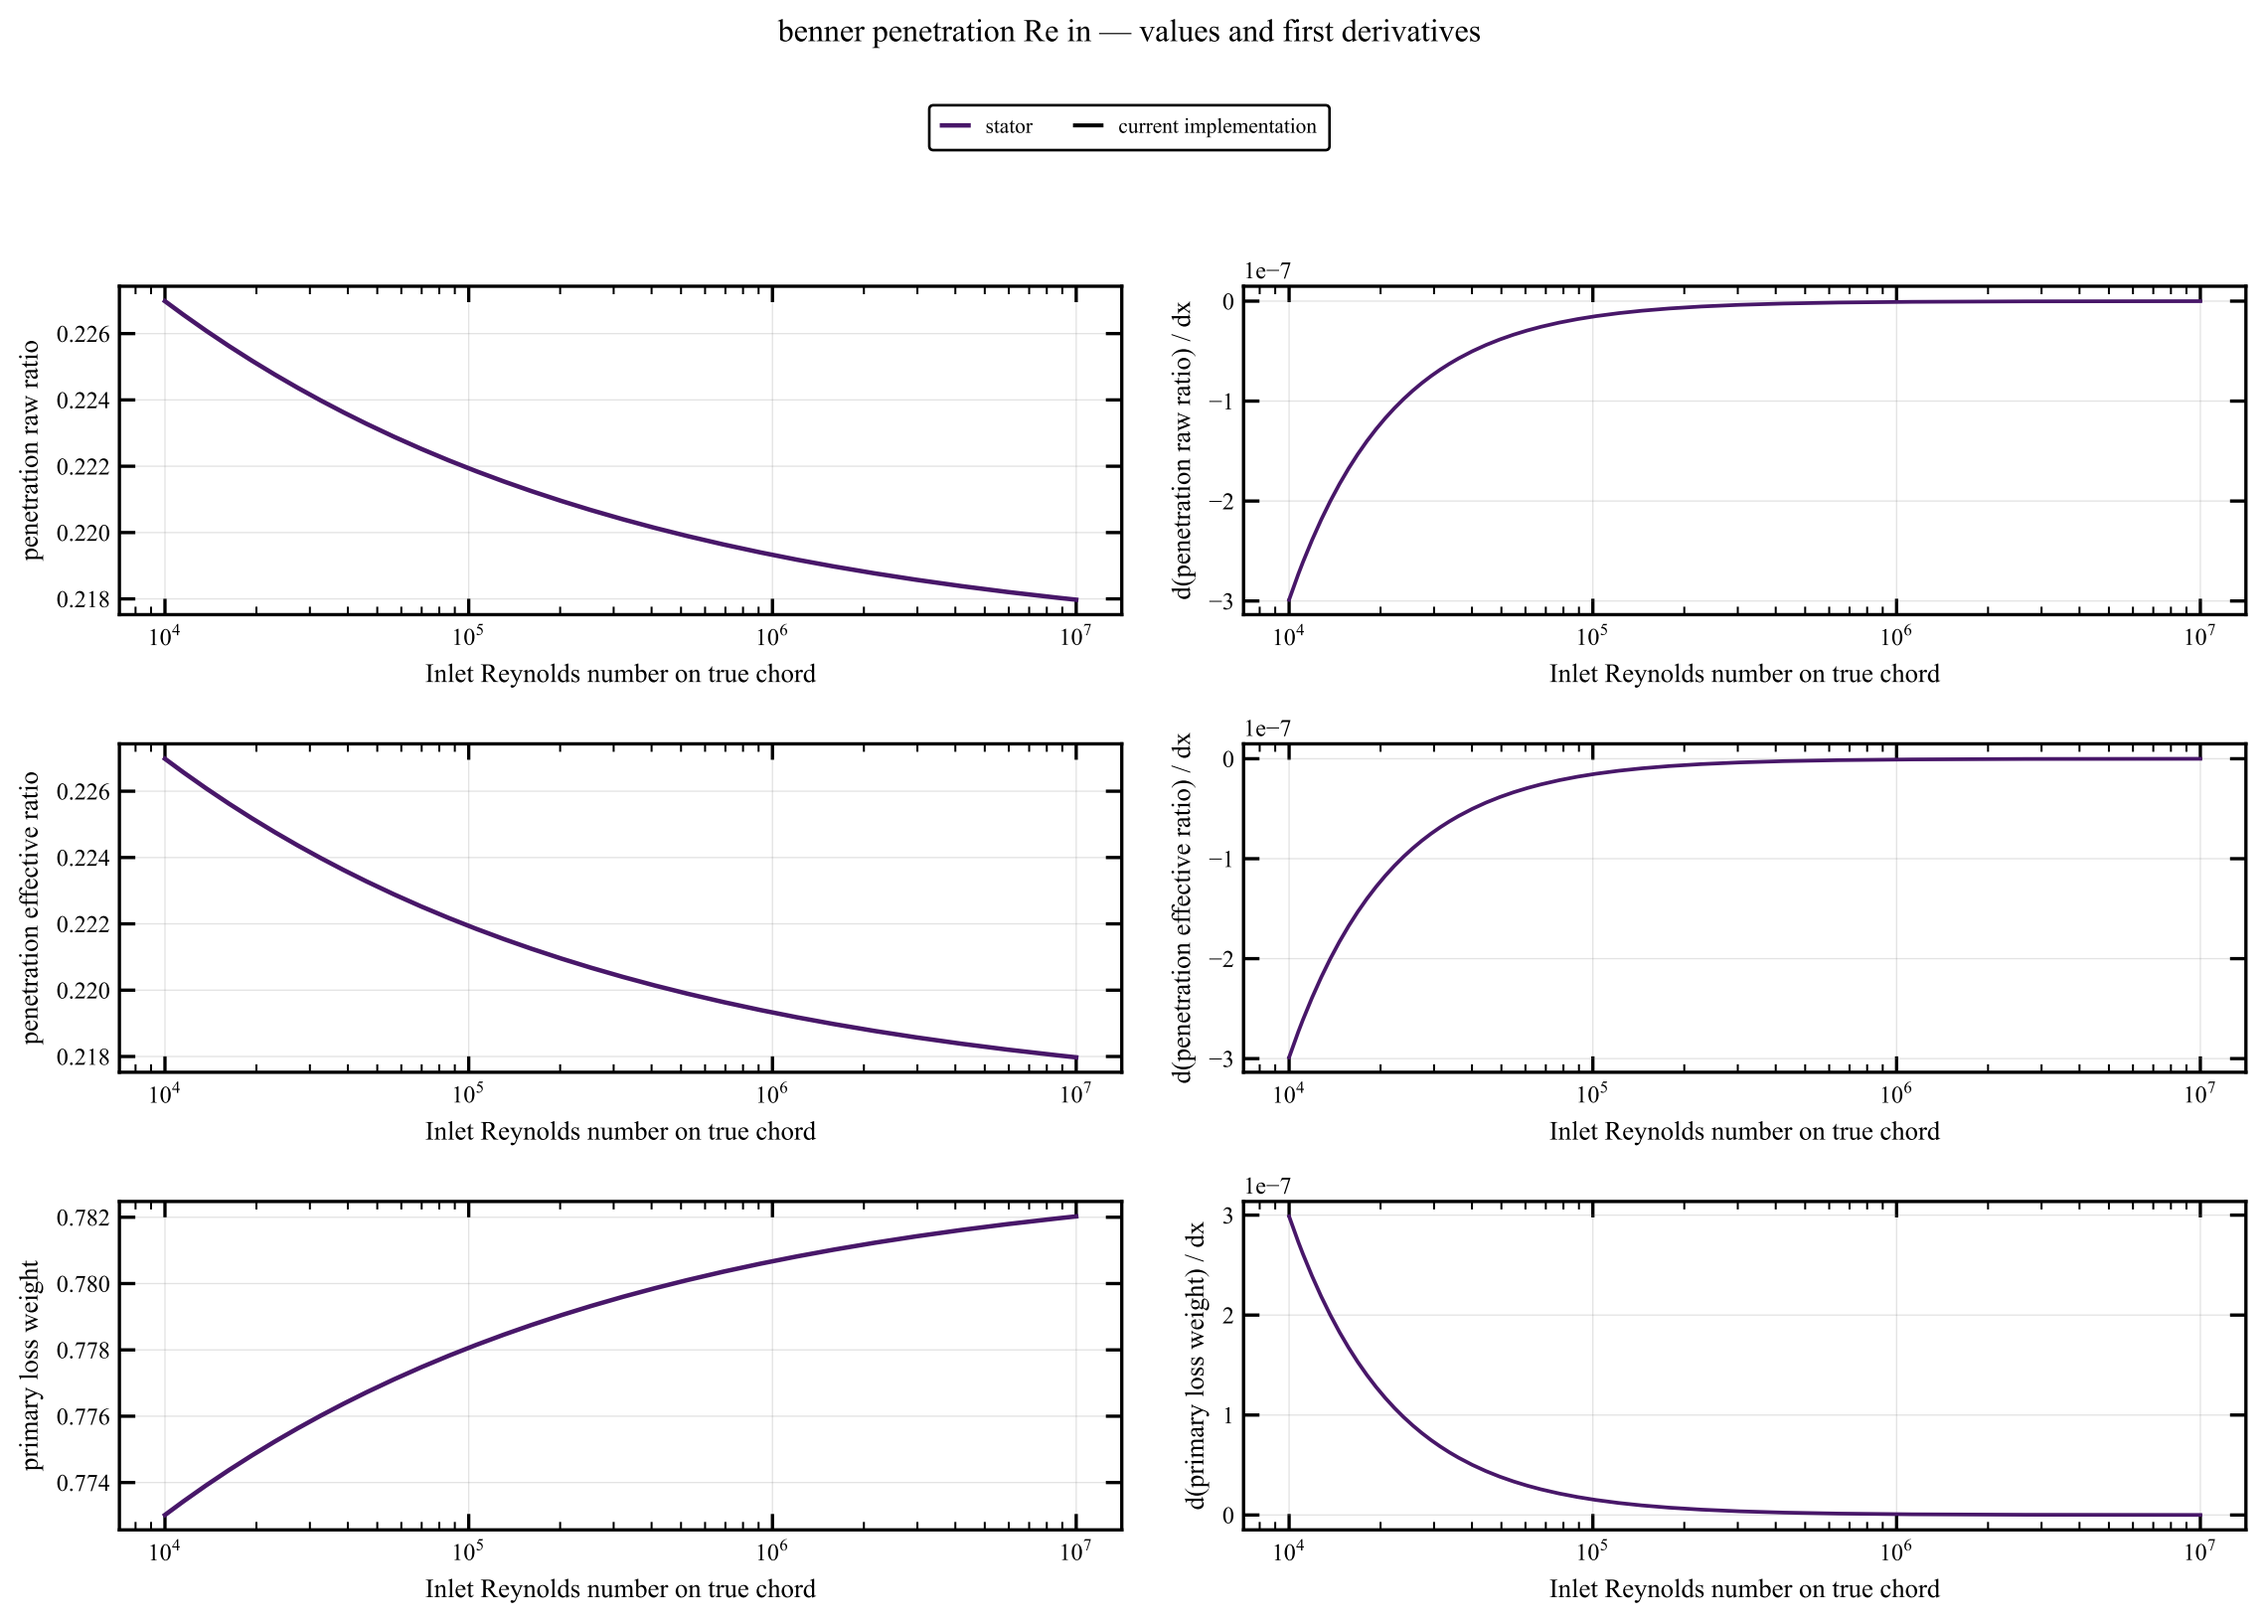
benner penetration Re in — values and first derivatives
stator
current implementation
penetration raw ratio
0.226
0.224
0.222
0.220
0.218
10^4
10^5
10^6
10^7
Inlet Reynolds number on true chord
d(penetration raw ratio) / dx
1e−7
0
−1
−2
−3
penetration effective ratio
d(penetration effective ratio) / dx
primary loss weight
0.782
0.780
0.778
0.776
0.774
d(primary loss weight) / dx
3
2
1
0