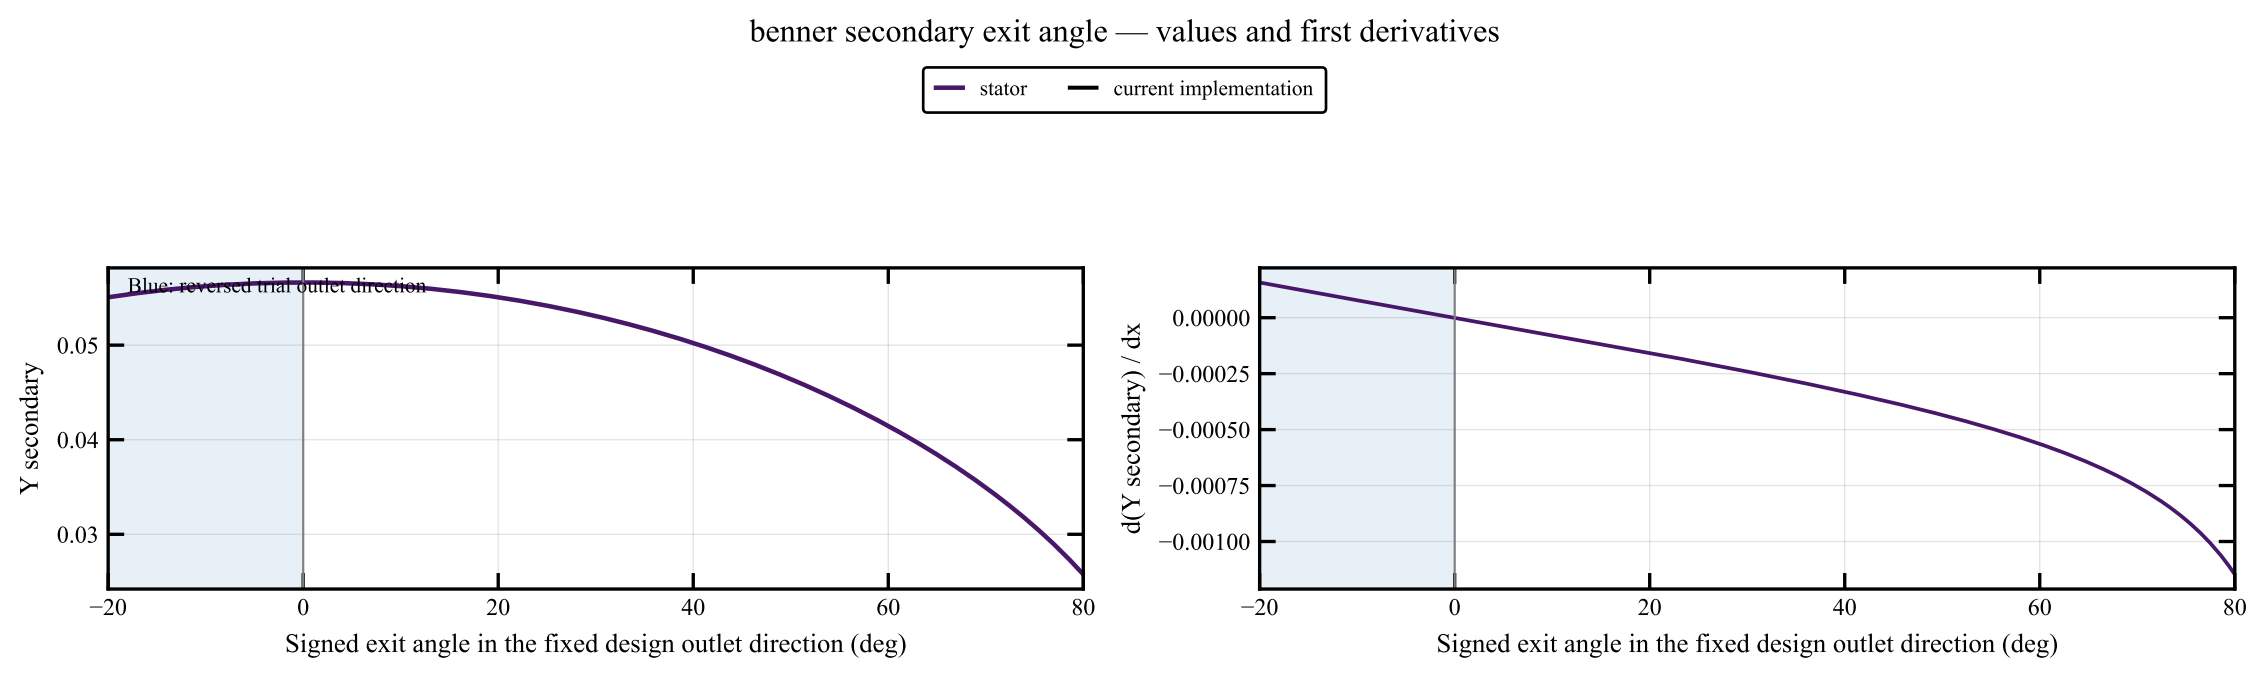
benner secondary exit angle — values and first derivatives
stator
current implementation
Blue: reversed trial outlet direction
Y secondary
0.05
0.04
0.03
−20
0
20
40
60
80
Signed exit angle in the fixed design outlet direction (deg)
d(Y secondary) / dx
0.00000
−0.00025
−0.00050
−0.00075
−0.00100
−20
0
20
40
60
80
Signed exit angle in the fixed design outlet direction (deg)