KO clearance: gap sensitivity for different aspect ratios

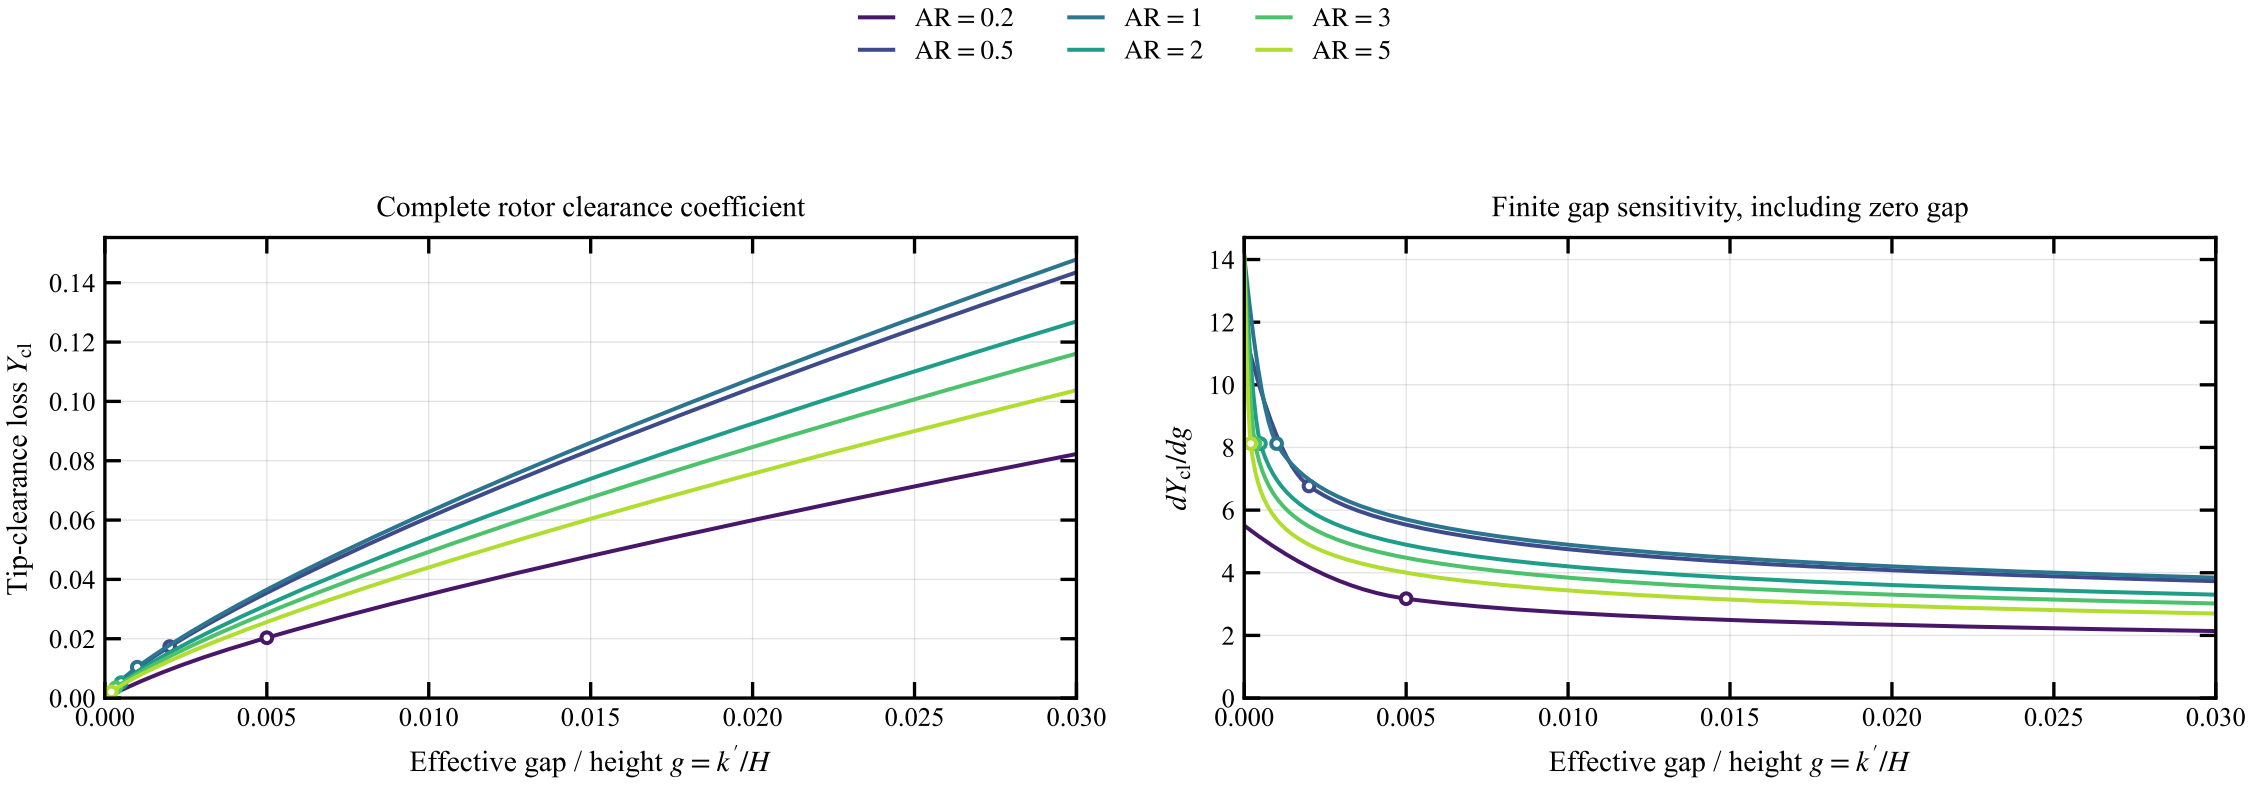

Outlet angle = 60 deg; z = 0.5; inlet angle = -30 deg; true chord = 0.05 m.
Circles: the gap factor recovers its published power at g = 0.001/AR; the AR continuation remains active below AR = 1.
Diagnostic geometry range; the paper does not specify a calibrated gap or aspect-ratio interval here.