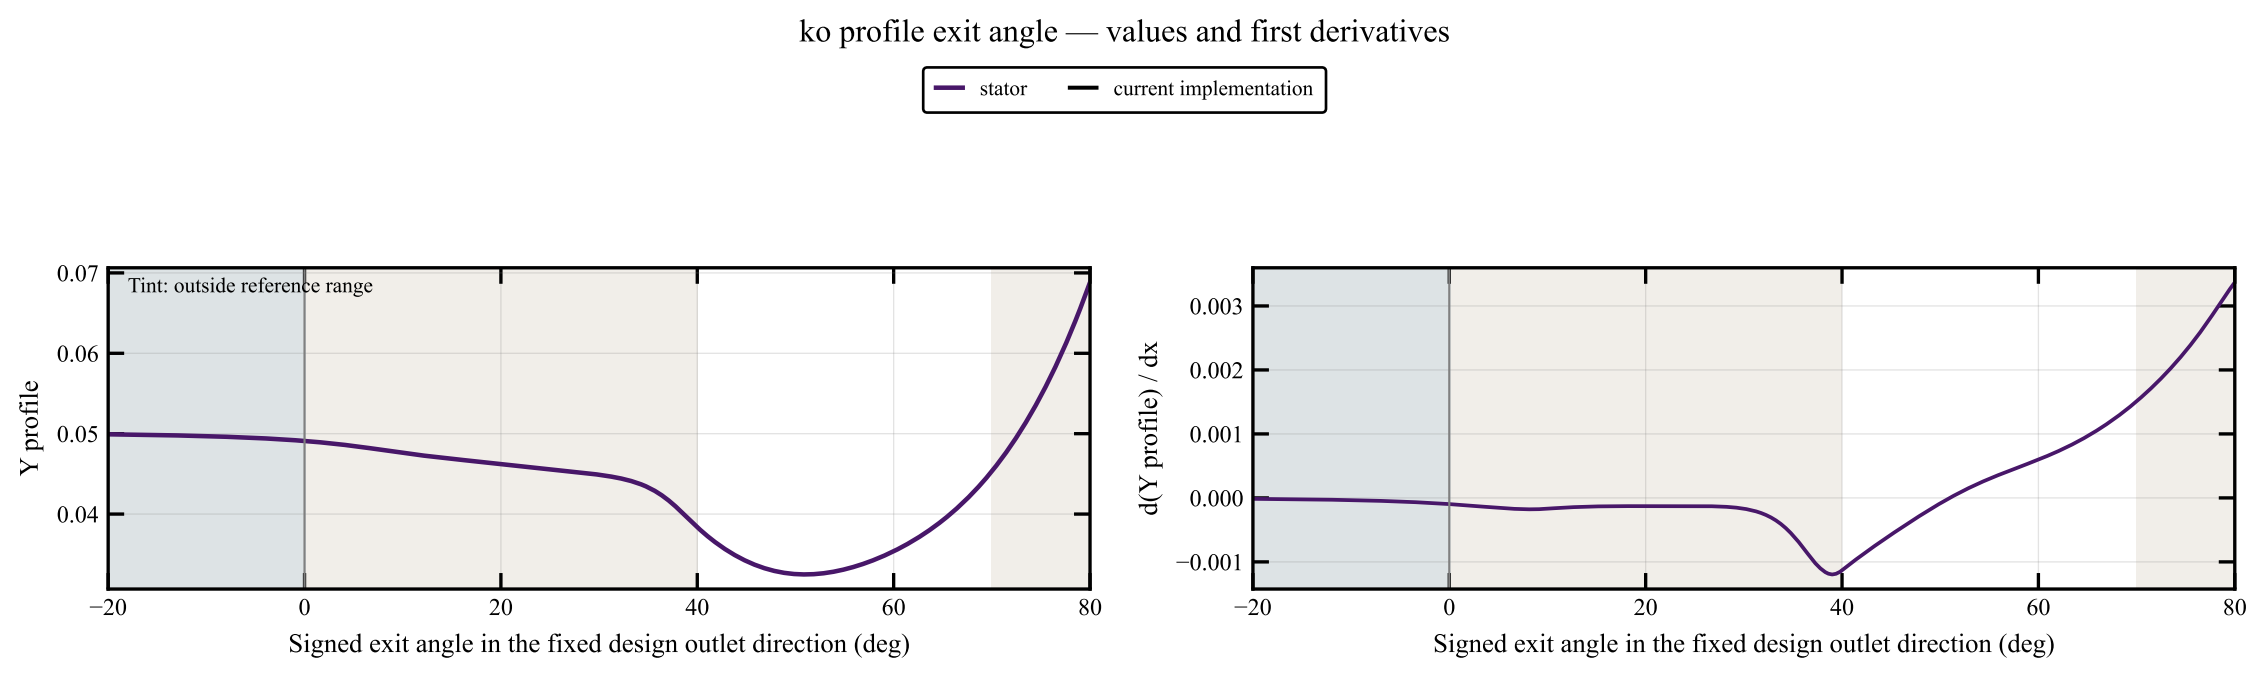
ko profile exit angle — values and first derivatives
stator
current implementation
Tint: outside reference range
Y profile
0.07
0.06
0.05
0.04
−20
0
20
40
60
80
Signed exit angle in the fixed design outlet direction (deg)
d(Y profile) / dx
0.003
0.002
0.001
0.000
−0.001
−20
0
20
40
60
80
Signed exit angle in the fixed design outlet direction (deg)