



Complete KO profile: geometry sensitivity (stator)

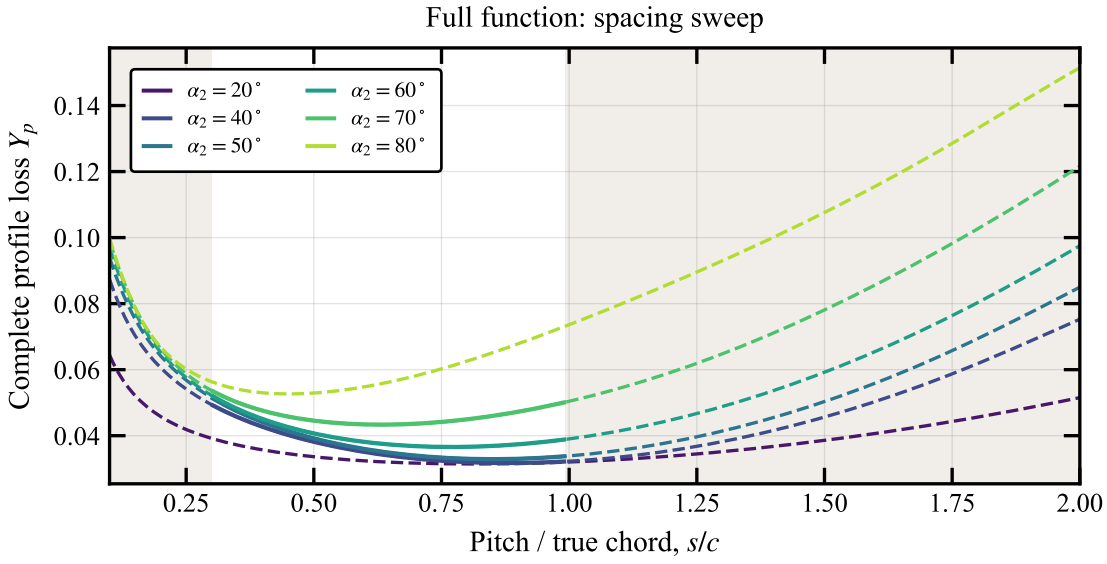

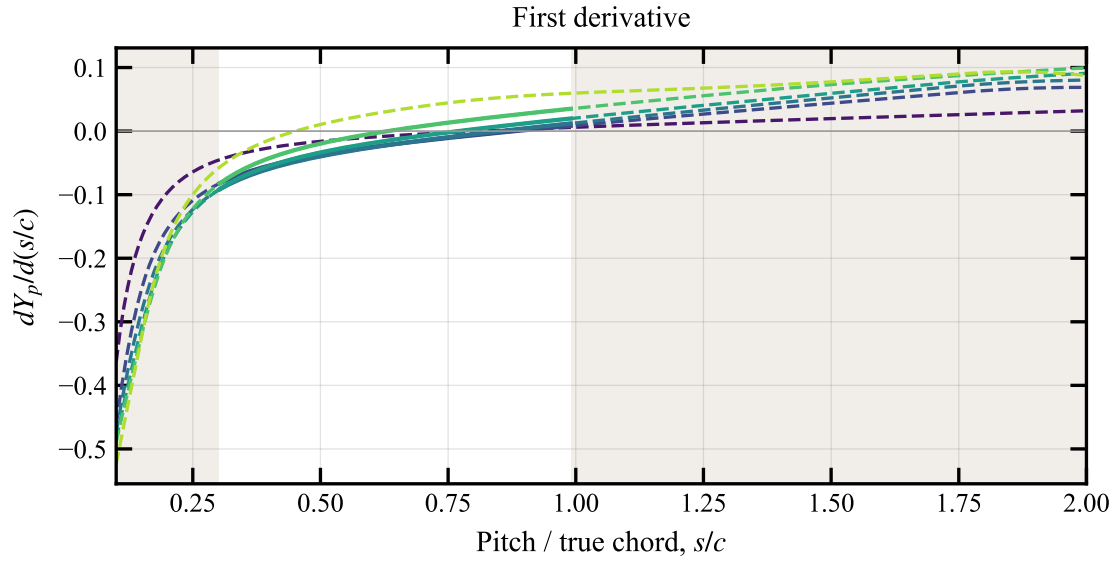

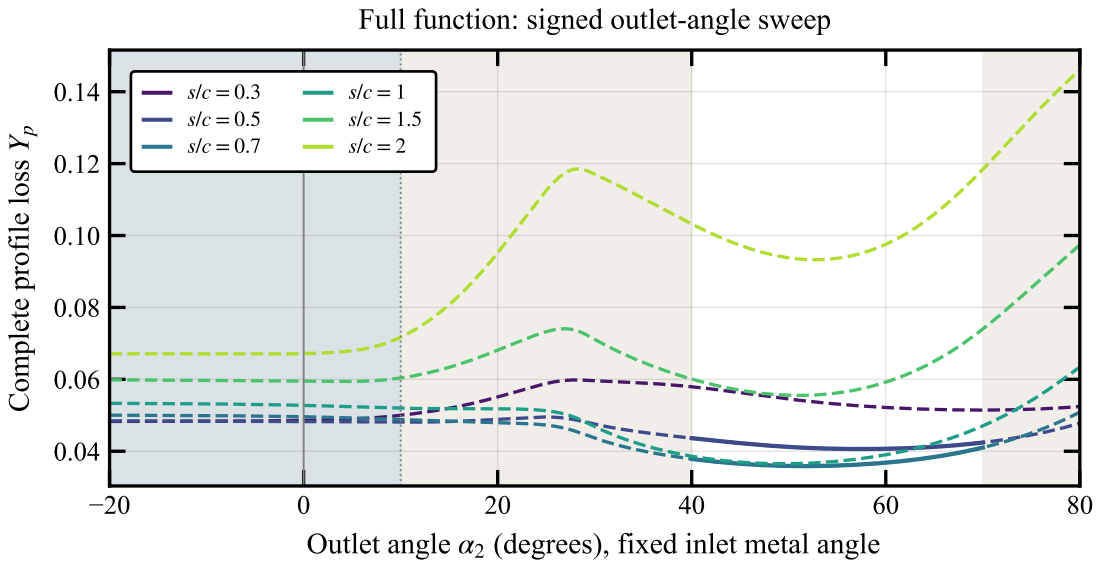

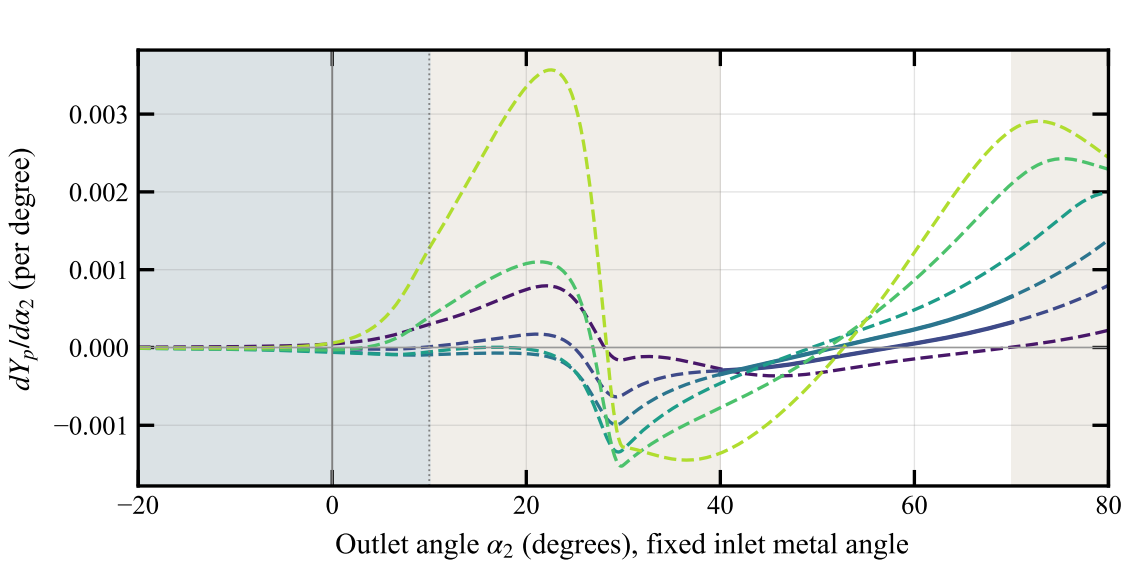

Thickness/chord = 0.2; Re = 500000; M1/M2 = 0.6/0.8; hub/tip = 0.8. Top: z = 0.5 at each fixed angle.
Bottom: fixed inlet/outlet metal angles = -30/+60 deg; z = 0.5 at outlet 60 deg and varies along the sweep.
Blue: continuation below 10 deg; solid vertical: zero outlet angle. Beige/dashed: beyond combined AM chart coverage.