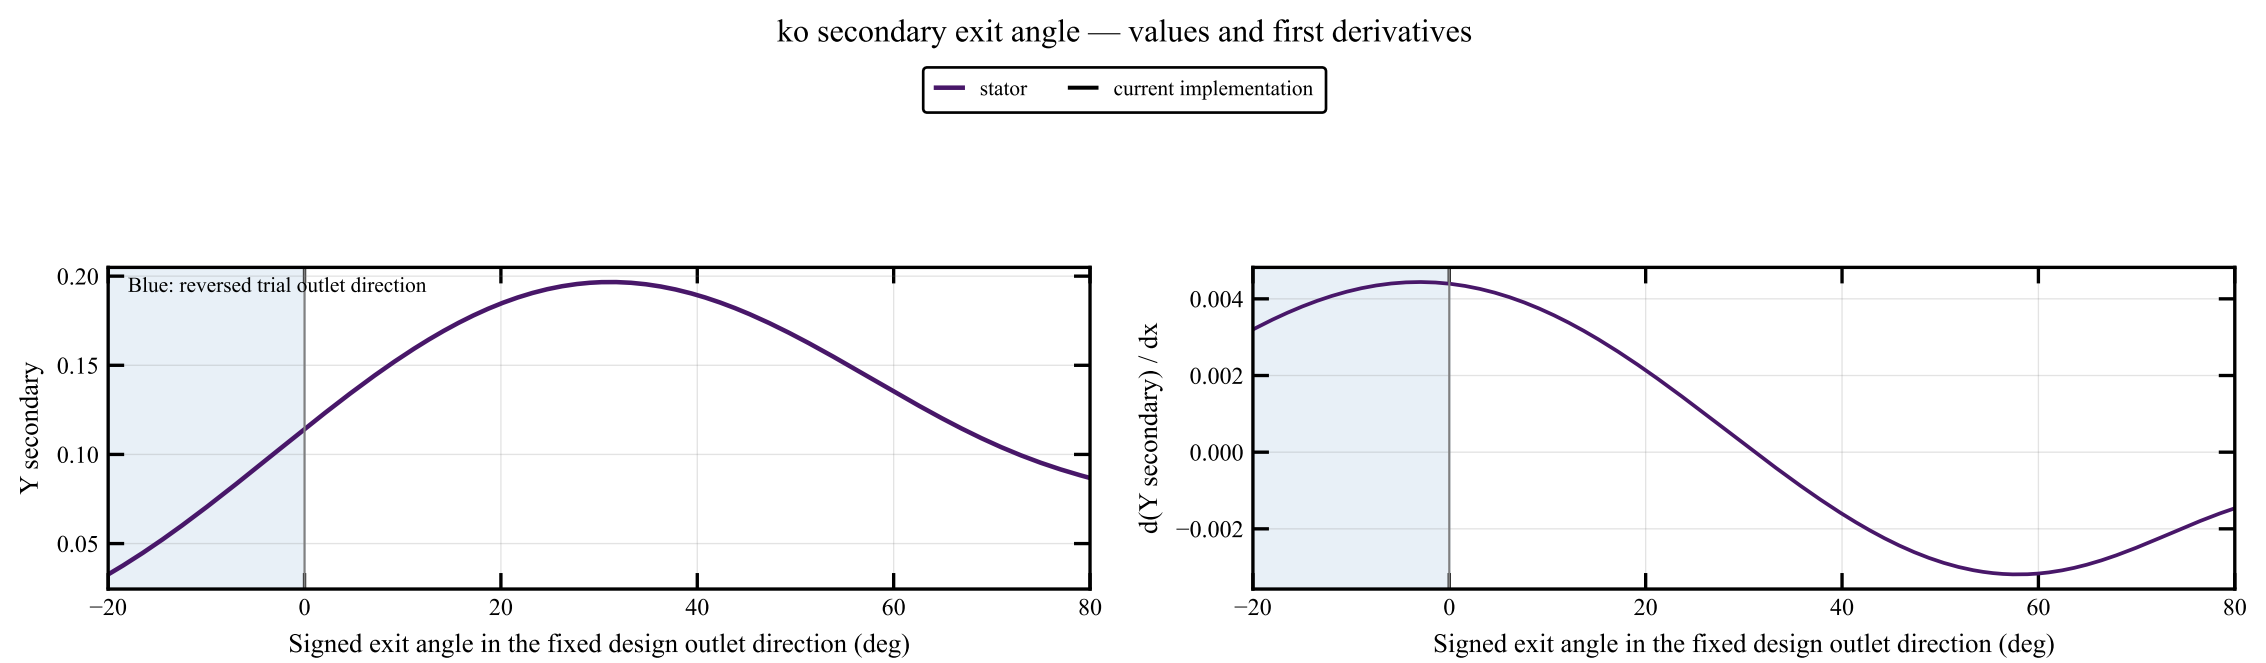
ko secondary exit angle — values and first derivatives
stator
current implementation
Blue: reversed trial outlet direction
Y secondary
0.20
0.15
0.10
0.05
−20
0
20
40
60
80
Signed exit angle in the fixed design outlet direction (deg)
d(Y secondary) / dx
0.004
0.002
0.000
−0.002
−20
0
20
40
60
80
Signed exit angle in the fixed design outlet direction (deg)