Mass flow

Benner / $U/c_0 = 0.6$

50 bar / 600 K total inlet

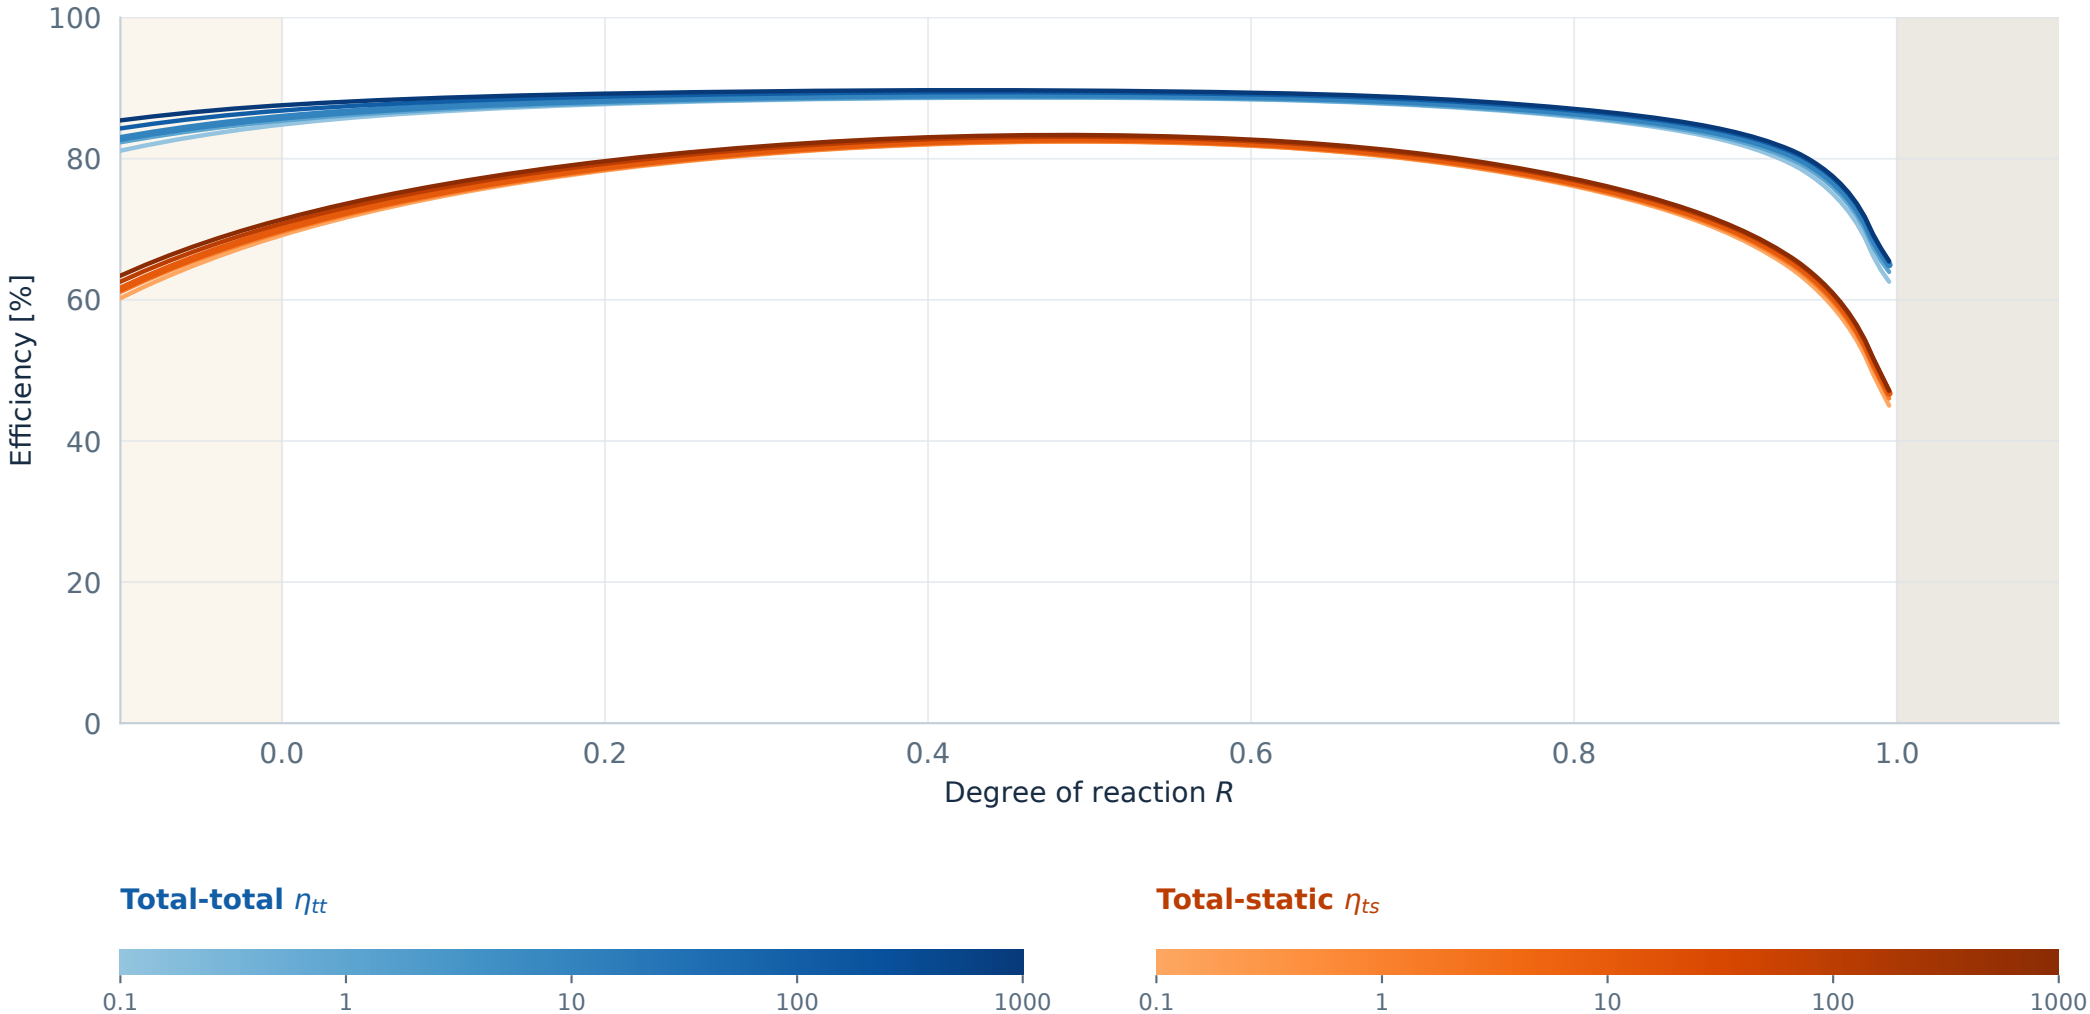

1,100/1,205 finite samples; signed efficiencies retained. Gray: no real reference design.