Specific speed

Benner / $U/c_0 = 0.6$

50 bar / 600 K total inlet

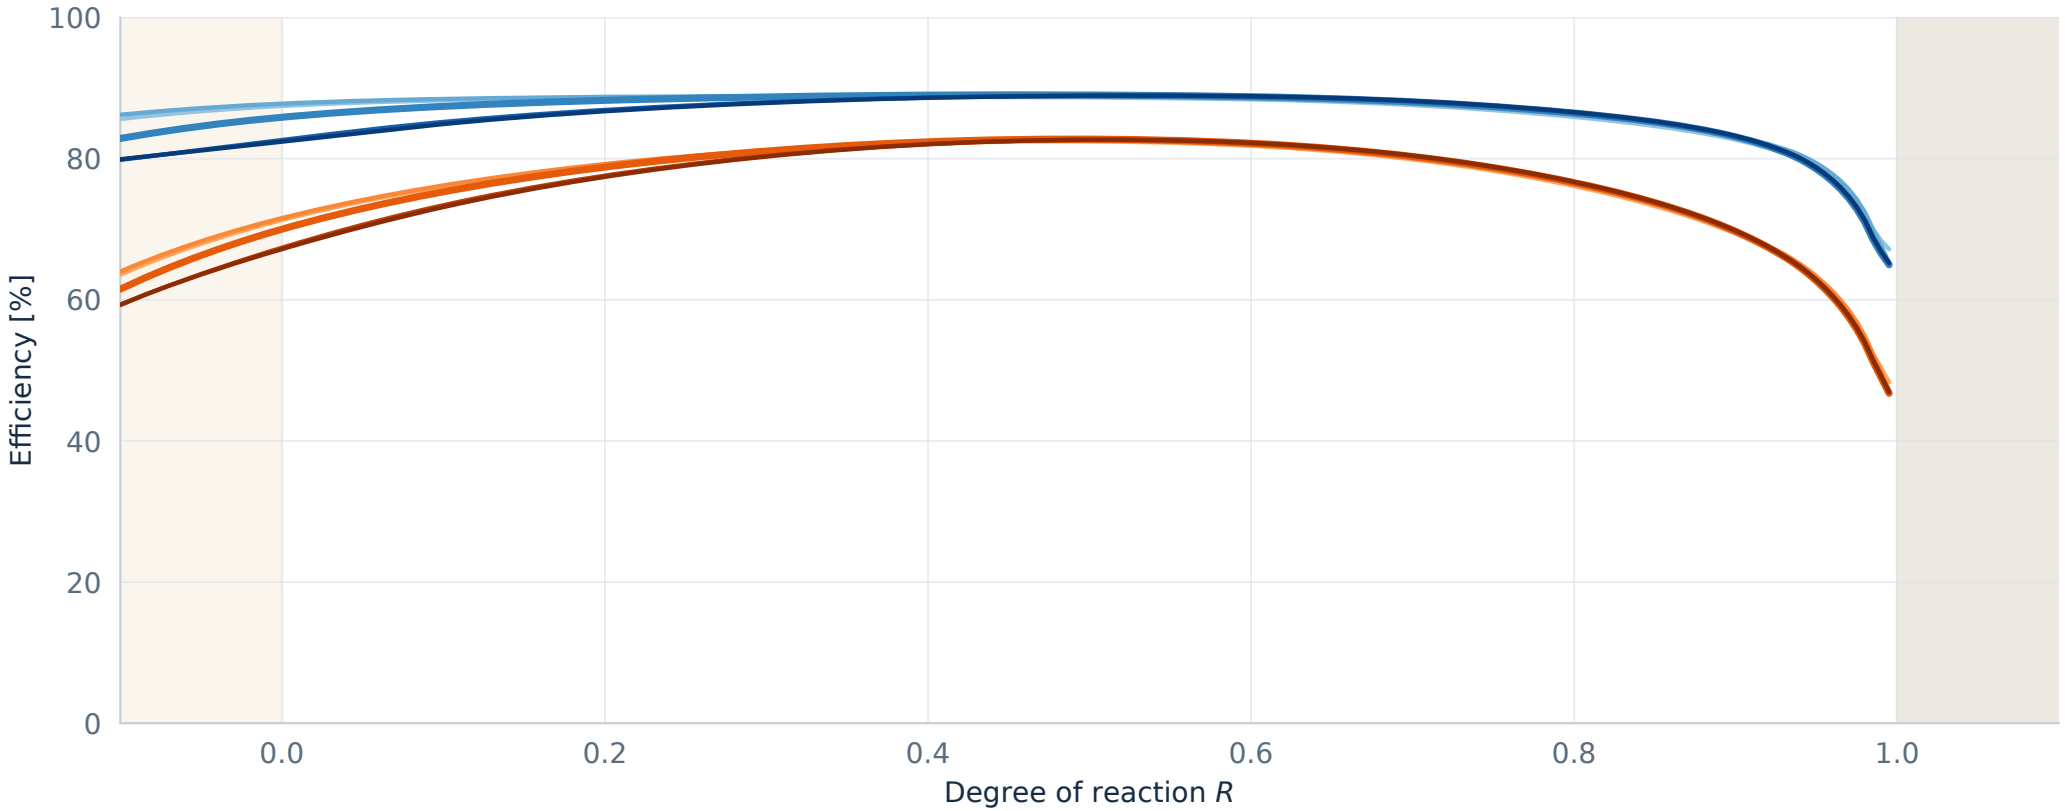

Total-total η_{tt}

0.1 0.5 1.05 1.5 2

Total-static η_{ts}

0.1 0.5 1.05 1.5 2

Curve parameter: Ω_s | bold: baseline 1.05

1,100/1,205 finite samples; signed efficiencies retained. Gray: no real reference design.